Model 632

HCMOS Clock Oscillator

FEATURES

- **Standard 3.2mm x 2.5mm 4-Pad Surface Mount Package**
- **HCMOS Output**
- **Fundamental and 3rd Overtone Crystal Designs**
- Frequency Range 1 – 125 MHz
- Frequency Stability ±50 ppm Standard, ±25 ppm and ±20 ppm Available
- Operating Voltages +1.8Vdc, +2.5Vdc, +2.8Vdc, +3.3Vdc or +5.0Vdc
- Operating Temperature to -40°C to +85°C
- Output Enable Standard
- Tape & Reel Packaging Standard, EIA-418
- **RoHS/Green Compliant [6/6]**

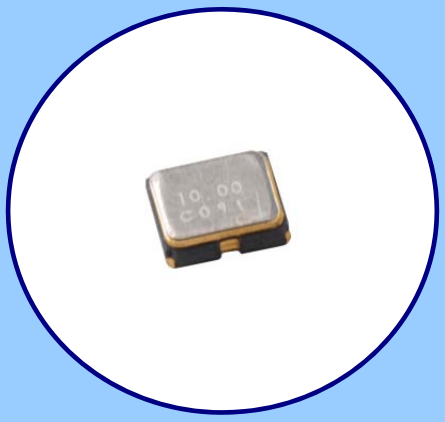

APPLICATIONS

Model 632 is ideal for applications; such as broadband access, Ethernet/Gigabit Ethernet, microprocessors/DSP/FPGA, networking equipment computers and peripherals, digital video, cameras and other portable devices.

ORDERING INFORMATION

632 □ □ □ □ □ □ M □ □ □ □ □

SUPPLY VOLTAGE

M = +1.8Vdc
N = +2.5Vdc
T = +2.8Vdc
L = +3.3Vdc
S = +5.0Vdc

FREQUENCY STABILITY

6 = ±20ppm [1]
5 = ±25ppm
3 = ±50ppm

FREQUENCY IN MHz

M - indicates MHz and decimal point. [2]

TEMPERATURE RANGE

C = -20°C to +70°C
I = -40°C to +85°C

1] Consult factory for 6l Stability/Temperature availability.

2] Frequency is recorded with three leading significant digits before the 'M' and 5 significant digits after the 'M' [including zeros].
[Ex. 3.579545 MHz, code as 003M57954; 14.31818 MHz, code as 014M31818; 125 MHz, code as 125M00000]

Not all performance combinations and frequencies may be available.
Contact your local CTS Representative or CTS Customer Service for availability.

PACKAGING INFORMATION [reference]

Device quantity is 1k pcs. minimum and 3k pcs. maximum per 180mm reel. 8mm tape width.

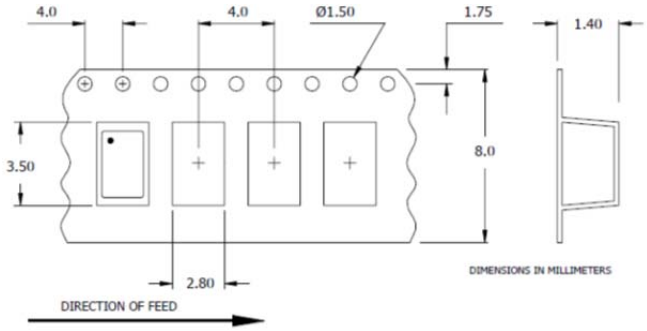

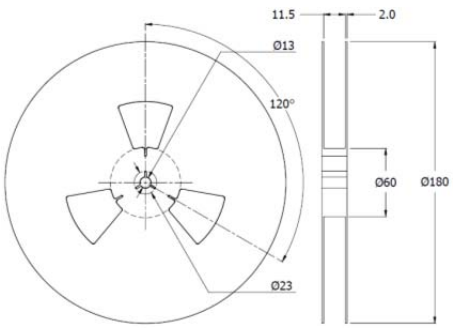

ELECTRICAL CHARACTERISTICS

	PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
ELECTRICAL PARAMETERS	Maximum Supply Voltage	V_{CC}	-	-0.5	-	4.0	V
	Storage Temperature	T_{STG}	-	-40	-	+100	°C
	Frequency Range	f_O	-	1.0	-	125	MHz
	Frequency Stability [See Note 1and Ordering Information]	$\Delta f/f_O$	-	-	-	20, 25, 50	± ppm
	Aging	$\Delta f/f_O$	-	-	-	3	± ppm/yr
	Operating Temperature Commercial Industrial	T_A	-	 -20 -40	 +25	 +70 +85	°C
	Supply Voltage Model 632M Model 632N Model 632T Model 632L Model 632S	V_{CC}	± 10 %	 1.62 2.25 2.52 2.97 4.50	 1.8 2.5 2.8 3.3 5.0	 1.98 2.75 3.08 3.63 5.50	V
	Supply Current Model 632M [+18V] Model 632N, 632T [+2.5V, +2.8V] Model 632L, 632S [+3.3V, +5.0V]	I_{CC}	C_L = 15pF 1.0 MHz to 100 MHz 100.1 MHz to 125 MHz 1.0 MHz to 100 MHz 100.1 MHz to 125 MHz 1.0 MHz to 100 MHz 100.1 MHz to 125 MHz	 - - - - - -	 - - - - - -	 7 12 10 20 15 25	mA
	Output Load	C_L		-	-	15	pF
	Output Voltage Levels Logic '1' Level Logic '0' Level	 V_{OH} V_{OL}	 CMOS Load CMOS Load	 90%V_{CC} -	 - -	 - 10%V_{CC}	V
	Output Current Logic '1' Level [M,N,T,L,S]	 I_{OH}	 V_{OH} = 90%V_{CC} [1.8V, 2.5/2.8V, 3.3V, 5.0V]	 -	 -	 -2, -4, -8, -16	mA
	Logic '0' Level [M,N,T,L,S]	I_{OL}	V_{OL} = 10%V_{CC} [1.8V, 2.5/2.8V, 3.3V, 5.0V]	-	-	+2, +4, +8, +16	
	Output Duty Cycle	SYM	@ 50% Level	45	-	55	%
	Rise and Fall Time Model 632M [+18V] Model 632N, 632T [+2.5V, +2.8V] Model 632L, 632S [+3.3V, +5.0V]	T_R, T_F	@ 10% - 90% Levels, C_L = 15pF 1.0 MHz to 20 MHz 20.1 MHz to 125 MHz 1.0 MHz to 20 MHz 20.1 MHz to 125 MHz 1.0 MHz to 20 MHz 20.1 MHz to 125 MHz	 - - - - - -	 - - - - - -	 5 4 4 3 3 2	ns
	Start Up Time	T_S	Application of V_{CC}	-	-	2	ms
	Enable Function Enable Input Voltage	 V_{IH}	 Pin 1 Logic '1', Output Enabled	 0.7*V_{CC}	 -	 -	V
	Disable Input Voltage	V_{IL}	Pin 1 Logic '0', Output Disabled	-	-	0.3*V_{CC}	
	Enable Time [M,N,T,L,S]	T_{PLZ}	Pin 1 Logic '1'	-	-	2	ms
	Standby Current	I_{ST}	Pin 1 Logic '0', Output Disabled	-	-	15	µA
	Period Jitter, pk-pk	pjpk-pk	-	-	-	40	ps
	Phase Jitter, RMS	tjrms	Bandwidth 12 kHz - 20 MHz	-	-	1	

Notes:
1. Inclusive of initial tolerance at time of shipment, changes in supply voltage, load, temperature and aging.

LVCMOS OUTPUT WAVEFORM

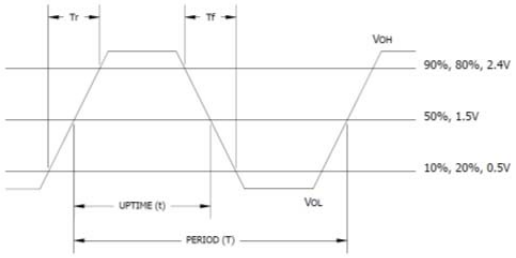

TEST CIRCUIT, CMOS LOAD

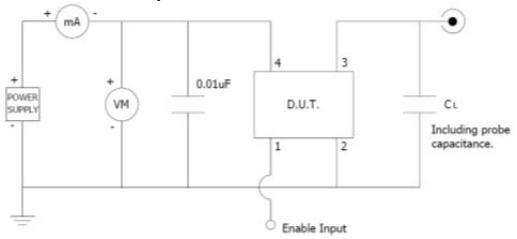

ENABLE TRUTH TABLE

PIN 1	PIN 3
Logic '1'	Output
Open	Output
Logic '0'	High Imp.

MECHANICAL SPECIFICATIONS

PACKAGE DRAWING

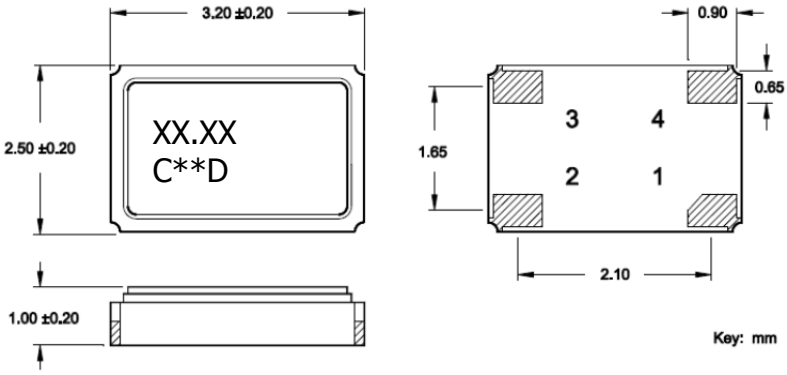

MARKING INFORMATION

1. XX.XX – Frequency in MHz.
2. C – CTS and Pin 1 identifier.
3. ** - Manufacturing Site Code.
4. D – Manufacturing Date Code.
   [See Table 1 for codes.]
5. Complete CTS part number, frequency value and date code information must appear on reel and carton labels.

NOTES

1. Termination pads (e4). Barrier-plating is nickel [Ni] with gold [Au] flash plate.
2. Reflow conditions per JEDEC J-STD-020; 260°C maximum, 20 seconds.
3. MSL = 1.

TABLE I

YEAR \ MONTH	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC
2001 2005 2009 2013 2017	A	B	C	D	E	F	G	H	J	K	L	M
2002 2006 2010 2014 2018	N	P	Q	R	S	T	U	V	W	X	Y	Z
2003 2007 2011 2015 2019	a	b	c	d	e	f	g	h	j	k	l	m
2004 2008 2012 2016 2020	n	p	q	r	s	t	u	v	w	x	y	z

SUGGESTED SOLDER PAD GEOMETRY

C_{BYPASS} should be ≥ 0.01 uF.

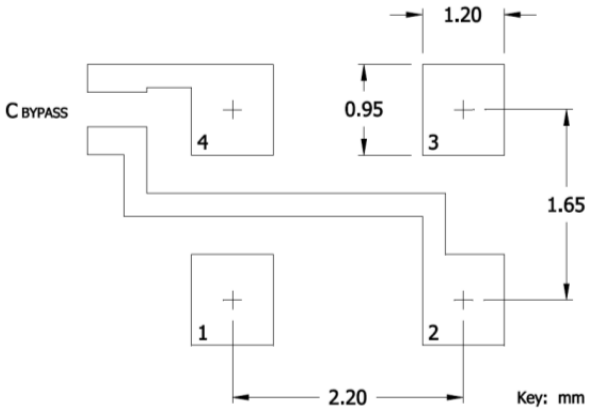

D.U.T. PIN ASSIGNMENTS

PIN	SYMBOL	DESCRIPTION
1	EOH	Enable
2	GND	Circuit & Package Ground
3	Output	RF Output
4	V_{CC}	Supply Voltage

LifeElectronics
Живое партнерство

ООО «ЛайфЭлектроникс» **“LifeElectronics” LLC**

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru