



# NC258 SAC305



## Lead-Free No Clean Solder Paste

### Features:

- Long Pause-to-Print Capabilities
- Enhances Fine Print Definitions
- No Head-in-Pillow
- Excellent Wetting, Even Leadless Devices
- Reduced Voiding
- RoHS Compliant

### Description:

NC258 has been developed to offer long pause-to-print capabilities while enhancing fine print definitions. NC258 reduces such defects as voiding and eliminates head-in-pillow. The superior wetting ability of NC258 results in bright, smooth and shiny solder joints. It also offers very low post process residues, which remain crystal clear even at the elevated temperatures required for today's lead-free alloys.

### Printing:


- Apply sufficient paste to the stencil to allow a smooth, even roll during the print cycle (a bead diameter of 12 to 16 mm (½ to ⅝ inch) is normally sufficient to begin).
- Apply small amounts of fresh solder paste to the stencil at controlled intervals to maintain paste chemistry and workable properties.
- NC258 provides the necessary tack time and force for today's high speed placement equipment, which will enhance product performance and reliability.
- Cleaning of your stencil will vary by application; however, it can be accomplished using AIM DJAW-10 stencil cleaner.

RECOMMENDED INITIAL PRINTER SETTINGS BELOW ARE DEPENDENT ON PCB AND PAD DESIGN			
PARAMETER	RECOMMENDED INITIAL SETTINGS	PARAMETER	RECOMMENDED INITIAL SETTINGS
Squeegee Pressure	0.9 - 1.5 lbs/inch of blade	PCB Separation Distance	0.75 - 2.0 mm (.030 - .080")
Squeegee Speed	0.5 - 6 inches/second	PCB Separation Speed	3.0 - 20.00 mm/second
Snap-off Distance	On Contact 0.00 mm (0.00")		


### Reflow Profile:

Two unique profile families are depicted below; both can be used in ramp-spike or ramp-soak-spike applications, and they each have similar reflow temperatures. The two profiles differ in where they reach their respective peak temperatures, as well as the time above liquidus (TAL). The shorter profile of the two would apply to smaller assemblies, whereas the longer profile would apply to larger assemblies, such as backplanes or high-density boards. The shaded area defines the process window. Oven efficiency, board size/mass, component type and density all influence the final profile for a given assembly. These profiles are starting points, and processing boards with thermal-couples attached is recommended to optimize the process.

SAC305 Reflow Profile Window For Low Density Boards

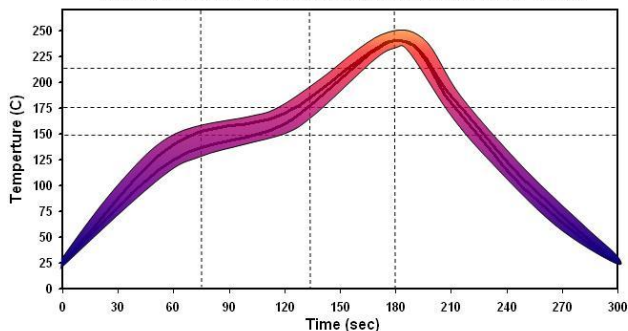

SAC305 Reflow Profile Window For High Density Boards

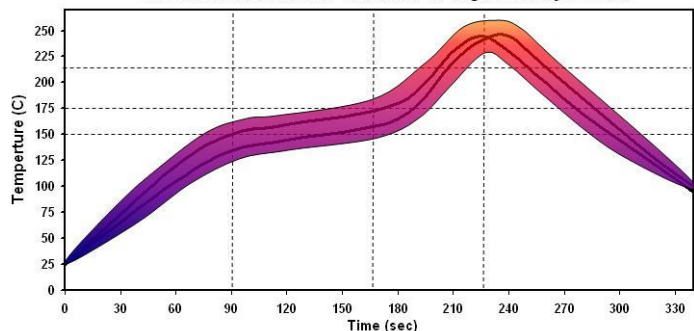

<i>RATE OF RISE 2°C / SEC MAX</i>	<i>RAMP TO 150°C (302°F)</i>	<i>PROGRESS THROUGH 150°C-175°C (302°F-347°F)</i>	<i>TO PEAK TEMP 230°C-245°C (445°F-474°F)</i>	<i>TIME ABOVE 217°C (425°F)</i>	<i>COOLDOWN ≤ 4 °C / SEC</i>	<i>PROFILE LENGTH AMBIENT TO COOL DOWN</i>
Short Profiles	≤ 60 Sec	15-45 Sec	45-75 Sec	45-60 Sec	45± 15 Sec	2.75-3.75 Min
Long Profiles	≤ 90 Sec	60-90 Sec	45-60 Sec	45-75 Sec	45± 15 Sec	4.0-5.0 Min

❖ THE RECOMMENDED REFLOW PROFILE FOR NC258 IS PROVIDED AS A GUIDELINE. OPTIMAL PROFILE MAY DIFFER DUE TO OVEN TYPE, ASSEMBLY LAYOUT, OR OTHER PROCESS VARIABLES. CONTACT AIM TECHNICAL SUPPORT IF YOU REQUIRE ADDITIONAL PROFILING ASSISTANCE.

### Compatible Products:

- AIM Lead-Free Electropure Solder Bar
- NC Paste Flux, No-Clean Tacky Flux
- NC270WR VOC-Free No-Clean Spray Flux
- NC264-5 No-Clean Flux Spray/Foam
- Glowcore No-Clean Cored Wire
- One-Step Underfill FF35
- Epoxy 4044 Chip Bonding Epoxy
- 200AX Stencil Cleaner

### Cleaning:

- NC258 can be cleaned if necessary with saponified water or an appropriate solvent cleaner.
- Please refer to the AIM cleaner matrix for a list of compatible cleaning materials.

### Handling and Storage:

- NC258 is best used within 1 year when stored between -22° and +22° C (-8° and 72° F).
- Allow the solder paste to warm up completely and naturally to ambient temperature (8 hrs.) prior to breaking the seal for use.
- Mix the product lightly and thoroughly (1-2 mins. max) to ensure even distribution of any separated material.
- Do not store new and used paste in the same container, and reseal any opened containers while not in use.
- Replace the internal plug and cap of the 500 gram jars to ensure the best possible seal.

### Physical Properties:

<i>ITEM</i>	<i>SPECIFICATION</i>
Appearance	Gray, Smooth, Creamy
Alloy	SAC305
Melting Point	217° -218° C
Particle Size	T3 , T4, T5
Metal Loading	89% (T3), 88.5% (T4, T5)
Viscosity	Print/dispense versions available.
Packaging	Available in all industry standard packaging.

## Test Data Summary:

<b>CLASSIFICATION</b>			
Product Name	IPC Classification to J-STD-004	Copper Mirror to J-STD-004B	Silver Chromate to J-STD-004B
NC258	ROL0	LOW	PASS
<b>POWDER TESTING</b>			
No.	Item	Results	Test Method
1	Powder Size	Type 3 – 45-25 micron Type 4 – 38-20 micron	IPC TM 650 2.2.14
2	Powder Shape	Spherical	Microscope
<b>FLUX MEDIUM TESTING</b>			
No.	Item	Results	Test Method
1	Acid Value	145 +/- 4 mg KOH/ g flux	J-STD-004B IPC TM 650 2.3.13
2	Halide Content	Silver Chromate Paper - Pass	J-STD-004B IPC TM 650 2.3.35
3	Fluorides Spot Test	No fluoride	J-STD-004B IPC TM 650 2.3.35.1 J-STD-004B IPC TM 650 2.3.35.2
4	Corrosivity Test/ Copper Mirror	Low	J-STD-004B IPC TM 650 2.3.32
5	Corrosion Flux	Pass	J-STD-004B IPC TM 650 2.6.15
6	Halide-Free/Silver Chromate Paper Test	Pass	J-STD-004B IPC TM 650 2.3.33
7	Surface Insulation Resistance	Pass – See AIM Qualification Test Report # NC258052510	J-STD-004 IPC TM 650 2.6.3.7
8	Compatibility Test	See list of recommended products above	GR-78-CORE
9	Oxygen Bomb	Bromine 269 mg/Kg Chlorine <99.9 mg/Kg	EN 14582:2007 SW 9056 SW 5050
<b>VISCOSITY TESTING</b>			
No.	Item	Results	Test Method
1	T-Bar Spindle Test Method	900 ± 10% kcps	J-STD-005 IPC TM 650 2.4.34
<b>SOLDER PASTE TESTING</b>			
No.	Item	Results	Test Method
1	Tack Test	37.9 g	J-STD-005 IPC TM 650 2.4.44
2	Tack Test	94.8 g	JIS Z 3284 Annez 9
3	Solder Ball Test	Pass	J-STD-005 IPC TM 650 2.4.43
4	Wetting Test	Pass	J-STD-005 IPC TM 650 2.4.45
5	Paste Shelf Life	Between -22° and +22° C (-8° and 72° F) = 1 year	AIM TM 125-11
6	Solder Paste Slump Test	Pass	J-STD-005 IPC TM 650 2.4.35

Canada +1-514-494-2000 · USA +1-401-463-5605 · Mexico +52-656-630-0032 · Europe +44-1737-222-258  
 Asia-Pacific +86-755-2993-6487 · India +91-80-41554753 · info@aimsolder.com · www.aimsolder.com  
 AIM IS ISO9001:2008 CERTIFIED

The information contained herein is based on data considered accurate and is offered at no charge. Product information is based upon the assumption of proper handling and operating conditions. All information pertaining to solder paste is produced with 45-micron powder. Liability is expressly disclaimed for any loss or injury arising out of the use of this information or the use of any materials designated. Please refer to <http://www.aimsolder.com/Home/TermsConditions.aspx> to review AIM's terms and conditions.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)