re Development Tools



Overview

Freescale OSEK*turbo* OS is the leading OSEK/VDX™ Real Time Operating System (RTOS) implementation available on the market today in terms of quality and performance.

OSEKturbo fully conforms to the latest
OSEK/VDX Operating System standard¹. The
RTOS is fully configurable and statically defined within the CodeWarrior™ IDE environment. Only those functions that are required are included providing the user with a truly scaleable RTOS.

OSEK*turbo* OS is available for a wide range of 8-, 16- and 32-bit embedded microprocessors. The

emphasis in the design of OSEK*turbo* OS was to meet demanding performance requirements, while maintaining the outstanding reputation for stability and quality (SEI CMM level 5²) established in more than five years of automotive ECU development. The result is that Freescale OSEK*turbo* is one of most widely used OSEK/VDX OS implementations on the market today. Although the OSEK/VDX specification was created by the automotive industry, the specification does not limit its use to automotive applications and it is increasingly being used in a wide range of embedded applications ranging from industrial control to telecom products.

Freescale OSEK tool support

Freescale offers a Builder tool for easy configuration of OSEK*turbo* applications. The Freescale OSEK Builder is a graphical Windows™ based application that enables the developer to easily configure a runtime system. The tool allows the developer to optimize the software to meet the specific application needs. A complete system description is generated in OSEK Implementation Language (OIL) format, allowing full portability of the application configuration. The developer may also choose to generate OS libraries from Builder.

Freescale also offers an OSEK plug-in to allow kernel-aware debugging in CodeWarrior
Development Studio, enabling the developers to use the CodeWarrior IDE for the whole application development. It brings many advantages such as simplified project setup through the use of stationaries and samples. CodeWarrior tools support

Freescale's 8- to 32-bit microcontrollers reducing the number of tools that need to be re-learned for new projects on different architectures. OSEK System Generator (SysGen) is fully integrated in the build process and for the configuration of project settings. OSEK Builder can also be called as OSEK configuration editor. CodeWarrior Development Studio supports full OSEK OS kernel awareness during debugging. CodeWarrior Development Studio can also provide simulation support for development without hardware.

In addition Freescale has established strong partnerships with industry leaders providing deeper integration with a wide variety of partner tools including Model Based Simulation, Code Generation, Schedulability Analysis, popular CAN-based communications software and tools, and support for many 3rd Party OSEK kernel aware debuggers (emulators) and compilers.



Benefits

By adopting Freescale OSEK*turbo* and CodeWarrior Development Studio, embedded developers can:

- > Reduce software integration time and the associated costs
- > Re-use software modules among different application designs
- > Reduce maintenance costs through the use of a high-level language and common platform
- > Ensure a high-quality, stable software environment for their applications
- > Ensure a highly efficient OS with extremely small memory footprint and outstanding performance
- > Ensure an optimized, highly integrated and broadly supported development tool chain

OSEK*turbo* applications are written in C language using the OSEK Application Programming Interface (API) enabling portability and reuse of software.

- ¹ OSEK/VDX Consortium (Offene Systeme und deren Schnittstellen für die Elektronik im Kraftfahrzeug/Vehicle Distributed eXecutive) for more information and for details on specification see: www.osek-vdx.org.
- OSEKturbo Software development team has been assessed at Capability Maturity Model (CMM) level 5 by the Software Engineering Institute (SEI) - for more information see: www.sei.cmu.edu/sei-home.html.






Real Time Operating System

OSEK*turbo* Performance Information

Context switch timings:

- Measurements done with Timer capture (MPC555: TB, time base register; HCS12DP256: TCNT, timer count register)
- Tasks activated consecutively, ISR that activates tasks as well
- 19 tasks, 3 ISRs, STANDARD status

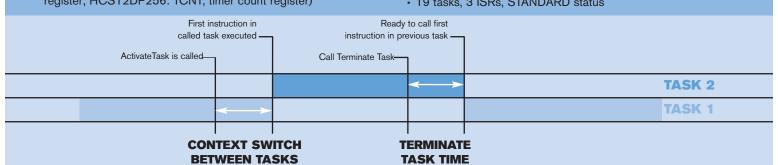

OSEK <i>turbo</i> Performance Information	MPC555 40MHz; BCC1	HCS12DP256 8MHz; BCC1
Context switch between tasks (ActiveTask)	1.7µs	12.5µs
Terminate task with return to background task	0.9µs	6.6µs
Context switch from ISR (ActiveTask)	2.1µs	14.9µs

Typical Memory Requirements:			
	MPC555	HCS12DP256	
Total OS ROM	2304 bytes	776 bytes	
OS data	108 bytes	60 bytes	
OS code	2196 bytes	716 bytes	
Total OS RAM	466 bytes	90 bytes	

Freescale OSEKturbo OS Products

OSEKturbo releases exist for all OS (BCC1, ECC1, BCC2, ECC2) and COM (CCCA and CCCB) conformance classes.

Supported Processors (check with your local Freescale sales office for latest list)

- > Freescale 68HC08
- > Freescale 68HC(S)12
- > Freescale MPC5xx
- > Freescale MPC5200
- > Freescale DSP56800F
- > Freescale S12X
- > Freescale MPC55xx
- > Freescale MAC7100

Technical Enhancements

> Timescale feature that enables cyclic task activations based on efficient alarms

- > OSEKturbo highly optimized for speed and memory on each target
- > ORTI (OSEK Runtime Interface) for kernel aware debugging
- > Enhanced OSEK Builder for OIL configuration
- > Multiple scheduling policies
- > Event control for task synchronization
- > Resource management based on OSEK priority ceiling protocol
- > Counter management
- > Efficient alarm management
- > Optimal stack methods
- > Stack monitoring
- > Fast links for accessing system data structures
- > Automatic exclusion of unused system services
- > Specific hardware features such as memory bank switching and use of low

power modes, interrupt handler and Floating Point registers

- > Full internal OSEK communication for inter process communication
- > Task management for activation and termination of tasks
- > Interrupt management
- > Error handling

Benchmark configuration:

- > BCC1 with one task per priority
- > Pre-emptive Scheduling
- > No multiple activations
- > 10 basic tasks + 1 initialization task
- > 10 alarms with task activations
- > 1 16-bit (1 ms)
- > 1 ISR (in addition to system timer)
- > No messages, no resources
- > Standard status, debug level zero
- > No hooks

Learn More: For more information about Freescale products, please visit www.freescale.com/codewarrior





OOO «ЛайфЭлектроникс" "LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 P/C 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 3010181090000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный) Email: org@lifeelectronics.ru