TLE4208G

Quad Half-Bridge Driver IC

Data Sheet

Rev. 1.4, 2016-02-02

Automotive Power

Table of Contents

1 Overview . . . 3

2 Block Diagram . . . 4

3 Pin Configuration . . . 6

3.1 Pin Assignment . . . 6

3.2 Pin Definitions and Functions . . . 6

4 General Product Characteristics . . . 8

4.1 Absolute Maximum Ratings . . . 8

4.2 Functional Range . . . 9

4.3 General Electrical Characteristics . . . 10

4.3.1 Electrical Characteristics . . . 10

5 Application Information . . . 12

6 Package Outlines . . . 14

7 Revision History . . . 15

1 Overview

PG-DSO-28

Features

- Driver for up to 3 motors
- Delivers up to 0.8 A continuous
- Optimized for DC motor management applications
- Very low current consumption in stand-by (Inhibit) mode
- Low saturation voltage; typ.1.2 V total @ 25 °C; 0.4 A
- Output protected against short circuit
- Error flag diagnosis
- Overvoltage lockout and diagnosis
- Undervoltage lockout
- CMOS/TTL compatible inputs with hysteresis
- No crossover current
- Internal clamp diodes
- Overtemperature protection with hysteresis and diagnosis
- Enhanced power DSO-Package
- Green Product (RoHS compliant)
- AEC Qualified

Description

The TLE4208G is a protected Quad-Half-Bridge-Driver designed specially for automotive and industrial motion control applications. The part is built using Infineons bipolar high voltage power technology DOPL.

In a cascade configuration up to three actuators (DC motors) can be connected between the four half-bridges. These four half-bridges are configured as 2 dual-half-bridges, which are supplied and controlled separately. Operation modes forward (cw), reverse (ccw), brake and high impedance are invoked from a standard interface.

The standard enhanced power PG-DSO-28 package meets the application requirements and saves PCB-board space and costs. Moreover the package is RoHS compliant.

Furthermore the built-in features like diagnosis, over- and undervoltage-lockout, short-circuit protection, over-temperature protection and the very low quiescent current in stand-by mode will open a wide range of automotive and industrial applications.

Type	Package	Marking
TLE4208G	PG-DSO-28	TLE4208G

2 Block Diagram

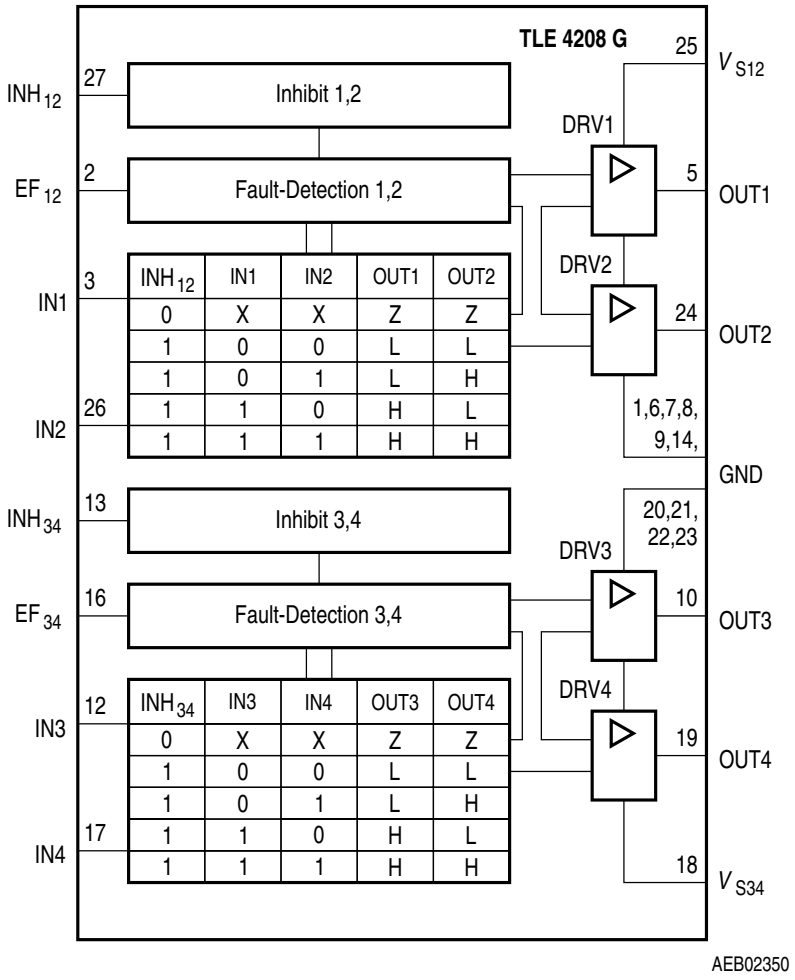

Figure 1 Block Diagram

Input Logic

Table 1 Functional Truth Table of Halfbridge 1 and 2

INH_{12}	IN1	IN2	OUT1	OUT2	MODE
0	**X**	**X**	**Z**	**Z**	**Stand-by**
1	0	0	L	L	Brake LL
1	0	1	L	H	CW
1	1	0	H	L	CCW
1	1	1	H	H	Brake HH

Note: Half-Bridge 1 and 2 connected to a full-bridge

Table 2 Functinal Truth Table of Halfbridge 3 and 4

INH_{34}	IN3	IN4	OUT3	OUT4	MODE
0	**X**	**X**	**Z**	**Z**	**Stand-by**
1	0	0	L	L	Brake LL
1	0	1	L	H	CW
1	1	0	H	L	CCW
1	1	1	H	H	Brake HH

IN:

0 = Logic LOW

1 = Logic HIGH

X = Don’t Care

OUT:

Z = Output in tristate condition

L = Output in sink condition

X = Output in source condition

Note: Half-Bridge 3 and 4 connected to a full-bridge

Table 3 Diagnosis

EF_{12}	EF_{34}	Error
1	1	no error
0	1	over temperature of half-bridge 1 and 2 OR
0	1	over voltage of half-bridge 1 and 2
1	0	over temperature of half-bridge 3 and 4 OR
1	0	over voltage of half-bridge 3 and 4
0	0	over temperature of all half-bridges OR
0	0	over voltage of all half-bridge

3 Pin Configuration

3.1 Pin Assignment

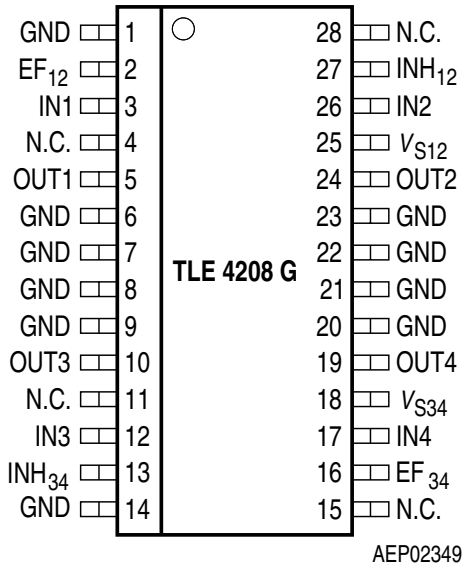

Figure 2 Pin Configuration

3.2 Pin Definitions and Functions

Pin	Symbol	Function
1, 6, 7, 8, 9, 14, 20, 21, 22, 23	GND	**Ground;** negative reference potential for blocking capacitor
2	EF_{12}	**Error Flag output of half-bridges 1 and 2**; open collector; low = error
3	IN1	**Input channel of half-bridge 1**; controls OUT 1
4, 11, 15, 28	N.C.	**Not Connected**
5	OUT 1	**Power output of half-bridge 1;** short circuit protected; with integrated clamp diodes
10	OUT 3	**Power output of half-bridge 3;** short circuit protected; with integrated clamp diodes
12	IN3	**Input channel of half-bridge 3**; controls OUT 3
13	INH_{34}	**Inhibit input of half-bridges 3 and 4**; low = half-bridges 3 and 4 in stand-by

Pin	Symbol	Function
16	EF_{34}	**Error Flag output of half-bridges 3 and 4**; open collector; low = error
17	IN4	**Input channel of half-bridge 4**; controls OUT 4
18	V_{S34}	**Power supply voltage of half-bridges 3 and 4**; positive reference potential for blocking capacitor
19	OUT 4	**Power output of half-bridge 4**; short circuit protected; with integrated clamp diodes
24	OUT 2	**Power-output of half-bridge 2**; short circuit protected; with integrated clamp diodes
25	V_{S12}	**Power supply voltage of half-bridges 1 and 2**; positive reference potential for blocking capacitor
26	IN4	**Input channel of half-bridge 4**; controls OUT 2
27	INH_{12}	**Inhibit input of half-bridges 1 and 2**; low = half-bridges 1 and 2in stand-by

4 General Product Characteristics

4.1 Absolute Maximum Ratings

Table 4 Absolute Maximum Ratings

T_j = -40°C to +150°; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Voltages						
Supply Voltage	V_{S12}, V_{S34}	-0.3	–	45	V	–
Supply Voltage	V_{S12}, V_{S34}	-1	–	–	V	t < 0.5s; I_{S12}, I_{S34} > -2A
Logic input voltages (IN1; IN2; INH_{12}; IN3; IN4; INH_{34})	V_I	-5	–	20	V	0V < V_{S12}, V_{S34} < 45V
Logic output voltage (EF_{12}; EF_{34})	V_{EF12}, V_{EF34}	–0.3	–	20	V	0V < V_{S12}, V_{S34} < 45V
Currents						
Output Current (cont.)	I_{OUT1-4}	–	–	–	A	internally limited
Output Current (peak)	I_{OUT1-4}	–	–	–	A	internally limited
Output Current (diode)	I_{OUT1-4}	-1	–	1	A	–
Output Current (EF)	$I_{EF12-34}$	-2	–	5	mA	–
Temperatures						
Junction Temperature	T_j	-40	–	150	°C	–
Storage Temperature	T_{stg}	-50	–	150	°C	–
Thermal Resistances						
Junction pin	$R_{thj-pin}$	–	–	25	K/W	measured to pin 7
Junction ambient	R_{thjA}	–	–	65	kV	–

Notes

1. *Stresses above the ones listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.*
2. *Integrated protection functions are designed to prevent IC destruction under fault conditions described in the data sheet. Fault conditions are considered as “outside” normal operating range. Protection functions are not designed for continuous repetitive operation.*

4.2 Functional Range

Table 5 Functional Range

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Supply Voltage	V_{S12}, V_{S34}	V_{UV_OFF}	–	18	V	After V_{S12}, V_{S34} rising above V_{UV_ON}
Extended Supply Voltage Range for Operation	V_{S12}, V_{S34}	-0.3	–	V_{UV_ON}	V	Outputs in tristate
Supply Voltage transients slew rate	V_{S12}, V_{S34}	-0.3	–	V_{UV_OFF}	V/µs	Outputs in tristate
Logic input voltages (IN1; IN2; INH12; IN3; IN4; INH34)	V_i	-2	–	18	V	–
Junction Temperature	T_j	-40	–	150	°C	–

Note: Within the functional or operating range, the IC operates as described in the circuit description. The electrical characteristics are specified within the conditions given in the Electrical Characteristics table.

4.3 General Electrical Characteristics

4.3.1 Electrical Characteristics

Table 6 Electrical Characteristics

V_{S12} =V_{S34} =8 V to 18 V, INH_{12} = INH_{34} = HIGH; I_{OUT1-4} = 0A; T_j = -40°C to +150°, all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Current Consumption INH_{12} = INH_{34} = LOW						
Quiescent current	I_S	–	–	100	µA	$I_S = I_{S12} + I_{S34}$
Quiescent current	I_S	–	20	40	µA	$I_S = I_{S12} + I_{S34}$; $V_{S12} = V_{S34}$ = 13.2V; T_j = 25 °C
INH_{12} = HIGH and INH_{34} = LOW or INH_{12} = LOW and INH_{34} = HIGH						
Supply current	I_{S12}, I_{S34}	–	10	20	mA	–
Supply current	I_{S12}, I_{S34}	–	–	30	mA	$I_{OUT1/3}$ = 0.4A $I_{OUT2/4}$ = -0.4A
Supply current	I_{S12}, I_{S34}	–	–	50	mA	$I_{OUT1/3}$ = 0.8A $I_{OUT2/4}$ = -0.8A
Over- and Under Voltage Lockout						
UV Switch ON voltage	$V_{UV\ ON}$	–	6.5	7.5	V	V_{S12},V_{S34} increasing
UV Switch OFF voltage	V_{UV_OFF}	5	6	–	V	V_{S12},V_{S34} decreasing
UV ON/ OFF hysteresis	V_{UV_HY}	–	0.5	–	V	$V_{UV\ ON}$ - $V_{UV\ OFF}$
OV Switch OFF voltage	$V_{OV\ OFF}$	–	20	24	V	V_{S12},V_{S34} increasing
OV Switch ON voltage	V_{OV_ON}	18	19.5	–	V	V_{S12},V_{S34} decreasing
OV ON/ OFF hysteresis	V_{OV_HY}	–	0.5	–	V	$V_{OV\ OFF}$ - $V_{OV\ ON}$
Outputs OUT1; OUT2; OUT3; OUT4 **Saturation Voltages**						
Source (upper) I_{OUT12}, I_{OUT34} = – 0.2 A	V_{SAT_U}	–	0.85	1.15	V	T_j= 25°C
Source (upper) I_{OUT12}, I_{OUT34} = – 0.4 A	V_{SAT_U}	–	0.90	1.20	V	T_j= 25°C
Sink (upper) I_{OUT12}, I_{OUT34} = – 0.8 A	V_{SAT_U}	–	1.10	1.50	V	T_j= 25°C
Sink (lower) I_{OUT12}, I_{OUT34} = 0.2 A	V_{SAT_L}	–	0.15	0.23	V	T_j= 25°C
Sink (lower) I_{OUT12}, I_{OUT34} = 0.4 A	V_{SAT_L}	–	0.25	0.40	V	T_j= 25°C
Sink (lower) I_{OUT12}, I_{OUT34} = 0.8 A	V_{SAT_L}	–	0.45	0.75	V	T_j= 25°C
Total Drop I_{OUT12}, I_{OUT34} = 0.2 A	V_{SAT}	–	1	1.4	V	$V_{SAT} = V_{SAT_U} + V_{SAT_L}$

Table 6 Electrical Characteristics

V_{S12} = V_{S34} = 8 V to 18 V, INH_{12} = INH_{34} = HIGH; I_{OUT1-4} = 0A; T_j = -40°C to +150°, all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Total Drop I_{OUT12}, I_{OUT34} = 0.4 A	V_{SAT}	–	1.2	1.7	V	$V_{SAT} = V_{SAT_U} + V_{SAT_L}$
Total Drop I_{OUT12}, I_{OUT34} = 0.8 A	V_{SAT}	–	1.6	2.5	V	$V_{SAT} = V_{SAT_U} + V_{SAT_L}$
Clamp Diodes						
Forward voltage; upper	V_{FU}	–	1	1.5	V	I_F = 0.4A
Upper leakage current	I_{LKU}	–	–	5	mA	I_F = 0.4A[1)]
Forward voltage; lower	V_{FL}	–	0.9	1.4	V	I_F = 0.4A
Input Interface **Logic Inputs IN1; IN2; IN3; IN4**						
H-input voltage	V_{IH}	–	2.0	3.0	V	–
L-input voltage	V_{IL}	1.0	1.5	–	V	–
Hysteresis of input voltage	V_{IHY}	–	0.5	–	V	–
H-input current	I_{IH}	-2	–	10	µA	V_I = 5V
L-input current	I_{IL}	-100	-20	-5	µA	V_I = 0V
Logic Inputs INH_{12}; INH_{34}						
H-input voltage	V_{IH}	–	2.7	3.5	V	–
L-input voltage	V_{IL}	1.0	2.0	–	V	–
Hysteresis of input voltage	V_{IHY}	–	0.7	–	V	–
H-input current	I_{IH}	–	100	250	µA	V_{INH} = 5V
L-input current	I_{IL}	-10	–	10	µA	V_{INH} = 0V
Error Flags EF_{12}; EF_{34}						
L-output voltage level	V_{EFL}	–	0.2	0.4	V	I_{EF} = 2 mA
Leakage current	I_{EFLK}	–	–	10	µA	0V < V_{EF} < 7V
Thermal Shutdown						
Thermal shutdown junction temperature	T_{jSD}	150	175	200	°C	–
Thermal switch-on junction temperature	T_{jSO}	120	–	170	°C	–
Temperature hysteresis	ΔT	–	30	–	K	–

1) Not subject to production test, specified by design

5 Application Information

Note: The following information is given as a hint for the implementation of the device only and shall not be regarded as a description or warranty of a certain functionality, condition or quality of the device.

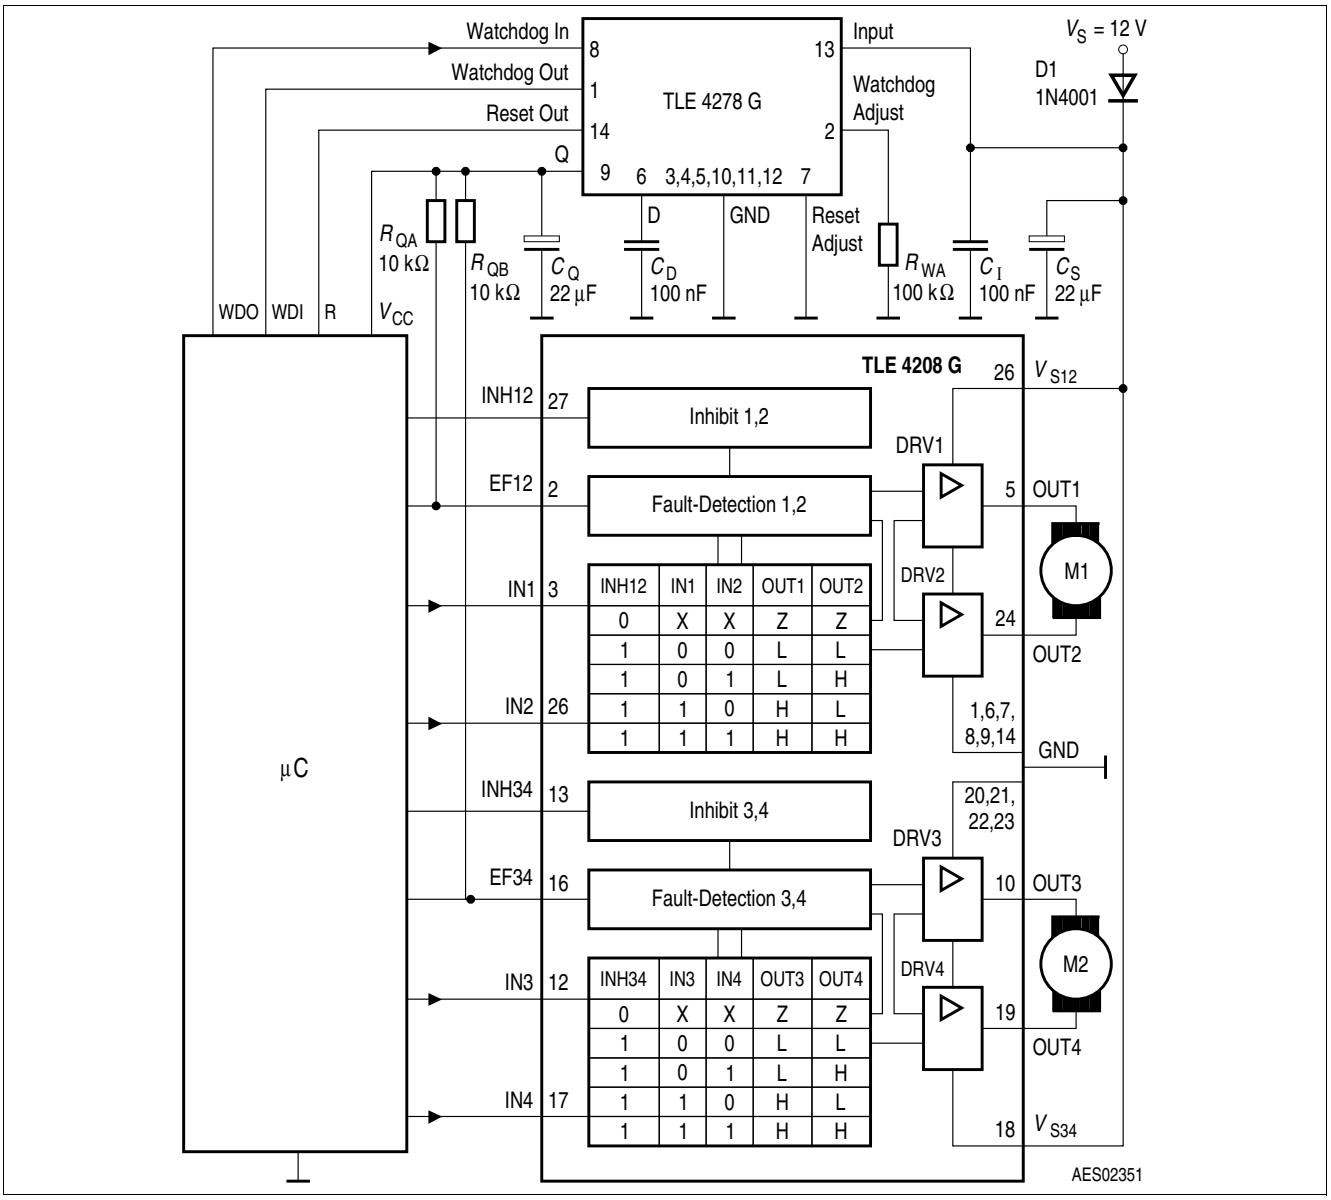

Figure 3 Application Circuit 1 (Device is used as Dual-Full-Bridge-Driver)

Note: This is a very simplified example of an application circuit. The function must be verified in the real application.

Diagrams

Quiescent current I_S over Temperature

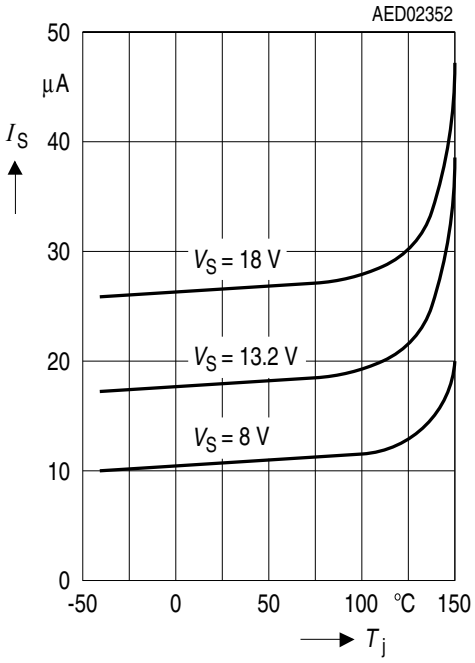

Saturation Voltage of Source $V_{SAT\,U}$ over Temperature

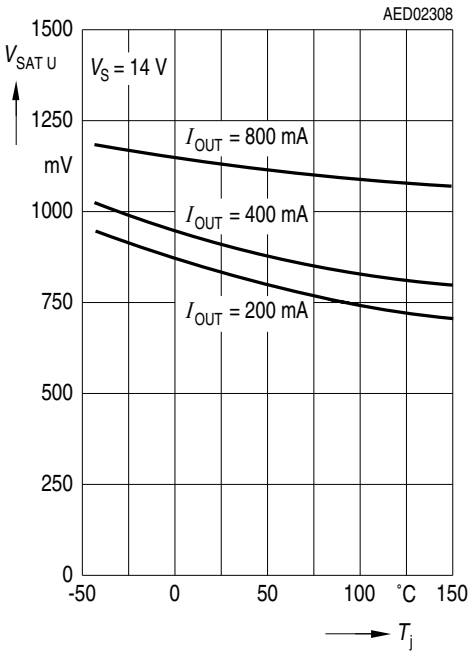

Saturation Voltage of Sink $V_{SAT\,L}$ over Temperature

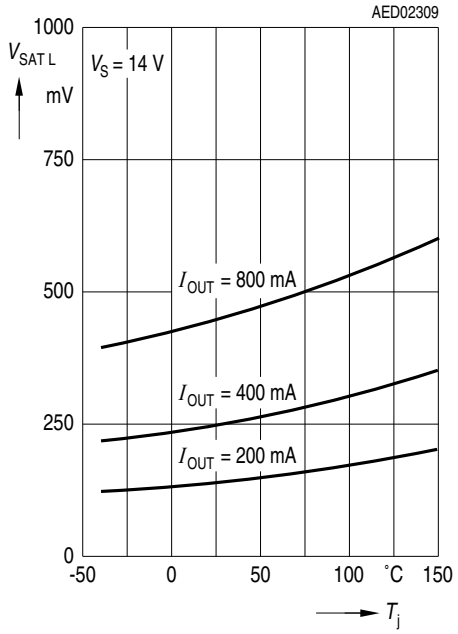

Total Drop at outputs V_{SAT} over Temperature

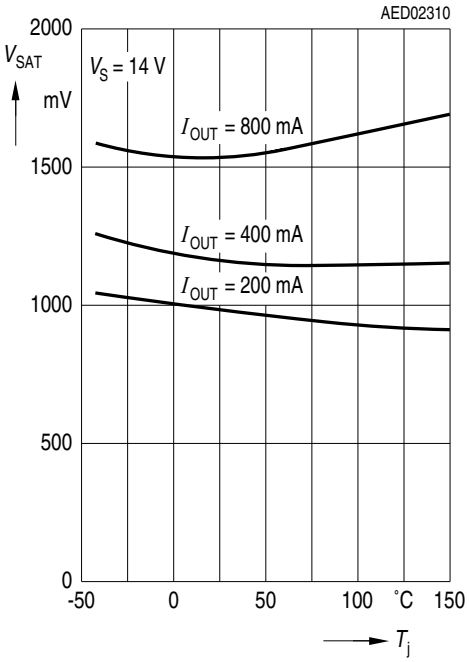

6 Package Outlines

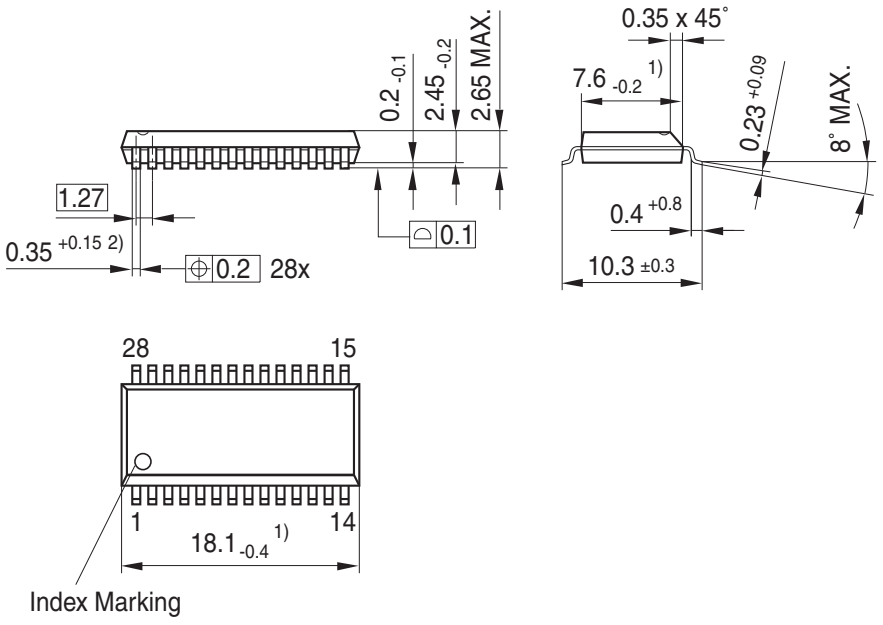

1) Does not include plastic or metal protrusion of 0.15 max. per side
2) Does not include dambar protrusion of 0.05 max. per side

Figure 4 PG-DSO-28

Green Product (RoHS compliant)

To meet the world-wide customer requirements for environmentally friendly products and to be compliant with government regulations the device is available as a green product. Green products are RoHS-Compliant (i.e Pb-free finish on leads and suitable for Pb-free soldering according to IPC/JEDEC J-STD-020).

For further information on alternative packages, please visit our website:
http://www.infineon.com/packages.

Dimensions in mm

7 Revision History

Revision	Date	Changes
Rev. 1.4	2016-02-02	Correction of typographical errors Page 10: VOFF_OFF and VOFF_ON are inverted. No change of the device behavior. Page 10,11: VS1, respectively VS2, renamed VS12 and VS34
Rev. 1.3	2014-02-12	Updated package designation and to latest data sheet formatting
Rev. 1.2	2011-04-11	Updated package designation to reflect various production sites.
Rev. 1.1	2008-02-04	Initial version of RoHS-compliant derivate of TLE4208G Page 1: added AEC certified statement Page 1 and 13: added RoHS compliance statement and Green product feature Page 1 and 3: Editorial change: deleted "fully" (The term "fully protected" often leads to misunderstandings as it is unclear with respect to which parameters). Page 1 and 14: Package changed to RoHS compliant version Page 15: added Revision History, updated Legal Disclaimer

Edition 2016-02-02

Published by
Infineon Technologies AG
81726 Munich, Germany

© 2016 Infineon Technologies AG
All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (**www.infineon.com**).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

LifeElectronics
Живое партнерство

ООО «ЛайфЭлектроникс» **“LifeElectronics” LLC**

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru