



FIAM™  
48V Input



Actual size:  
2.28 x 2.2 x 0.5in  
[57,9 x 55,9 x 12,7mm]



## Filter Input Attenuator Module

### Features & Benefits

- RoHS Compliant (with F or G pin style)
- EMI filtering – Class B <sup>[a]</sup>
- Transient protection
- Low-profile mounting options
- 10 and 20 Ampere versions
- UL, CSA, EN compliance
- Mini-size package
- Inrush current limiting

### Product Highlights

The FIAM is a DC front-end module providing transient protection, inrush current limiting and Class B EMI filtering in a Mini-size package. The FIAM enables designers using Vicor 48V<sub>IN</sub> Mini, Micro or Maxi DC-DC converters to meet the transient immunity and EMI requirements of Bellcore, FCC, ETSI and European Norms and protect system hardware from inrush current. The FIAM accepts an input voltage of 36 – 76V<sub>DC</sub>, is available in 10 or 20A versions and provides reverse polarity protection and remote on/off control.

The FIAM is housed in an industry-standard “half brick” module measuring 2.28 x 2.2 x 0.5in and, depending upon model selected, may be mounted onboard or inboard for height-critical applications.

<sup>[a]</sup> EMI performance is subject to a wide variety of external influences such as PCB construction, circuit layout etc. As such, external components in addition to those listed herein may be required in specific instances to gain full compliance to the standards specified.

### Compatible Products

- Mini, Micro, Maxi 48V Input DC-DC converters

### Absolute Maximum Rating

| Parameter                 | Rating      | Unit            | Notes               |
|---------------------------|-------------|-----------------|---------------------|
| +IN to –IN                | 80          | V <sub>DC</sub> | Continuous          |
|                           | 100         | V               | 100ms               |
| +OUT to –OUT              | 75          | V <sub>DC</sub> | Continuous          |
| Mounting torque           | 5 [0.57]    | in-lbs [N·m]    | 6 each, #4-40 or M3 |
| Operating temperature     | –40 to +100 | °C              | T- and H-Grade      |
| Storage temperature       | –55 to +125 | °C              | H-Grade             |
| Pin soldering temperature | 500 [260]   | °F [°C]         | <5sec; wave solder  |
|                           | 750 [390]   | °F [°C]         | <7sec; hand solder  |

### Thermal Resistance

| Parameter            | Min | Typ  | Max | Unit    |
|----------------------|-----|------|-----|---------|
| Baseplate to sink    |     |      |     |         |
|                      |     | 0.16 |     | °C/Watt |
|                      |     | 0.14 |     | °C/Watt |
| Baseplate to ambient |     |      |     |         |
|                      |     | 8.0  |     | °C/Watt |
|                      |     | 1.9  |     | °C/Watt |

### Part Numbering

|             |                    |                                                                                                                                                 |                                                                                                                                           |                                              |
|-------------|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|
| <b>FIAM</b> | <b>1</b>           | <b>C</b>                                                                                                                                        | <b>1</b>                                                                                                                                  | <b>1</b>                                     |
| Product     | Type               | Product Grade Temperatures (°C)                                                                                                                 | Pin Style                                                                                                                                 | Baseplate                                    |
|             | 1 = 10A<br>2 = 20A | Grade Operating Storage<br>E = –10 to +100 –20 to 125<br>C = –20 to +100 –40 to 125<br>T = –40 to +100 –40 to 125<br>H = –40 to +100 –55 to 125 | 1 = Short<br>2 = Long<br>S = Short ModuMate<br>N = Long ModuMate<br>F = Short RoHS<br>G = Long RoHS<br>K = Extra Long RoHS <sup>[b]</sup> | 1 = Slotted<br>2 = Threaded<br>3 = Thru hole |

<sup>[b]</sup> Not intended for socket or Surfmate mounting

Note: Product images may not highlight current product markings.

## Specifications

(Typical at  $T_{BP} = 25^{\circ}\text{C}$ , nominal line and 75% load, unless otherwise specified.)

### Input Specifications

| Parameter       | Min | Typ | Max   | Unit             | Notes                  |
|-----------------|-----|-----|-------|------------------|------------------------|
| Input voltage   | 36  | 48  | 76    | $V_{DC}$         | Continuous             |
| Inrush limiting |     |     | 0.014 | A/ $\mu\text{F}$ | Capacitor C1. Figure 6 |

### Output Specifications

| Parameter            | Min  | Typ  | Max | Unit          | Notes                                                    |
|----------------------|------|------|-----|---------------|----------------------------------------------------------|
| Output current       |      |      |     |               |                                                          |
| FIAM1xxx             |      |      | 10  | A             |                                                          |
| FIAM2xxx             |      |      | 20  | A             |                                                          |
| Efficiency           | 96.0 | 97.5 |     | %             | Internal voltage drop is 1.4 max. @ 20A, 100°C baseplate |
| External capacitance |      |      |     |               | See illustration on page 3, Figure 6.                    |
| FIAM1xxx             | 10   |      | 150 | $\mu\text{F}$ | 100V                                                     |
| FIAM2xxx             | 100  |      | 330 | $\mu\text{F}$ | 100V                                                     |

### Control Pin Specifications

| Parameter        | Min | Typ | Max | Unit     | Notes                                   |
|------------------|-----|-----|-----|----------|-----------------------------------------|
| ON / OFF control |     |     |     |          |                                         |
| Enable (ON)      | 0.0 |     | 1.0 | $V_{DC}$ | Referenced to $-V_{OUT}$                |
| Disable (OFF)    | 3.5 |     | 5.0 | $V_{DC}$ | 100k $\Omega$ internal pull-up resistor |

### Electromagnetic Compatibility

| Parameter             | Min | Typ | Max | Unit | Notes                                                            |
|-----------------------|-----|-----|-----|------|------------------------------------------------------------------|
| Transient immunity    |     |     |     |      |                                                                  |
| Belcore TR-NWT-000499 |     |     | 200 | V    | 1 $\mu\text{sec}$ duration                                       |
| ETS 300 386-1 Class 2 |     |     | 200 | V    | 5.0 $\mu\text{sec}$ rise time, 50 $\mu\text{sec}$ duration surge |
|                       |     |     | 250 | V    | 1 – 100nsec burst                                                |

### Safety Specifications

| Parameter                               | Min | Typ   | Max | Unit      | Notes |
|-----------------------------------------|-----|-------|-----|-----------|-------|
| Dielectric withstand (I/O to baseplate) |     | 1,500 |     | $V_{RMS}$ |       |
|                                         |     | 2,121 |     | $V_{DC}$  |       |

## Specifications (Cont.)


(Typical at  $T_{BP} = 25^{\circ}\text{C}$ , nominal line and 75% load, unless otherwise specified.)

### Agency Approvals

| Safety Standards                                | Markings | Notes                                                                             |
|-------------------------------------------------|----------|-----------------------------------------------------------------------------------|
| UL1950, CSA 22.2-950, EN60950                   |          |                                                                                   |
| Conducted Emission (Figures 2&3) <sup>[c]</sup> |          |                                                                                   |
| Bellcore GR-001089-Core                         |          | Issue 2                                                                           |
| EN55022                                         |          | Level B; When used with Vicor Mini, Maxi, Micro 48V <sub>IN</sub> DC-DC converter |
| FCC Part 15                                     |          | Level B                                                                           |

### General Specifications

| Parameter                   | Min | Typ         | Max        | Unit              | Remarks                                     |
|-----------------------------|-----|-------------|------------|-------------------|---------------------------------------------|
| Reverse polarity protection |     |             |            |                   | No damage to module, external fuse required |
| Weight                      |     | 3.1<br>[88] | 4<br>[113] | ounces<br>[grams] |                                             |
| Warranty                    |     |             | 2          | years             |                                             |

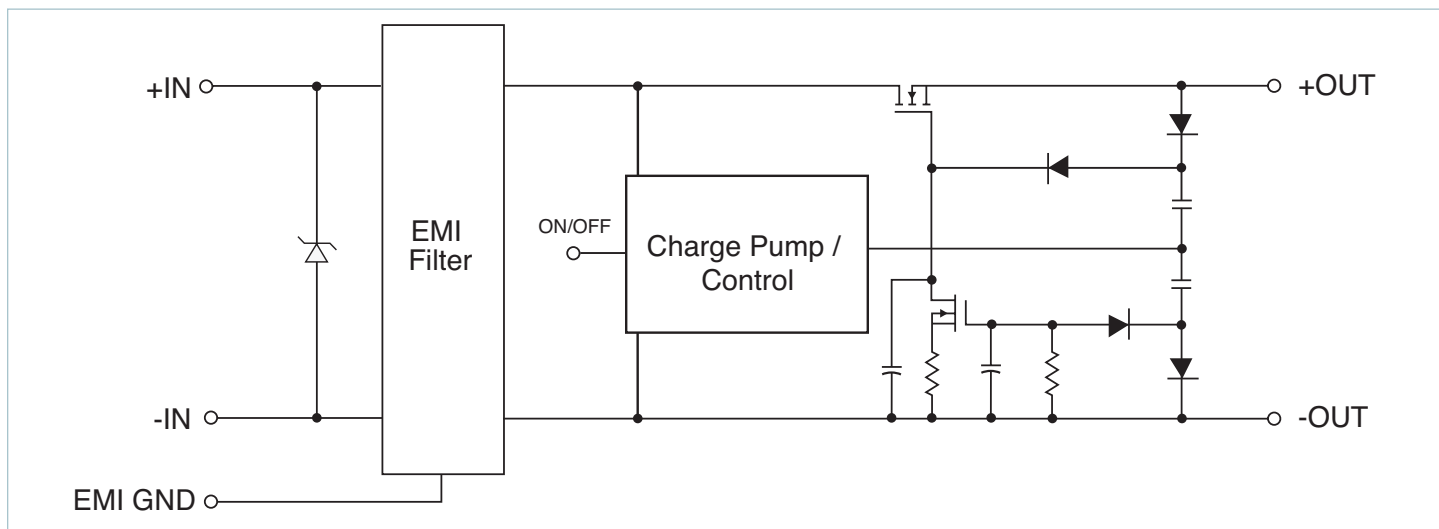

**Figure 1** — FIAM block diagram

<sup>[c]</sup> EMI performance is subject to a wide variety of external influences such as PCB construction, circuit layout etc.

As such, external components in addition to those listed herein may be required in specific instances to gain full compliance to the standards specified.

## Conducted Noise

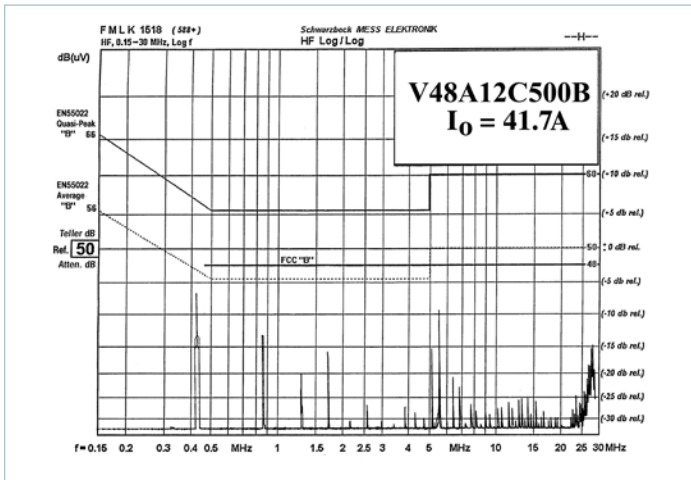


Figure 2 — FIAM and model V48A12C500 DC-DC converter

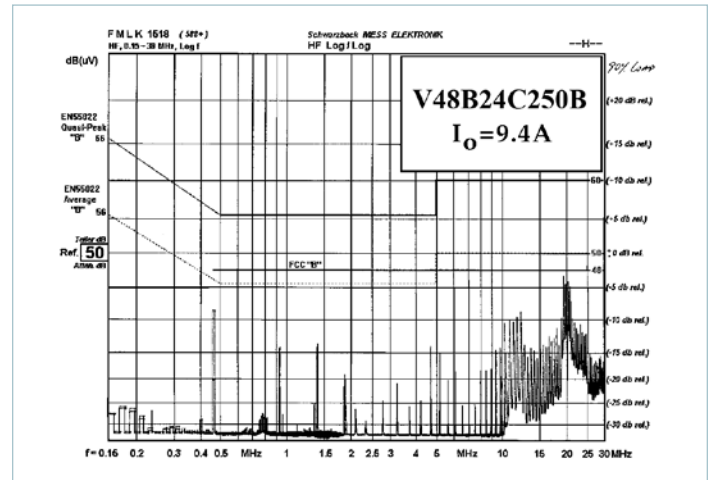


Figure 3 — FIAM and model V48B24C250 DC-DC converter

## Inrush Limiting

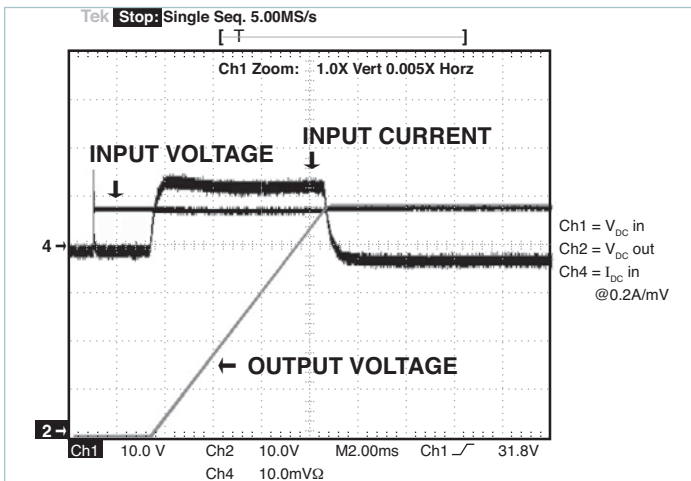


Figure 4 — Inrush limiting: inrush current with 330μF external capacitance

## Transient Immunity

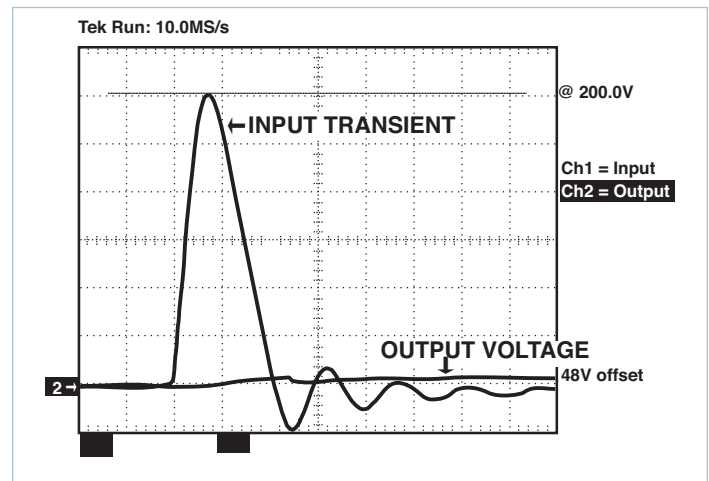


Figure 5 — Transient immunity: FIAM output response to an input transient

## Transient and Surge Protection


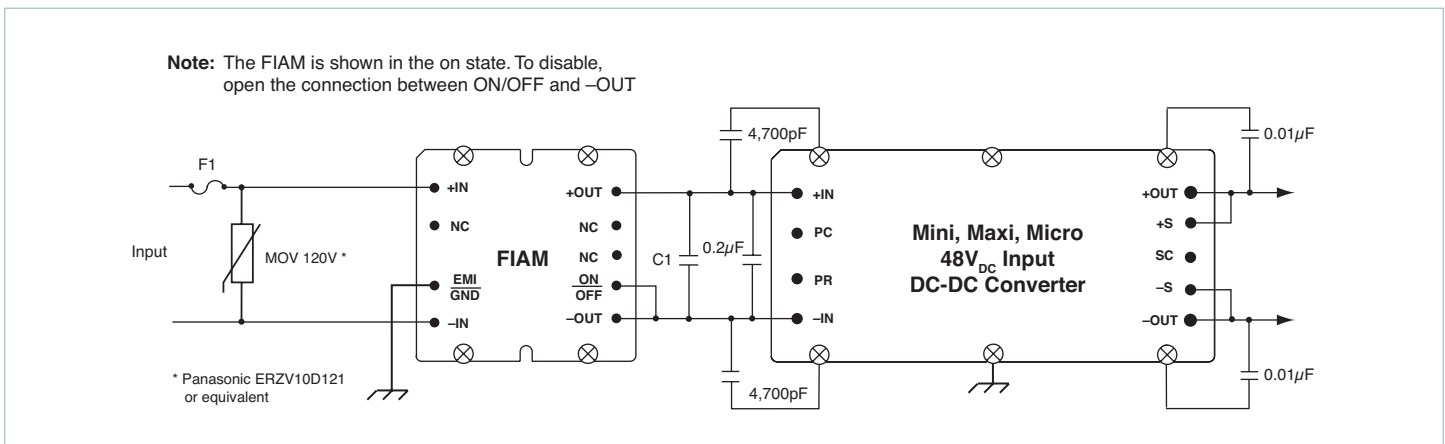


Figure 6 — Typical connection diagram


## Storage

Vicor products, when not installed in customer units, should be stored in ESD safe packaging in accordance with ANSI/ESD S20.20, "Protection of Electrical and Electronic Parts, Assemblies and Equipment" and should be maintained in a temperature controlled factory/warehouse environment not exposed to outside elements controlled between the temperature ranges of 15°C and 38°C. Humidity shall not be condensing, no minimum humidity when stored in an ESD compliant package.

## Mechanical Diagram

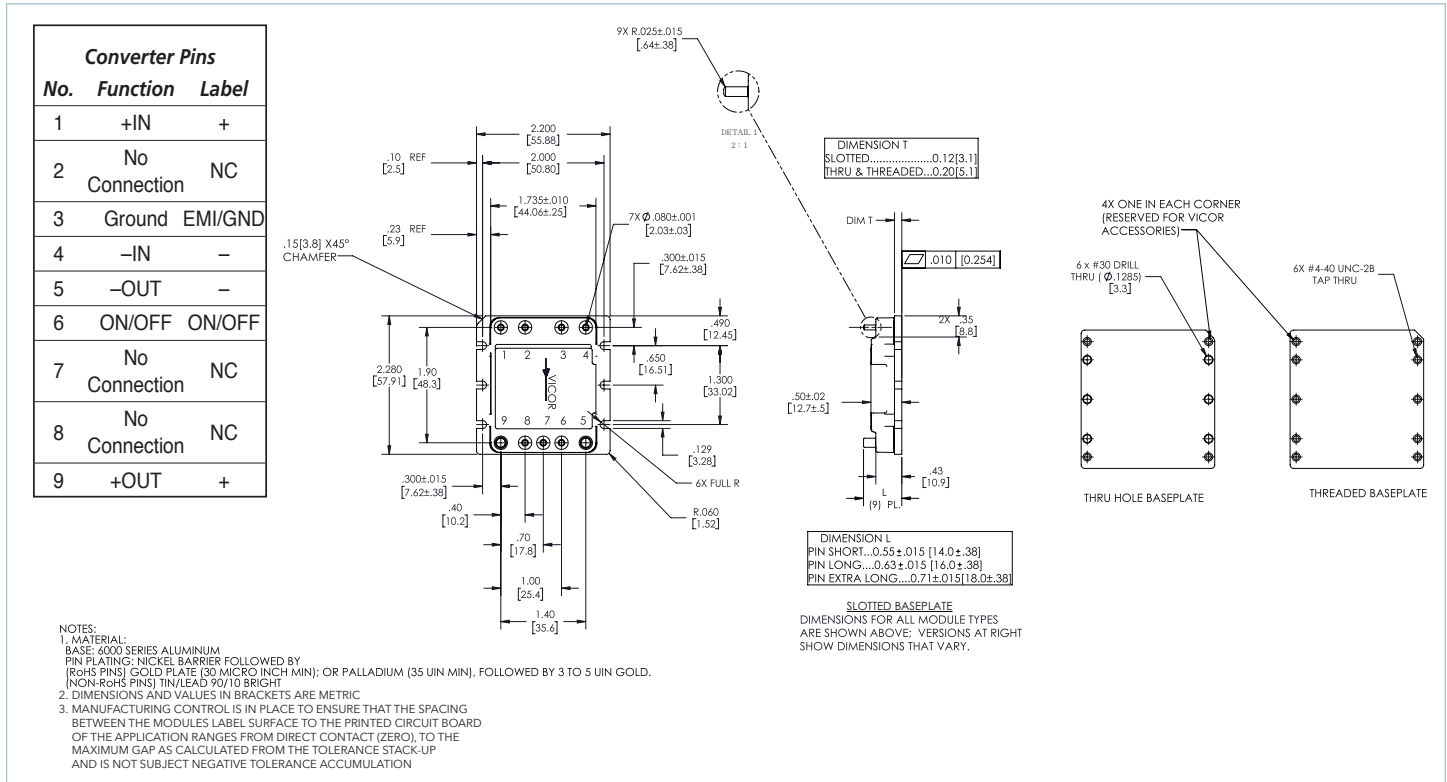

## PCB Mounting Specifications

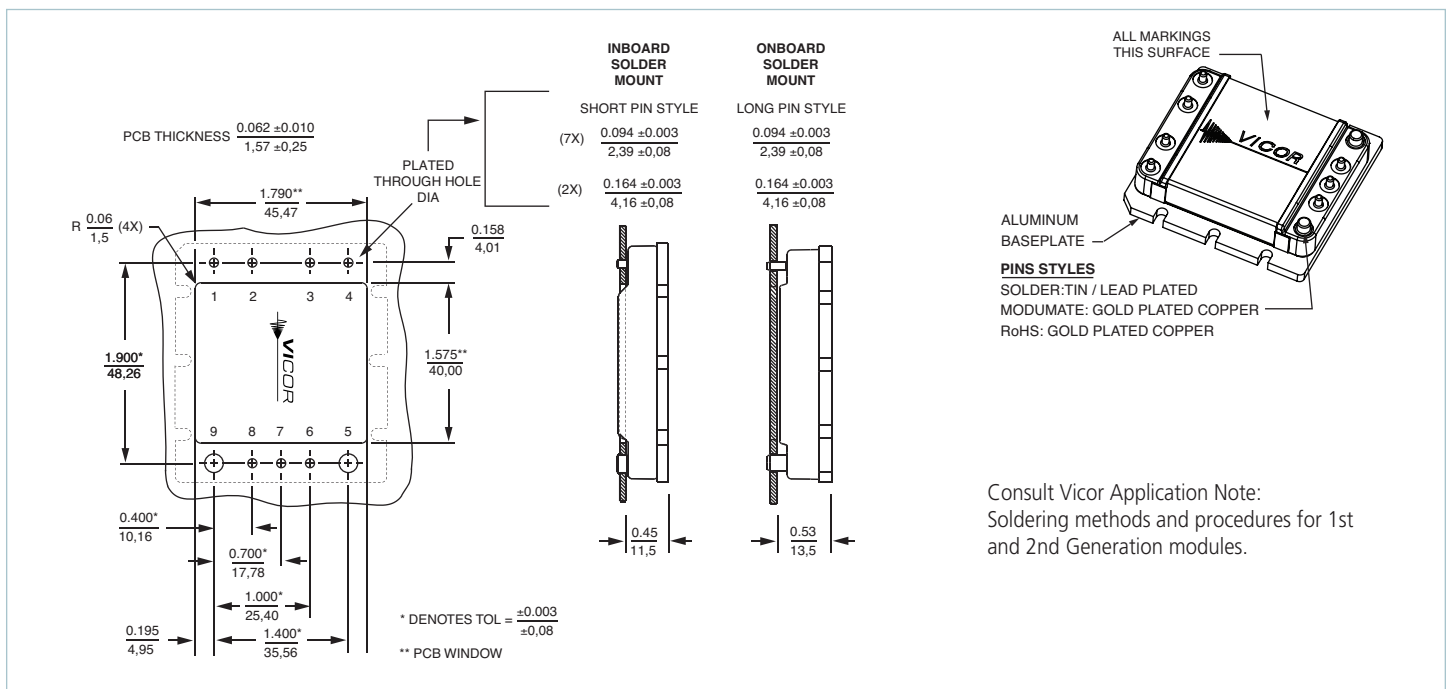

---

**Vicor's comprehensive line of power solutions includes high density AC-DC and DC-DC modules and accessory components, fully configurable AC-DC and DC-DC power supplies, and complete custom power systems.**

Information furnished by Vicor is believed to be accurate and reliable. However, no responsibility is assumed by Vicor for its use. Vicor makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication. Vicor reserves the right to make changes to any products, specifications, and product descriptions at any time without notice. Information published by Vicor has been checked and is believed to be accurate at the time it was printed; however, Vicor assumes no responsibility for inaccuracies. Testing and other quality controls are used to the extent Vicor deems necessary to support Vicor's product warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

**Specifications are subject to change without notice.**

Visit [http://www.vicorpower.com/dc-dc\\_filters/fiam-filter\\_input\\_attenuator\\_module](http://www.vicorpower.com/dc-dc_filters/fiam-filter_input_attenuator_module) for the latest product information.

### **Vicor's Standard Terms and Conditions and Product Warranty**

All sales are subject to Vicor's Standard Terms and Conditions of Sale, and Product Warranty which are available on Vicor's webpage (<http://www.vicorpower.com/termsconditionswarranty>) or upon request.

### **Life Support Policy**

VICOR'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF VICOR CORPORATION. As used herein, life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness. Per Vicor Terms and Conditions of Sale, the user of Vicor products and components in life support applications assumes all risks of such use and indemnifies Vicor against all liability and damages.

### **Intellectual Property Notice**

Vicor and its subsidiaries own Intellectual Property (including issued U.S. and Foreign Patents and pending patent applications) relating to the products described in this data sheet. No license, whether express, implied, or arising by estoppel or otherwise, to any intellectual property rights is granted by this document. Interested parties should contact Vicor's Intellectual Property Department.

Contact Us: <http://www.vicorpower.com/contact-us>

#### **Vicor Corporation**

25 Frontage Road  
Andover, MA, USA 01810  
Tel: 800-735-6200  
Fax: 978-475-6715  
[www.vicorpower.com](http://www.vicorpower.com)

#### **email**

Customer Service: [custserv@vicorpower.com](mailto:custserv@vicorpower.com)  
Technical Support: [apps@vicorpower.com](mailto:apps@vicorpower.com)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Vicor:

[FIAM1CG3](#) [FIAM2T21](#) [FIAM1T11](#) [FIAM1HG3](#) [FIAM2CS1](#) [FIAM1T12](#) [FIAM2CF2](#) [FIAM1C22](#) [FIAM2CG3](#)  
[FIAM2T13](#) [FIAM2T11](#) [FIAM2T22](#) [FIAM1TN2](#) [FIAM2HG2](#) [FIAM2C23](#) [FIAM2T23](#) [FIAM1C21](#) [FIAM1M21](#) [FIAM2H22](#)  
[FIAM2CF3](#) [FIAM1TF3](#) [FIAM1C11](#) [FIAM2TG1](#) [FIAM2E11](#) [FIAM2CN1](#) [FIAM2C13](#) [FIAM1TG1](#) [FIAM2TN1](#)  
[FIAM2C11](#) [FIAM1T21](#) [FIAM1MS3](#) [FIAM1TF1](#) [FIAM1CF1](#) [FIAM1CG2](#) [FIAM2CG2](#) [FIAM2H21](#) [FIAM1TS1](#)  
[FIAM1C23](#) [FIAM1T23](#) [FIAM1H21](#) [FIAM1HG1](#) [FIAM2HF3](#) [FIAM1CS1](#) [FIAM1C12](#) [FIAM1T22](#) [FIAM1C13](#) [FIAM2E22](#)  
[FIAM1CN1](#) [FIAM2HG3](#) [FIAM2C22](#) [FIAM1CN2](#) [FIAM1TN1](#) [FIAM2H23](#) [FIAM1CG1](#) [FIAM2HG1](#) [FIAM2TS1](#)  
[FIAM2H11](#) [FIAM1TG3](#) [FIAM2CG1](#) [FIAM2C21](#) [FIAM2TF1](#) [FIAM1CF2](#) [FIAM2CF1](#) [FIAM1H11](#)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)