


# 50 Ohm SMB PC Mount Right Angle Bulkhead Jack Receptacle




INCHES (MILLIMETERS)  
CUSTOMER DRAWINGS AVAILABLE UPON REQUEST

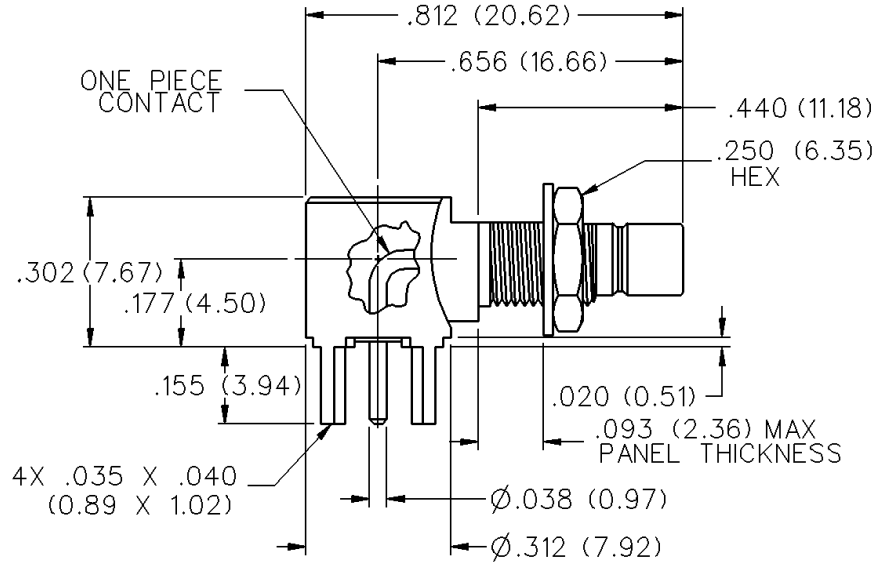

| GOLD PLATED  | NICKEL PLATED |
|--------------|---------------|
| 131-3701-341 | 131-3701-346  |

Mounting hole layout

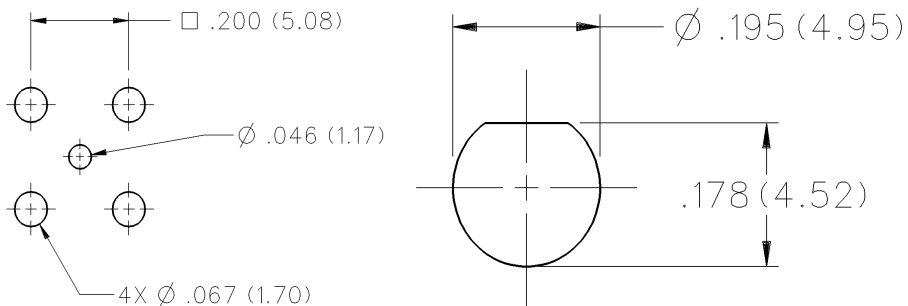

# SMB - 50 Ohm Connectors

## Specifications



INCHES (MILLIMETERS)  
CUSTOMER DRAWINGS AVAILABLE UPON REQUEST

### ELECTRICAL RATINGS

**Impedance:** 50 ohms

**Frequency Range:** Connectors ..... 0-4 GHz  
Dummy loads ..... 0-1 GHz

**VSWR:** (f = GHz)      Straight      Right Angle  
                                 Cabled      Cabled  
RG-178 cable ..... 1.30 + .04f      1.45 + .06f  
RG-316, RG-58, and .086 semi-rigid cable ..... 1.25 + .04f      1.35 + .04f  
Adapters ..... 1.20 + .04f

Uncabled receptacles, dummy loads ..... N/A

**Working Voltage:** (Vrms maximum)<sup>†</sup>

| Connectors for Cable Type      | Sea Level | 70K Feet |
|--------------------------------|-----------|----------|
| RG-178                         | 250       | 60       |
| RG-316, RG-58, .086 semi-rigid |           |          |
| uncabled receptacles, adapters | 335       | 85       |
| Dummy loads                    |           | N/A      |

**Dielectric Withstanding Voltage:** (VRMS minimum at sea level)<sup>†</sup>

|                                                |      |
|------------------------------------------------|------|
| Connectors for RG-178                          | 750  |
| Connectors for RG-316, RG-58, .086 semi-rigid, |      |
| uncabled receptacles, adapters                 | 1000 |
| Dummy loads                                    | N/A  |

**Corona Level:** (Volts minimum at 70,000 feet)<sup>†</sup>

|                                               |     |
|-----------------------------------------------|-----|
| Connectors for RG-178                         | 185 |
| Connectors for RG-316, RG-58, .086 semi-rigid | 250 |
| Uncabled receptacles, adapters, dummy loads   | N/A |

**Insertion Loss:** (dB maximum, tested at 1.5 GHz)

|                                                |         |
|------------------------------------------------|---------|
| Straight cable connectors                      | 0.30 dB |
| Right angle cable connectors                   | 0.60 dB |
| Uncabled receptacles, adapters and dummy loads | N/A     |

**Insulation Resistance:** 1000 megohms minimum

**Contact Resistance:** (milliohms maximum)      Initial      After Environmental

|                                            |      |      |
|--------------------------------------------|------|------|
| Center contact (straight cabled connectors |      |      |
| and uncabled receptacles)                  | 6.0  | 8.0  |
| Center contact (right angle cabled         |      |      |
| connectors and adapters)                   | 12.0 | 16.0 |
| Outer contact (gold plated connectors)     | 1.0  | 1.5  |
| Outer contact (nickel plated connectors)   | 2.5  | 3.5  |
| Braid to body (gold plated connectors)     | 1.0  | N/A  |
| Braid to body (nickel plated connectors)   | 2.5  | N/A  |

**RF Leakage:** (dB minimum tested at 2.5 GHz)

|                                                |        |
|------------------------------------------------|--------|
| Cable connectors                               | -55 dB |
| Uncabled receptacles, adapters and dummy loads | N/A    |

<sup>†</sup>Avoid user injury due to misapplication. See safety advisory definitions inside front cover.

\*\* All gold plated parts include a .00005" min. nickel underplate barrier layer.

**RF High Potential Withstanding Voltage:** (Vrms minimum, tested at 4 and 7 MHz)<sup>†</sup>

|                                   |     |
|-----------------------------------|-----|
| Connectors for RG-178             | 500 |
| Connectors for RG-316, RG-58      | 700 |
| Uncabled receptacles and adapters | 600 |
| Dummy loads                       | N/A |

**Power Rating (Dummy Load):** 0.5 watt @ +25°C, derated to 0.25 watt @ +125° C

### MECHANICAL RATINGS

**Engagement Design:** MIL-C-39012, Series SMB

**Engagement/Disengagement Force:** 2 pounds min to 14 pounds maximum axial force

**Contact Retention:** 4 lbs. min axial force (captivated contacts)  
1 inch-ounce min torque (uncabled receptacles)

| Cable Retention:               | Axial Force* (pounds) | Torque (in-oz) |
|--------------------------------|-----------------------|----------------|
| Connectors for RG-178          | 10                    | N/A            |
| Connectors for RG-316          | 20                    | N/A            |
| Connectors for RG-58           | 40                    | 16             |
| Connectors for .086 semi-rigid | 30                    | 16             |

\* or cable breaking strength whichever is less.

**Durability:** 500 cycles minimum

### ENVIRONMENTAL RATINGS

(Meets or exceeds the applicable paragraph of MIL-C-39012)

**Temperature Range:** Connectors ..... - 65°C to + 165°C  
Dummy loads ..... - 65°C to + 125°C

**Thermal Shock:** MIL-STD-202, Method 107, Condition B (N/A dummy loads)

**Corrosion:** MIL-STD-202, Method 101, Condition B (N/A dummy loads)

**Shock:** MIL-STD-202, Method 213, Condition B (N/A dummy loads)

**Vibration:** MIL-STD-202, Method 204, Condition B (N/A dummy loads)

### MATERIAL SPECIFICATIONS

**Bodies:** Brass per QQ-B-626 or zinc per ASTM B86-71, gold plated\*\* per MIL-G-45204 .00001 min or nickel plated per QQ-N-290

**Contacts:** Male - brass per QQ-B-626, gold plated per MIL-G-45204 .00003" min.  
Female - beryllium copper per QQ-C-530, gold plated per MIL-G-45204 .00003" min.

**Insulators:** PTFE fluorocarbon per ASTM D 1710 and ASTM D 1457 OR Teflon PFA 340


**Expansion Caps:** Brass per QQ-B-613, gold plated per MIL-G-45204 .00001" min. or nickel plated per QQ-N-290

**Crimp Sleeves:** Copper per WW-T-799, gold plated per MIL-G-45204 .00001" min. or nickel plated per QQ-N-290

**Mounting Hardware:** Brass (nuts) per QQ-B-626 or phosphor bronze (lockwashers) QQ-B-750, gold plated per MIL-G-45204 .00001" min. or nickel plated per QQ-N-290

**Cover Rings:** Phosphor Bronze per QQ-B-750, gold plated per MIL-G-45204 .00001 min. or nickel plated per QQ-N-290.

### MATING ENGAGEMENT FOR SMB SERIES PER MIL-C-39012

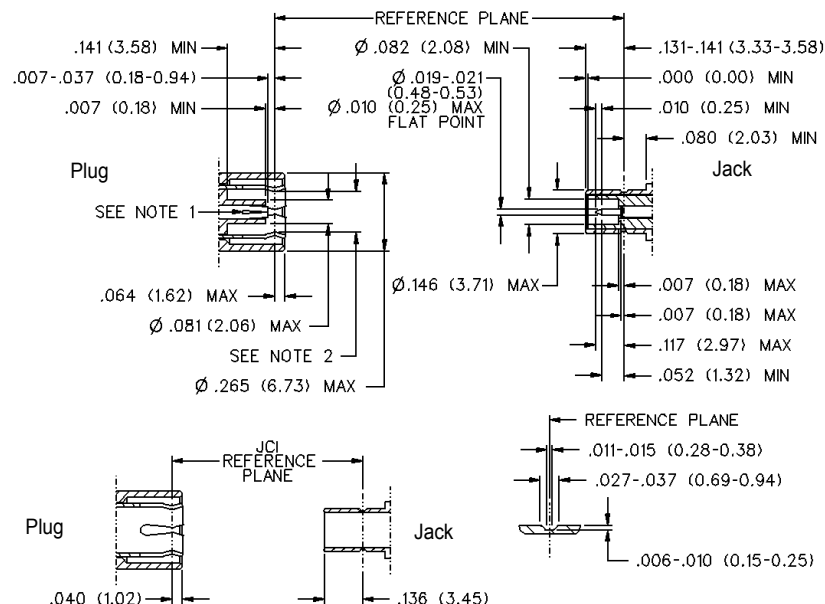

#### Notes

1. ID of contact to meet VSWR mating characteristics and connector durability when mated with a dia .019/.053 male contact.
2. Must meet the force to engage and disengage when mated with mating part.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)