

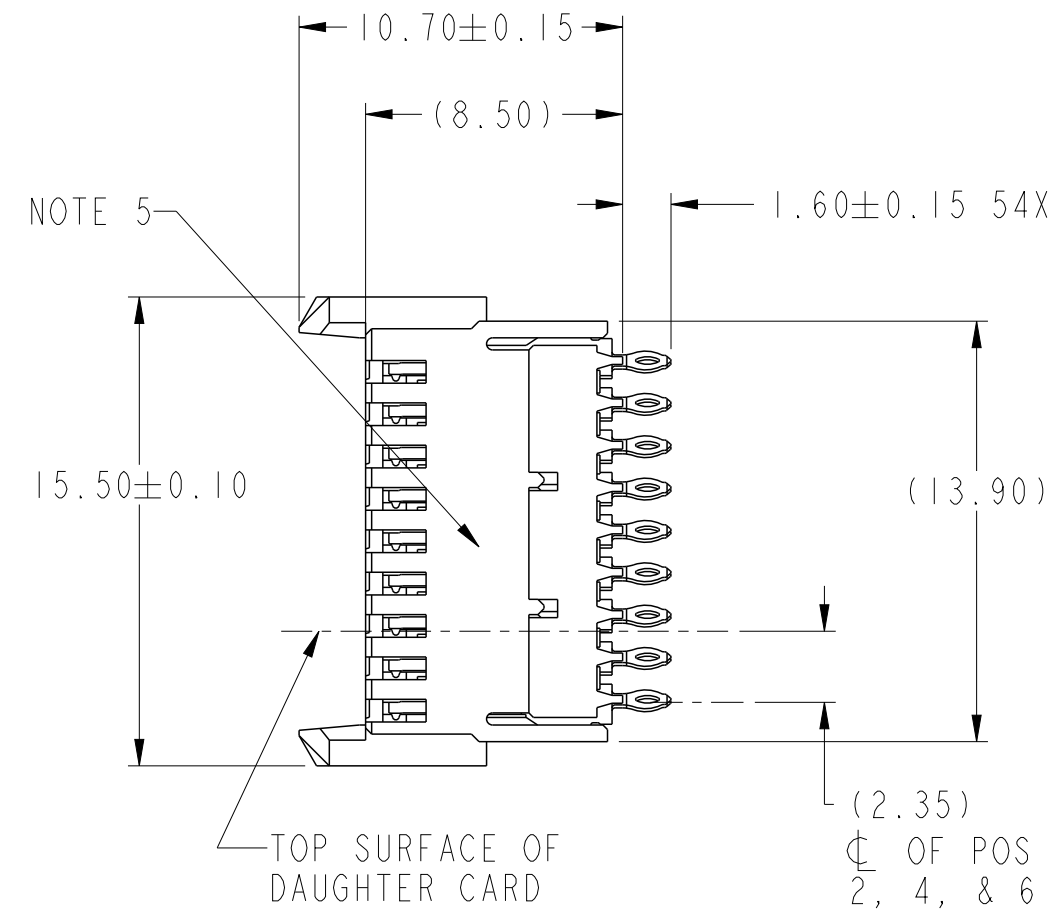
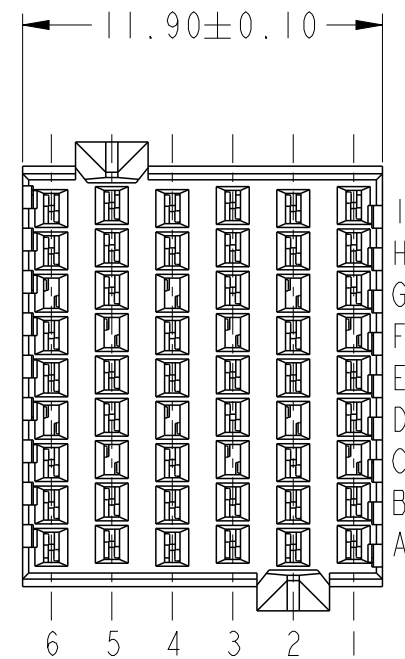


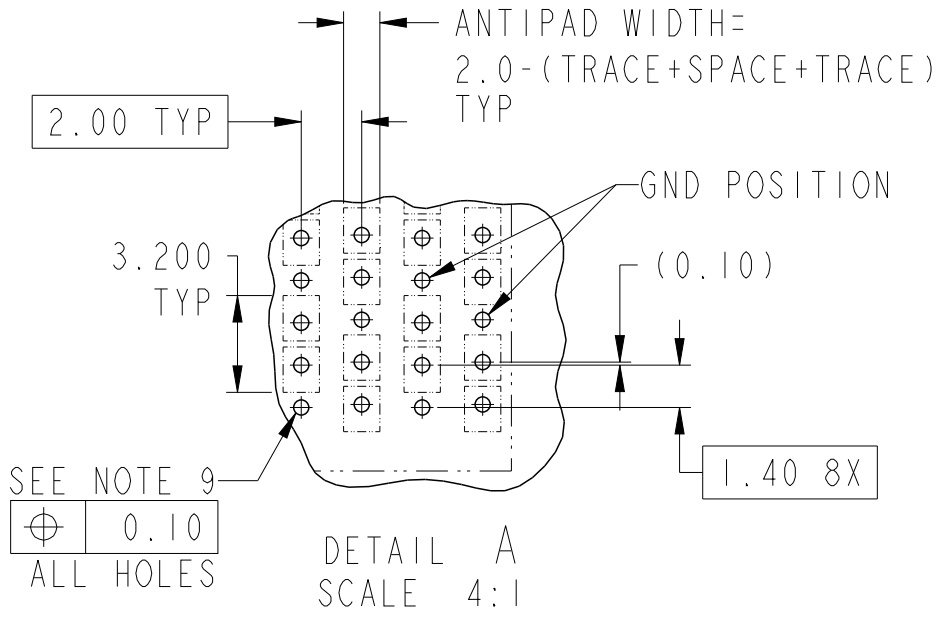


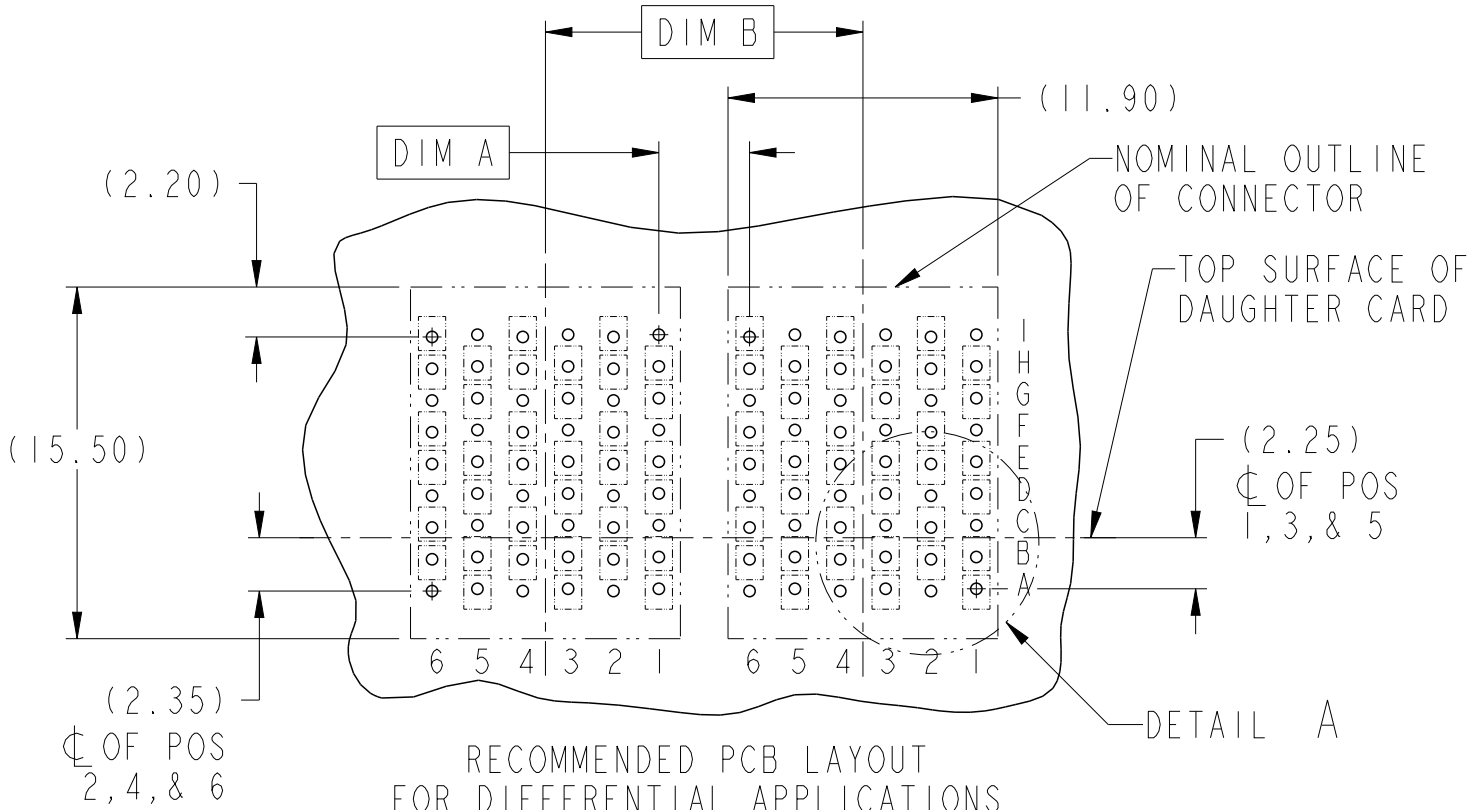

spec ref				dr	Sandar Soe	2013/03/05	projection 	MM 	size	A3	scale	4:1
tolerance std ASME Y14.5 - TOLERANCES UNLESS OTHERWISE SPECIFIED				eng	Sandar Soe	2013/12/20			ecn no	-		
				chr	-	-						
				appr	Chen-Hong Tan	2013/12/20			product family		AirMax VS	
surface - ✓ ASME Y14.5	linear	0.X	±0.3		title AirMax VS2 VERT RECEPT ASSY PRESS-FIT, 54POS, 12mm, GXT+				dwg no 10124469		rev A	
		0.XX	±0.10									
			0.XXX		±0.050							
angular		0°	±2°	www.fci.com	cat. no.		-	Product - Customer Drw			sheet 1 of 4	

ADJACENT HEADER WIDTHS	DIM A	DIM B
12MM/12MM	2.00	12.00
12MM/14MM	3.00	13.00
14MM/14MM	4.00	14.00




spec ref				dr		Sandar Soe	2013/03/05		projection		MM		size		A3	scale		3:1									
tolerance std				eng		Sandar Soe	2013/12/20						ecn no		-												
ASME Y14.5				chr		-																					
-				appr		Chen-Hong Tan	2013/12/20		product family				rel level				Released										
surface 3.200 linear				0.X		±0.3				title				AirMax VS2 VERT RECEPT ASSY				dwg no		10124469				rev		A	
ASME Y14.5				angular		0°		±2°		www.fci.com		cat. no.		-		Product - Customer Drw				sheet 2 of 4							




Copyright FCI.

ADJACENT HEADER WIDTHS	DIM C	DIM D
12MM/12MM	2.00	12.00
12MM/14MM	3.00	13.00
14MM/14MM	4.00	14.00

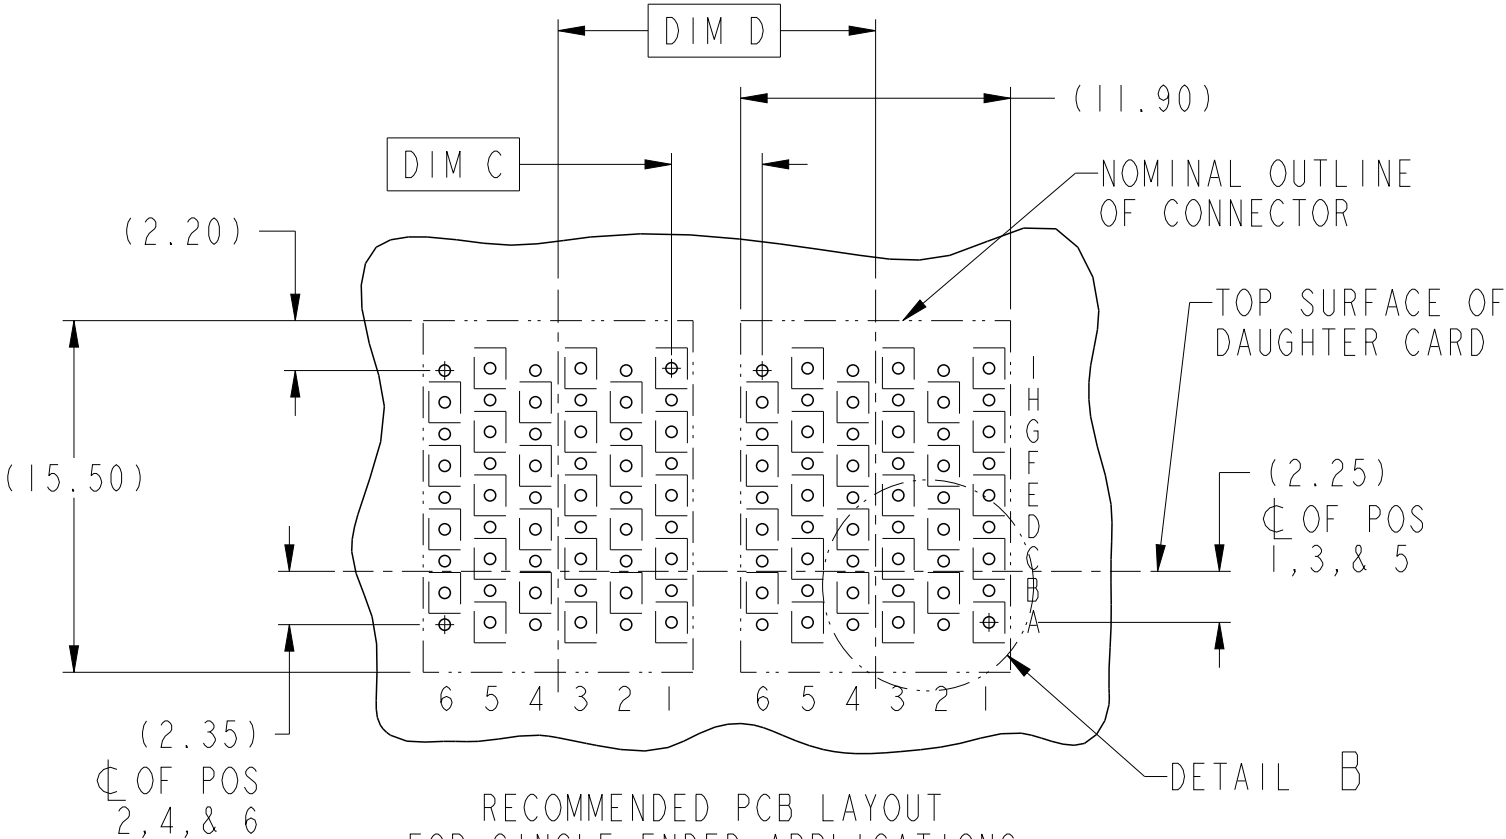

RECOMMENDED PCB LAYOUT
FOR SINGLE ENDED APPLICATIONS
COMPONENT SIDE
(TWO ADJACENT FOOTPRINTS SHOWN)
NOTES 6 & 7

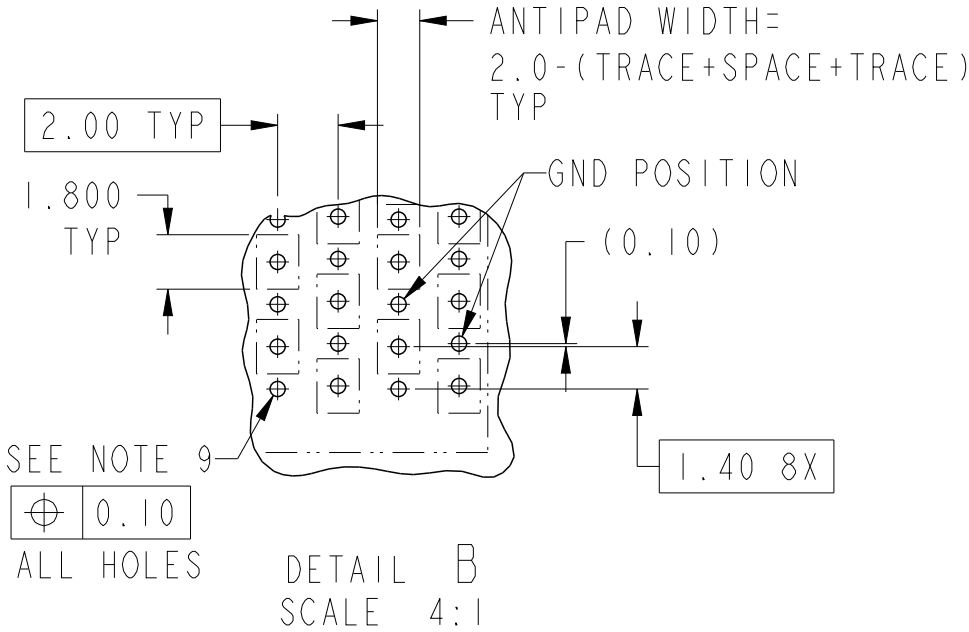


spec ref				dr		Sandar Soe	2013/03/05		projection		MM		size		A3	scale		3:1												
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		Sandar Soe	2013/12/20						ecn no				-											
ASME Y14.5						chr		-	-																					
-						appr		Chen-Hong Tan	2013/12/20		product family					rel level				Released										
surface		3.200 linear		0.X		±0.3				title		AirMax VS2 VERT RECEPT ASSY					dwg no		10124469					rev		A				
																											0.XX		±0.10	
																											0.XXX		±0.050	
ASME Y14.5		angular		0°		±2°		www.fci.com		cat. no.		-		Product - Customer Drw					sheet 3 of 4											



Copyright FCI.

PART NUMBER	PRESS-FIT TAIL PLATING TYPE
10124469-102	TIN/LEAD ALLOY OVER NICKEL
10124469-102LF	TIN OVER NICKEL (LEAD FREE)

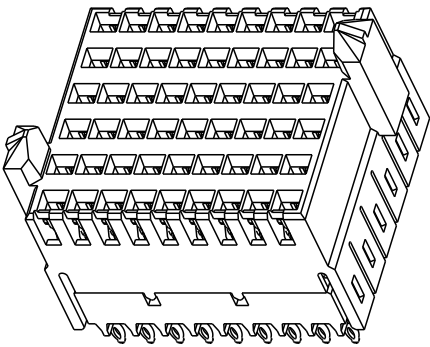

NOTES:

- CONNECTOR MATERIALS:
HOUSING & RETAINER: HIGH TEMP THERMOPLASTIC, NATURAL, UL94V-0
IMLA PLASTIC: HIGH TEMP THERMOPLASTIC, BLACK, UL94V-0
CONTACT: COPPER ALLOY
- CONTACT PLATING:
SEPARABLE INTERFACE: PERFORMANCE-BASED PLATING, QUALIFIED TO MEET THE REQUIREMENTS OF FCI PRODUCT SPECIFICATION GS-12-239, INCLUDING TELCORDIA GR-1217-CORE (November 1995) CENTRAL OFFICE TEST SEQUENCE.

PRESS-FIT TAILS: SEE TABLE
- PRODUCT SPECIFICATION: GS-12-239
- APPLICATION SPECIFICATION: GS-20-035
- PRODUCT MARKING, (PART NUMBER & LOT CODE), ON THIS SURFACE
- REFER TO CUSTOMER DRAWING 10035911 FOR INFORMATION REGARDING PCB LAYOUT OF POWER AND GUIDE MODULES RELATIVE TO SIGNAL MODULES
- POSITIONS F OF ODD NUMBERED COLUMNS AND POSITIONS G OF EVEN NUMBERED COLUMNS CORRESPOND TO EARLY MATE HEADER PINS
- THERE IS NO GROUND BUSSING WITHIN THE CONNECTOR SYSTEM
- REFER TO CUSTOMER DRAWING 10045979 FOR INFORMATION ON PCB HOLE DIAMETERS AND PLATING OPTIONS.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 40 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
- PACKAGING MEETS GS-14-920 LEAD FREE LABELING SPECIFICATION.

spec ref				dr		Sandar Soe	2013/03/05			size	A3	scale	3:1	
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng		Sandar Soe	2013/12/20			ecn no	-			
				chr		-	-							
ASME Y14.5				appr		Chen-Hong Tan	2013/12/20	product family		AirMax VS		rel level	Released	
surface 	linear	0.X	±0.3		title				dwg no	10124469			rev	
		0.XX	±0.10											
		0.XXX	±0.050											
ASME Y14.5	angular	0°	±2°	www.fci.com	cat. no.		-	Product - Customer Drw				sheet 4 of 4		A

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru