


## 280-018P pin connectors with standard M24308 type mounting flange, crimp termination

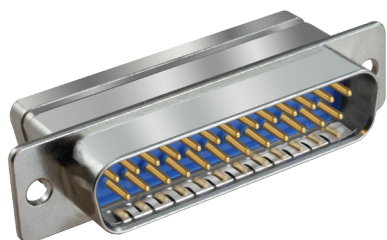

HiPer-D® pin connectors feature crimp, rear-releaseable size #20 or #22 contacts. Intermateable with standard M24308-type D-Subminiature connectors, the HiPer-D® features a rugged machined aluminum shell, waterproof sealing and optional ground springs for improved resistance to electromagnetic interference. Gold-plated size #20 contacts conform to M39029/64-369 and accept #20 to #24 AWG wire. Gold-plated size #22 contacts conform to M39029/58-360 and accept #22 to #28 AWG wire. Contacts are packaged with connector. Terminate contacts with crimp tools purchased separately. Glass-reinforced thermoset epoxy insulators, copper alloy retention clips. Fluorosilicone face seal and rear grommet meet IP67 immersion requirement. 1000 VAC, 5 Amps (#22) or 7.5 Amps (#20).

B

| Ordering Information           |                                                                                                                                           |      |                                                                                                                                                |   |   |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|------|------------------------------------------------------------------------------------------------------------------------------------------------|---|---|
| Sample Part Number             | 280-018P                                                                                                                                  | 3S25 | ME                                                                                                                                             | G | P |
| Basic Part Number              | 280-018P                                                                                                                                  |      |                                                                                                                                                |   |   |
| Shell Size-Contact Arrangement | See Shell Size - Contact Arrangements Table                                                                                               |      |                                                                                                                                                |   |   |
| Shell Finish                   | <b>ME</b> = Electroless Nickel (RoHS)<br><b>JF</b> = Cadmium with Yellow Chromate<br><b>Z1</b> = Passivated Stainless Steel (RoHS)        |      | <b>MT</b> = Nickel-PTFE (RoHS)<br><b>Z2</b> = Gold (RoHS)                                                                                      |   |   |
| Ground Spring                  | <b>G</b> = Supplied with EMI Ground Spring                                                                                                |      | <b>N</b> = No Ground Spring                                                                                                                    |   |   |
| Mating Hardware                | <b>N</b> = No Hardware (Through-Hole)<br><b>L</b> = Jackscrew, Hex Head, Low Profile<br><b>S</b> = Screwlock, Male, Hex Head, Low Profile |      | <b>P</b> = #4-40 Female Jackpost<br><b>K</b> = Jackscrew, Slot Head, Extended Length<br><b>T</b> = Screwlock, Male, Slot Head, Extended Length |   |   |

| Shell Size - Contact Arrangements |                      |     |
|-----------------------------------|----------------------|-----|
| Shell Size-Contact Arr.           | Contact Size and Qty |     |
|                                   | #20                  | #22 |
| <b>Standard Density</b>           |                      |     |
| <b>1S9</b>                        | 9                    |     |
| <b>2S15</b>                       | 15                   |     |
| <b>3S25</b>                       | 25                   |     |
| <b>4S37</b>                       | 37                   |     |
| <b>5S50</b>                       | 50                   |     |
| <b>High Density</b>               |                      |     |
| <b>1H15</b>                       |                      | 15  |
| <b>2H26</b>                       |                      | 26  |
| <b>3H44</b>                       |                      | 44  |
| <b>4H62</b>                       |                      | 62  |
| <b>5H78</b>                       |                      | 78  |
| <b>6H104</b>                      |                      | 104 |


| Mating Hardware                             |                                                     |
|---------------------------------------------|-----------------------------------------------------|
| <b>N</b><br>Thru-Hole<br>No Hardware        | <b>P</b><br>Female Jackpost                         |
|                                             |                                                     |
| <b>S</b><br>Captive Screwlock,<br>Hex Head  | <b>L</b><br>Captive Jackscrew,<br>Hex Head          |
|                                             |                                                     |
| <b>K</b><br>Slot-Head Extended<br>Jackscrew | <b>T</b><br>Slot-Head Extended<br>Captive Screwlock |
|                                             |                                                     |

| Materials and Finishes |                                       |
|------------------------|---------------------------------------|
| Shell                  | Aluminum alloy                        |
| Contacts               | Copper alloy, 50 microin. gold plated |
| Insulators             | Thermoset epoxy                       |
| Retention Clips        | Copper alloy                          |
| Grommet and Seal       | Fluorosilicone rubber                 |
| EMI Spring             | Copper alloy, nickel plated           |
| Hardware               | 300 series stainless steel            |

| Specifications        |                          |
|-----------------------|--------------------------|
| Current Rating        | #22 5 AMPS, #20 7.5 AMPS |
| Test Voltage          | 1000 VAC RMS             |
| Insulation Resistance | 5000 megohms minimum     |
| Operating Temperature | -65° C. to +200° C.      |
| Ingress Protection    | IP 67                    |
| Shock                 | 300 g.                   |
| Vibration, Random     | 43.92 g.                 |

## 280-018P pin connectors with standard M24308 type mounting flange, crimp termination

### 280-018P DIMENSIONS

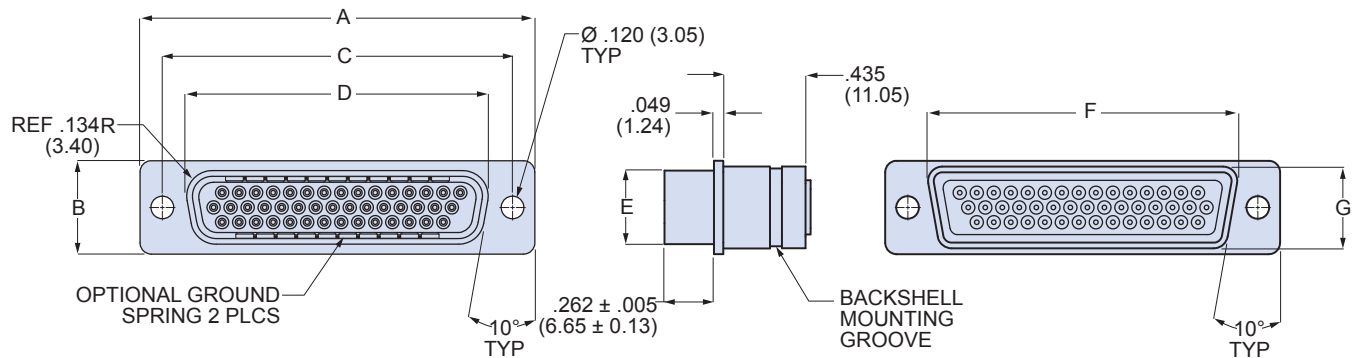

| Shell Size | A      |        | B      |        | C Basic |       | D     |       | E    |       | F Max. |       | G Max. |       |
|------------|--------|--------|--------|--------|---------|-------|-------|-------|------|-------|--------|-------|--------|-------|
|            | in     | mm     | in     | mm     | in.     | mm    | in    | mm    | in   | mm    | in.    | mm    | in.    | mm    |
| 1          | ± .015 | ± 0.38 | ± .015 | ± 0.38 | .984    | 24.99 | .726  | 18.44 | .389 | 9.88  | .769   | 19.53 | .432   | 10.97 |
| 2          | ± .015 | ± 0.38 | ± .015 | ± 0.38 | 1.312   | 33.32 | 1.054 | 26.77 | .389 | 9.88  | 1.093  | 27.76 | .432   | 10.97 |
| 3          | ± .015 | ± 0.38 | ± .015 | ± 0.38 | 1.852   | 47.04 | 1.594 | 40.49 | .389 | 9.88  | 1.635  | 41.53 | .432   | 10.97 |
| 4          | ± .015 | ± 0.38 | ± .015 | ± 0.38 | 2.500   | 63.50 | 2.242 | 56.95 | .389 | 9.88  | 2.282  | 57.96 | .432   | 10.97 |
| 5          | ± .015 | ± 0.38 | ± .015 | ± 0.38 | 2.406   | 61.11 | 2.139 | 54.33 | .501 | 12.73 | 2.188  | 55.58 | .544   | 13.82 |
| 6          | ± .015 | ± 0.38 | ± .015 | ± 0.38 | 2.500   | 63.50 | 2.272 | 57.71 | .563 | 14.30 | 2.312  | 58.72 | .606   | 15.39 |

### NOTES

- HiPer-D® connectors are available with a wide variety of materials and finishes. See [About Series 28 HiPer-D® Shell Plating Options](#) for additional choices. Glenair offers the industry's widest selection of plating and material choices with no setup charge, no minimum order quantity and no schedule impact.
- For panel cutout dimensions, refer to [Panel Cutouts and Printed Circuit Board Footprints](#).
- Connectors are supplied with crimp contacts per M39029. Contacts are not installed. Refer to [HiPer-D® Contacts and Crimp Tools](#) for contact part numbers, specifications, crimp tool information, and insertion/extraction tools.
- HiPer-D® connectors meet the requirements of MIL-DTL-24308 and are intermateable with standard M24308-type D-Subminiature connectors with corresponding contact arrangements and type.
- Additional electrical, mechanical and environmental specifications are listed in [HiPer-D® Product Specification](#).

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)