



### Main

|   |  |
|---|--|
| Range of product  | OsiSense XM  |
| Product or component type   | Electromechanical pressure sensor  |
| Pressure sensor type  | Electromechanical pressure sensor  |
| Device short name   | XMLC   |
| Pressure sensor size  | 507.63 psi (35 bar)  |
| Controlled fluid  | Air (32...320 °F (0...160 °C))<br>Fresh water (32...320 °F (0...160 °C))<br>Hydraulic oil (32...320 °F (0...160 °C))   |
| Fluid connection type   | G 1/4 (female) conforming to ISO 228   |
| Electrical connection   | Screw-clamps terminals 1 x 0.5...2 x 2.5 mm <sup>2</sup>   |
| AWG gauge   | AWG 20...AWG 14  |
| Cable entry   | Cable gland 9...13 mm  |
| Contacts type and composition                                     | 2 C/O  |
| Product specific application                                      | -  |
| Pressure switch type of operation                                 | Regulation between 2 thresholds  |
| Electrical circuit type   | Control circuit  |
| Scale type  | Adjustable differential  |
| Local display   | With   |
| Adjustable range of switching point on rising pressure            | 50.76...507.63 psi (3.5...35 bar)  |
| Adjustable range of switching point on falling pressure           | 36.26...485.88 psi (2.5...33.5 bar)  |
| Possible differential maximum at 319.08 psi (22 bar) high setting |  |
| Maximum permissible accidental pressure                           | 1160.3 psi (80 bar)  |
| Destruction pressure  | 2320.6 psi (160 bar)   |
| Pressure actuator   | Diaphragm  |
| Materials in contact with fluid                                   | Brass<br>FPM, FKM  |
| Enclosure material  | Zinc alloy   |
| [In] rated current  | 3 A, B300, AC-15 (U <sub>e</sub> = 120 V) conforming to EN/IEC 60947-5-1<br>1.5 A, B300, AC-15 (U <sub>e</sub> = 240 V) conforming to EN/IEC 60947-5-1<br>0.1 A, R300, DC-13 (U <sub>e</sub> = 250 V) conforming to EN/IEC 60947-5-1 |

### Complementary

|   |   |
|---|---|
| Possible differential minimum at low setting  | 14.5 psi (1 bar) (+/- 0.2 bar)  |
| Possible differential minimum at high setting | 21.76 psi (1.5 bar) (+/- 0.5 bar)   |
| Maximum permissible pressure - per cycle      | 652.67 psi (45 bar)   |
| Terminal block type                           | 8 terminals   |
| Operating rate                                | 120 cyc/mn  |
| Repeat accuracy                               | < 2 %   |
| [Ui] rated insulation voltage                 | 500 V conforming to EN/IEC 60947-1<br>300 V conforming to UL 508<br>300 V conforming to CSA C22.2 No 14 |
| [Uimp] rated impulse withstand voltage        | 6 kV conforming to EN/IEC 60947-1   |
| Auxiliary contacts operation                  | Simultaneous, snap action   |
| Contacts material                             | Silver contacts   |
| Resistance across terminals                   | < 25 mOhm conforming to IEC 255-7 category 3<br>< 25 mOhm conforming to NF C 93-050 method A            |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

|                          |                                  |
|--------------------------|----------------------------------|
| Short-circuit protection | 10 A cartridge fuse type gG (gl) |
| Mechanical durability    | 5000000 cycles                   |
| Setting                  | External                         |
| Height                   | 4.45 in (113 mm)                 |
| Depth                    | 3.35 in (85 mm)                  |
| Width                    | 1.81 in (46 mm)                  |
| Product weight           | 1.53 lb(US) (0.695 kg)           |

## Environment

|                                       |  |
|---------------------------------------|--|
| standards                             | CE<br>EN/IEC 60947-5-1<br>UL 508<br>CSA C22.2 No 14  |
| product certifications                | CSA<br>UL<br>EAC   |
| protective treatment                  | TC (standard version)  |
| ambient air temperature for operation | -13...158 °F (-25...70 °C)   |
| ambient air temperature for storage   | -40...158 °F (-40...70 °C)   |
| operating position                    | Any position   |
| vibration resistance                  | 4 gn (f = 30...500 Hz) conforming to IEC 60068-2-6   |
| shock resistance                      | 50 gn conforming to IEC 60068-2-27   |
| electrical shock protection class     | Class I conforming to IEC 1140<br>Class I conforming to IEC 536<br>Class I conforming to NF C 20-030 |
| IP degree of protection               | IP66 conforming to EN/IEC 60529  |


## Offer Sustainability

|  |  |
|--|--|
| Not Green Premium product  | Not Green Premium product  |
| Compliant - since 0928 - Schneider Electric declaration of conformity  | Compliant - since 0928 - Schneider Electric declaration of conformity  |
| Reference not containing SVHC above the threshold  | Reference not containing SVHC above the threshold  |
| Need no specific recycling operations  | Need no specific recycling operations  |
| WARNING: This product can expose you to chemicals including:   | WARNING: This product can expose you to chemicals including:   |
| Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and                                | Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and                                |
| Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. | Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. |
| For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>                              | For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>                              |

## Contractual warranty

|                 |           |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|


## Dimensions

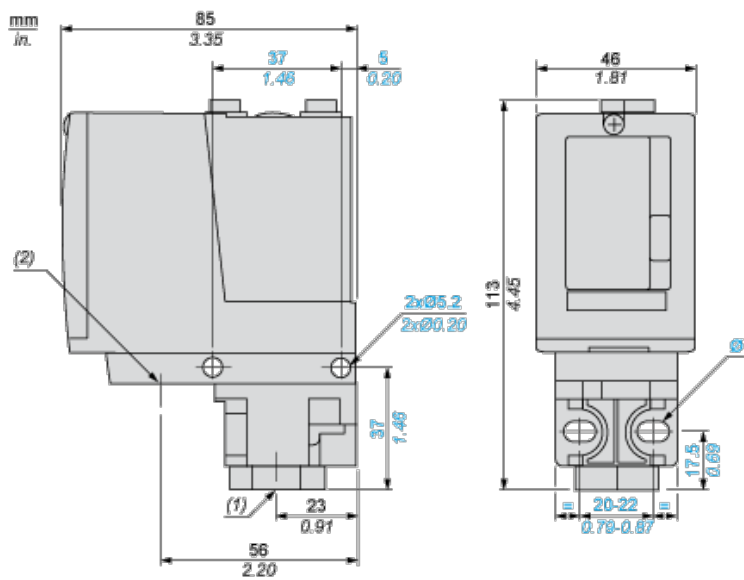


- (1) 1 fluid entry, tapped G1/4 (BSP female)
- (2) 1 electrical connections entry, tapped Pg 13.5
- Ø : 2 elongated holes Ø 5.2 x 6.7

## Wiring Diagram

### Terminal Model



## Operating Curves

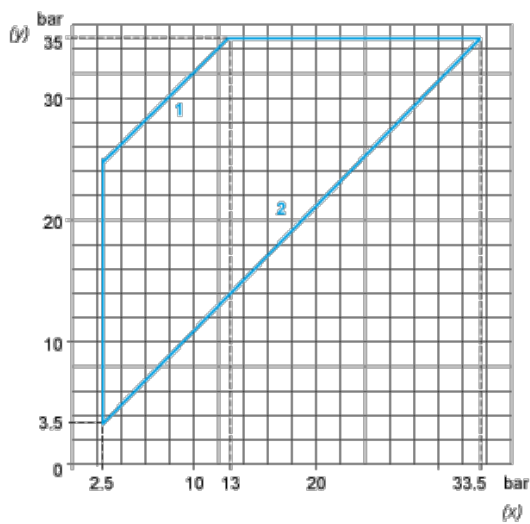

- (y) Rising pressure
- (x) Falling pressure
- 1 : Maximum differential
- 2 : Minimum differential



(y) Pressure

(x) Time

(1) Adjustable value

PH : High point

PB : Below point

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)