

### FEATURES


- Standard 7x5mm Surface Mount Footprint
- HCMOS/TTL Compatible Output
- Frequency Range 1.5 – 77.76 MHz
- Frequency Stability,  $\pm 50$  ppm Standard ( $\pm 25$  ppm and  $\pm 20$  ppm available)
- +3.3Vdc or +5.0Vdc Operation
- Operating Temperature to  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$
- Output Enable Standard
- Low Phase Jitter, **NON-Multiplied**
- Tape & Reel Packaging
- **RoHS/Green Compliant**

### DESCRIPTION

The Model 357 is a ceramic packaged Voltage Controlled oscillator offering reduced size and enhanced stability. The small size means it is perfect for any application. The enhanced stability means it is the perfect choice for today's communications applications that require tight frequency control.



### ORDERING INFORMATION

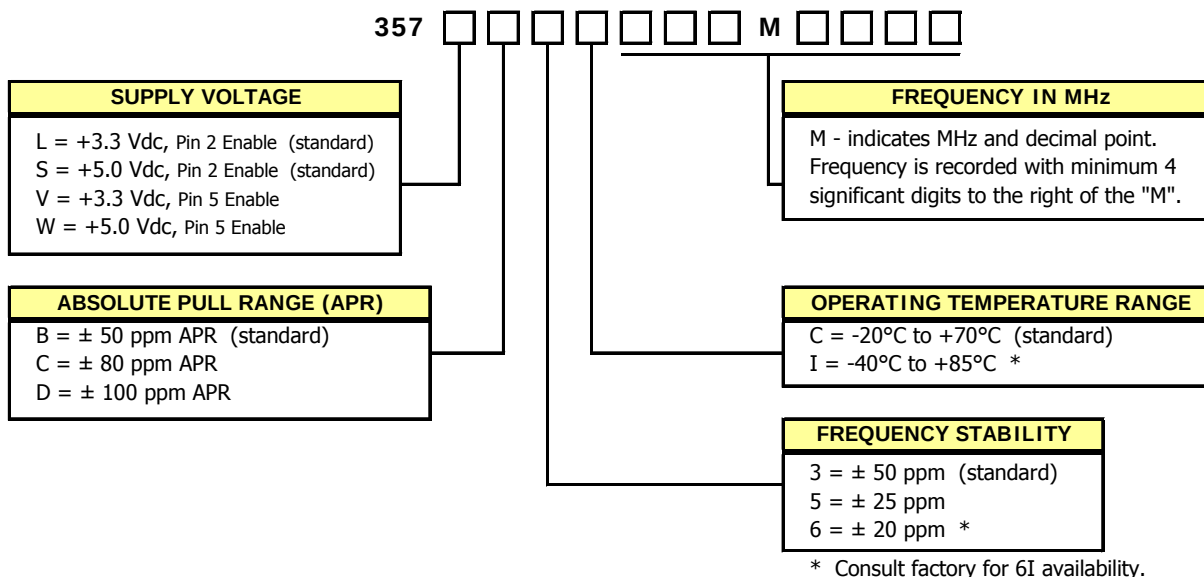

Example Part Number: 357LB3C019M4400

## ELECTRICAL CHARACTERISTICS

|                                    | PARAMETER                                                        | SYMBOL               | CONDITIONS                                                                                           | MIN               | TYP                | MAX                  | UNIT   |
|------------------------------------|------------------------------------------------------------------|----------------------|------------------------------------------------------------------------------------------------------|-------------------|--------------------|----------------------|--------|
| Absolute Maximums                  | Maximum Supply Voltage                                           | $V_{CC}$             | -                                                                                                    | -0.5              | -                  | 7.0                  | V      |
|                                    | Maximum Control Voltage                                          | $V_C$                | -                                                                                                    | -0.5              | -                  | $V_{CC}$             | V      |
|                                    | Storage Temperature                                              | $T_{STG}$            | -                                                                                                    | -55               | -                  | 125                  | °C     |
|                                    | Frequency Range                                                  | $f_0$                | -                                                                                                    | 1.5               | -                  | 77.76                | MHz    |
|                                    | Frequency Stability<br>(See Note 1 and Ordering Information)     | $\Delta f/f_0$       | -                                                                                                    | -                 | -                  | 20, 25 or 50         | ± ppm  |
|                                    | Absolute Pull Range<br>(See Note 2 and Ordering Information)     | APR                  | -                                                                                                    | 50, 80 or 100     | -                  | -                    | ± ppm  |
|                                    | Operating Temperature<br>Commercial<br>Industrial                | $T_A$                | -                                                                                                    | -20<br>-40        | 25                 | 70<br>85             | °C     |
| Electrical and Waveform Parameters | Supply Voltage<br>Model 357S, 357W<br>Model 357L, 357V           | $V_{CC}$             | ± 10 %                                                                                               | 4.5<br>2.97       | 5.0<br>3.3         | 5.5<br>3.63          | V      |
|                                    | Supply Current                                                   | $I_{CC}$             | $C_L = 15$ pF<br>1.5 MHz to 20 MHz<br>20.1 MHz to 40 MHz<br>40.1 MHz to 60 MHz<br>60.1 MHz to 80 MHz | -<br>-<br>-<br>-  | 5<br>8<br>10<br>12 | 20<br>30<br>40<br>45 | mA     |
|                                    | Output Load                                                      | $C_L$                | -                                                                                                    | -                 | -                  | 30                   | pF     |
|                                    | Control Voltage<br>Model 357S, 357W<br>Model 357L, 357V          | $V_C$                | $V_{CC} = 5.0$ V<br>$V_C = 3.3$ V                                                                    | 0.5<br>0.3        | 2.5<br>1.65        | 4.5<br>3.0           | V      |
|                                    | Frequency Deviation                                              | $\Delta f$           | 25°C at Time of Shipment, over $V_C$ range                                                           | -                 | 135                | -                    | ± ppm  |
|                                    | Linearity<br>Best Straight Line Fit                              | L                    | < 52 MHz<br>> 52 MHz                                                                                 | -<br>-            | 5<br>8             | 10<br>15             | %      |
|                                    | Output Duty Cycle                                                | SYM                  | @ 50% Level                                                                                          | 45                | -                  | 55                   | %      |
|                                    | Output Voltage Levels<br>Logic '1' Level<br>Logic '0' Level      | $V_{OH}$<br>$V_{OL}$ | CMOS Load<br>CMOS Load                                                                               | 90% $V_{CC}$<br>- | -<br>-             | -<br>10% $V_{CC}$    | V      |
|                                    | Output Current Levels<br>Logic '1' Level<br>Logic '0' Level      | $I_{OH}$<br>$I_{OL}$ | CMOS Load<br>CMOS Load                                                                               | -<br>-            | -<br>-             | -14<br>14            | mA     |
|                                    | Rise and Fall Time                                               | $T_R, T_F$           | @ 10% - 90% Levels                                                                                   | -                 | 3.5                | 5.0                  | ns     |
|                                    | Input Impedance                                                  | $Z_C$                | -                                                                                                    | 50                | -                  | -                    | kOhms  |
|                                    | Transfer Function                                                | -                    | -                                                                                                    | -                 | Positive           | -                    | -      |
|                                    | Start Up Time                                                    | $T_S$                | Application of $V_{CC}$                                                                              | -                 | -                  | 10                   | ms     |
|                                    | Modulation Roll-off                                              | -                    | @ -3dB                                                                                               | 10                | -                  | -                    | kHz    |
|                                    | Phase Jitter                                                     | $t_{jms}$            | Bandwidth 12 kHz - 20 MHz                                                                            | -                 | -                  | 1                    | ps RMS |
|                                    | Enable Function<br>Enable Input Voltage<br>Disable Input Voltage | $V_{IH}$<br>$V_{IL}$ | Pin 2 or Pin 5 Logic '1', Output Enabled<br>Pin 2 or Pin 5 Logic '0', Output Disabled                | 2.5<br>-          | -<br>-             | -<br>0.5             | V      |
|                                    | Enable Time                                                      | $T_{PLZ}$            | Pin 2 or Pin 5 Logic '1'                                                                             | -                 | -                  | 100                  | ns     |

Notes:


- Inclusive of initial tolerance at time of shipment, changes in supply voltage, load, temperature and 10 year aging at an average operating temperature of +40 °C.
- Minimum guaranteed frequency shift from  $f_0$  over variations in temperature, aging, power supply and load at an average operating temperature of +40°C for 10 years.

### SINGLE SIDE BAND PHASE NOISE (typical maximum)

| Frequency Offset | Phase Noise (dBc/Hz) * | Frequency Offset | Phase Noise (dBc/Hz) * |
|------------------|------------------------|------------------|------------------------|
| 10 Hz            | -60                    | 10k Hz           | -130                   |
| 100 Hz           | -90                    | 100k Hz          | -150                   |
| 1k Hz            | -112                   | ≥ 100k Hz        | -150                   |

\* Results may vary depending on frequency.


### CMOS/TTL OUTPUT WAVEFORM

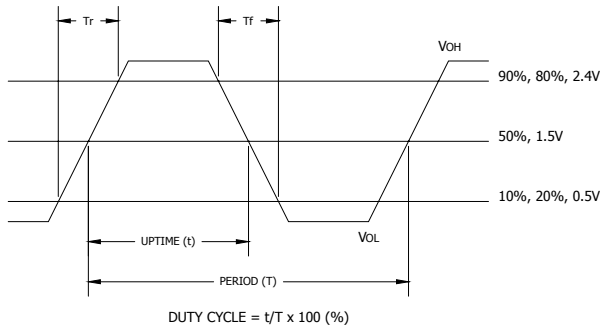

### D.U.T. PIN ASSIGNMENTS

| PIN | SYMBOL      | DESCRIPTION              |
|-----|-------------|--------------------------|
| 1   | $V_C$       | Control Voltage          |
| 2   | EOH or N.C. | Enable or No Connect     |
| 3   | GND         | Circuit & Package Ground |
| 4   | Output      | RF Output                |
| 5   | N.C. or EOH | No Connect or Enable     |
| 6   | $V_{CC}$    | Supply Voltage           |

### TEST CIRCUIT, CMOS LOAD

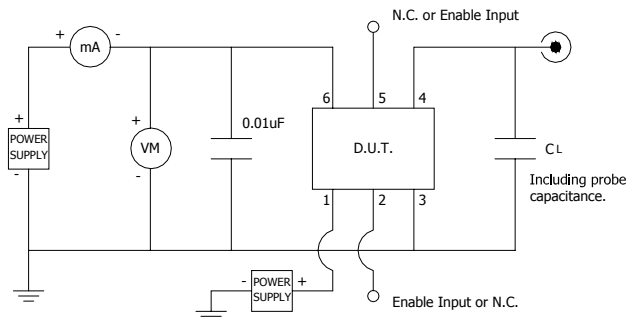


### ENABLE TRUTH TABLE

| PIN 2 or PIN 5 | PIN 4     |
|----------------|-----------|
| Logic '1'      | Output    |
| Open           | Output    |
| Logic '0'      | High Imp. |

## MECHANICAL SPECIFICATIONS

### PACKAGE DRAWING

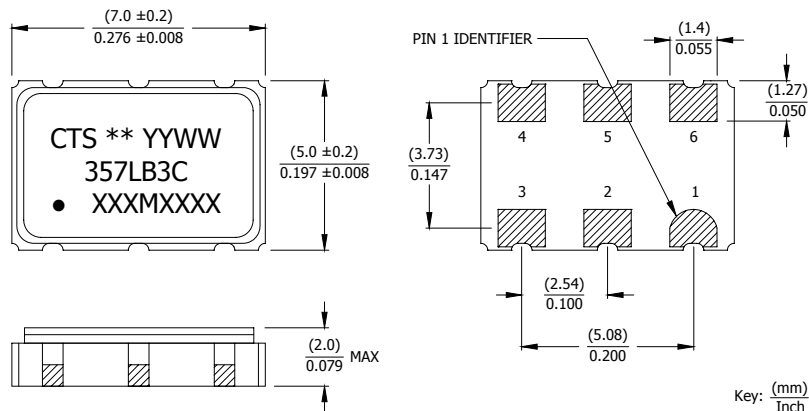


### MARKING INFORMATION

- \*\* - Manufacturing Site Code.
- YYWW - Date code, YY - year, WW - week.
- Truncated CTS part number.
- XXXMXXXX - Frequency marked with 4 significant digits after the 'M'.

### NOTES


- Termination pads (e4), barrier-plating is nickel (Ni) with gold (Au) flash plate.
- Reflow conditions per JEDEC J-STD-020.

### SUGGESTED SOLDER PAD GEOMETRY

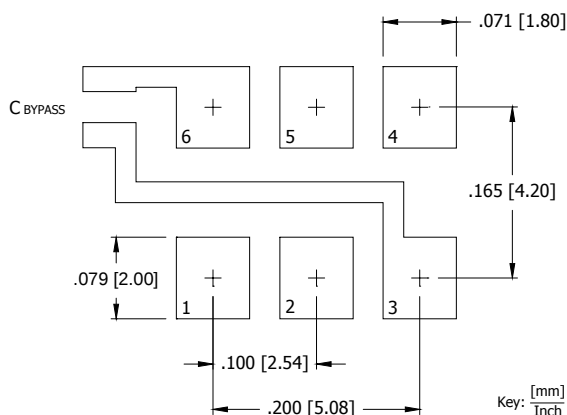


C BYPASS should be ≥ 0.01 uF.

### SUGGESTED REFLOW PROFILE

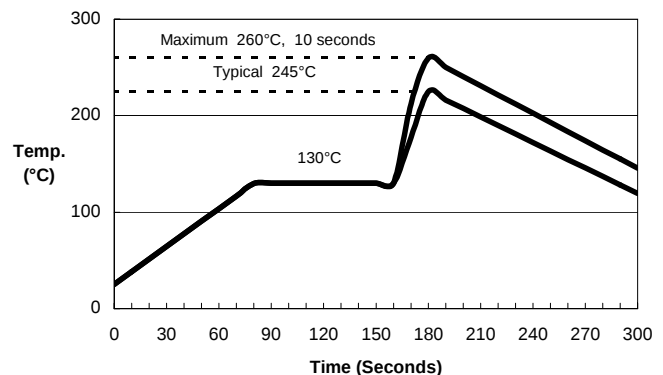

## TAPE AND REEL INFORMATION

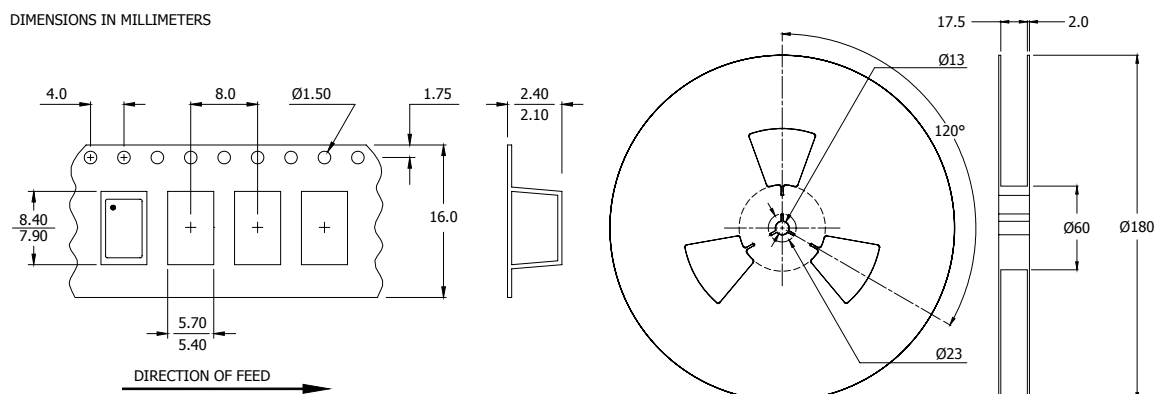

Device quantity is 1,000 pieces per 180mm reel.

## ENVIRONMENTAL SPECIFICATIONS

|                                  |                                                                                                                                                     |
|----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Temperature Cycle:               | 400 cycles from $-55^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ , 10 minute dwell at each temperature, 1 minute transfer time between temperatures. |
| Mechanical Shock:                | 1,500g's, 0.5mS duration, $\frac{1}{2}$ sinewave, 3 shocks each direction along 3 mutually perpendicular planes (18 total shocks).                  |
| Sinusoidal Vibration:            | 0.06 inches double amplitude, 10 to 55 Hz and 20g's, 55 to 2,000 Hz, 3 cycles each in 3 mutually perpendicular planes (9 times total).              |
| Gross Leak:                      | No leak shall appear while immersed in an FC40 or equivalent liquid at $+125^{\circ}\text{C}$ for 20 seconds.                                       |
| Fine Leak:                       | Mass spectrometer leak rates less than $2 \times 10^{-8}$ ATM cc/sec air equivalent.                                                                |
| Resistance to Solder Heat:       | Product must survive 3 reflows of $+260^{\circ}\text{C}$ peak, 10 seconds maximum.                                                                  |
| High Temperature Operating Bias: | 2,000 hours at $+125^{\circ}\text{C}$ , maximum bias, disregarding frequency shift.                                                                 |
| Frequency Aging:                 | 1,000 hours at $+85^{\circ}\text{C}$ , full bias, less than $\pm 5$ ppm shift.                                                                      |
| Moisture Sensitivity Level:      | Level 1 per JEDEC J-STD-020.                                                                                                                        |

## QUALITY AND RELIABILITY

Quality systems meet or exceed the requirements of ISO 9000:2000 standards.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)