


1	2	3	4	5	6	7	8																																																																																																			
PRODUCT NUMBER		TYPE		TOP CAGE HOLE	PACKAGE																																																																																																					
10122382-101LF		3 EMI SUPPRESSION PINS IN TOP CAGE & COMPLIANT PINS IN BOTTOM CAGE		WITHOUT HOLE	TRAY																																																																																																					
10122382-102LF		3 EMI SUPPRESSION PINS IN TOP CAGE & COMPLIANT PINS IN BOTTOM CAGE		WITH HOLE	TRAY																																																																																																					
10122382-202LF		3 EMI SUPPRESSION PINS IN TOP CAGE & NO COMPLIANT PINS IN BOTTOM CAGE		WITH HOLE	TRAY																																																																																																					
10122382-112LF		3 EMI SUPPRESSION PINS IN TOP CAGE & COMPLIANT PINS IN BOTTOM CAGE		WITH HOLE	Tape&Reel	⚠																																																																																																				
10122382-102LF SFP+ IXI CAGE BASIC TYPE						10122382-202LF (NO COMPLIANT PINS IN BOTTOM CAGE)																																																																																																				
		10122382-102LF 3 EMI SUPPRESSION PINS IN TOP CAGE & COMPLIANT PINS IN BOTTOM CAGE		10122382-101LF (NO TOP CAGE HOLES FOR BETTER EMI PERFORMANCE)																																																																																																						
NOTES:																																																																																																										
1. MATERIAL: CAGE BODY: NICKEL SILVER ALLOY EMI SPRING: STAINLESS STEEL INSULATION TAPE: SILICON POLYIMIDE																																																																																																										
2. DATUM AND BASIC DIMENSIONS ARE ESTABLISHED BY CUSTOMER.																																																																																																										
3. PADS AND VIAS ARE CHASSIS GROUND, 11 PLACES.																																																																																																										
4. THROUGH HOLES, PLATING OPTIONAL.																																																																																																										
5. CROSS-HATCHED AREA DENOTES COMPONENT AND TRACE KEEP-OUT (EXCEPT CHASSIS GROUND).																																																																																																										
6. THIS AREA DENOTES COMPONENT KEEP-OUT (TRACES ALLOWED).																																																																																																										
7. PRODUCT SPECIFICATION: GS-12-1165																																																																																																										
8. APPLICATION SPECIFICATION: GS-20-0384																																																																																																										
9. PACKAGE PER GS-14-2344 AND GS-14-920																																																																																																										
10. PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.																																																																																																										
				<table><tr><td>spec ref</td><td colspan="3">RELEASE</td><td>dr</td><td>LHA</td><td>2016-02-10</td><td>projection</td><td>MM</td><td>size</td><td>A2</td><td>scale</td><td>4:1</td></tr><tr><td>tolerance std</td><td colspan="3">TOLERANCES UNLESS OTHERWISE SPECIFIED</td><td>eng</td><td>LHA</td><td>2016-02-10</td><td rowspan="3"></td><td rowspan="3">MM</td><td>ecn no</td><td colspan="3">MD-0070</td></tr><tr><td>ASME Y14.5</td><td colspan="3"></td><td>chr</td><td></td><td>2016-02-10</td><td>rel level</td><td colspan="3">Released</td></tr><tr><td>-</td><td colspan="3"></td><td>appr</td><td>Fuhang Zheng</td><td>2016-02-10</td><td colspan="3"></td></tr><tr><td>surface</td><td>linear</td><td>0.X</td><td>±0.25</td><td colspan="2">Amphenol FCI</td><td colspan="2">title</td><td colspan="2">SFP+ IXI Cage</td><td>dwg no</td><td colspan="2">10122382</td></tr><tr><td></td><td></td><td>0.XX</td><td>±0.15</td><td colspan="2"></td><td colspan="2"></td><td colspan="2">EMI SPRING TYPE</td><td></td><td colspan="2">rev</td></tr><tr><td></td><td></td><td>0.XXX</td><td>±</td><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td><td></td><td colspan="2">D</td></tr><tr><td>ISO 1302</td><td>angular</td><td>0°</td><td>±2°</td><td colspan="2"></td><td colspan="2">cat. no.</td><td colspan="2"></td><td colspan="2">Product - Customer Drw</td><td>sheet 1 of 6</td></tr></table>		spec ref	RELEASE			dr	LHA	2016-02-10	projection	MM	size	A2	scale	4:1	tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	LHA	2016-02-10		MM	ecn no	MD-0070			ASME Y14.5				chr		2016-02-10	rel level	Released			-				appr	Fuhang Zheng	2016-02-10				surface	linear	0.X	±0.25	Amphenol FCI		title		SFP+ IXI Cage		dwg no	10122382				0.XX	±0.15					EMI SPRING TYPE			rev				0.XXX	±								D		ISO 1302	angular	0°	±2°			cat. no.				Product - Customer Drw		sheet 1 of 6		
spec ref	RELEASE			dr	LHA	2016-02-10	projection	MM	size	A2	scale	4:1																																																																																														
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	LHA	2016-02-10		MM	ecn no	MD-0070																																																																																																
ASME Y14.5				chr		2016-02-10			rel level	Released																																																																																																
-				appr	Fuhang Zheng	2016-02-10																																																																																																				
surface	linear	0.X	±0.25	Amphenol FCI		title		SFP+ IXI Cage		dwg no	10122382																																																																																															
		0.XX	±0.15					EMI SPRING TYPE			rev																																																																																															
		0.XXX	±								D																																																																																															
ISO 1302	angular	0°	±2°			cat. no.				Product - Customer Drw		sheet 1 of 6																																																																																														
				PDS: Rev : D		STATUS: Released		Printed: Aug 18, 2016																																																																																																		

PRODUCT NUMBER	TYPE	TOP CAGE HOLE	PACKAGE
10122382-302LF	2 EMI SUPPRESSION PINS IN TOP CAGE & COMPLIANT PINS IN BOTTOM CAGE	WITH HOLE	TRAY
10122382-402LF	2 EMI SUPPRESSION PINS IN TOP CAGE & NO COMPLIANT PINS IN BOTTOM CAGE	WITH HOLE	TRAY

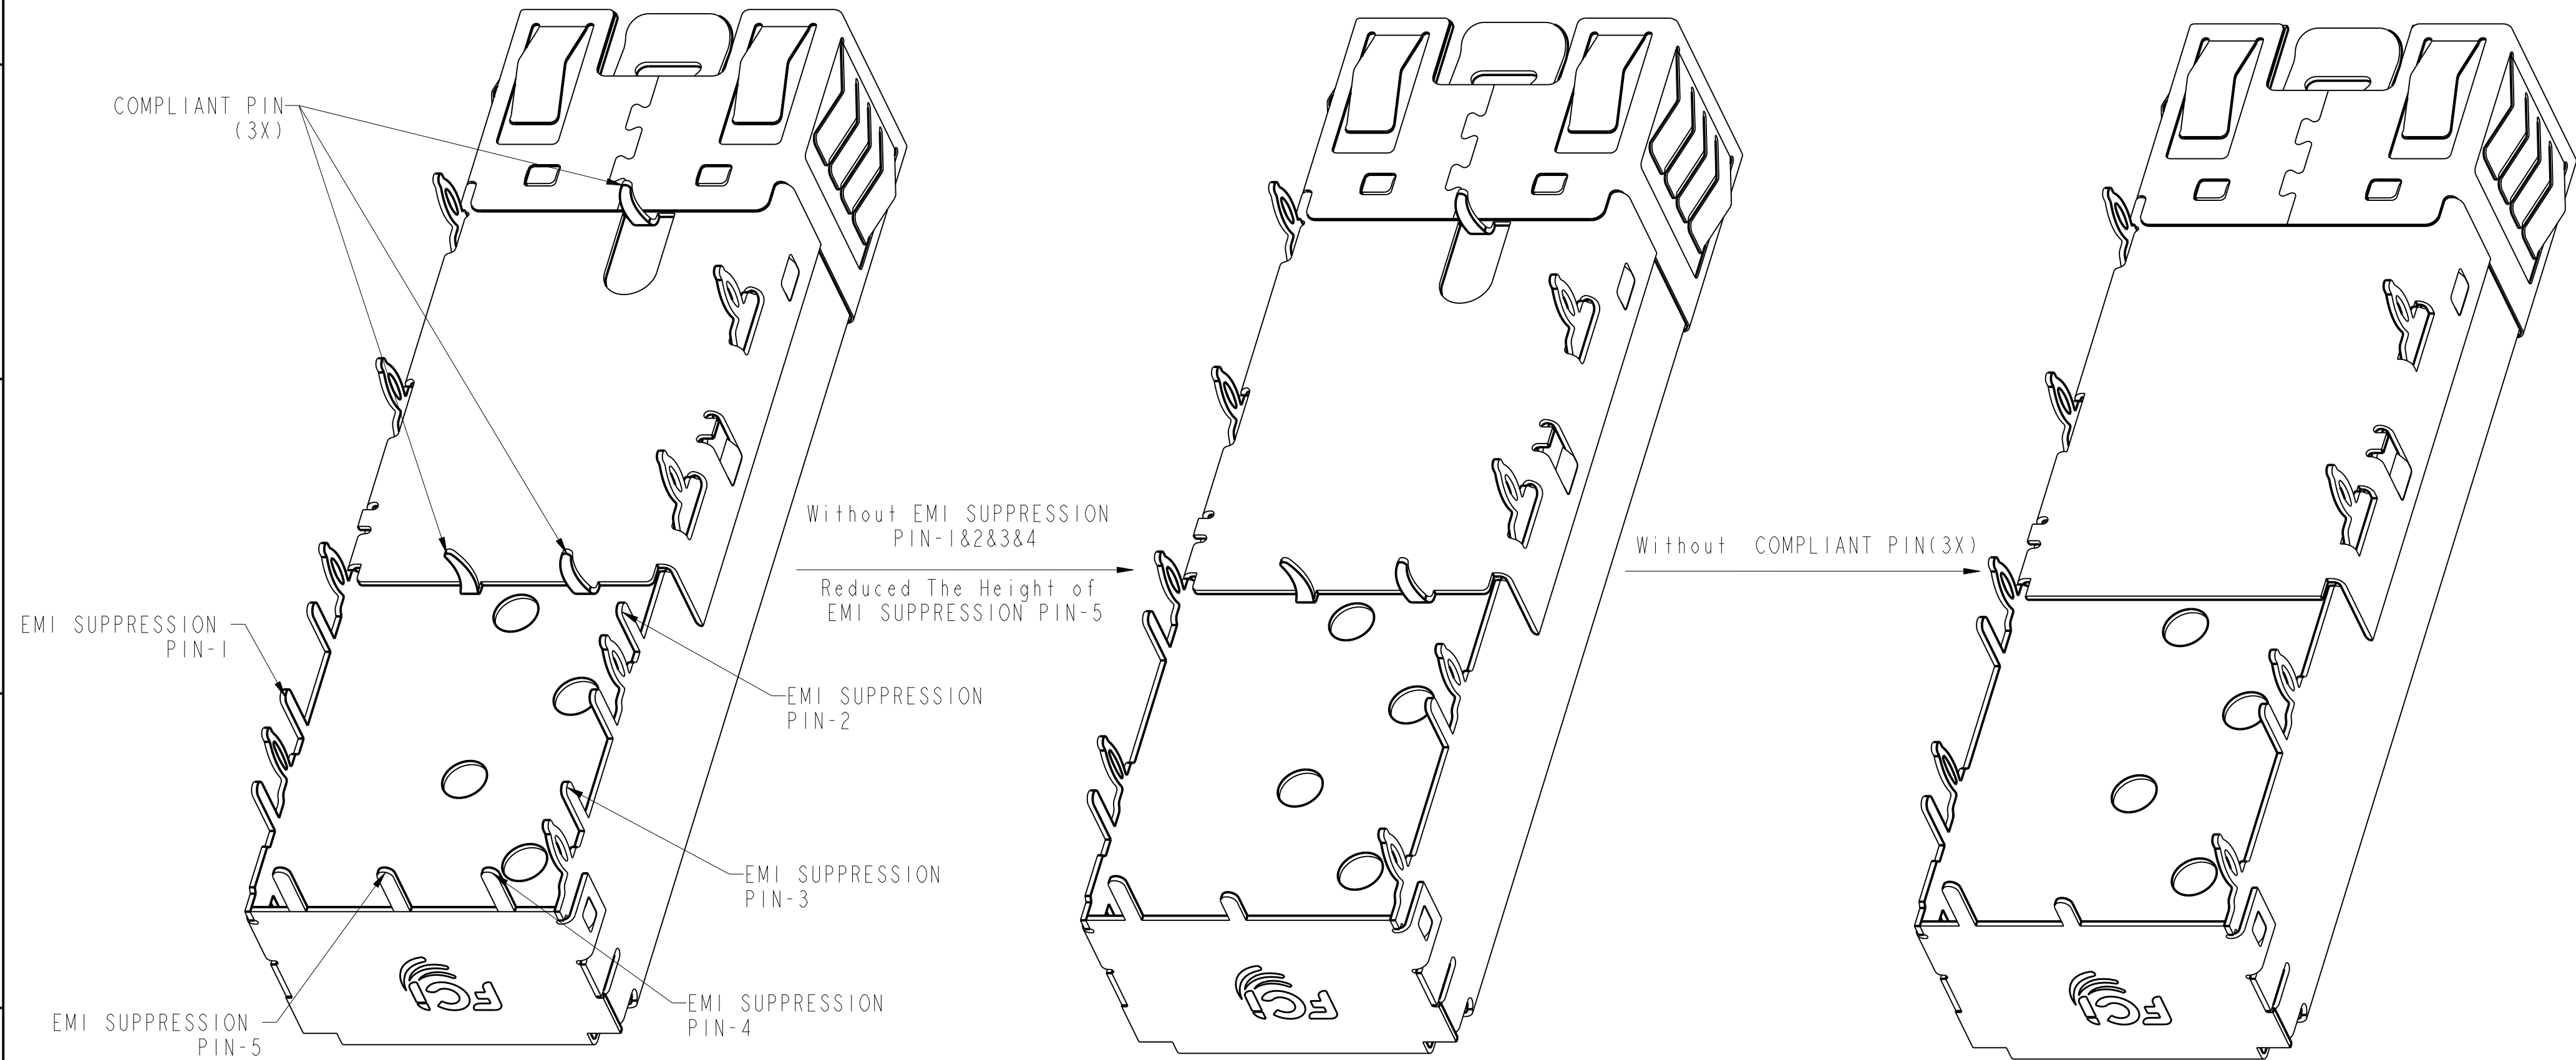

10122382-102LF

10122382-302LF

10122382-402LF




10122382-302LF/402LF WILL ALLOW FOR BELLY TO BELLY MOUNTING.

spec ref		RELEASE		dr		LhA	2016-02-16	projection		MM		size		A2	scale		5:1												
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng		LhA	2016-02-16					ecn no		100-0070															
ASME Y14.5				chr								rel level		Released															
-		appr		Pei-Ming.Zhang	2016-02-16	product family		SFP +																					
surface		linear		0.X		±0.25		Amphenol FCI				SFP+ IXL Cage		EMI SPRING TYPE		cat. no.		-		Product - Customer Drw		sheet 2 of 6							
																								title		10122382		rev	
																								D					
ISO 1302		angular		0°		±2°																							

PDS: Rev :D

STATUS:Released

Printed: Aug 18, 2016

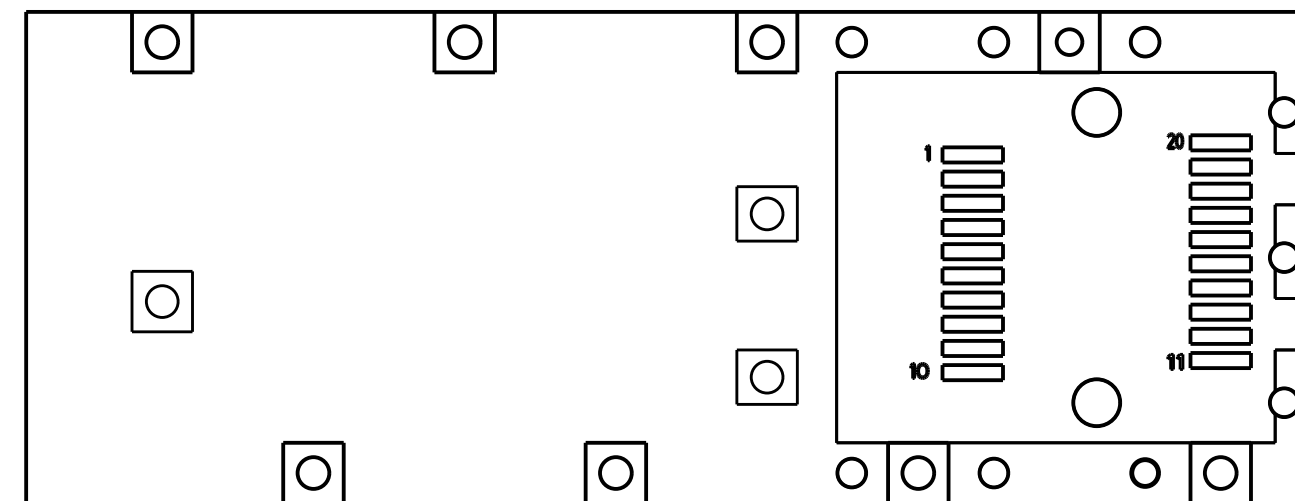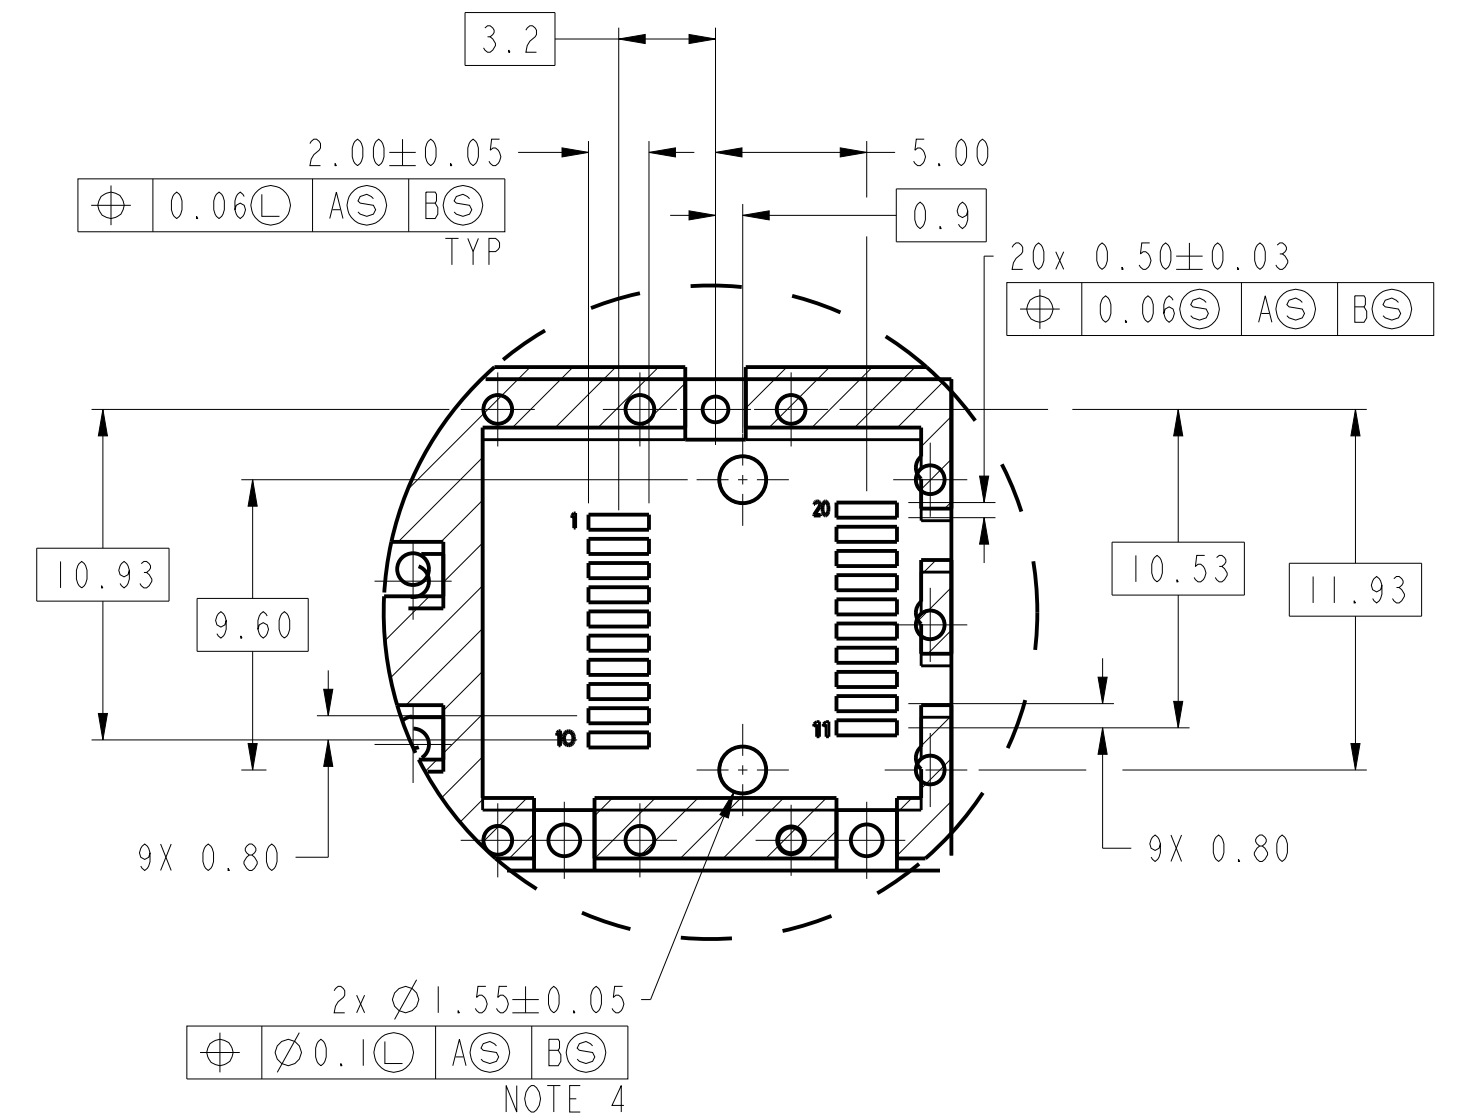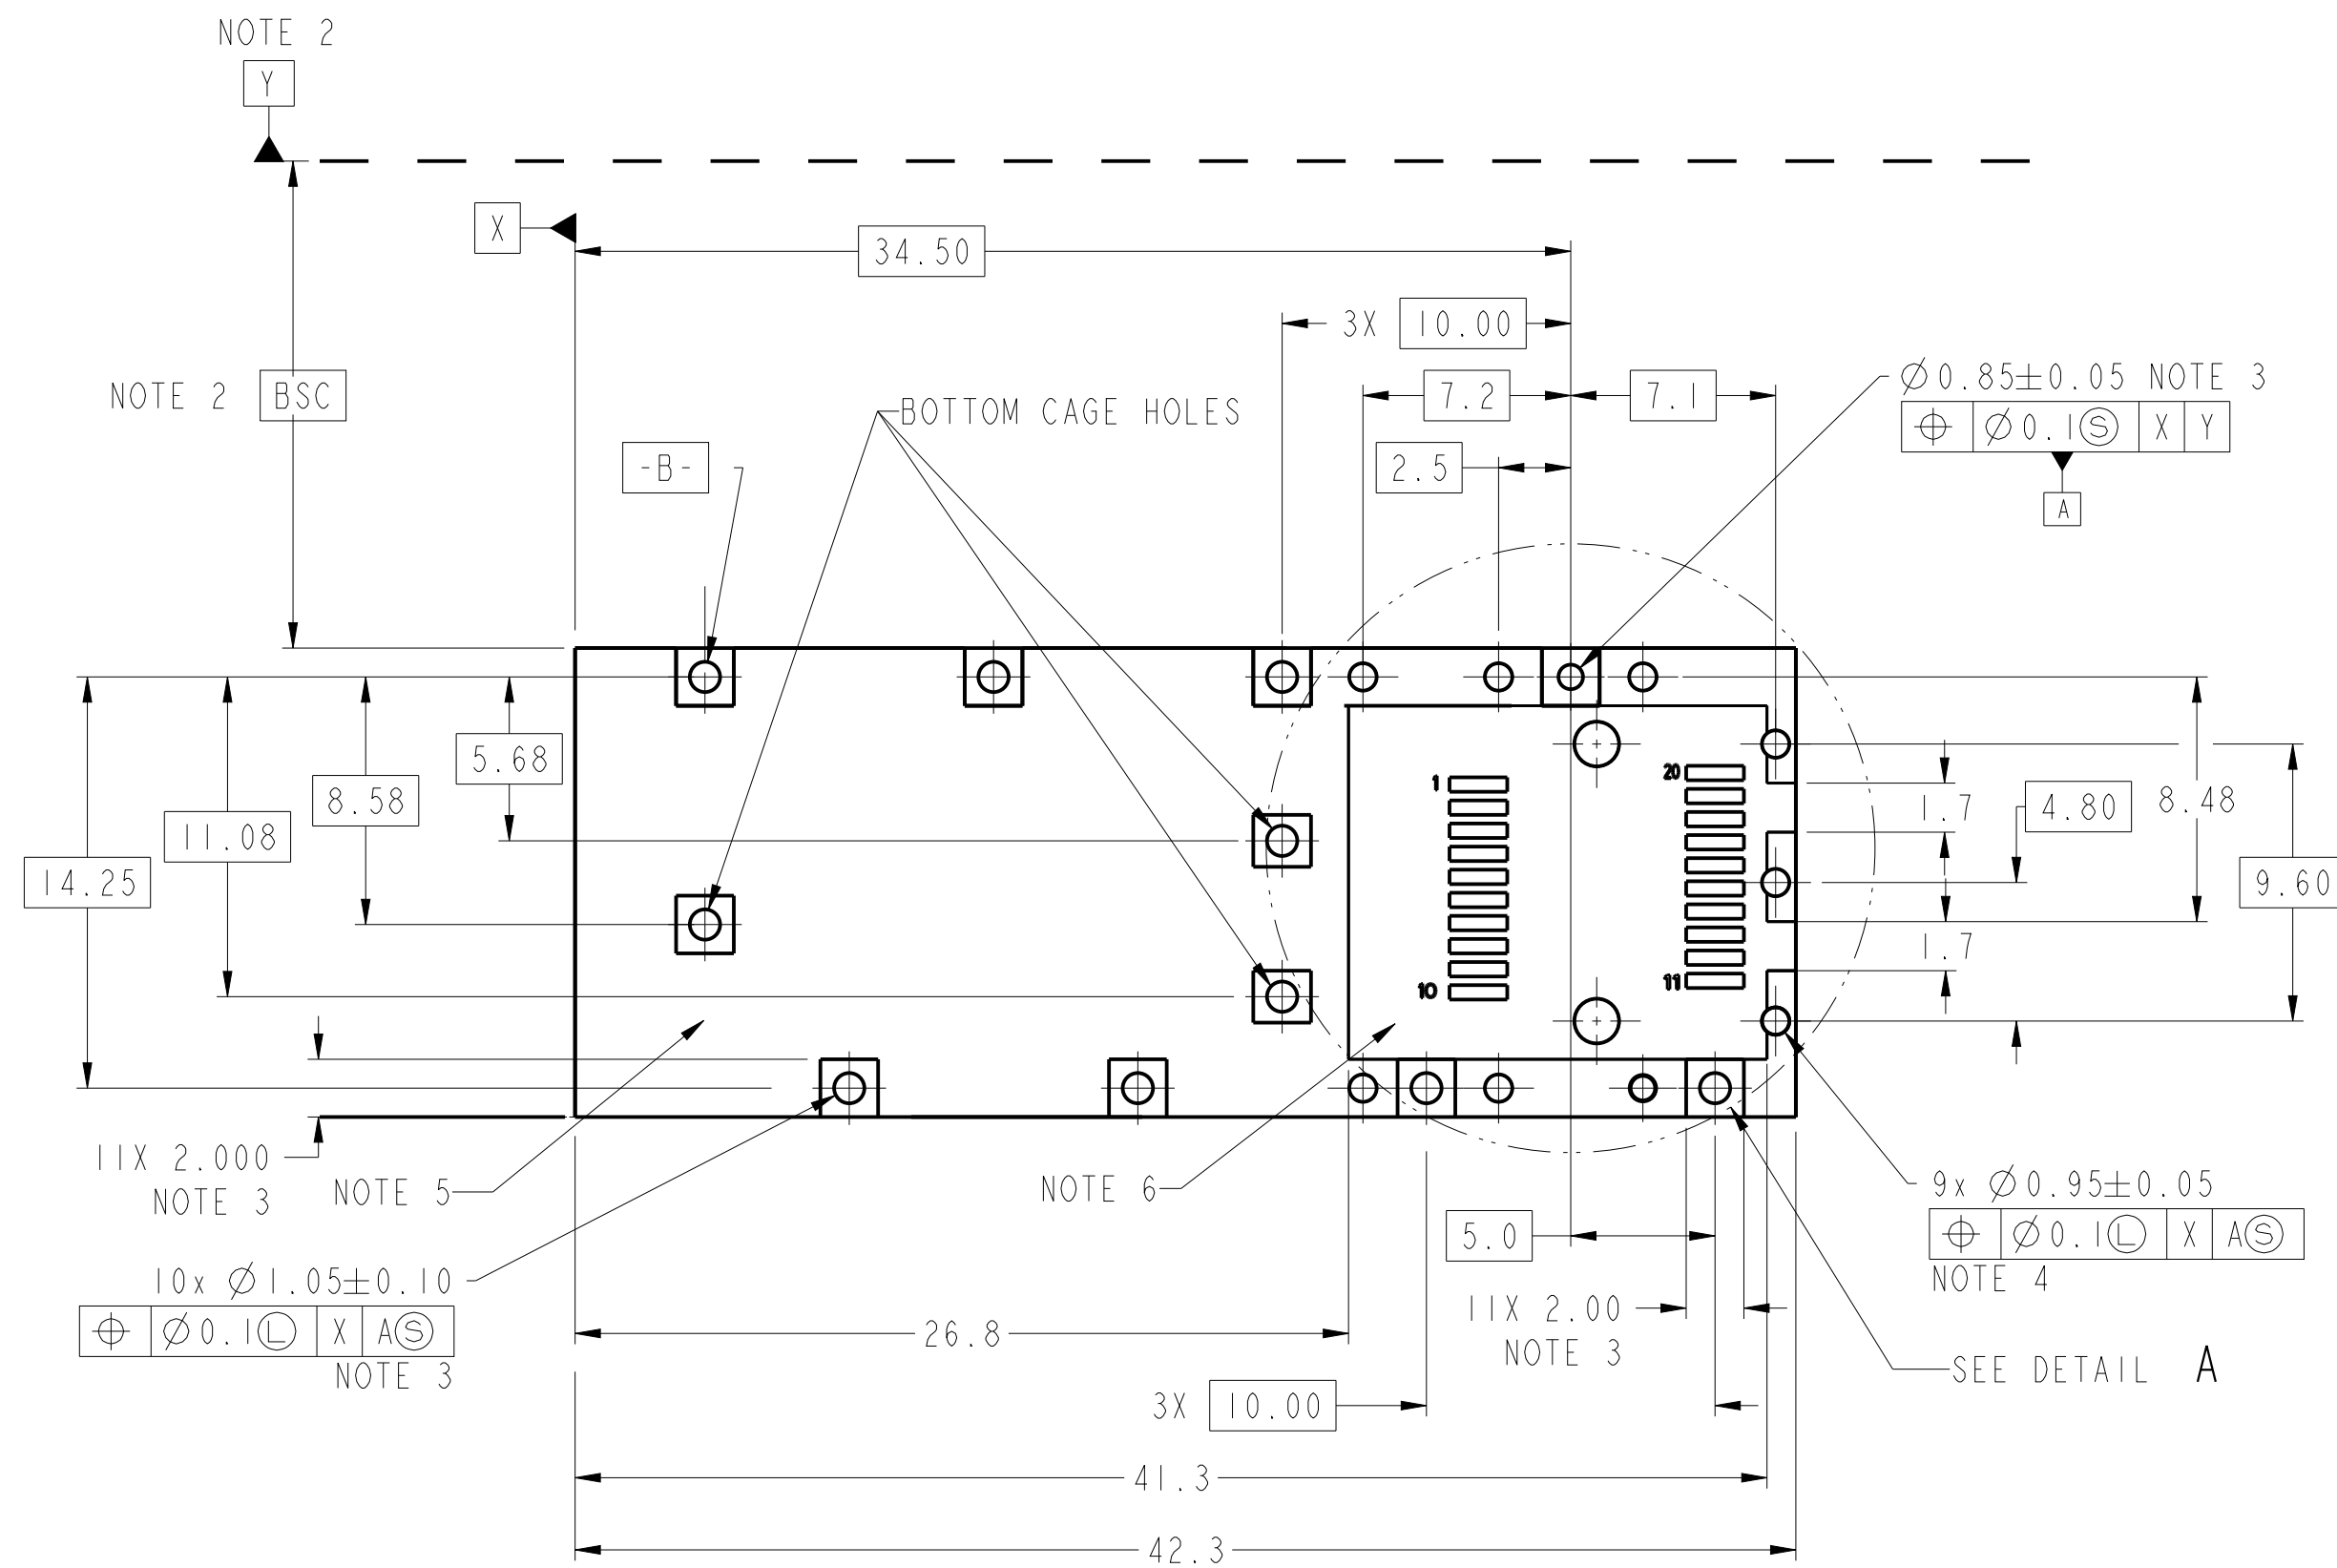


NOTE:
SEE SHEET 4 FOR
HOST CONNECTOR LAYOUT


spec ref		RELEASE		dr		LhA		2016-02-16		projection		MM		size		A2		scale		4:1			
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng		LhA		2016-02-16						ecn no		10122382							
ASME Y14.5				chr										rel level		Released							
				appr		Pei-Ming Zhang		2016-02-16		product family		-											
surface		linear		0.X ±0.25		±0.15		Amphenol FCI		title		SFP+ 1X1 Cage		dwg no		10122382		rev		D			
																						0.XX ±0.15	
																						0.XXX ±	
ISO 1302		angular		0° ±2°						cat. no.		-		Product - Customer Drw		sheet 4 of 6							

Amphenol
FCi

© 2016 APCI

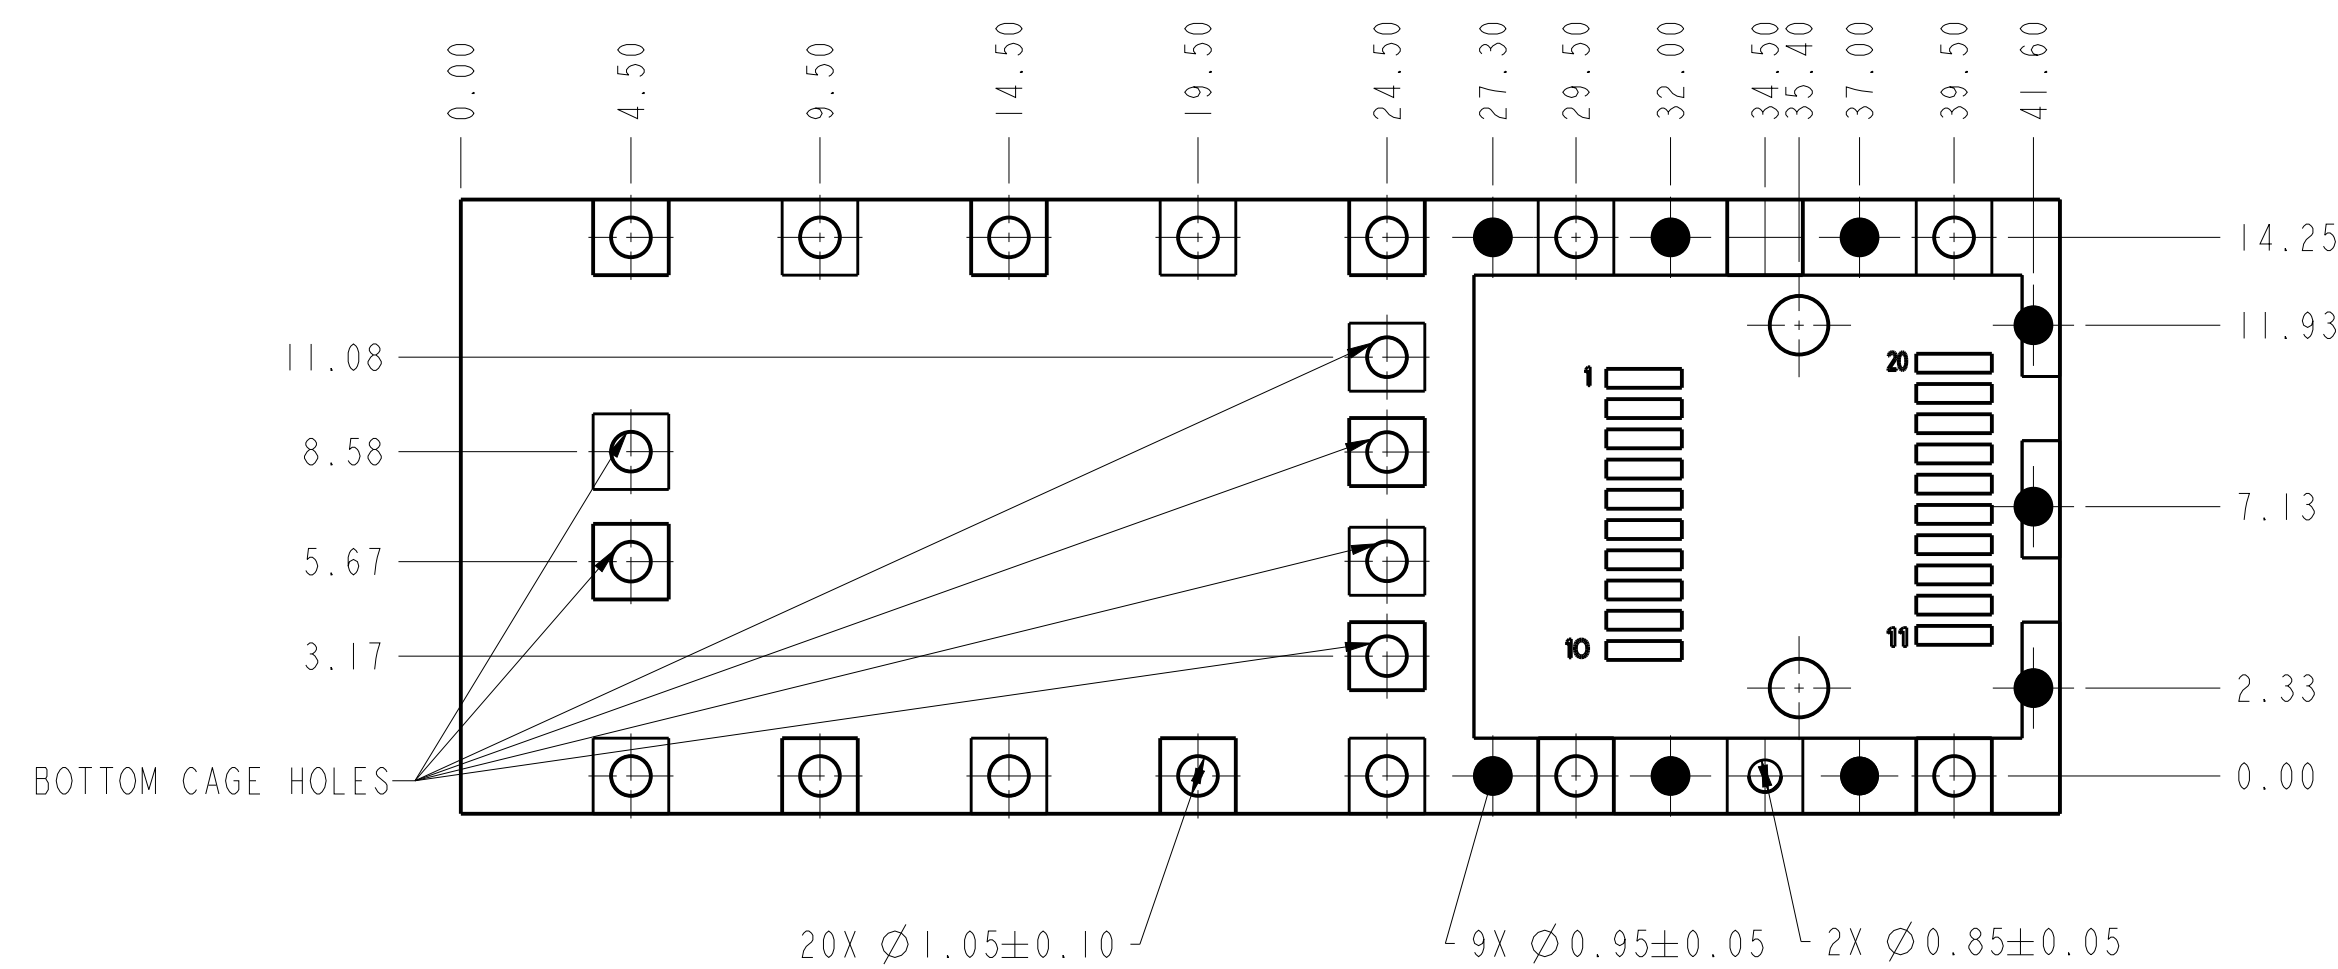



NOTE:
SEE SHEET 4 FOR
HOST CONNECTOR LAYOUT

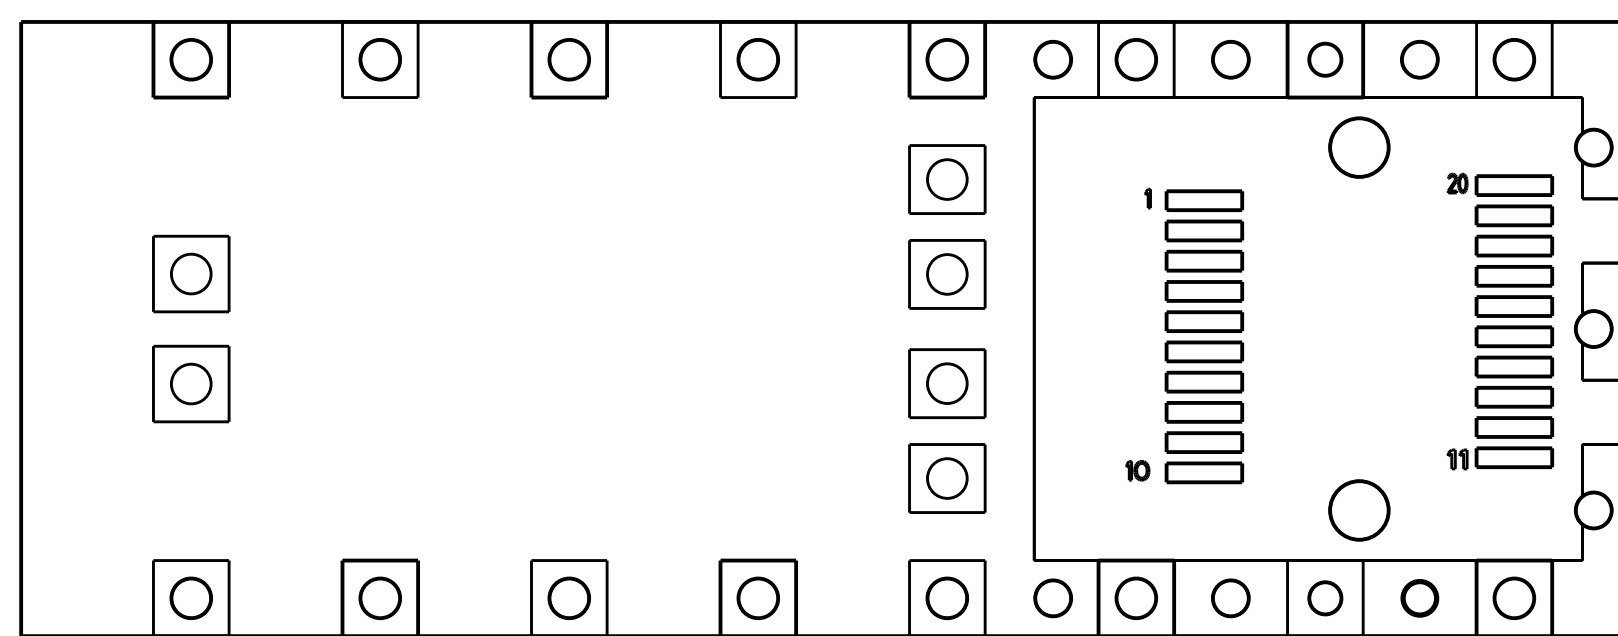



NOTE:
SEE SHEET 4 FOR
HOST CONNECTOR LAYOUT

spec ref		RELEASE			dr		LhA	2016-02-16	projection		MM		size		A2	scale		1:1				
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED			eng		LhA	2016-02-16					ecn no		HD-0570							
ASME Y14.5					chr								rel level		Released							
					appr		Pei-Ming Zhang		2016-02-16		product family		-									
surface		ISO 1302	linear	0.X	±0.25	Amphenol FCI		title		SFP+ 1X1 Cage				dwg no		10122382				rev		D
✓	0.XX			±0.15																		
	0.XXX			±-																		
		angular	0°	±2°			cat. no.		-		Product- Customer Drw				sheet 5 of 6							

BEZEL AND BOARD POSITION DIMENSIONS FOR SINGLE SIDE MOUNTING
(EMI SPRING FINGER)

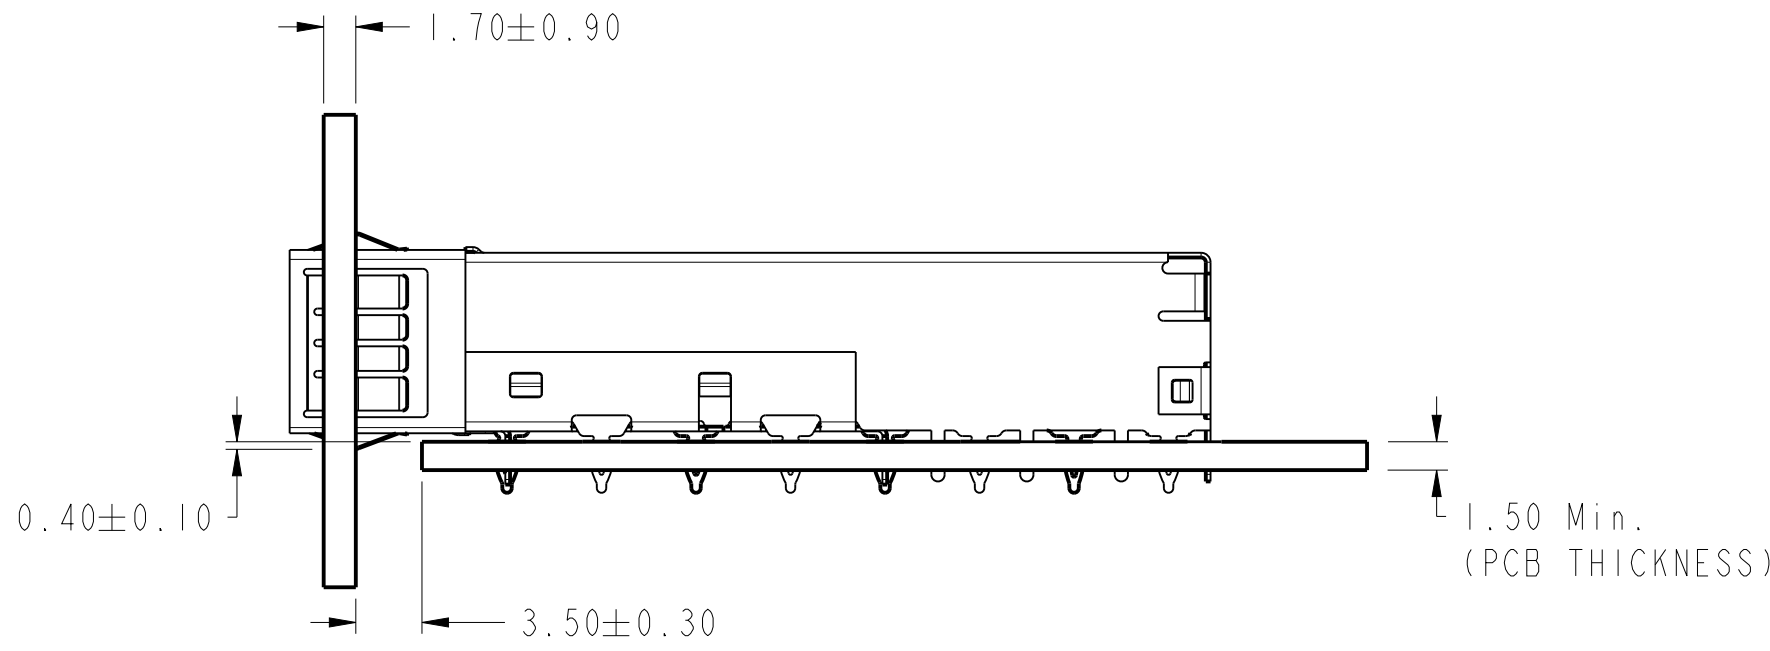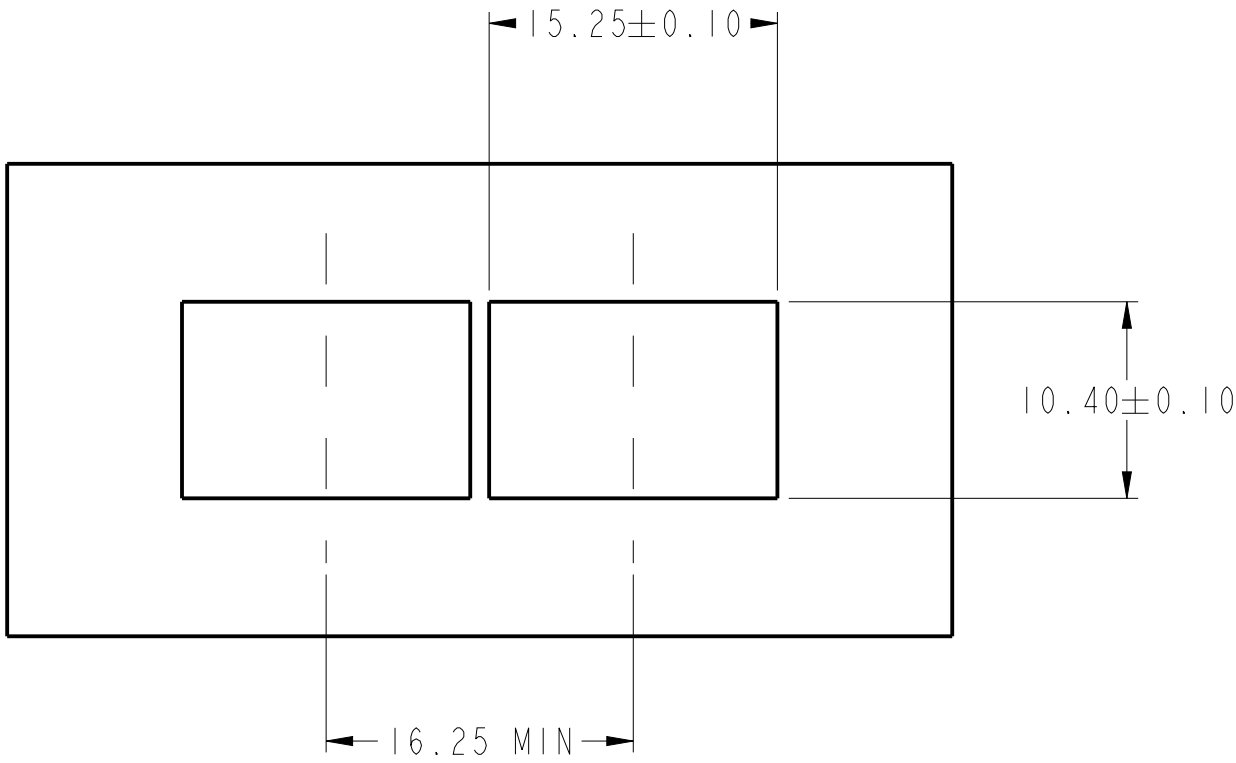

10122382-302LF/402LF
BEZEL AND BOARD POSITION DIMENSIONS FOR BELLY TO BELLY MOUNTING
(EMI SPRING FINGER)

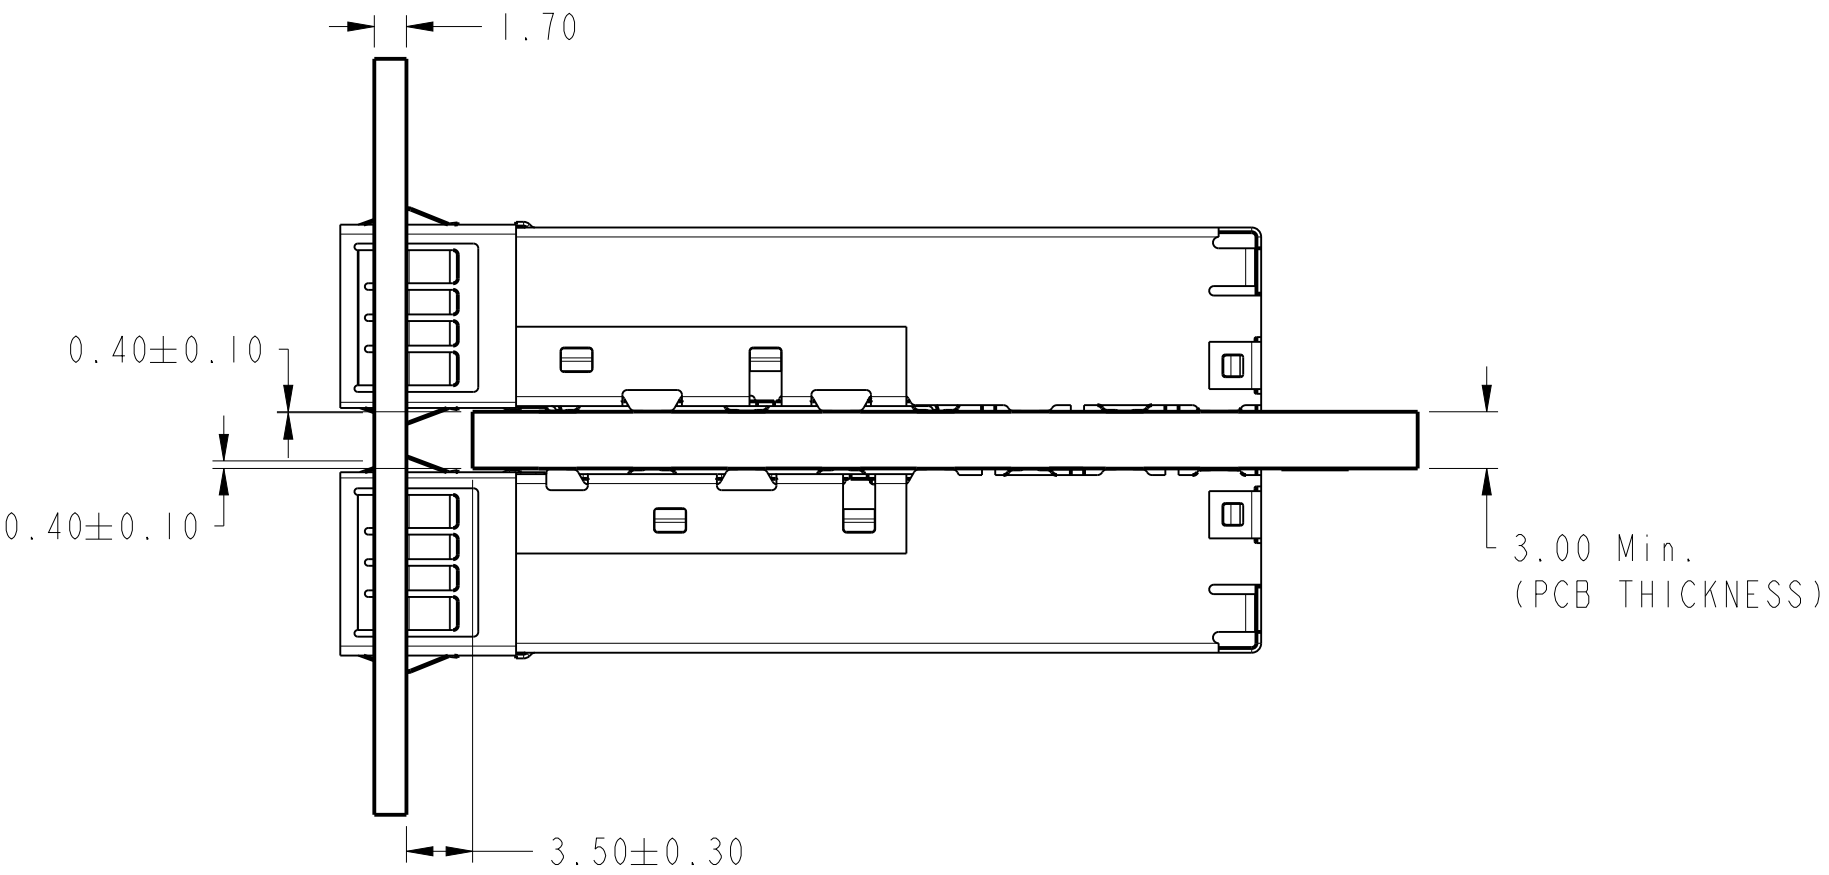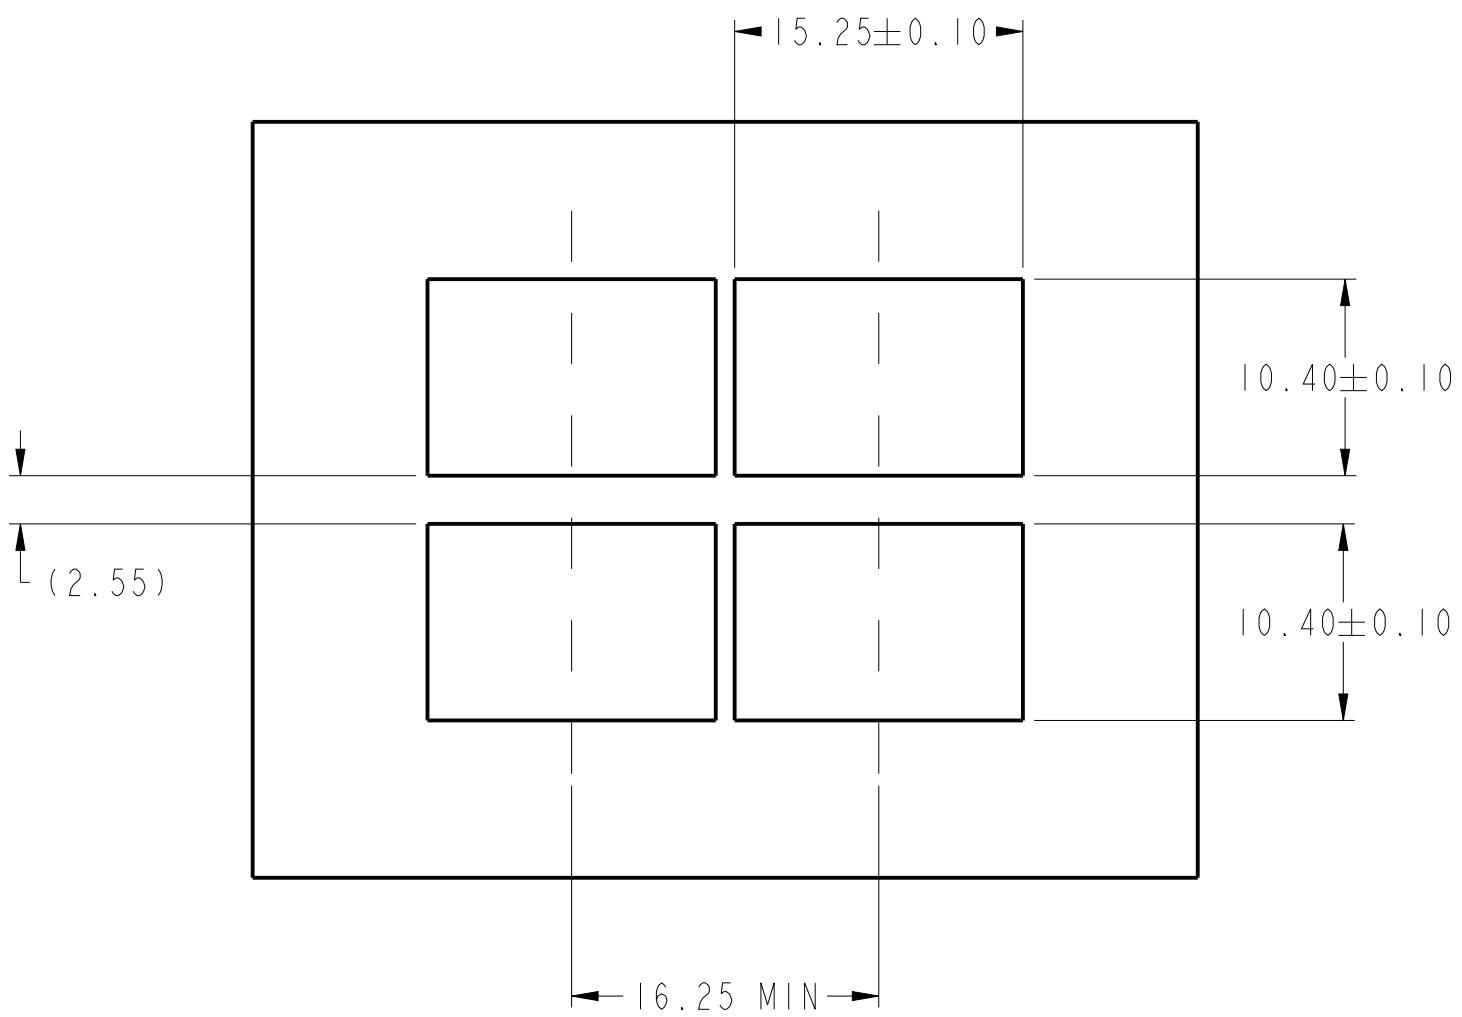

spec ref	RELEASE			dr	LhA	2016-02-18			size	A2	scale	1:1
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	LhA	2016-02-18			ecn no	ND-0070		
ASME Y14.5				chr					rel level	Released		
-				appr	Pei-Ming.Zhang	2016-02-18	product family			SFP +		
surface	linear	0.X	±0.25	Amphenol FCI	title	SFP+ IXI Cage			dwg no	10122382		rev
		0.XX	±0.15									
		0.XXX	± -									
ISO 1302	angular	0°	±2°				cat. no.	-	Product - Customer Drw			sheet 6 of 6

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru