


12-Fiber MTP ports are Polarity B, Optimized for Parallel Optics, Base-8 Connectivity. Guaranteed compatibility when used with recommended Tripp Lite cabling. Cassette designed specifically for use with Tripp Lite cables, such as the N820-, N821-, N844- and N845-Series cables.

40Gb to 10Gb Breakout Cassette, (x2) 12-Fiber OM4 MTP/MPO (Male w/Pins) to (x12) LC Duplex

MODEL NUMBER: **N484-2M12-LC12**

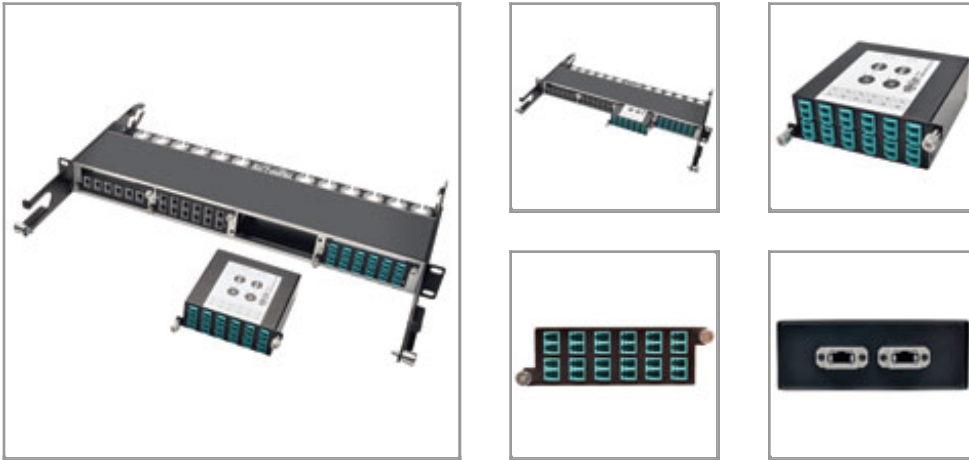

Description

Tripp Lite's N484-2M12-LC12 is a High Density 40Gb to 10Gb Breakout Cassette, with (x12) LC connections to (x2) 12-Fiber, OM4, MTP/MPO connections. Designed specifically for use with Tripp Lite's [N484-00U](#) and [N484-01U](#) chassis'; up to 4 cassettes per [N484-01U](#), or 1 per [N484-00U](#). Supports 40GbE, internally using OM4 fiber optic cable, with an extremely low insertion loss of 0.35db that is well under the IEEE 802.3ae maximum channel loss spec of <25db. Effectively trunks 24-fibers between IDF's and MDF's with (x2) 12-Fiber MTP/MPO cables, breaking out to (x12) LC Duplex fiber connections. 12-Fiber MTP ports are Polarity B, Optimized for Parallel Optics, Base-8 Connectivity. Guaranteed compatibility when used with recommended Tripp Lite cabling. Cassette designed specifically for use with Tripp Lite cables, such as the N820-, N821-, N844- and N845-Series cables. Installation is simple, with the cassette being easily installed or removed using screw tabs to lock or unlock it from the panel; no tools required. Furthermore, each cassette features factory terminated connectors that reduce the time and labor required of field connector terminations. Cassette housing made with heavy duty, 1.0mm Cold Rolled Steel.

Features

- High Density Fiber Cassette for use with Tripp Lite's [N484-00U](#) and [N484-01U](#) chassis'
- 40Gb to 10Gb Breakout Cassette, with (x12) LC connections to (x2) 12-Fiber OM4 MTP/MPO connections
- Complies with IEEE 802.3ae (10GbE) and ANSI T11.2 (Fibre Channel) requirements
- Max insertion loss of 0.35dB falls well under the IEEE 802.3ae maximum channel loss spec of <25dB
- 12-Fiber MTP ports are Polarity B, Optimized for Parallel Optics, Base-8 Connectivity
- Guaranteed compatibility when used with recommended Tripp Lite cabling
- Cassette designed specifically for use with Tripp Lite cables, such as the N820-, N821-, N844- and N845-Series cables

Highlights

- High Density Fiber Cassette for use with Tripp Lite's [N484-00U](#) and [N484-01U](#) chassis'
- 40Gb to 10Gb Breakout Cassette, with (x12) LC connections to (x2) 12-Fiber MTP/MPO connections (Male w/Pins)
- 12-Fiber MTP ports are Polarity B, Optimized for Parallel Optics, Base-8 Connectivity
- Guaranteed compatibility when used with recommended Tripp Lite cabling
- Cassette designed specifically for use with Tripp Lite cables, such as the N820-, N821-, N844- and N845-Series cables
- Internal OM4 wiring
- Complies with IEEE 802.3ae (10GbE) and ANSI T11.2 (Fibre Channel) requirements
- Max insertion loss of 0.35dB falls well under the IEEE 802.3ae maximum channel loss spec of <25dB

System Requirements

- 12-Fiber MTP ports are Polarity B, Optimized for Parallel Optics, Base-8 Connectivity
- Guaranteed compatibility when used with recommended Tripp Lite cabling
- Cassette designed specifically for use with Tripp Lite cables, such as the N820-, N821-, N844- and N845-Series cables

Package Includes

- N484-2M12-LC12 40Gb to 10Gb Breakout Cassette, (x2) 12-Fiber OM4 MTP/MPO to (x12) LC Duplex



- Installation is simple, with the cassette being easily installed or removed using screw tabs to lock or unlock it from the panel; no tools required
- Each cassette features factory terminated connectors that reduce the time and labor required of field connector terminations
- Housing made of heavy duty, 1.0mm Cold Rolled Steel
- Includes dust caps for unused ports

Duplex

- Quick Start Guide

Specifications

PHYSICAL	
Unit Dimensions (hwd / in.)	1.4 x 4.4 x 3.8
Unit Weight (lbs.)	0.7
Unit Weight (kg)	0.32
Color	Black
ENVIRONMENTAL	
Operating Temperature Range	-4 to 122 F (-20 to 50 C)
CONNECTIONS	
Ports	12
Side A - Connector 1	(2) 12-STRAND MTP (MALE)
Side B - Connector 1	(12) LC DUPLEX (FEMALE)
CERTIFICATIONS	
Approvals	RoHS, REACH
WARRANTY	
Product Warranty Period (Worldwide)	Lifetime limited warranty

© 2017 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru