

REFERENCE SPECIFICATIONS

-NFC 93425 (in compliance with HE 501)

PHYSICAL CHARACTERISTICS

-INSULATOR MATERIAL: THERMOPLASTIC UL94V0

-CONTACT MATERIAL: PHOSPHOR BRONZE,
GOLD OVER NICKEL

-ACCESSORIES: STEEL FOR METAL BRACKETS,
cadmium plated yellow passivation
THERMOPLASTIC UL94V0 FOR PLASTIC BRACKETS

BRASS FOR OTHERS ACCESSORIES,
cadmium plated yellow passivation

-SHELLS: STEEL, cadmium plated yellow passivation

ELECTRICAL CHARACTERISTICS

-NOMINAL CURRENT: 7.5A

-CONTACT RESISTANCE: <=7.3 m Ohms

-CONTACT/CONTACT : >=1000 V

-CONTACT/GROUND : >=1200 V

-INSULATION RESISTANCE: >=5000 MOhms

ENVIRONMENTAL CHARACTERISTICS

- CLIMATIC CATEGORY: 55/125/56

TEMPERATURE RANGE -55°C TO +125°C

DAMP HEAT STEADY STATE 56 DAYS

SALT SPRAY 48 HOURS

MECHANICAL CHARACTERISTICS

RETENTION AGAINST TORQUE: -Threaded insert:0.7 N.m min

-Female screw:0.5 N.m min

Series

DBML25S500M

Shell size: **E A B C D**
(see sheet 3)

Front accessory definition
(see sheet 2)

Blank :without accessory
L :threaded insert M3
O :threaded insert UNC 4-40
V :female screw UNC 4-40

Layout of contacts (see sheet 3)

9,15,25,37,50

Contacts

S :Socket

Termination type

5 Right angle/Europe standard

Plating

00 Right angle 500 matings/unmatings



43 Right angle 500 matings/unmatings
for harsh environment

PCB accessories definition(see sheet 2)

Blank :Plastic brackets

C :Without brackets


M :Metal brackets



25 WAY for Example

rev	acc no	dr	date
A	3506-0174	MPE	2006/11/14
B	3508-0014	MPE	2007/01/17
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-





www.fciconnect.com				surface ☒ tolerance std ISO 1302 ISO 406 ISO 1101			projection		mm		
				TOLERANCES UNLESS OTHERWISE SPECIFIED							
Dr	M	PESSON	2006/11/14	ANGULAR	LINEAR	0.X	±0.3	size	A2	Scale 2:1	
Eng	P	LEGARE	2006/11/14			0.XX	±0.1				
Chr	P	LEGARE	2006/11/14	0° ±2°		0.XXX	±0.05	ECN	LS08-0014		
Appr	P	LEGARE	2006/11/14	Product family			Spec ref				
				SUB FEMALE DM HE501 series				deg no		C01-8637-1736	
				with right angle contact				Rev.		B	
				catalog no				CUSTOMER		sheet 1 of 9	

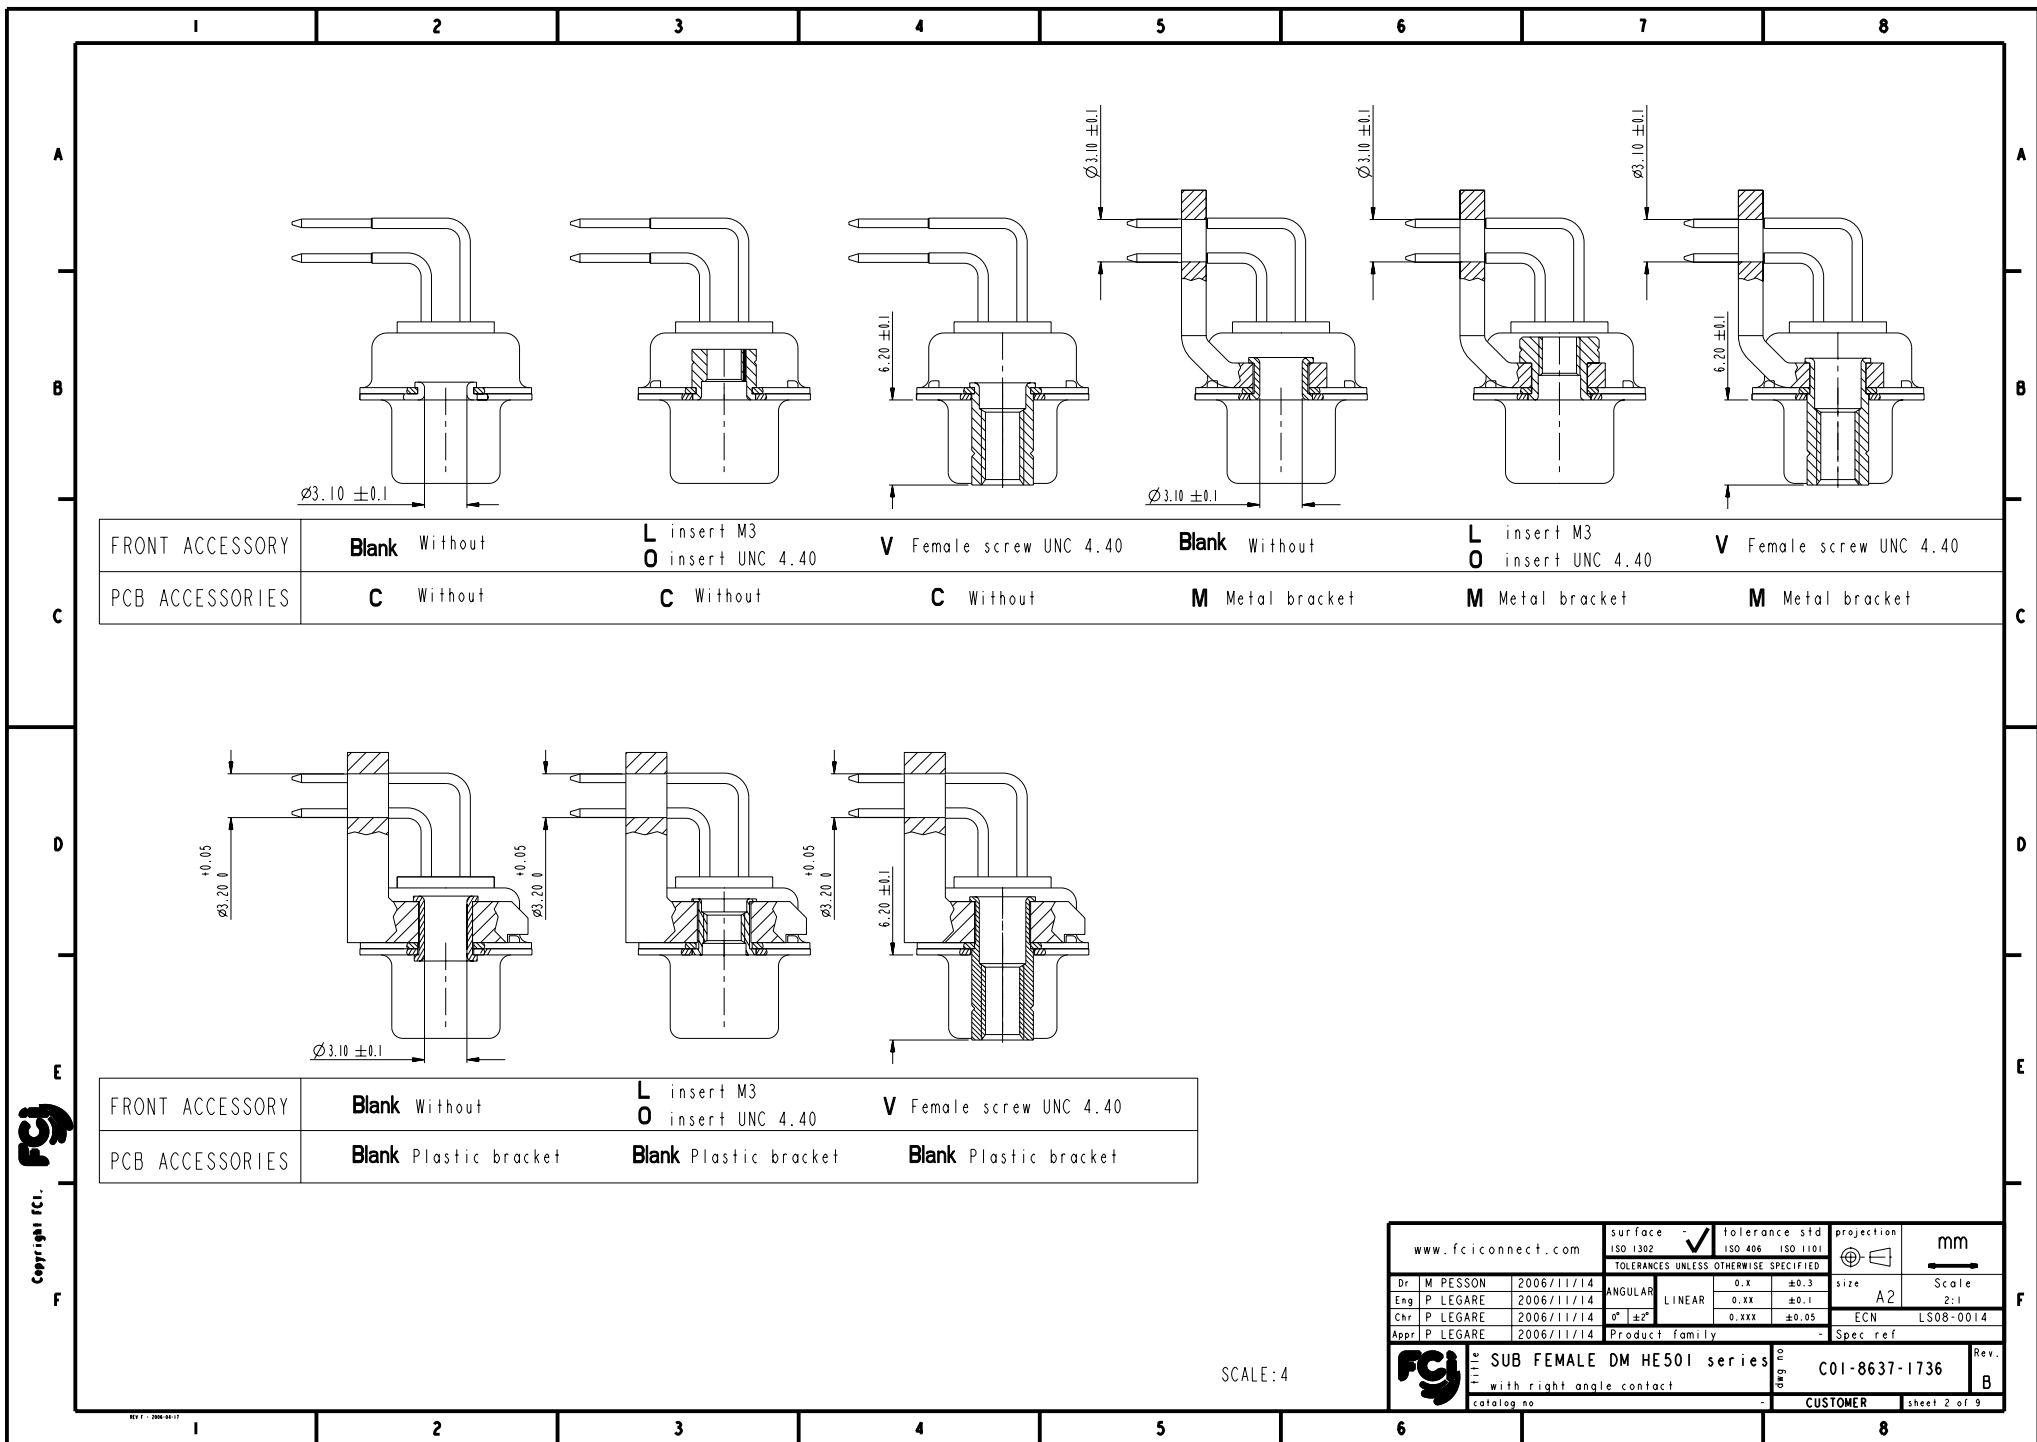


DIMENSION FOR SHELL E,A,B,C WITHOUT BRACKET

Dimensions are in millimeters

Shell size	Number of contacts	A ^{+0.76} ₋₀	B ^{+0.25} ₋₀	C ± 0.12	F ^{+0.57} ₋₀	G ^{+0.25} ₋₀	H ^{+0.51} ₋₀
E	09	30.43	16.21	24.99	10.64	6.05	19.02
A	15	38.76	24.54	33.32	10.64	6.05	27.25
B	25	52.65	38.25	47.04	10.64	6.05	41.02
C	37	68.94	54.71	63.50	10.64	6.05	57.45

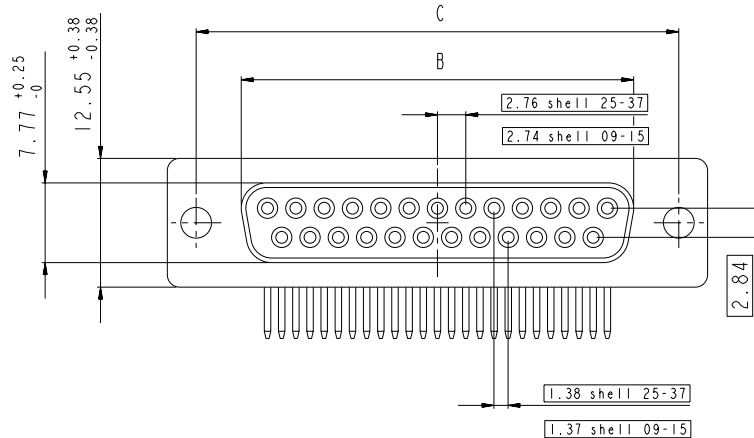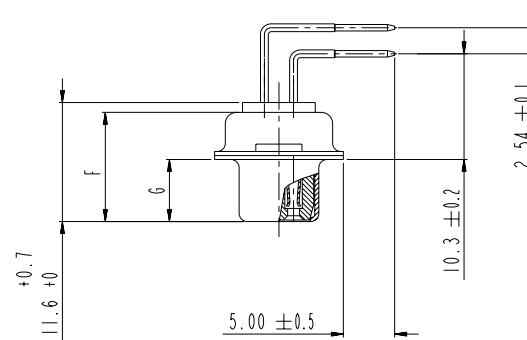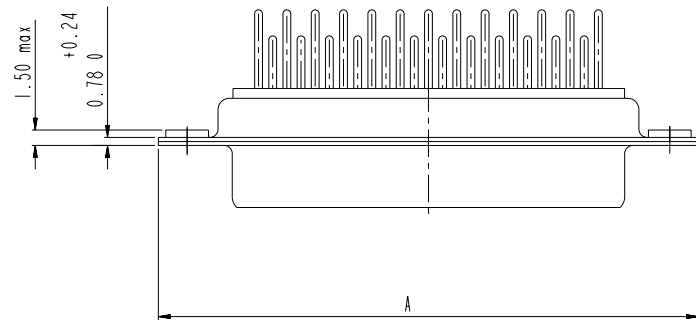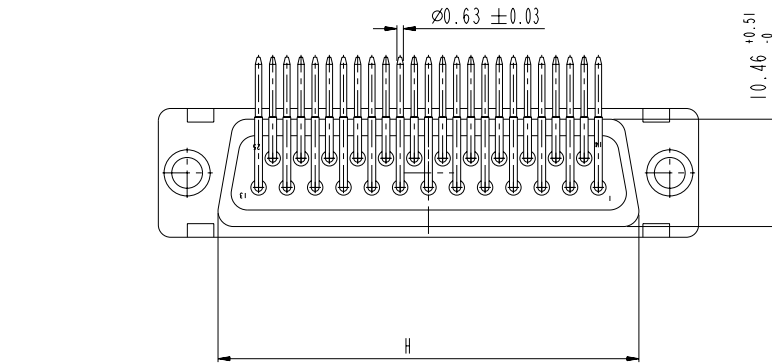

LAYOUT DIMENSIONS

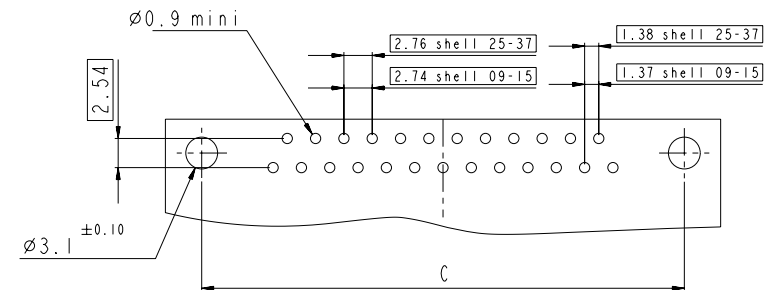





SCALE: 3

www.fciconnect.com			surface - ☒ tolerance std ISO 1302 ISO 406 ISO 1101			projection 		mm 	
TOLERANCES UNLESS OTHERWISE SPECIFIED									
Dr	M PESSON	2006/11/14	ANGULAR	LINEAR	0.X	±0.3	size A2	Scale 2:1	ECN LS08-0014
Eng	P LEGARE	2006/11/14			0.XX	±0.1			
Chr	P LEGARE	2006/11/14	0° ±2°		0.XXX	±0.05			
Appr	P LEGARE	2006/11/14	Product family				Spec ref		
			SUB FEMALE DM HE501 series				C01-8637-1736		Rev. B
			with right angle contact						
catalog no			CUSTOMER				sheet 4 of 9		


DIMENSION FOR SHELL E,A,B,C WITH METAL BRACKET

Dimensions are in millimeters


Shell size	Number of contacts	A ^{+0.76 -0}	B ^{+0.25 -0}	C ^{±0.12}	F ^{+0.57 -0}	G ^{+0.25 -0}	H ^{+0.51 -0}
E	09	30.43	16.21	24.99	10.64	6.05	19.02
A	15	38.76	24.54	33.32	10.64	6.05	27.25
B	25	52.65	38.25	47.04	10.64	6.05	41.02
C	37	68.94	54.71	63.50	10.64	6.05	57.45

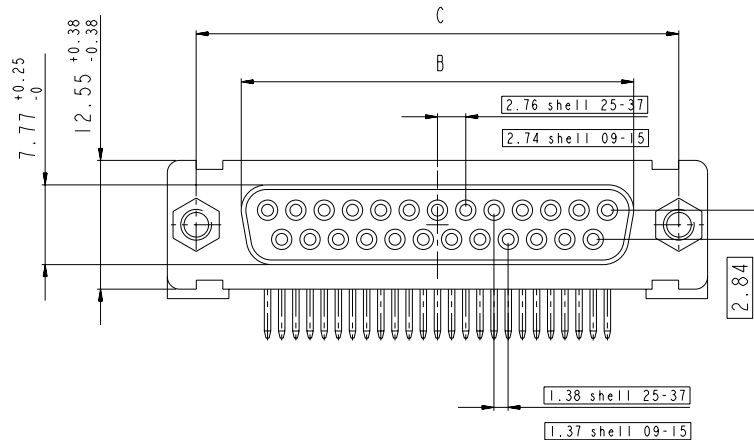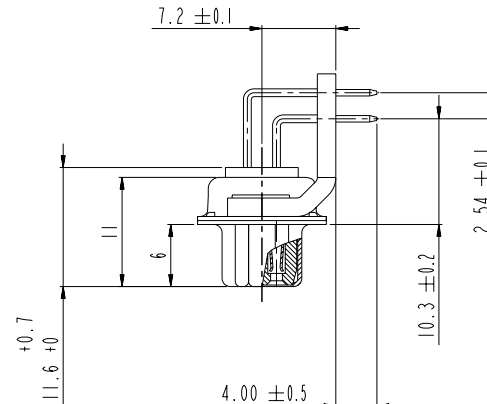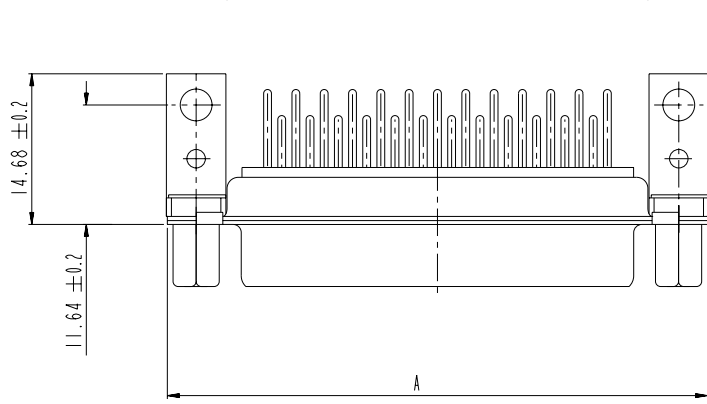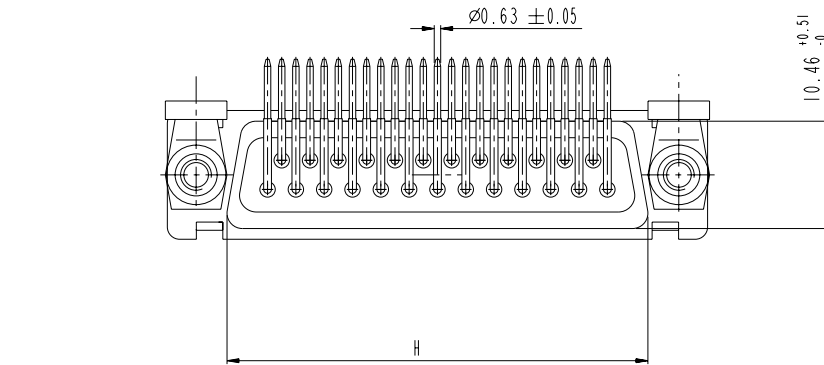


LAYOUT DIMENSIONS

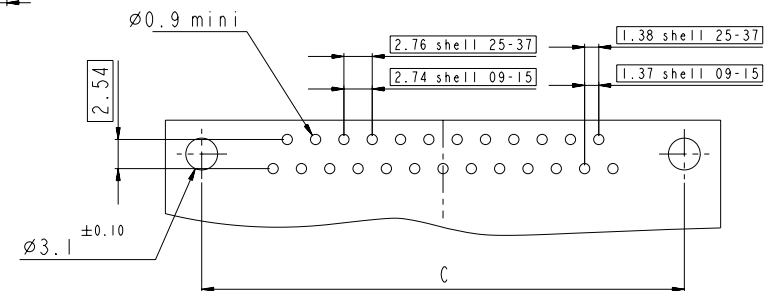



SCALE: 3

www.fciconnect.com			surface - ☒ tolerance std ISO 1302 ISO 406 ISO 1101			projection 		mm 	
TOLERANCES UNLESS OTHERWISE SPECIFIED									
Dr	M PESSON	2006/11/14	ANGULAR	LINEAR	0.X 0.XX 0.XXX	±0.3 ±0.1 ±0.05	size A2	Scale 2:1	
Eng	P LEGARE	2006/11/14							
Chr	P LEGARE	2006/11/14	0° ±2°				ECN	LS08-0014	
Appr	P LEGARE	2006/11/14	Product family			- Spec ref			
			SUB FEMALE DM HE501 series				C01-8637-1736		Rev.
			with right angle contact						B
catalog no			day no				CUSTOMER		sheet 5 of 9

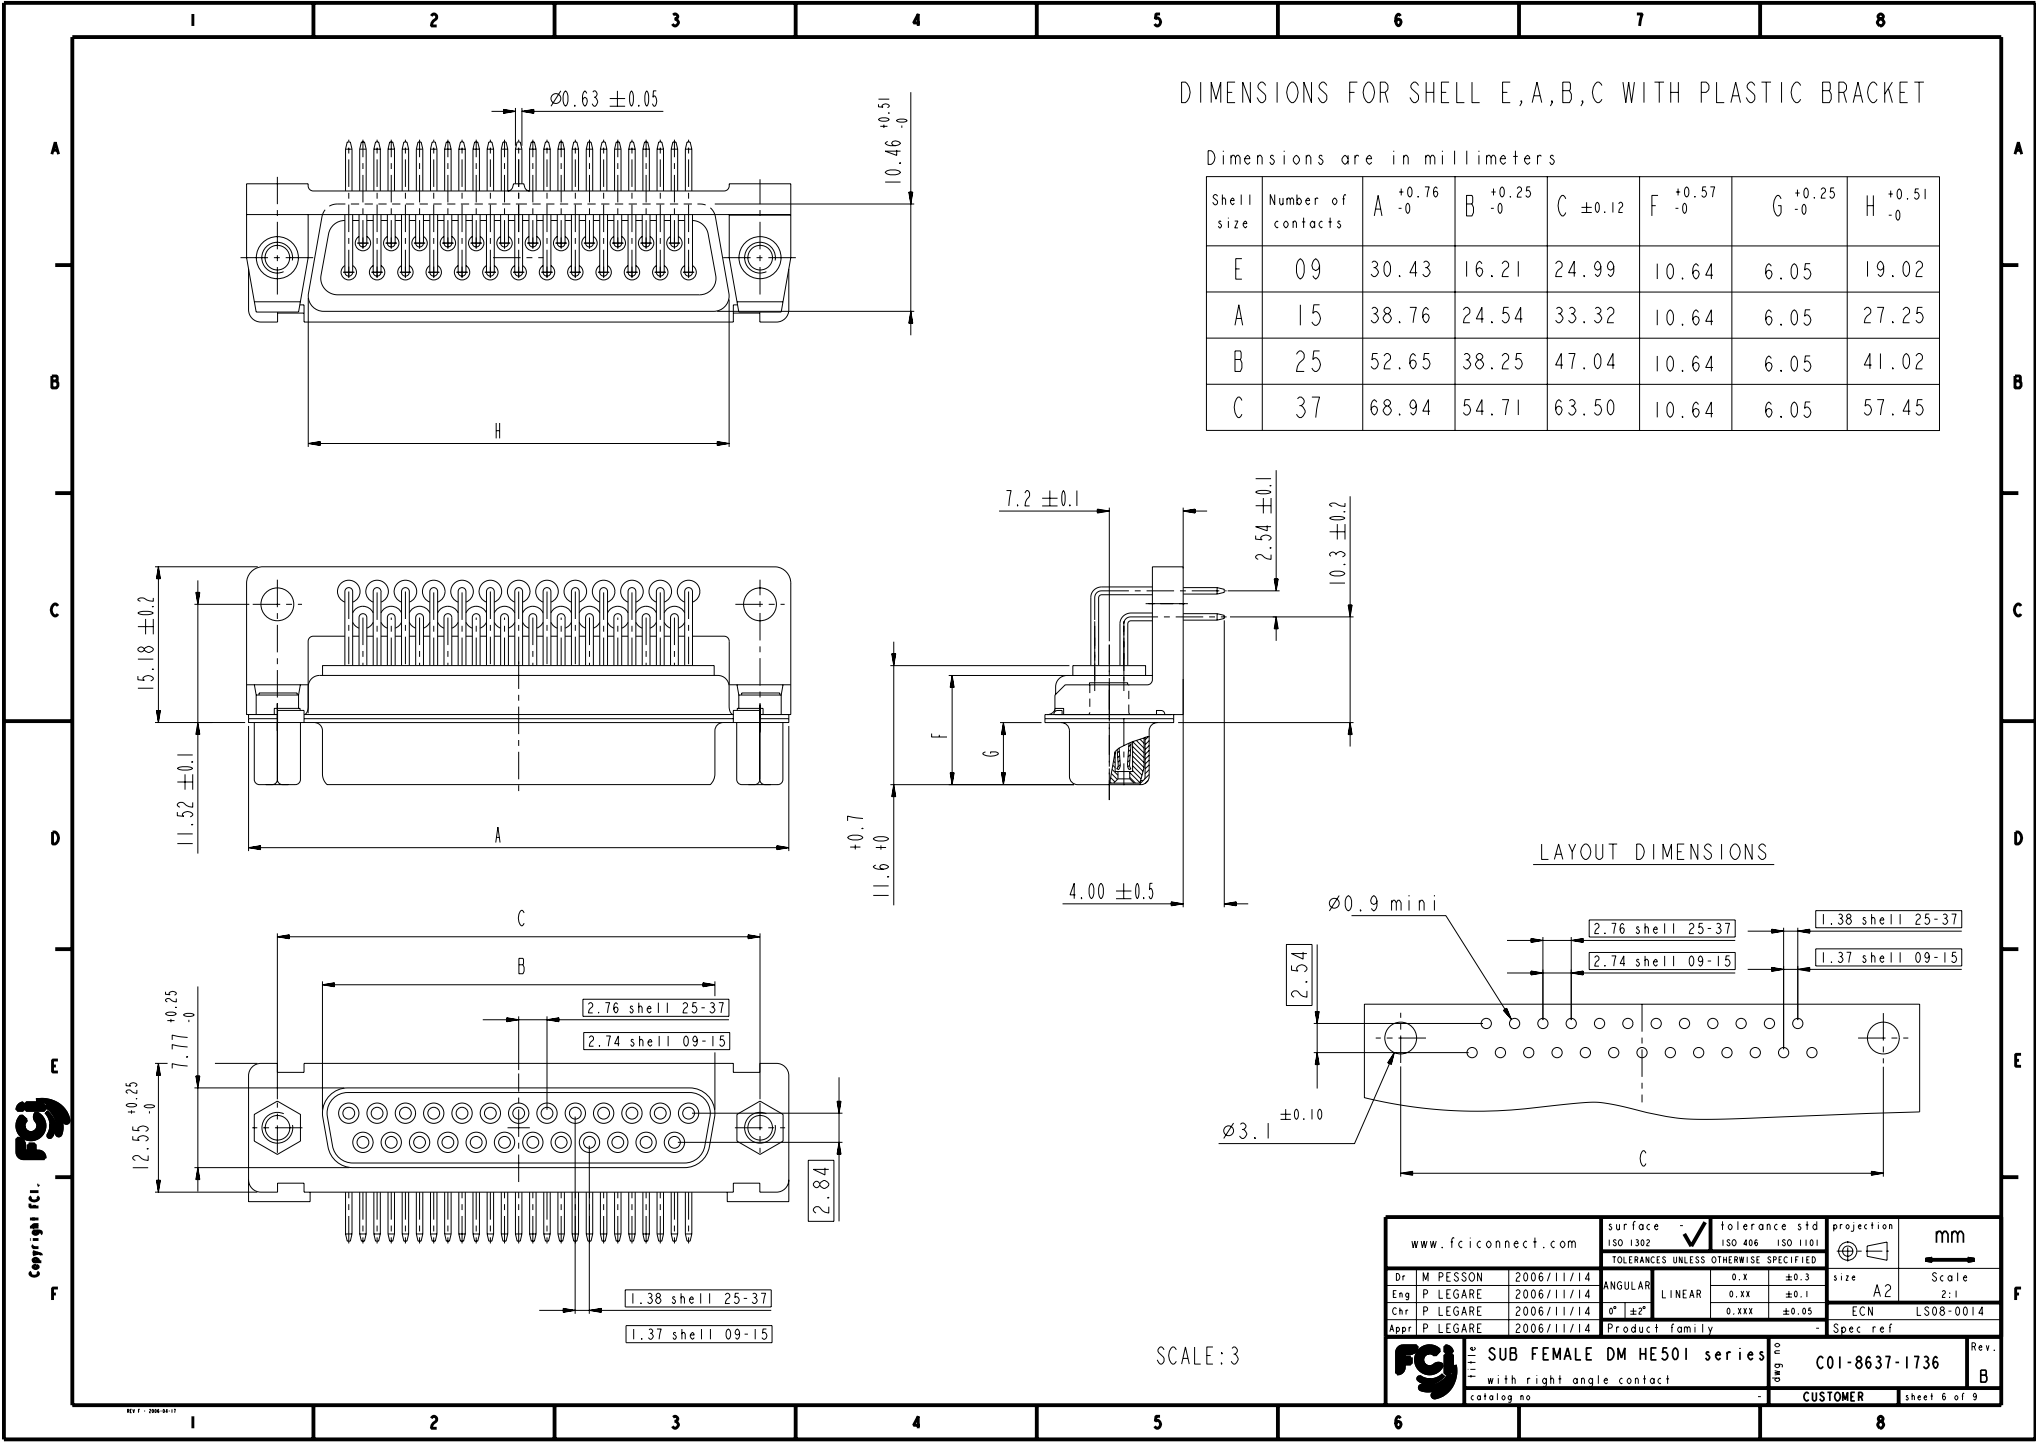


Copyright fci.

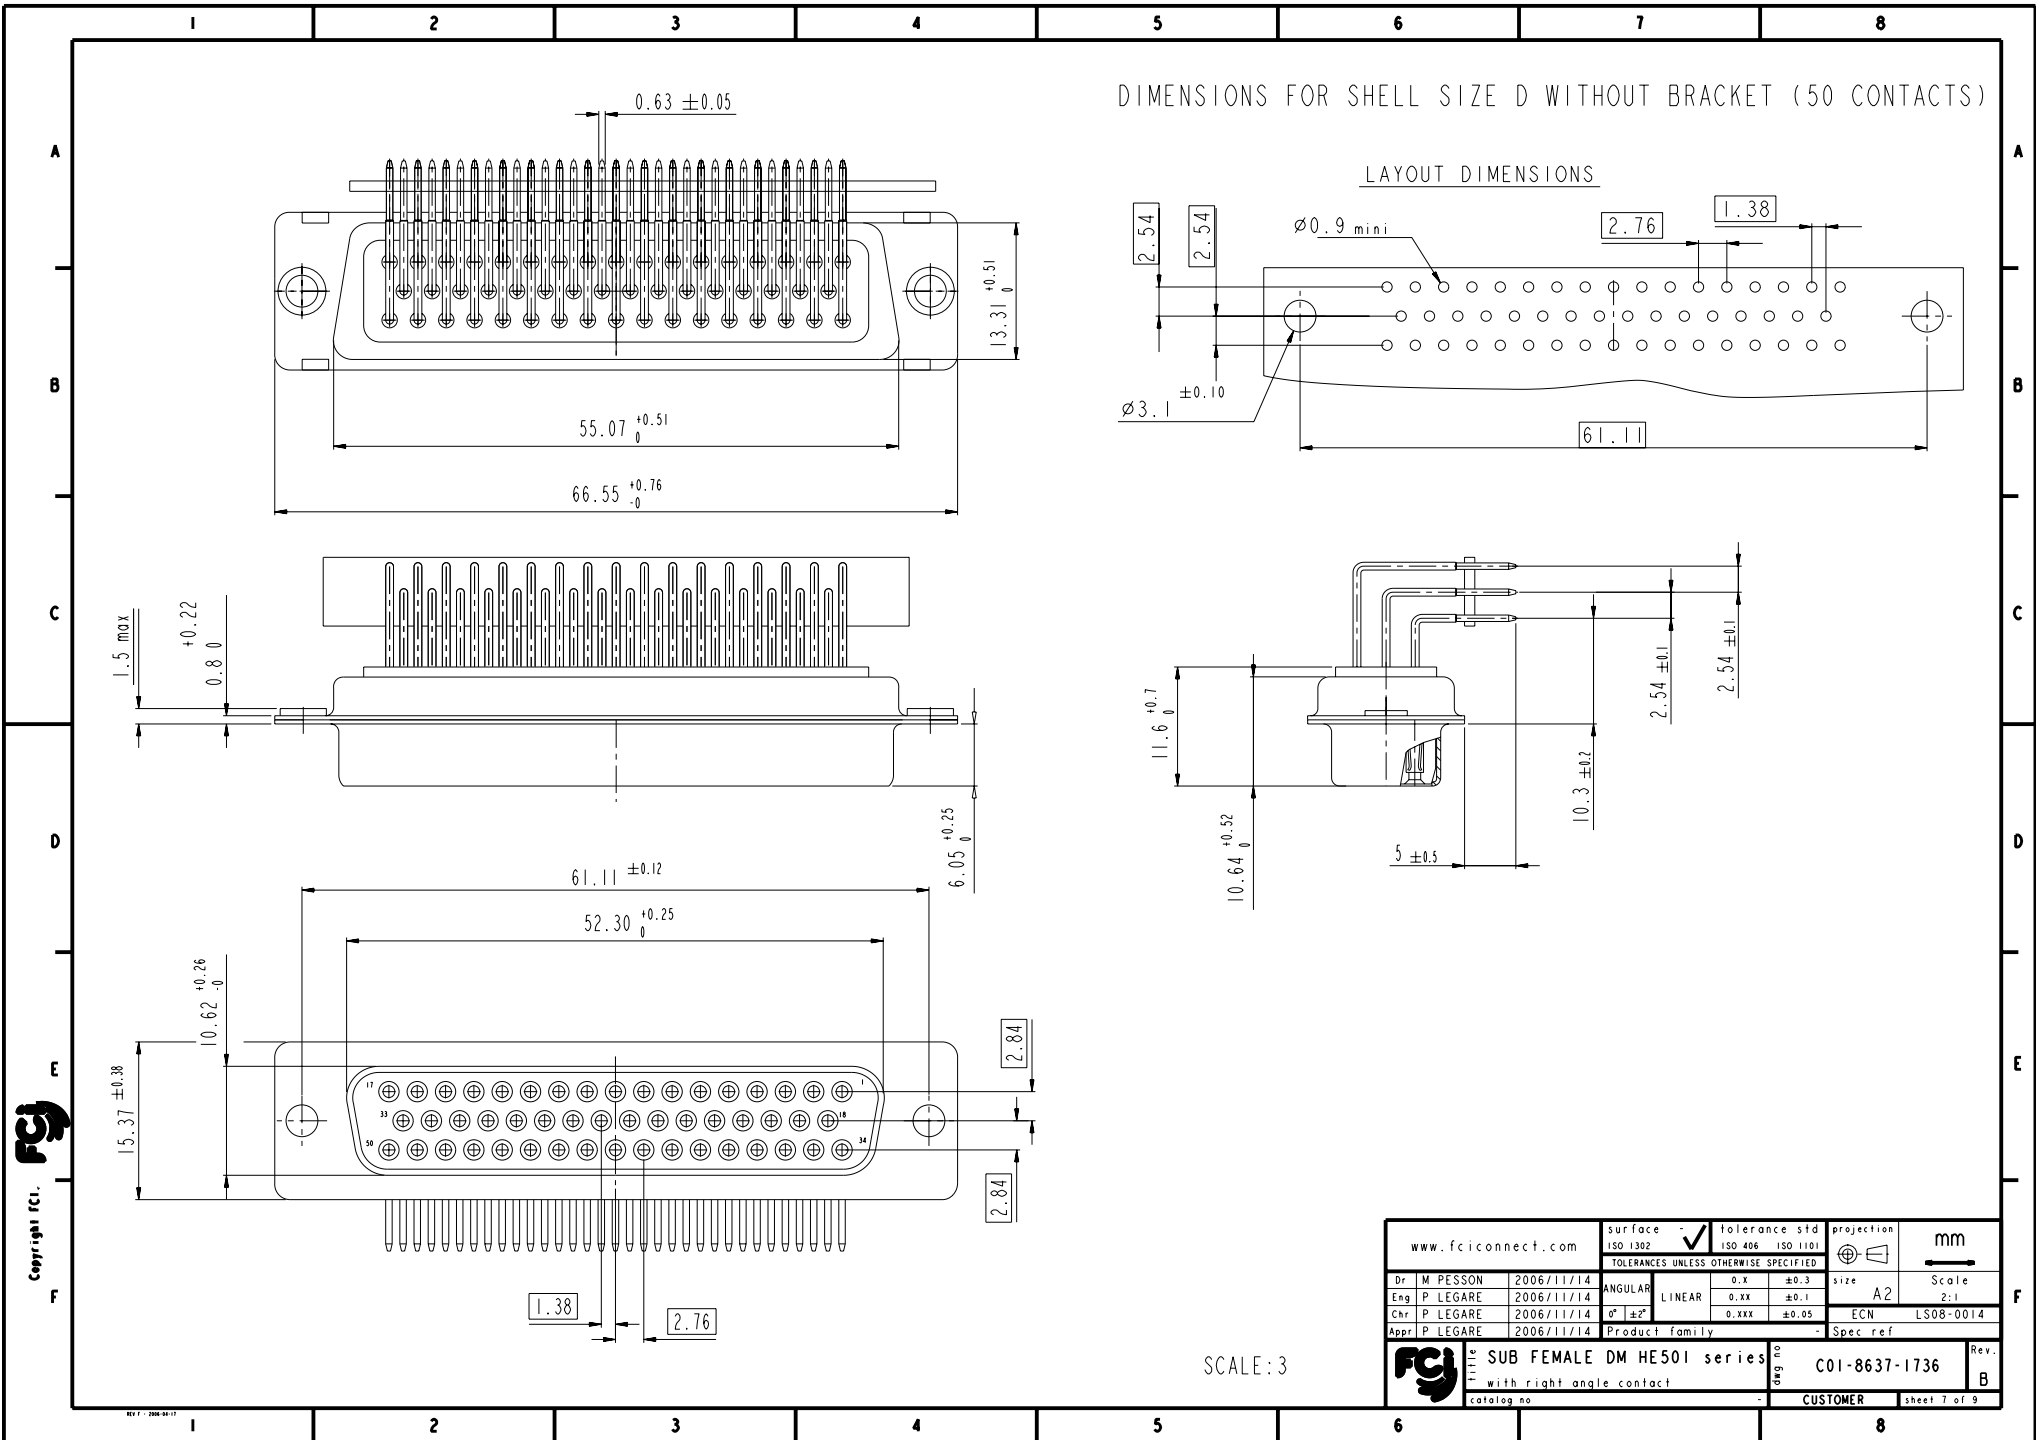

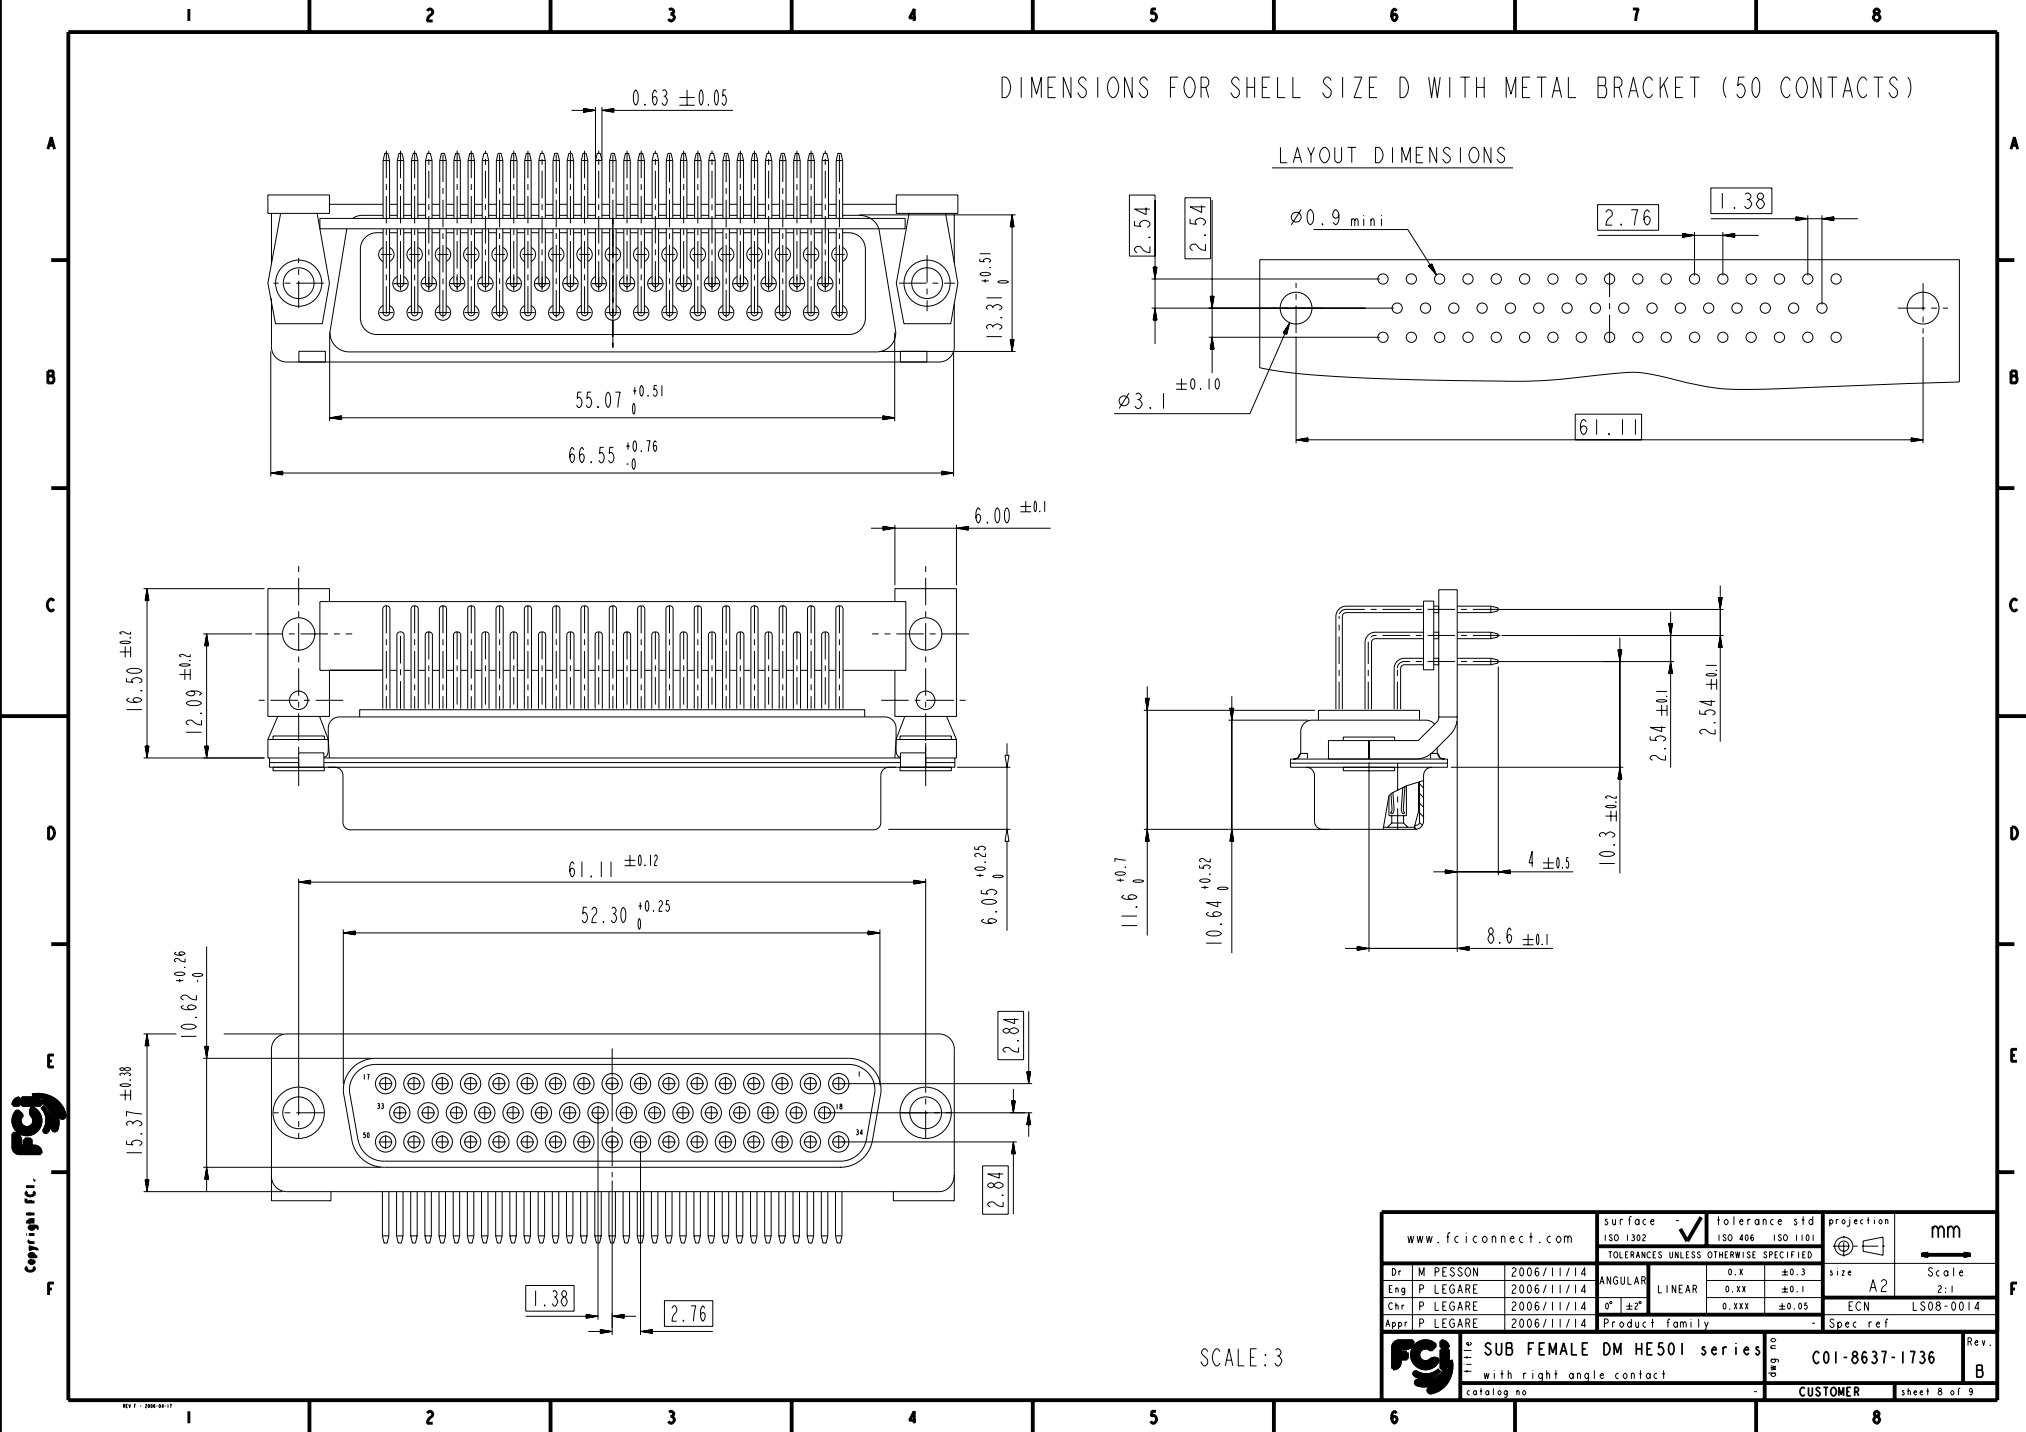



SCALE:3

www.fciconnect.com			surface - ☒ tolerance std ISO 1302 ISO 406 ISO 1101			projection 		mm 	
TOLERANCES UNLESS OTHERWISE SPECIFIED									
Dr	M PESSON	2006/11/14	ANGULAR	LINEAR	0.X	±0.3	size	A2	Scale
Eng	P LEGARE	2006/11/14			0.XX	±0.1			
Chr	P LEGARE	2006/11/14	0° ±2°		0.XXX	±0.05	ECN	LS08-0014	
Appr	P LEGARE	2006/11/14	Product family				- Spec ref		
			SUB FEMALE DM HE501 series				C01-8637-1736		Rev.
			with right angle contact						B
catalog no			-				CUSTOMER		sheet 8 of 9

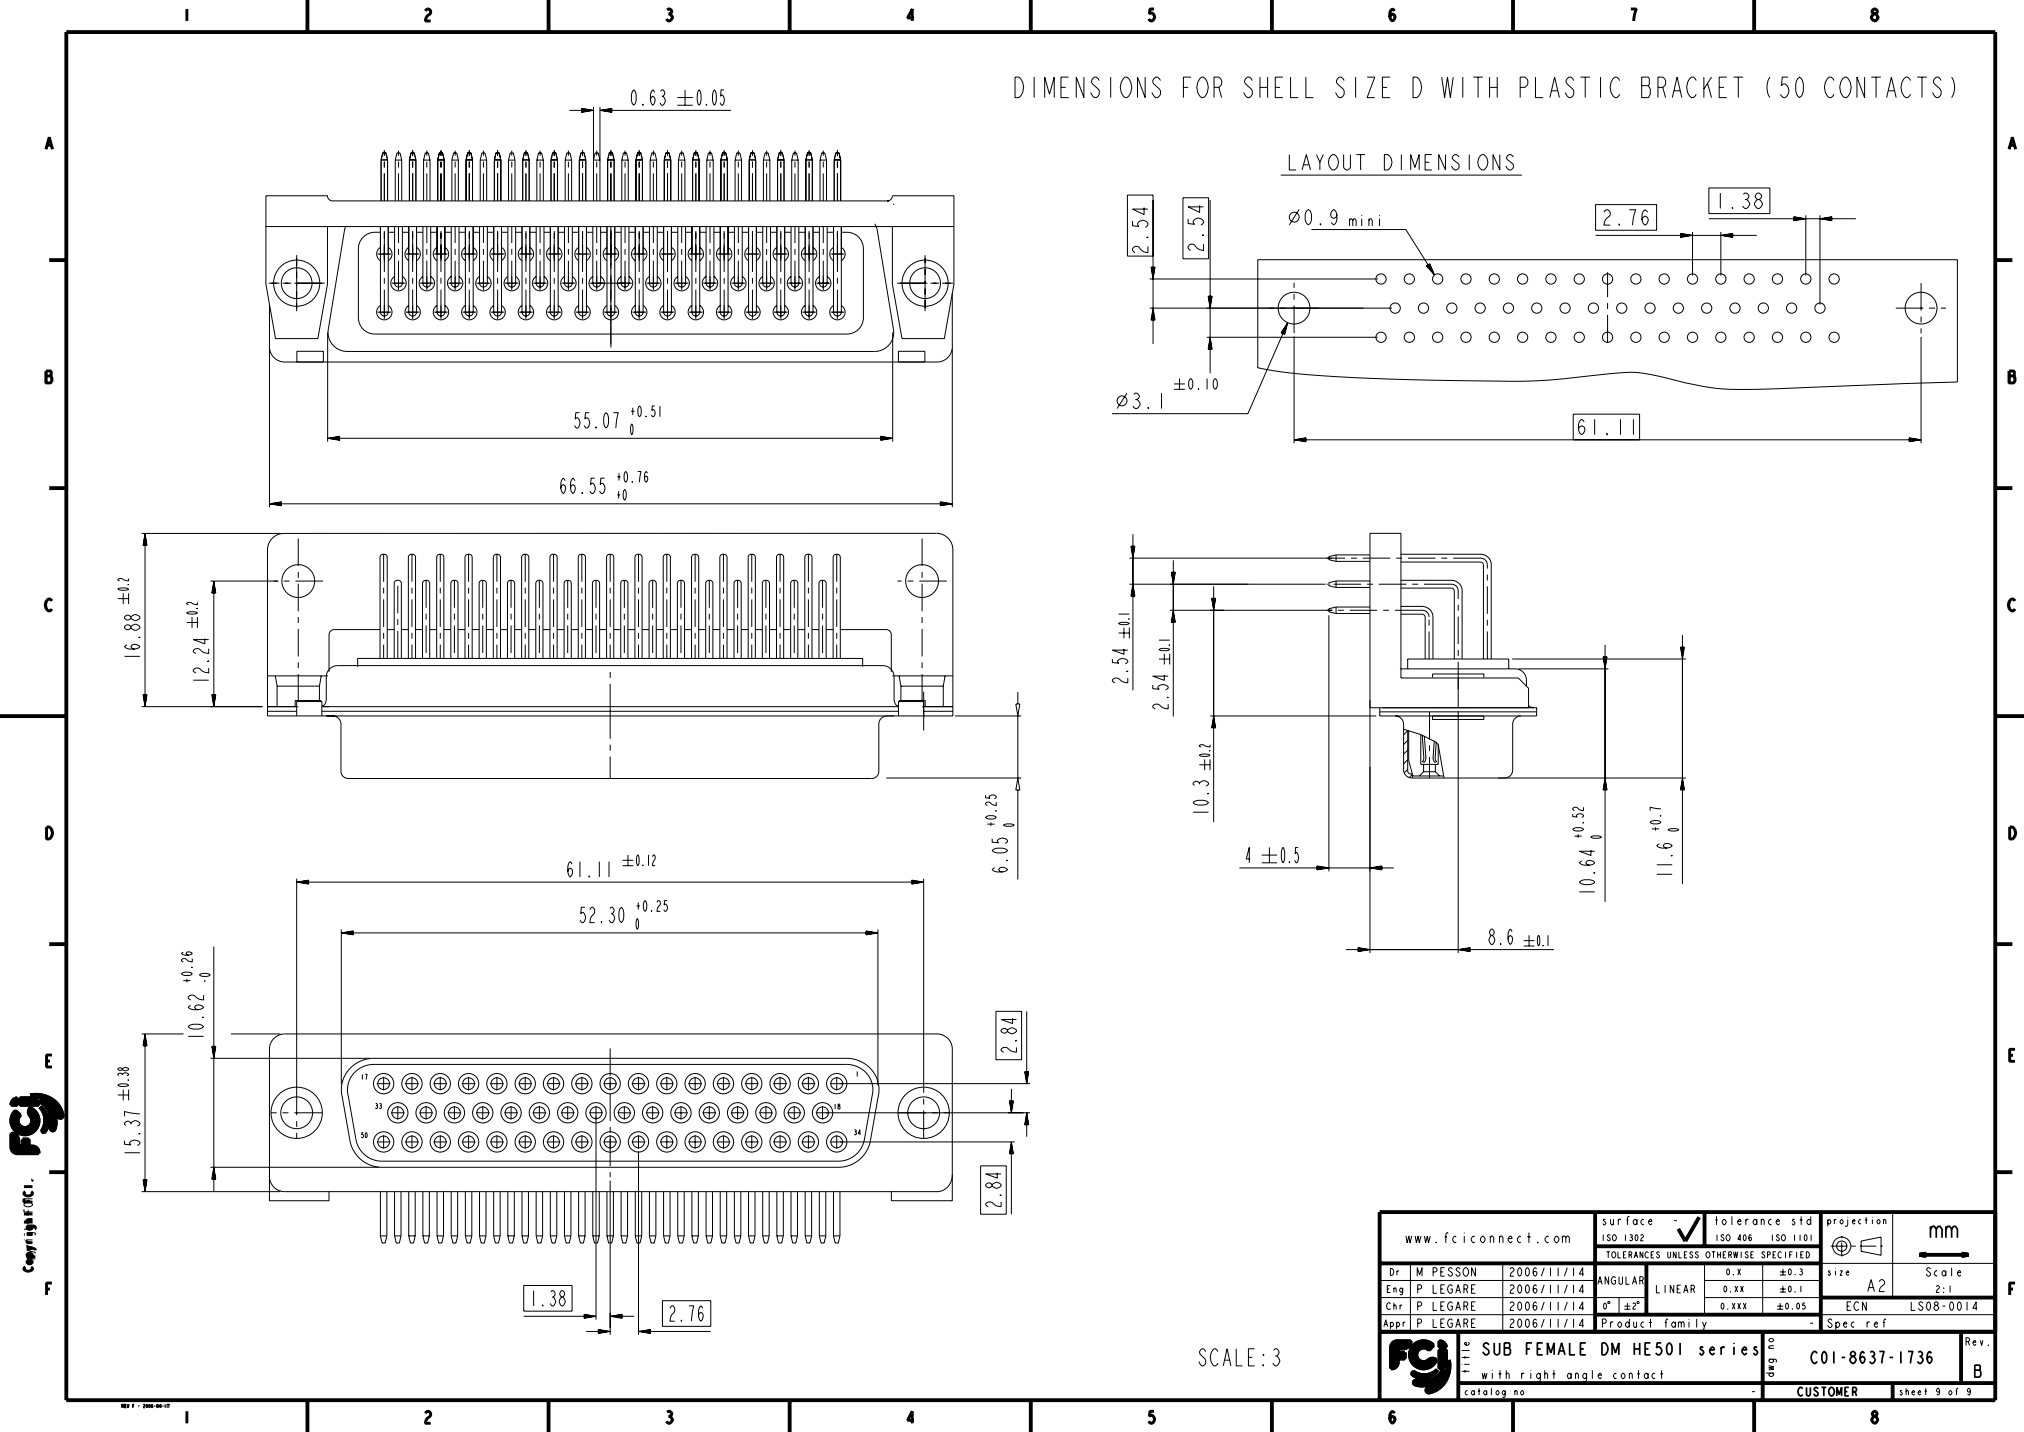

DIMENSIONS FOR SHELL SIZE D WITH PLASTIC BRACKET (50 CONTACTS)

LAYOUT DIMENSIONS

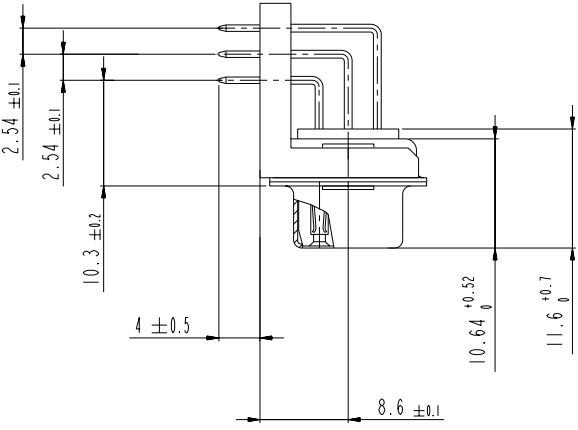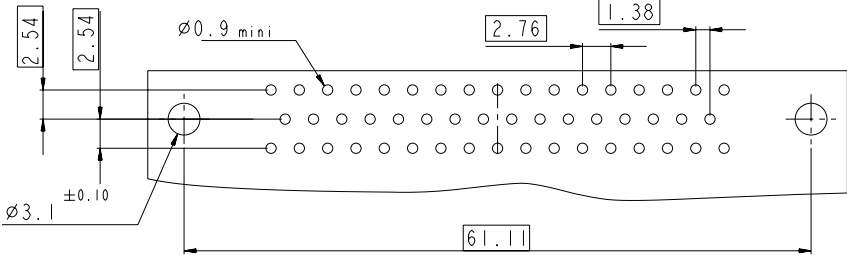

SCALE: 3

www.fciconnect.com			surface ☒ ISO 1302			tolerance std ☒ ISO 406 ☐ ISO 1101			projection 			
TOLERANCES UNLESS OTHERWISE SPECIFIED												
Dr	M PESSON	2006/11/14	ANGULAR	LINEAR	0.X	± 0.3		size	A2	Scale	2:1	
Eng	P LEGARE	2006/11/14			0.XX	± 0.1			ECN	LS08-0014		
Chr	P LEGARE	2006/11/14	0° $\pm 2^\circ$		0.XXX	± 0.05						
Appr	P LEGARE	2006/11/14	Product family			- Spec ref						
			SUB FEMALE DM HE501 series						C01-8637-1736		Rev. B	
			with right angle contact									
catalog no									CUSTOMER		sheet 9 of 9	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru