

REFERENCE SPECIFICATIONS

-NFC 93425 (in compliance with HE 501)

PHYSICAL CHARACTERISTICS

-INSULATOR MATERIAL: THERMOPLASTIC UL94V0

-CONTACT MATERIAL: PHOSPHOR BRONZE,
GOLD OVER NICKEL

-ACCESSORIES: STEEL FOR METAL BRACKETS,
cadmium plated yellow passivation
THERMOPLASTIC UL94V0 FOR PLASTIC BRACKETS

BRASS FOR OTHERS ACCESSORIES,
cadmium plated yellow passivation

-SHELLS: STEEL,cadmium plated yellow passivation

ELECTRICAL CHARACTERISTICS

-NOMINAL CURRENT: 7.5A

-CONTACT RESISTANCE: <=7.3 m Ohms

-CONTACT/CONTACT : >=1000 V

-CONTACT/GROUND : >=1200 V

-INSULATION RESISTANCE: >=5000 MOhms

ENVIRONMENTAL CHARACTERISTICS

- CLIMATIC CATEGORY: 55/125/56

TEMPERATURE RANGE -55°C TO +125°C

DAMP HEAT STEADY STATE 56 DAYS

SALT SPRAY 48 HOURS

MECHANICAL CHARACTERISTICS

RETENTION AGAINST TORQUE: -Threaded insert:0.7 N.m.min

-Female screw:0.5 N.m.min

Series

DBML25S500M

Shell size: **E A B C D**
(see sheet 3)

Front accessory definition
(see sheet 2)

Blank :without accessory
L :threaded insert M3
O :threaded insert UNC 4-40
V :female screw UNC 4-40

Layout of contacts (see sheet 3)

9,15,25,37,50

Contacts

S :Socket

Termination type

5 Right angle/Europe standard



Plating

00 Right angle 500 matings/unmatings

43 Right angle 500 matings/unmatings
for harsh environment

PCB accessories definition(see sheet 2)


Blank :Plastic brackets
C :Without brackets
M :Metal brackets



25 WAY for Example

rev	acc no	dr	date
A	3506-0174	MPE	2006/11/14
B	3508-0014	MPE	2007/01/17
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com				surface	-	tolerance std	ISO 1302	ISO 406	ISO 1101	projection	mm
				TOLERANCES UNLESS OTHERWISE SPECIFIED							
				ANGULAR	LINEAR	0.X	±0.3	size	A2	Scale	2:1
				0° ±2°		0.XX	±0.1	ECN	LS08-0014		
						0.XXX	±0.05	Spec ref			
				Product family							
				SUB FEMALE DM HE501 series				deg no	C01-8637-1736	Rev.	B
				with right angle contact				CUSTOMER			
				catalog no				sheet 1 of 9			

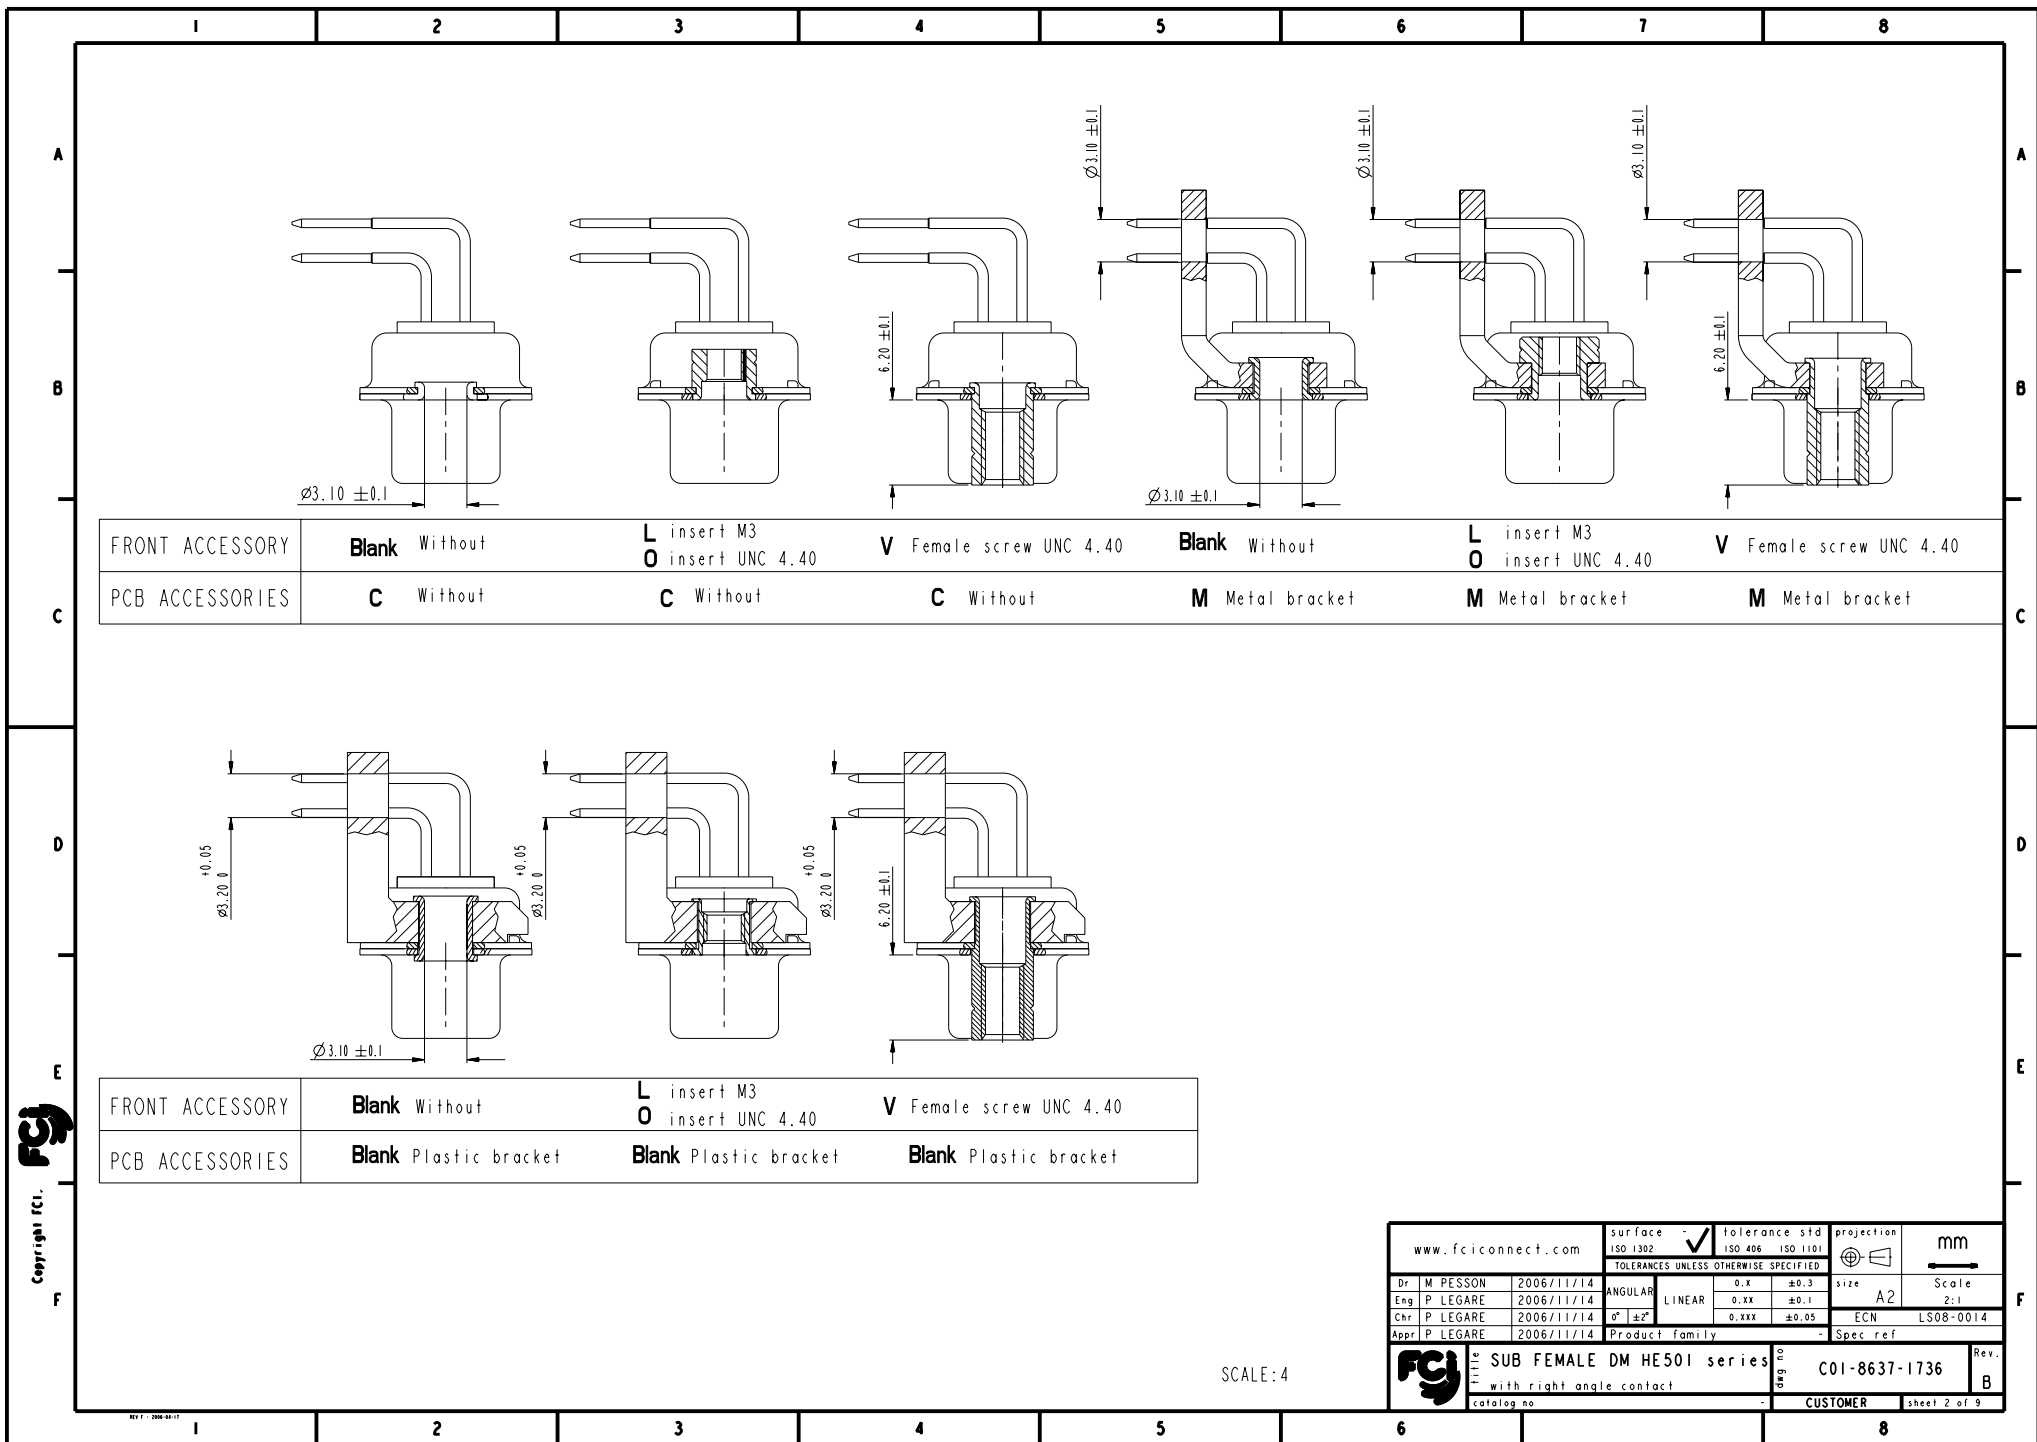

PART NUMBER	FRONT ACCESSORY	PCB ACCESSORY
D*MxxS500C	without	without
D*MLxxS500C	insert M3	without
D*MOxxS500C	insert UNC 4.40	without
D*MVxxS500C	female screw UNC 4.40	without
D*MxxS500M	without	Metal bracket
D*MLxxS500M	insert M3	Metal bracket
D*MOxxS500M	insert UNC 4.40	Metal bracket
D*MVxxS500M	female screw UNC 4.40	Metal bracket
D*MxxS500	without	Plastic bracket
D*MLxxS500	insert M3	Plastic bracket
D*MOxxS500	insert UNC 4.40	Plastic bracket
D*MVxxS500	female screw UNC 4.40	Plastic bracket

shell size	Contact number
X	XX
E	09
A	15
B	25
C	37
D	50

PART NUMBER	FRONT ACCESSORY	PCB ACCESSORY
D*MxxS543C	without	without
D*MLxxS543C	insert M3	without
D*MOxxS543C	insert UNC 4.40	without
D*MVxxS543C	female screw UNC 4.40	without
D*MxxS543M	without	Metal bracket
D*MLxxS543M	insert M3	Metal bracket
D*MOxxS543M	insert UNC 4.40	Metal bracket
D*MVxxS543M	female screw UNC 4.40	Metal bracket
D*MxxS543	without	Plastic bracket
D*MLxxS543	insert M3	Plastic bracket
D*MOxxS543	insert UNC 4.40	Plastic bracket
D*MVxxS543	female screw UNC 4.40	Plastic bracket

CROSS REFERENCES HE501 and FCI

HE501 P/N	FCI P/N	FRONT ACCESSORY	PCB ACCESSORY
HE501PxxVS6	D*MxxS500	without	Plastic bracket
HE501MxxVS6	D*MxxS500M	without	Metal bracket

www.fciconnect.com

Dr M PESSON

Eng P LEGARE

Chr P LEGARE

Appr P LEGARE

2006/11/14

2006/11/14

2006/11/14

2006/11/14

surface -

tolerance std

tolerances unless otherwise specified

ANGULAR

LINEAR

0° ±2°

Product family

ISO 1302

ISO 406

ISO 1101

0.X

0.XX

0.XXX

±0.3

±0.1

±0.05

projection

size

ECN

Spec ref

mm

Scale

LS08-0014

C01-8637-1736

Rev. B

deg no

with right angle contact

CUSTOMER





sheet 3 of 9

Copyright FCI


DIMENSION FOR SHELL E,A,B,C WITHOUT BRACKET

Dimensions are in millimeters

Shell size	Number of contacts	A ^{+0.76} ₋₀	B ^{+0.25} ₋₀	C ± 0.12	F ^{+0.57} ₋₀	G ^{+0.25} ₋₀	H ^{+0.51} ₋₀
E	09	30.43	16.21	24.99	10.64	6.05	19.02
A	15	38.76	24.54	33.32	10.64	6.05	27.25
B	25	52.65	38.25	47.04	10.64	6.05	41.02
C	37	68.94	54.71	63.50	10.64	6.05	57.45

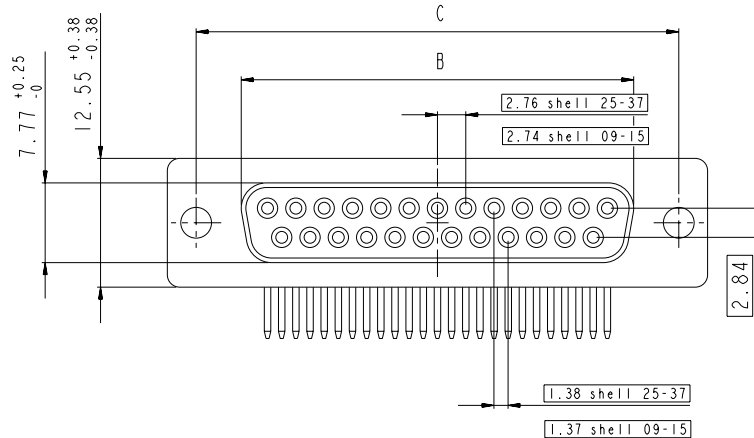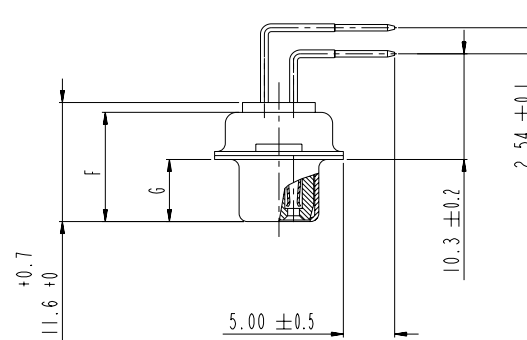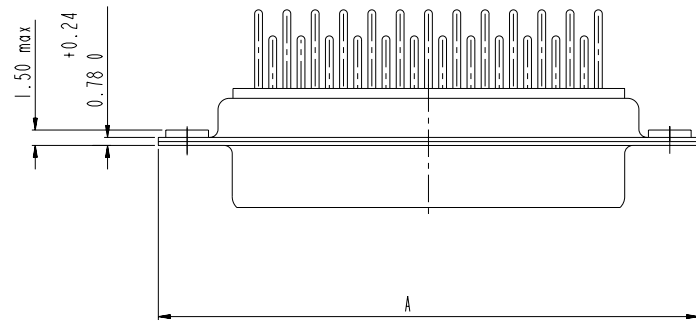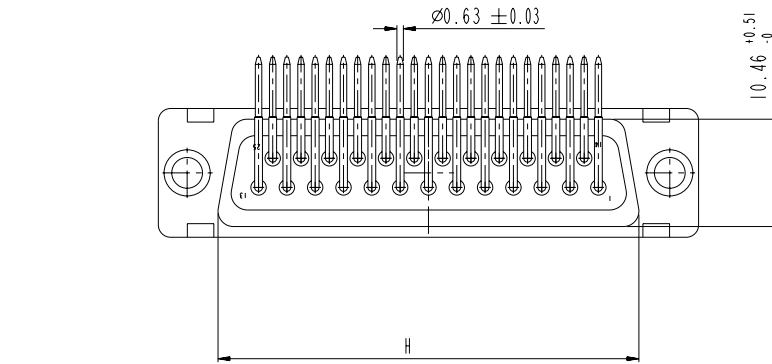

LAYOUT DIMENSIONS

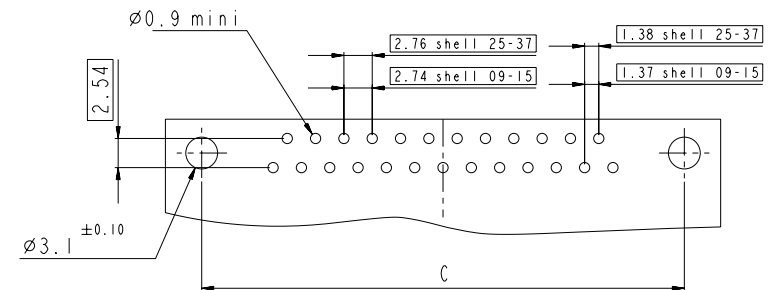





SCALE: 3

www.fciconnect.com			surface -	tolerance std	projection	mm	
			ISO 1302	ISO 406	ISO 1101		
			TOLERANCES UNLESS OTHERWISE SPECIFIED				
Dr	M PESSON	2006/11/14	ANGULAR	0.X	±0.3	size	Scale
Eng	P LEGARE	2006/11/14		0.XX	±0.1	A2	2:1
Chr	P LEGARE	2006/11/14		0.XXX	±0.05	ECN	LS08-0014
Appr	P LEGARE	2006/11/14	Product family		Spec ref		
			SUB FEMALE DM HE501 series		C01-8637-1736		
			with right angle contact		B		
			catalog no		CUSTOMER		


DIMENSION FOR SHELL E,A,B,C WITH METAL BRACKET

Dimensions are in millimeters

Shell size	Number of contacts	A ^{+0.76} ₋₀	B ^{+0.25} ₋₀	C ± 0.12	F ^{+0.57} ₋₀	G ^{+0.25} ₋₀	H ^{+0.51} ₋₀
E	09	30.43	16.21	24.99	10.64	6.05	19.02
A	15	38.76	24.54	33.32	10.64	6.05	27.25
B	25	52.65	38.25	47.04	10.64	6.05	41.02
C	37	68.94	54.71	63.50	10.64	6.05	57.45

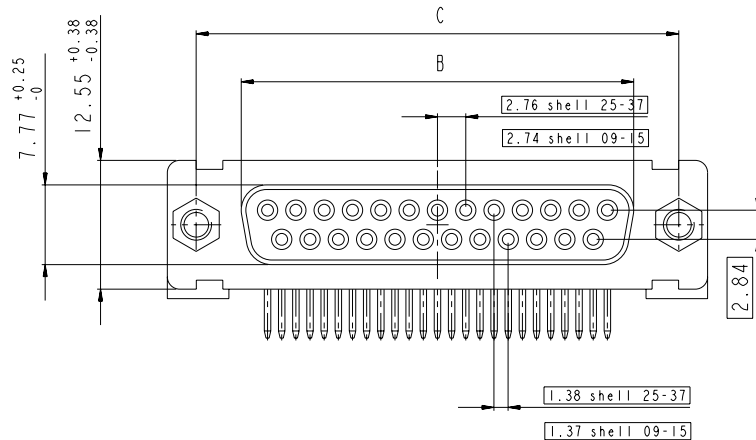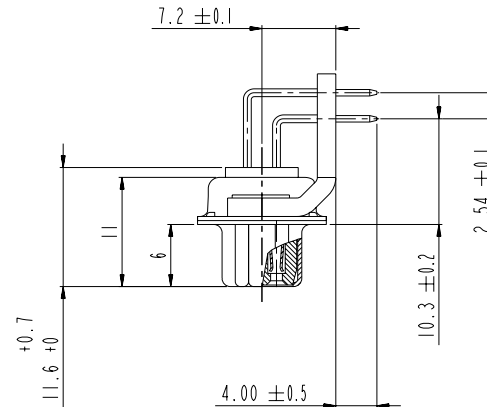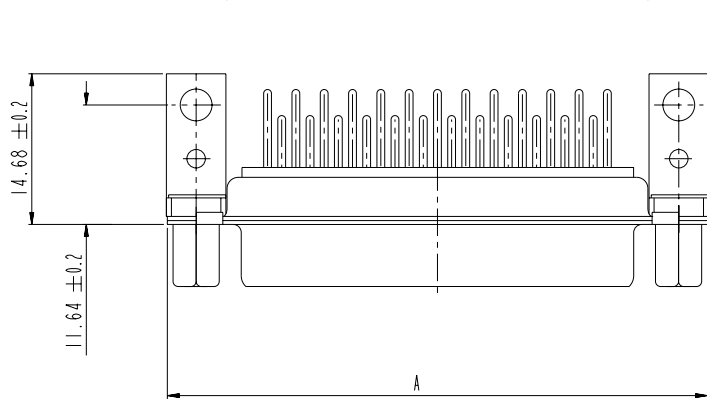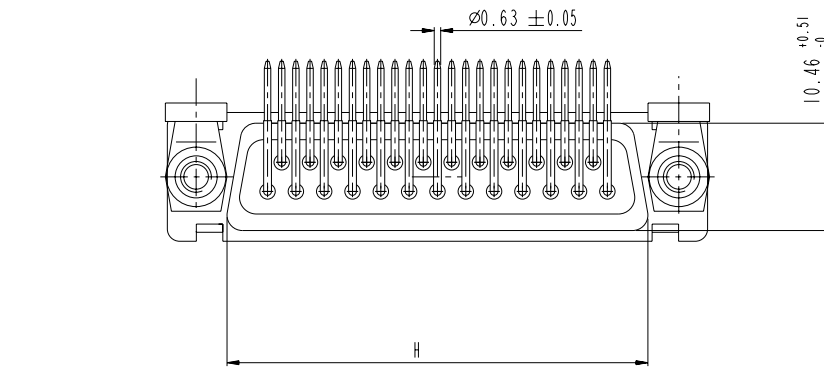



LAYOUT DIMENSIONS

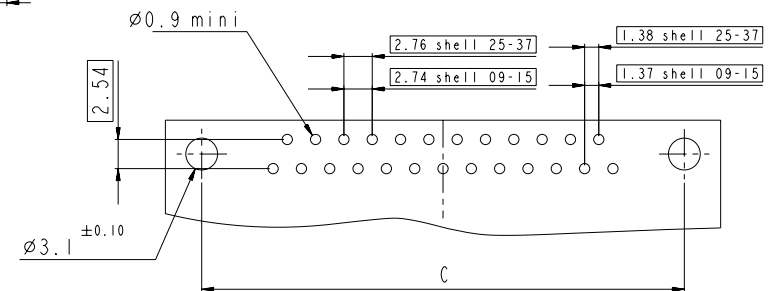

SCALE: 3



www.fciconnect.com		surface -	tolerance std	projection	mm
		ISO 1302	ISO 406	ISO 1101	
		TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	M PESSON	2006/11/14	ANGULAR	0.X	± 0.3
Eng	P LEGARE	2006/11/14	LINEAR	0.XX	± 0.1
Chr	P LEGARE	2006/11/14	$\phi^\circ \pm 2^\circ$	0.XXX	± 0.05
Appr	P LEGARE	2006/11/14	Product family	Spec ref	
SUB FEMALE DM HE501 series		deg no	C01-8637-1736		Rev.
with right angle contact					B
catalog no		CUSTOMER		sheet 5 of 9	

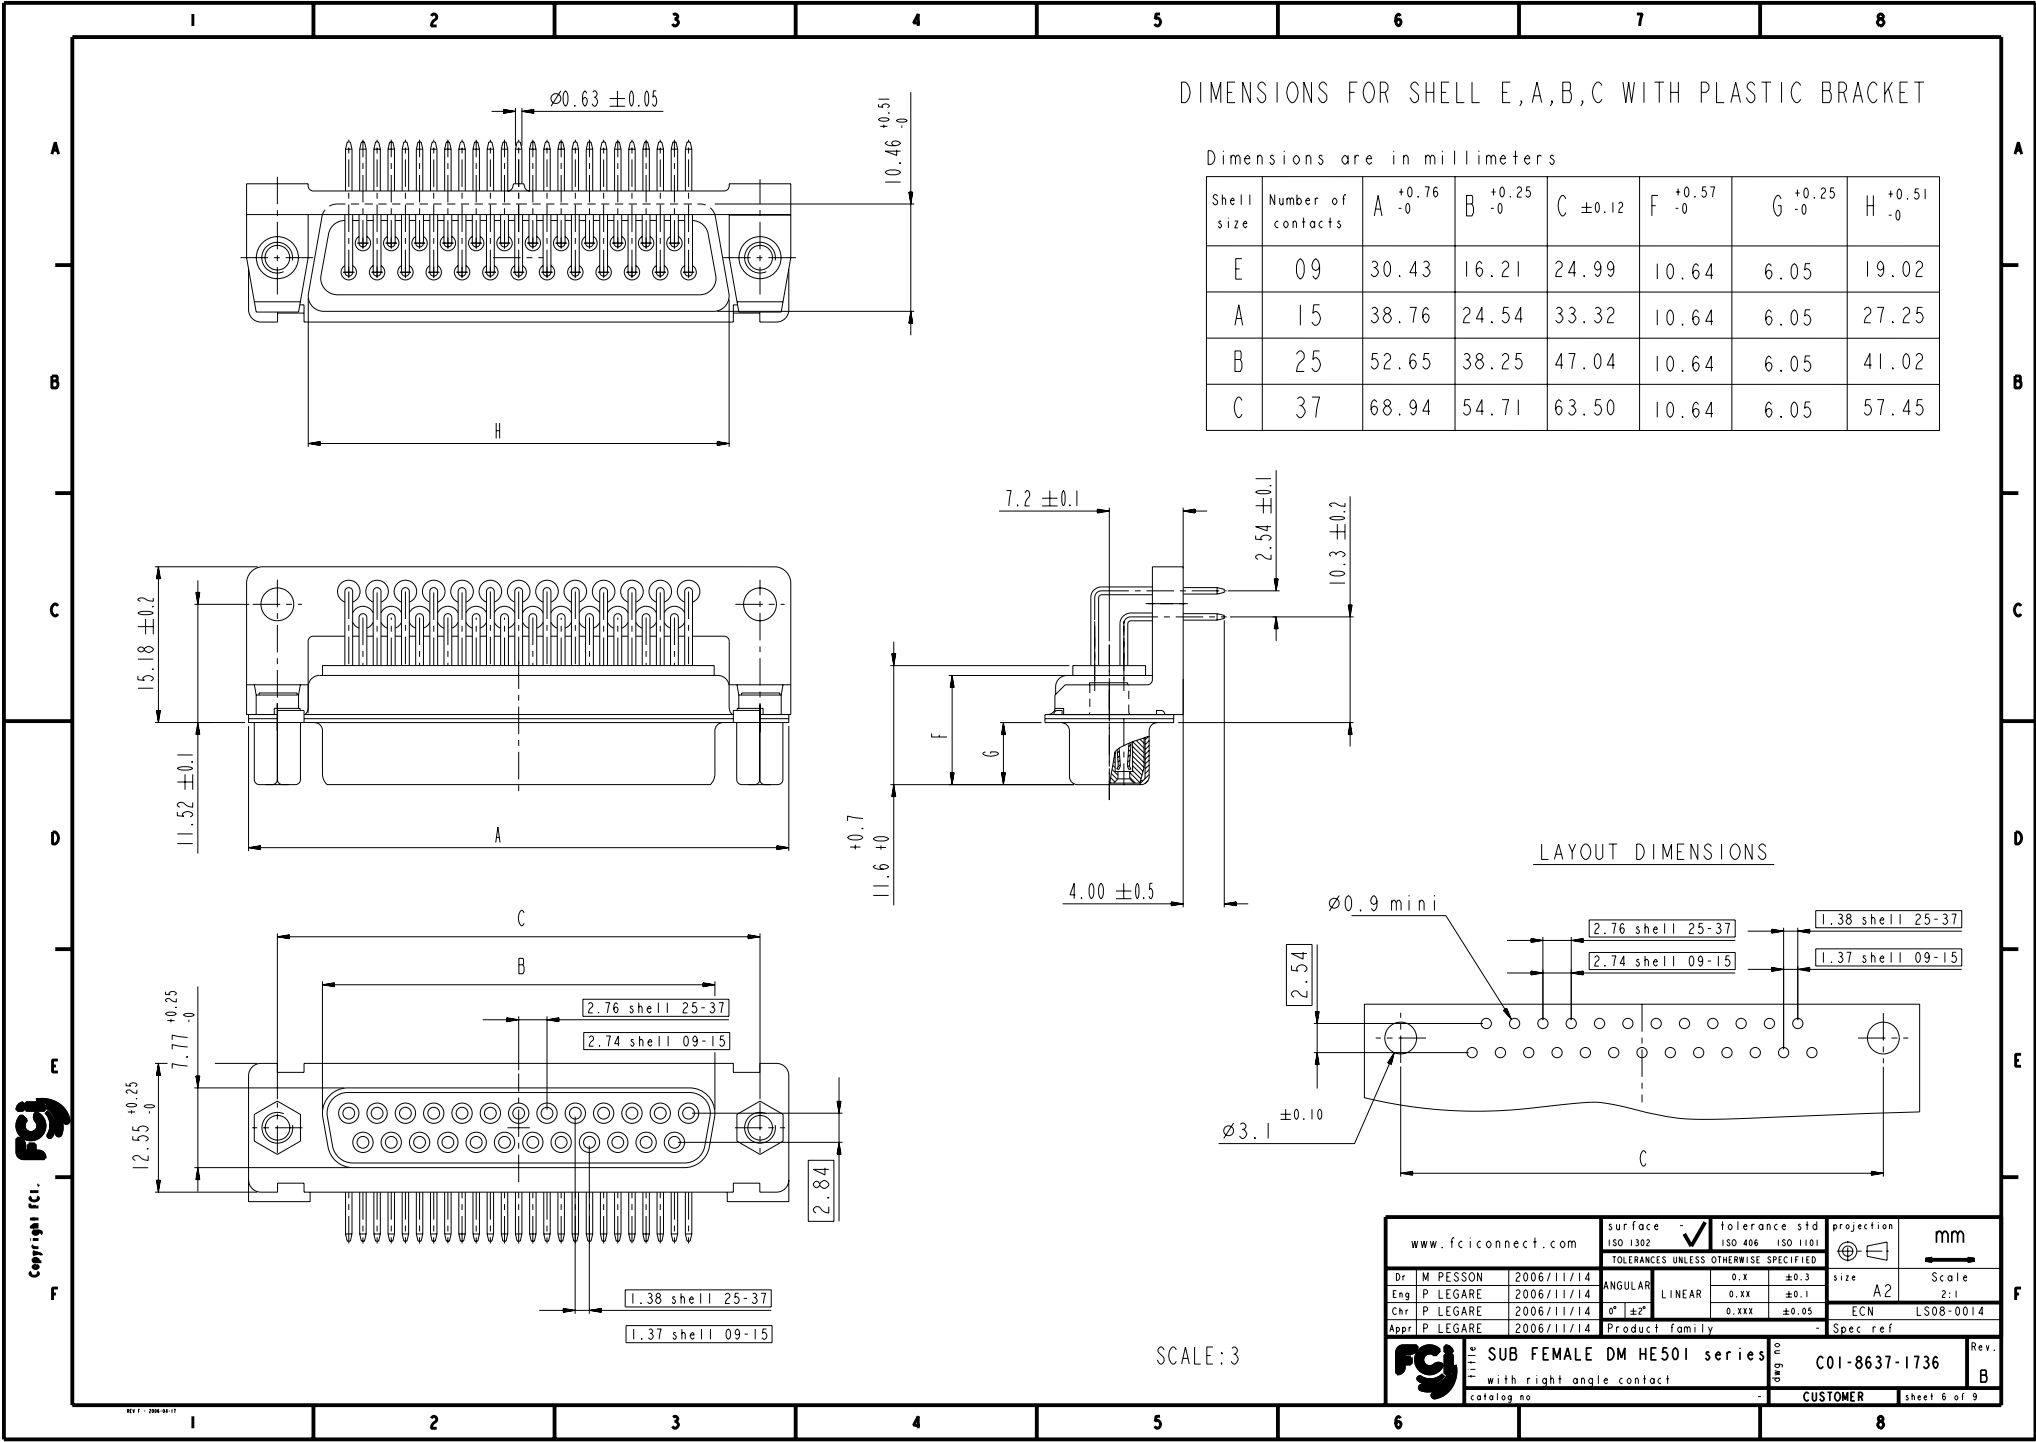

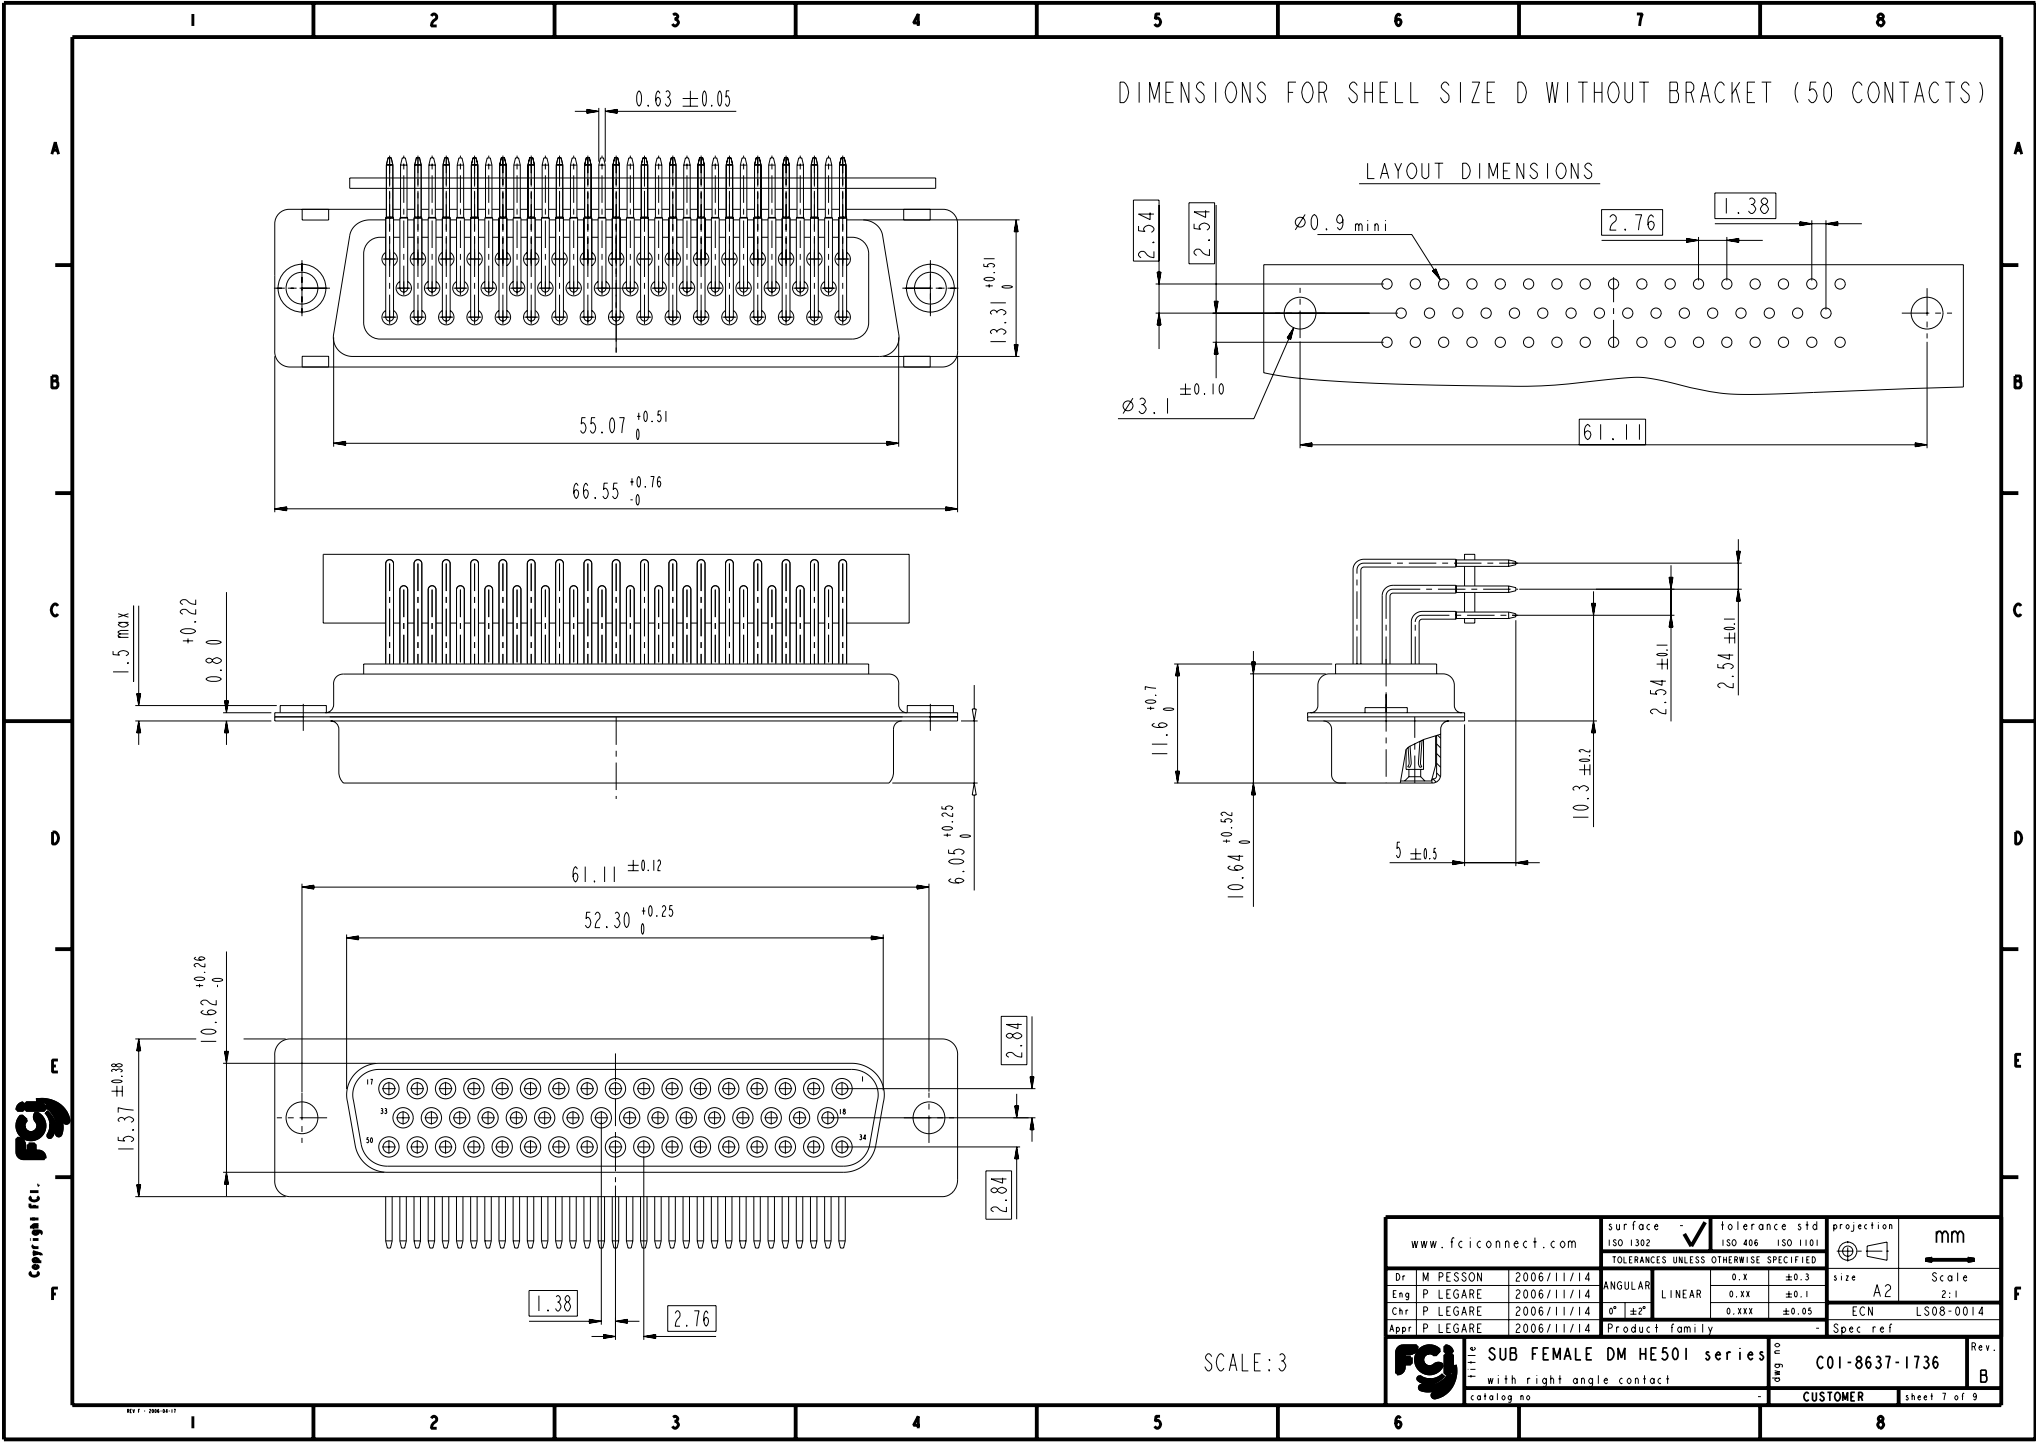


DIMENSIONS FOR SHELL SIZE D WITHOUT BRACKET (50 CONTACTS)


LAYOUT DIMENSIONS

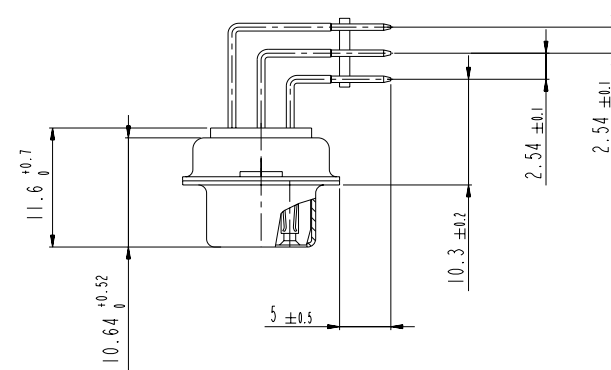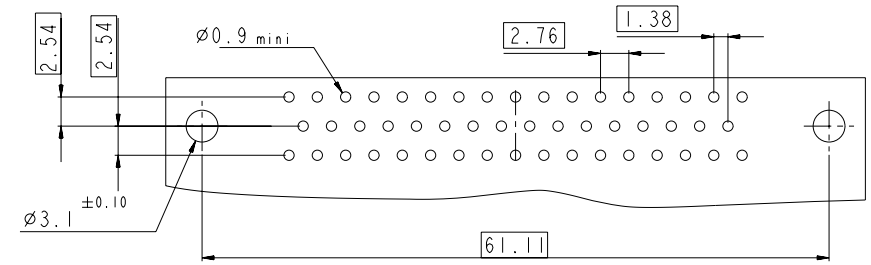

www.fciconnect.com		surface	ISO 1302	tolerance std	ISO 406	ISO 1101	projection	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED					size	Scale
Dr	M PESSON	2006/11/14	ANGULAR	0.X	±0.3		A2	2:1
Eng	P LEGARE	2006/11/14	LINEAR	0.XX	±0.1		ECN	LS08-0014
Chr	P LEGARE	2006/11/14	0° ±2°	0.XXX	±0.05		Spec ref	
Appr	P LEGARE	2006/11/14	Product family					
SUB FEMALE DM HE501 series		with right angle contact		C01-8637-1736		Rev. B		
catalog no		CUSTOMER		sheet 7 of 9				

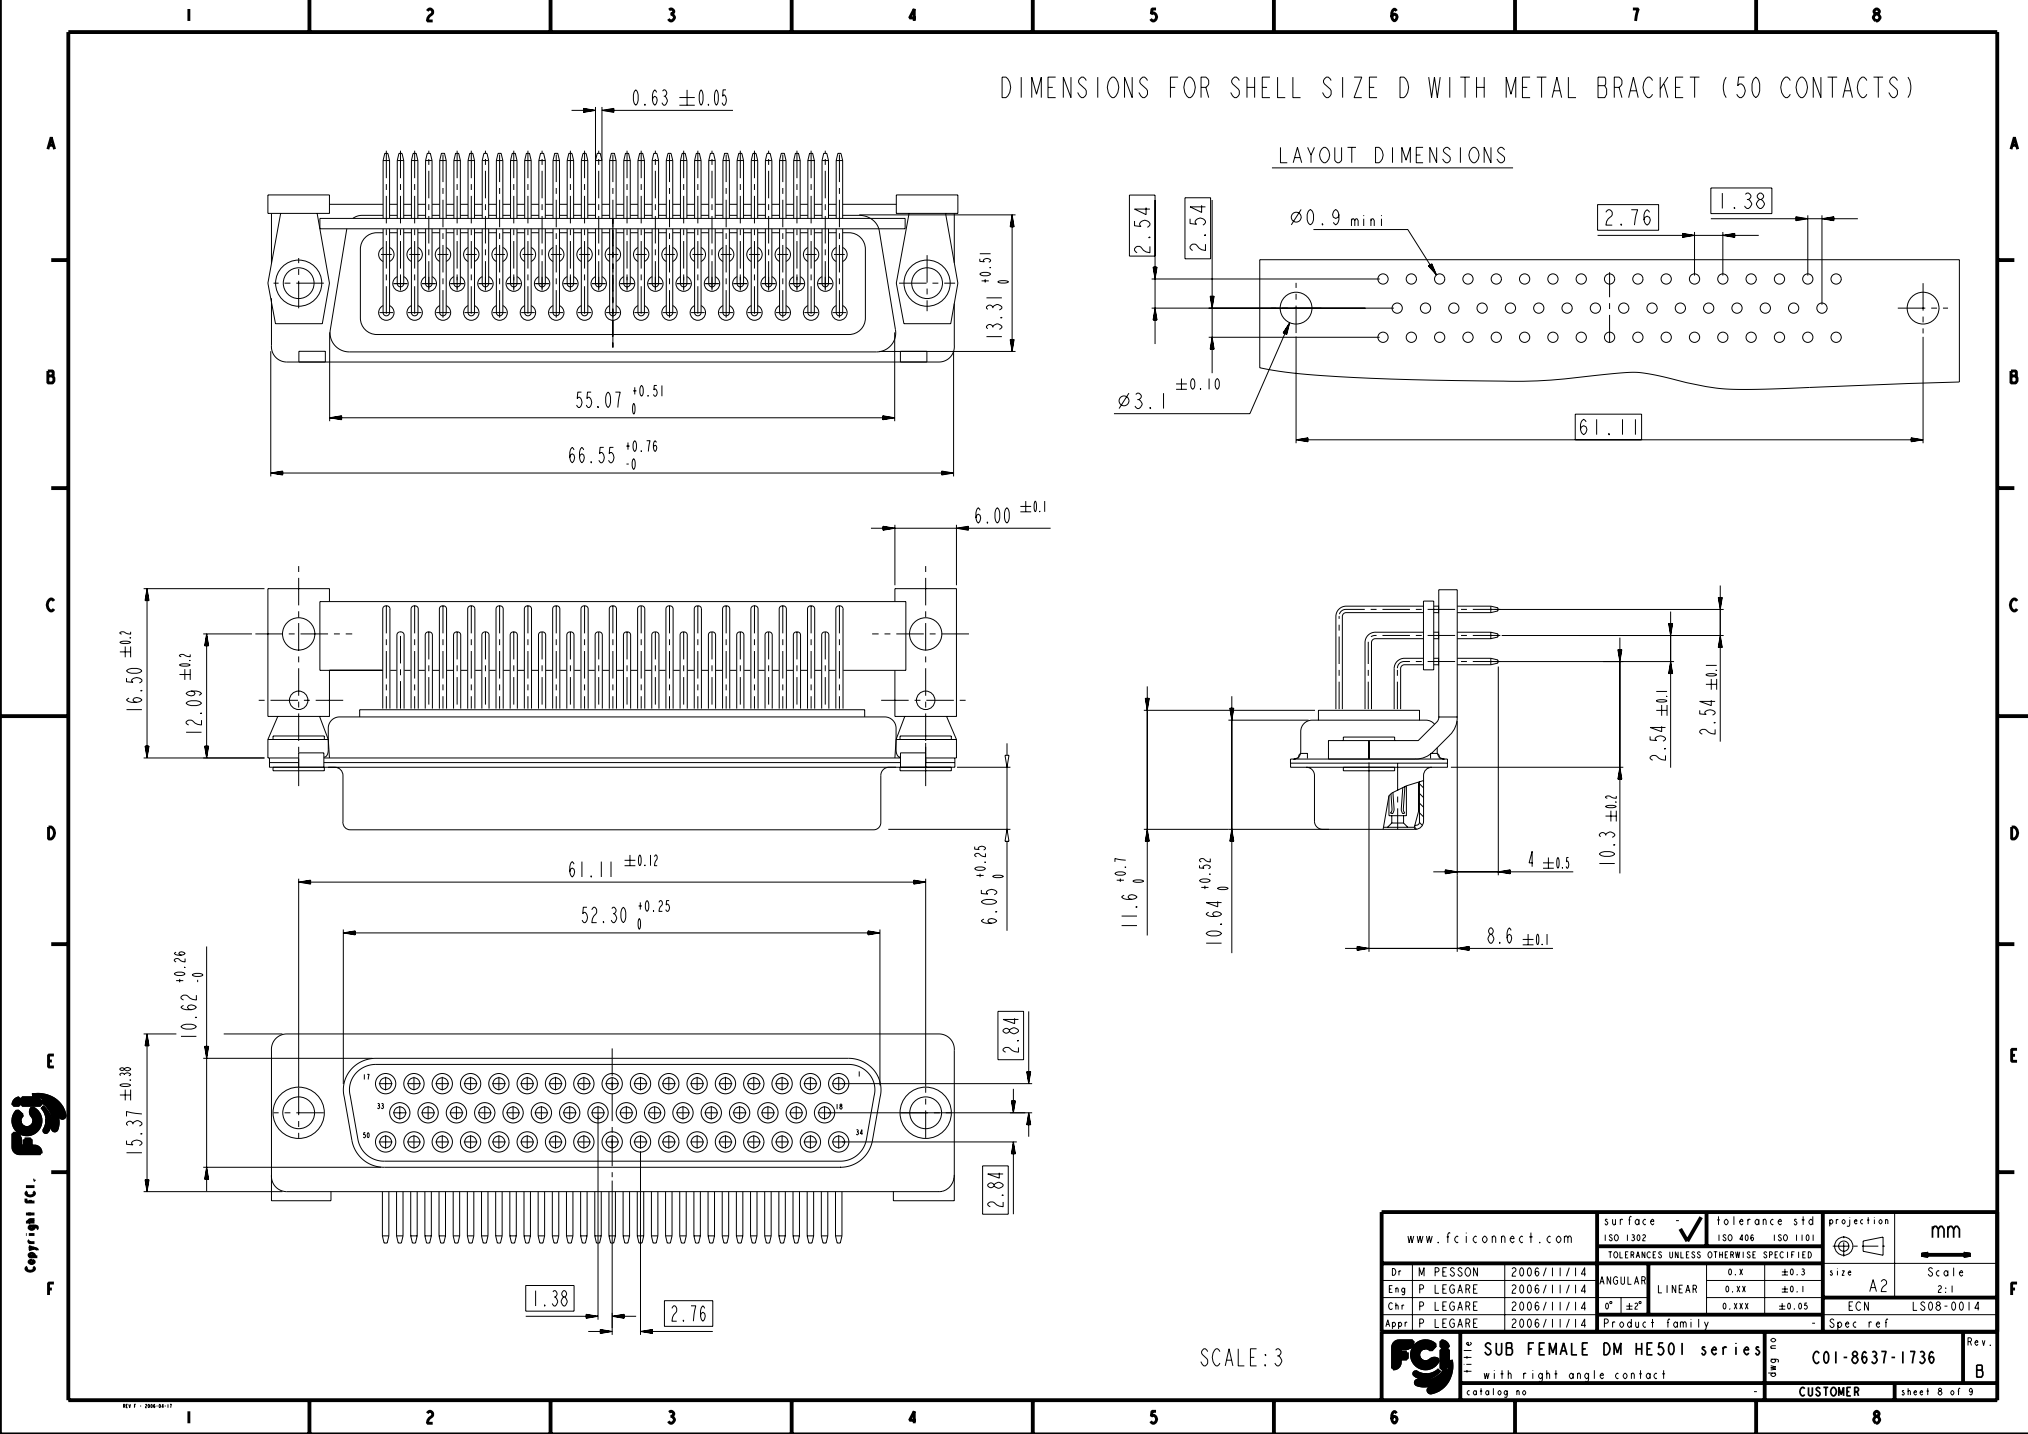

www.fciconnect.com			surface ☒ ISO 1302 tolerance std ISO 406 ISO 1101			projection 		mm 	
TOLERANCES UNLESS OTHERWISE SPECIFIED									
Dr	M PESSON	2006/11/14	ANGULAR	LINEAR	0.X	±0.3	size A2	Scale 2:1	
Eng	P LEGARE	2006/11/14			0.XX	±0.1			
Chr	P LEGARE	2006/11/14	0° ±2°		0.XXX	±0.05	ECN	LS08-0014	
Appr	P LEGARE	2006/11/14	Product family				Spec ref		
			SUB FEMALE DM HE501 series				C01-8637-1736		Rev. B
with right angle contact			catalog no				CUSTOMER		sheet 8 of 9

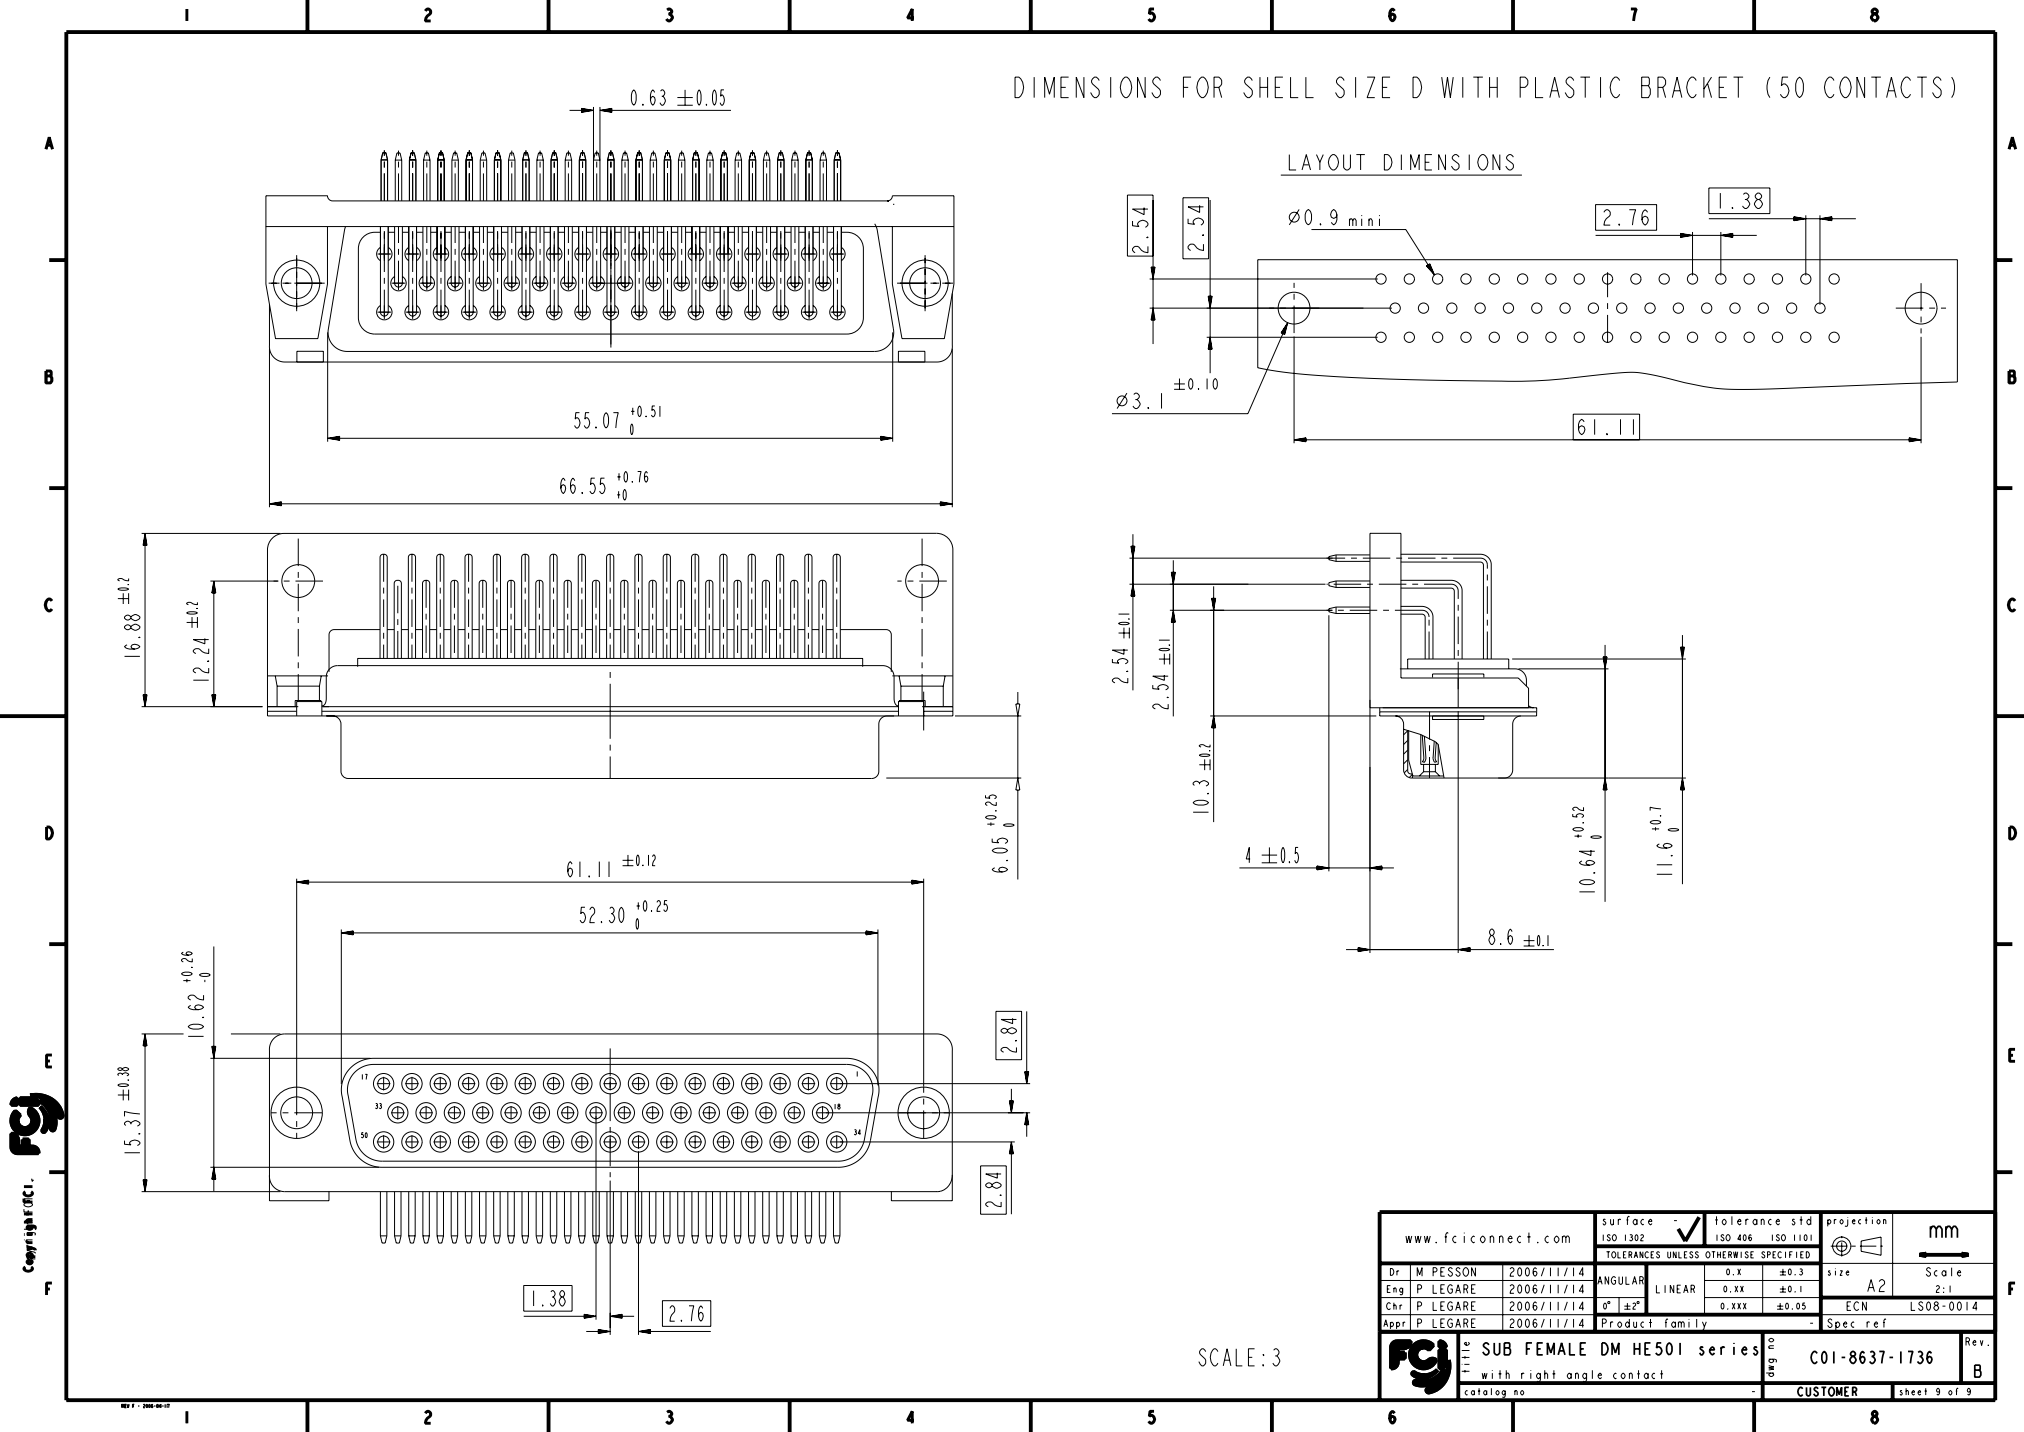

SCALE:3

www.fciconnect.com			surface -  tolerance std ISO 1302 ISO 406 ISO 1101			projection 		mm 	
			TOLERANCES UNLESS OTHERWISE SPECIFIED						
Dr	M PESSON	2006/11/14	ANGULAR	LINEAR	0.X	± 0.3	size A2	Scale 2:1	
Eng	P LEGARE	2006/11/14			0.XX	± 0.1			
Chr	P LEGARE	2006/11/14	0° $\pm 2^\circ$		0.XXX	± 0.05	ECN	LS08-0014	
Appr	P LEGARE	2006/11/14	Product family			- Spec ref			
			SUB FEMALE DM HE501 series				C01-8637-1736		Rev. B
			with right angle contact						
catalog no			-				CUSTOMER		sheet 9 of 9

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru