

**PW Series LTE Band 8  
Single-Band Monopole Antenna**

PW Series antennas are rugged, low-cost and easy to install. The single frequency band of PW antennas makes the job of antenna selection simple, with better performance in the target frequency band than in multiband antennas and rejection of signals from unwanted frequencies.

The PW LTE Band 8 antenna targets 870 MHz to 960 MHz with excellent VSWR, gain and efficiency for cellular IoT (LTE-M, NB-IoT) and traditional LTE Band 8, as well as GSM and UMTS applications.

This rugged 1/4-wave monopole antenna may be used with plastic or metal enclosures and supports weather-resistant applications.



**Features**

- Outperforms similar multiband solutions
- Durable, flexible main shaft
- Wide bandwidth
- Weather resistant for IP-rated applications<sup>1</sup>
- O-ring compatible base
- Compatible with plastic<sup>2</sup> and metal enclosures
- High gain (1.0 dBi at 870 MHz, 0.4 dBi at 920 MHz and 0.4 dBi at 960 MHz)
- High efficiency (60% at 870 MHz, 64% at 920 MHz and 49% at 960 MHz)

**Applications**

- LTE Band 8
- LTE-M (Cat-M1) and NB-IoT cellular IoT
- GSM: P-GSM-900, E-GSM-900, R-GSM-900, T-GSM-900
- UMTS: E-GSM
- Sensing and remote monitoring
- Hand-held devices
- Internet of Things (IoT) devices
- Low-power wide-area (LPWA) networks

**Ordering Information**

| Part Number      | Description                                                                                                                        |
|------------------|------------------------------------------------------------------------------------------------------------------------------------|
| ANT-B8-PW-QW-UFL | LTE Band 8 PW Series antenna, with 216 mm (8.5 in) 1.32 mm coax cable terminated with an MHF1/U.FL-compatible plug (female socket) |
| ANT-B8-PW-QW     | LTE Band 8 PW Series antenna, with 216 mm (8.5 in) unterminated RG-174 coax cable                                                  |

Available from Linx Technologies and select distributors and representatives.

Notes  
1 Use of an O-ring is recommended, IP-ratings cannot be guaranteed  
2 With appropriate counterpoise

## Electrical Specifications

|                       | ANT-B8-PW-QW-ccc                                                                        |
|-----------------------|-----------------------------------------------------------------------------------------|
| Frequency Range       | 870 MHz to 960 MHz                                                                      |
| Center Frequency      | 920 MHz                                                                                 |
| VSWR (max)            | 2.0                                                                                     |
| Peak Gain (dBi)       | 1.6                                                                                     |
| Polarization          | Linear                                                                                  |
| Radiation             | Omnidirectional                                                                         |
| Max Power             | 10 W                                                                                    |
| Wavelength            | 1/4-wave                                                                                |
| Impedance             | 50 $\Omega$                                                                             |
| Connection            | MHF1/U.FL-compatible plug (female socket) on 1.32 mm cable or unterminated RG-174 cable |
| Cable Length          | 216 mm (8.5 in)                                                                         |
| Height                | 80.5 mm (3.17 in)                                                                       |
| Weight                | ANT-B8-PW-QW = 19.9 g (0.70 oz) ANT-B8-PW-QW-UFL = 18.8 g (0.66 oz)                     |
| Operating Temperature | -40 °C to +90 °C                                                                        |

Electrical specifications and plots measured with a 102 mm x 102 mm (4 in x 4 in) reference ground plane.

## VSWR

Figure 1 and Figure 2 provide the voltage standing wave ratio (VSWR) across the antenna bandwidth. VSWR describes the power reflected from the antenna back to the radio. A lower VSWR value indicates better antenna performance at a given frequency. Reflected power is also shown on the right-side vertical axis as a gauge of the percentage of transmitter power reflected back from the antenna.

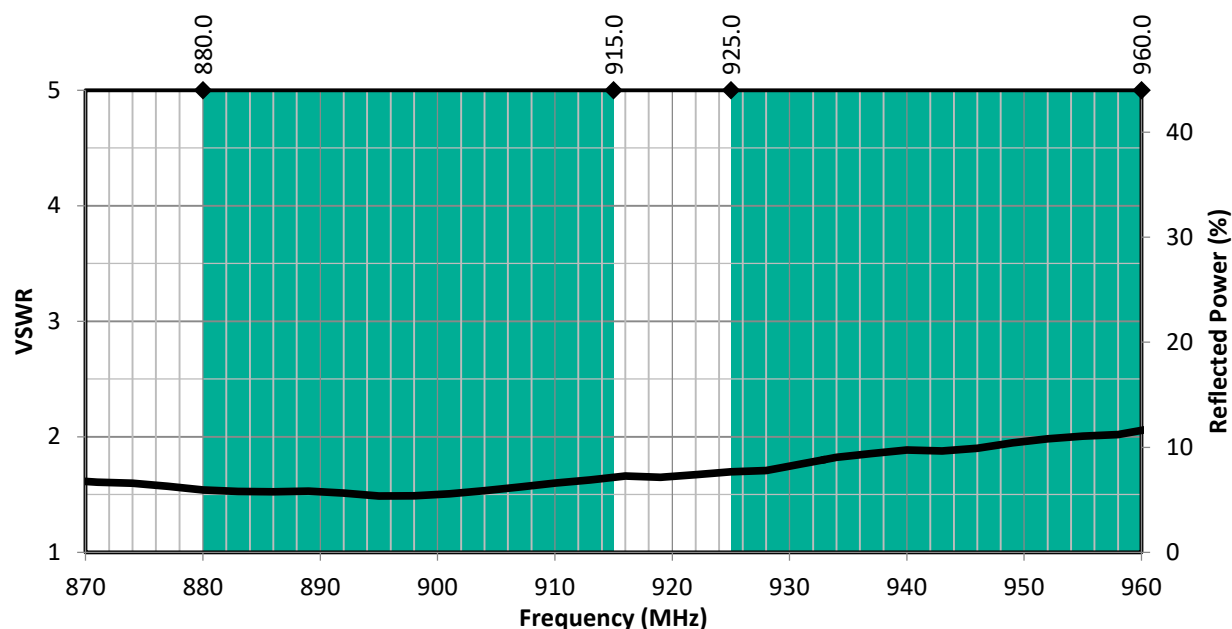


Figure 1. PW LTE Band 8 Antenna VSWR with Band 8 Uplink/Downlink Highlights

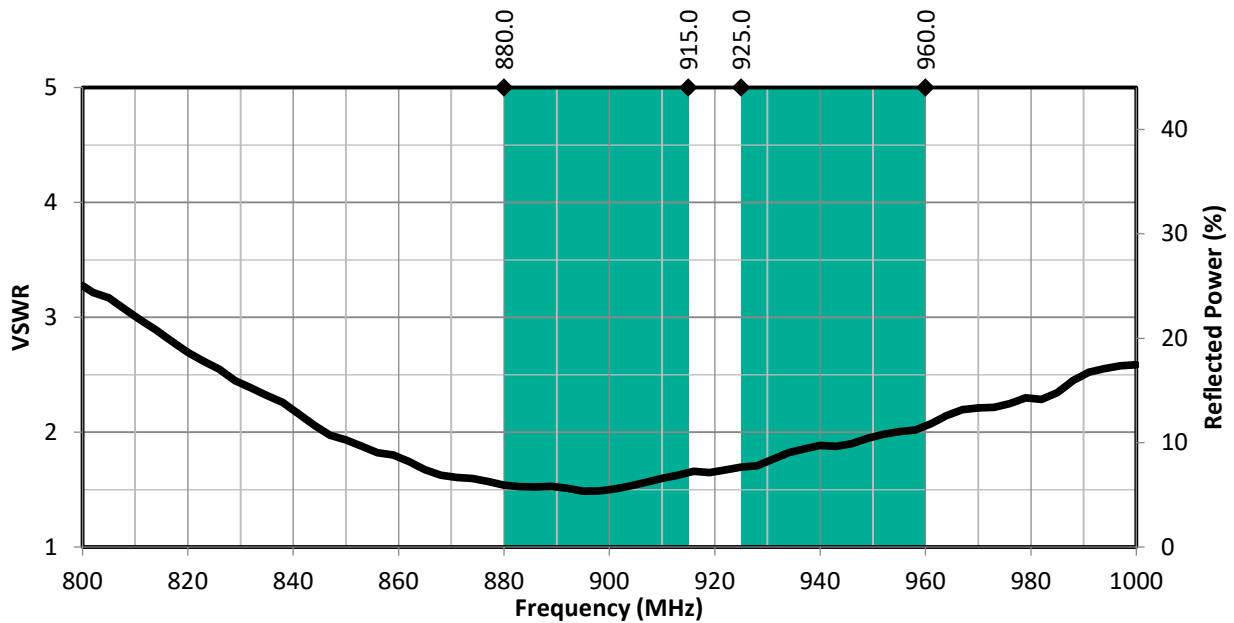


Figure2. PW LTE Band 8 Antenna Full Bandwidth VSWR

### Return Loss

Return loss (Figure3), represents the loss in power at the antenna due to reflected signals. Like VSWR, a lower return loss value indicates better antenna performance at a given frequency.

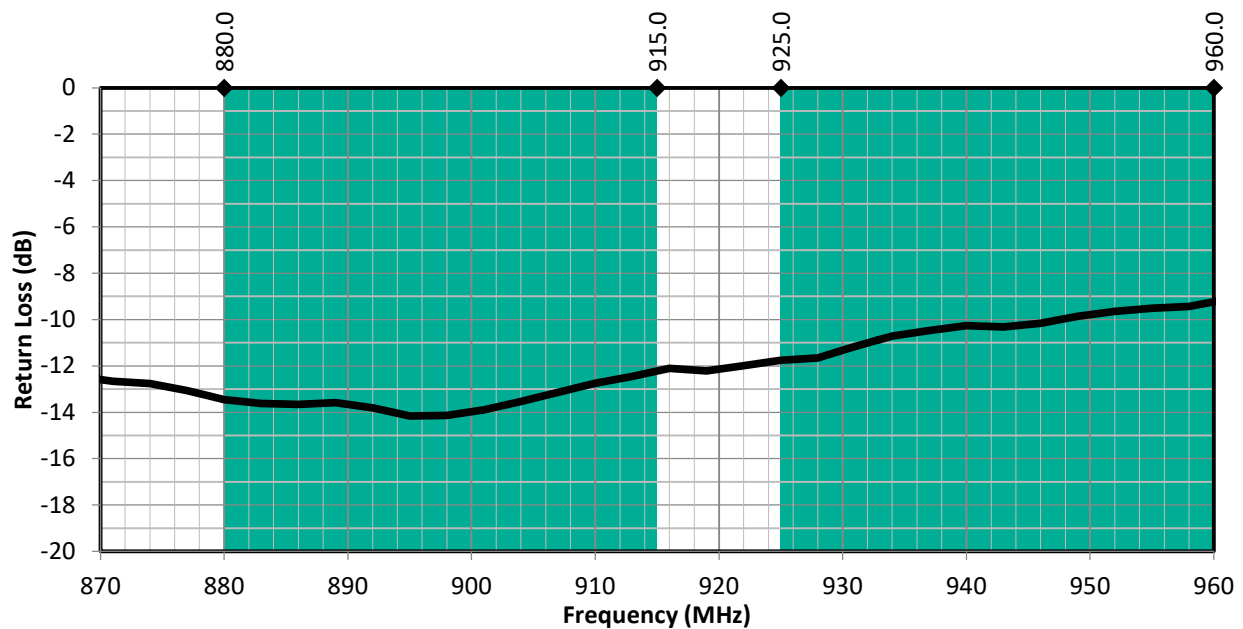


Figure3. PW LTE Band 8 Antenna Return Loss with Band 8 Uplink/Downlink Highlights

### Peak Gain

The peak gain across the antenna bandwidth is shown in Figure 4. Peak gain represents the maximum antenna input power concentration across 3-dimensional space, and therefore peak performance, at a given frequency, but does not consider any directionality in the gain pattern.

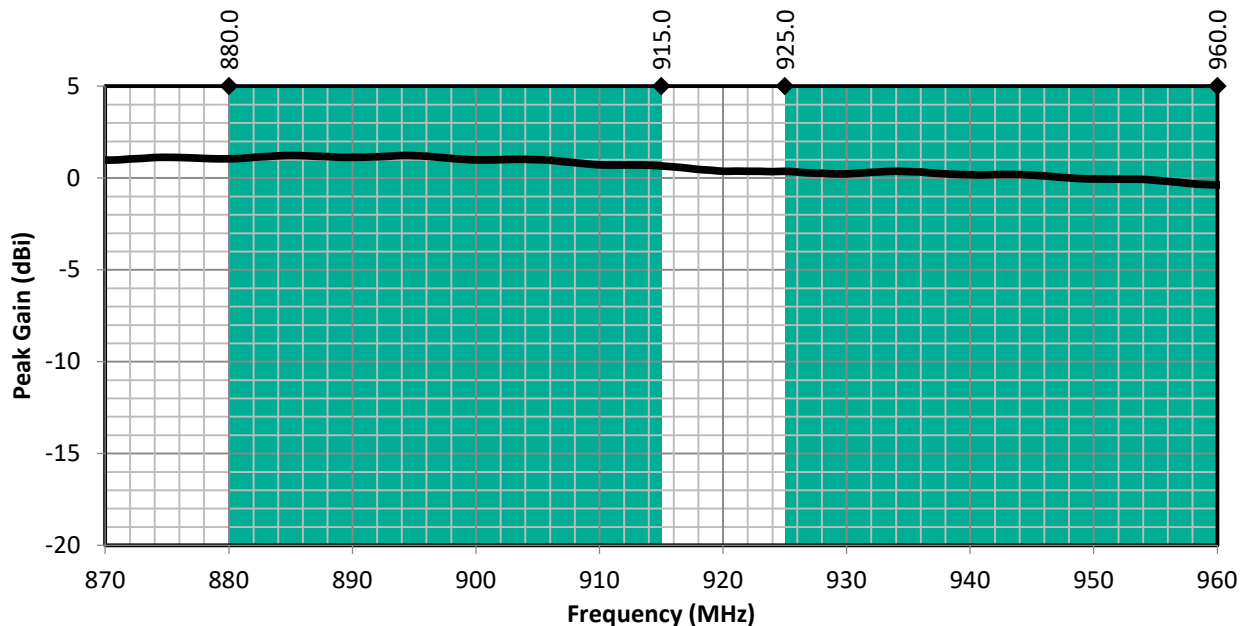


Figure 4. PW LTE Band 8 Antenna Peak Gain with Band 8 Uplink/Downlink Highlights

### Average Gain

Average gain (Figure 5), is the average of all antenna gain in 3-dimensional space at each frequency, providing an indication of overall performance without expressing antenna directionality.

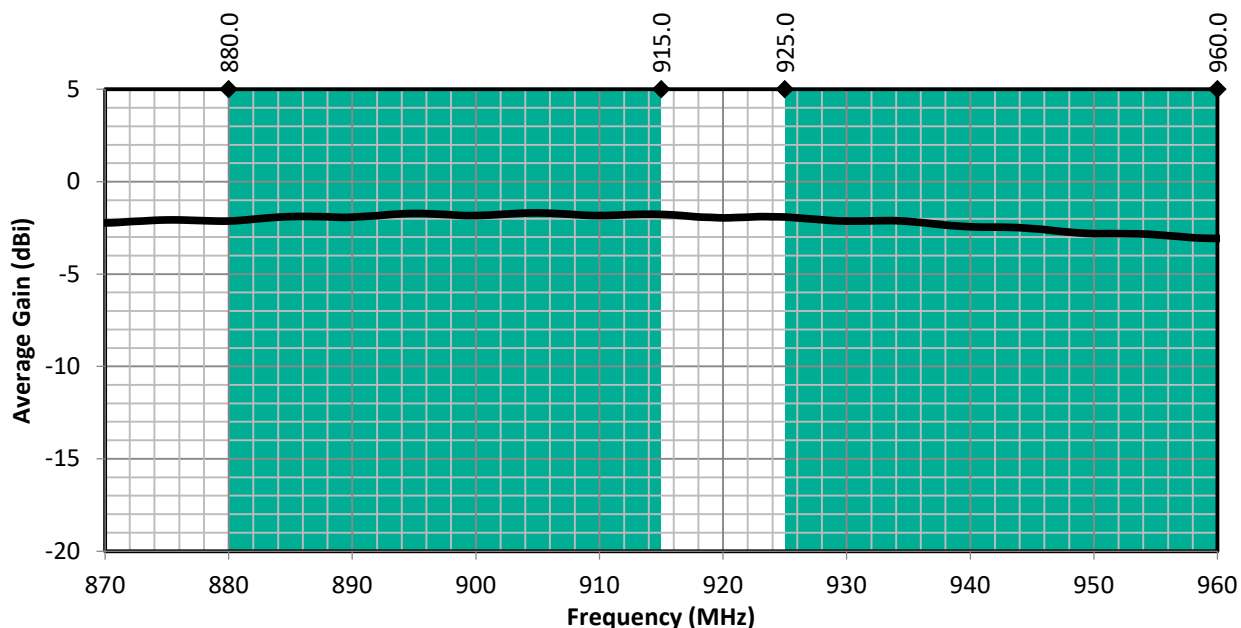


Figure 5. PW LTE Band 8 Antenna Average Gain with Band 8 Uplink/Downlink Highlights

### Radiation Efficiency

Radiation efficiency (Figure 6), shows the ratio of power delivered to the antenna relative to the power radiated at the antenna, expressed as a percentage, where a higher percentage indicates better performance at a given frequency.

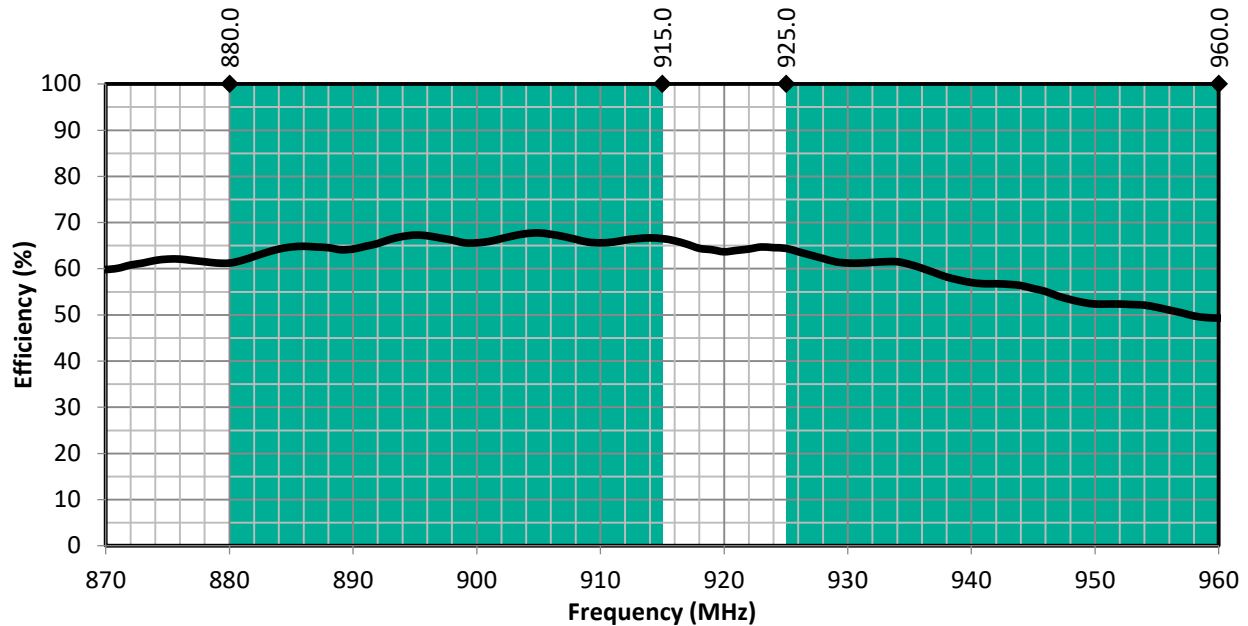


Figure 6. PW LTE Band 8 Antenna Radiation Efficiency with Band 8 Uplink/Downlink Highlights

### Product Dimensions

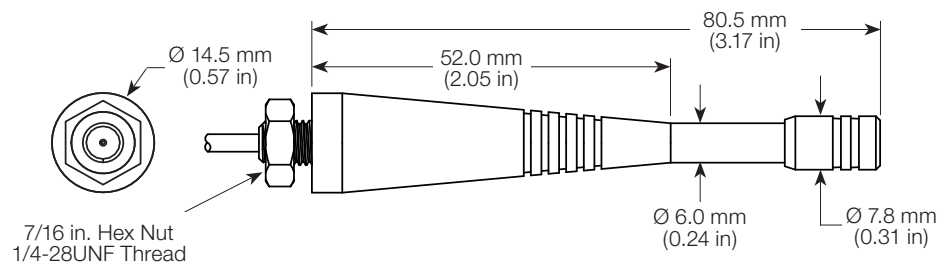


Figure 7. PW LTE Band 8 Antenna Dimensions

### Antenna Mounting


The antenna is attached by placing its cable and base through a 6.35 mm (0.25 in) hole in the product enclosure and securing it with the included nut or by threading it into a PEM-style insert (not included).

The straight-cut RG-174 coax cable option allows the attachment of a 50-ohm RF connector or allows the cable to be soldered directly to a PCB, eliminating the need for a connector. The connectorized option provides a 1.32 mm coax cable terminated with an MHF1/U.FL-compatible plug (female socket) for simplified manufacturing or for applications requiring the ability to disconnect the antenna.

### Counterpoise

Quarter-wave or monopole antennas require an associated ground plane counterpoise for proper operation. The size and location of the ground plate relative to the antenna will affect the overall performance of the antenna in the final design. When used in conjunction with a ground plane smaller than that used to tune the antenna, the center frequency typically will shift higher in frequency and the bandwidth will decrease. The proximity of other circuit elements and packaging near the antenna will also affect the final performance.

For further discussion and guidance on the importance of the ground plane counterpoise, please refer to Linx Application Note, *AN-00501: Understanding Antenna Specifications and Operation*.

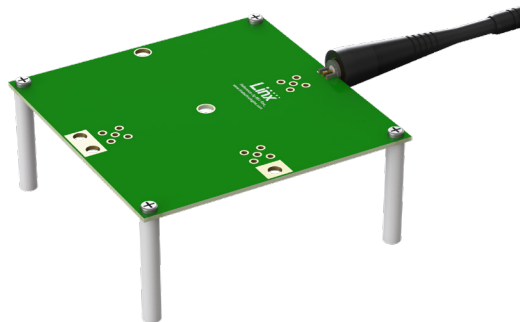

**Figure8. PW LTE Band 8 Antenna Shown On Edge of Evaluation Board**

### Radiation Patterns

Radiation patterns provide information about the directionality and 3-dimensional gain performance of the antenna by plotting gain at specific frequencies in three orthogonal planes. Antenna radiation patterns (Figure9), are shown using polar plots covering 360 degrees. The antenna graphic above the plots provides reference to the plane of the column of plots below it. Note: when viewed with typical PDF viewing software, zooming into radiation patterns is possible to reveal fine detail.



### 890 MHz to 960 MHz (916 MHz)

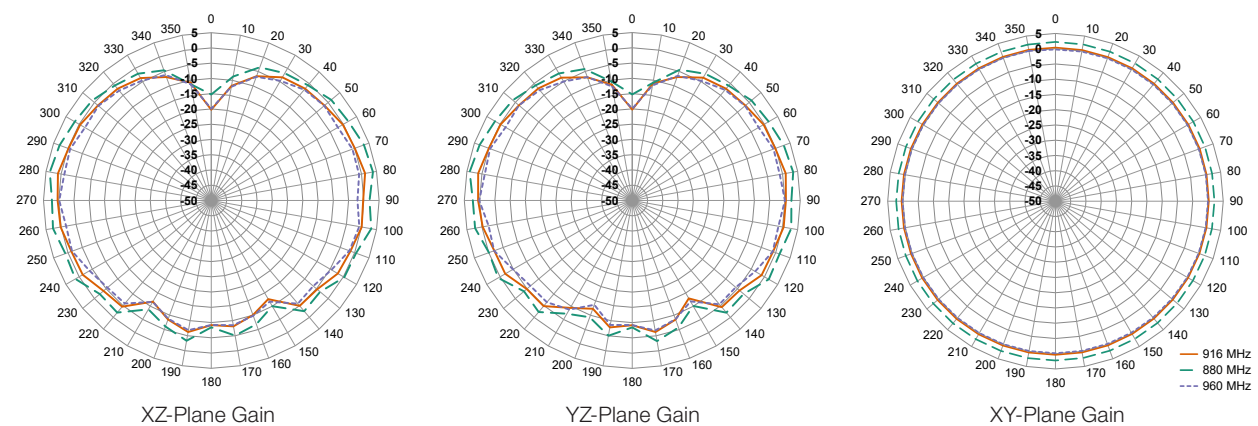


Figure9. Radiation Patterns for PW LTE Band 8 Antenna

---

**Website:** <http://linxtechnologies.com>  
**Linx Offices:** 159 Ort Lane, Merlin, OR, US 97532  
**Phone:** +1 (541) 471-6256  
**E-MAIL:** [info@linxtechnologies.com](mailto:info@linxtechnologies.com)

---

Linx Technologies reserves the right to make changes to the product(s) or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Wireless Made Simple is a registered trademark of Linx Acquisitions LLC. Other product and brand names may be trademarks or registered trademarks of their respective owners.

Copyright © 2020 Linx Technologies

All Rights Reserved



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)