


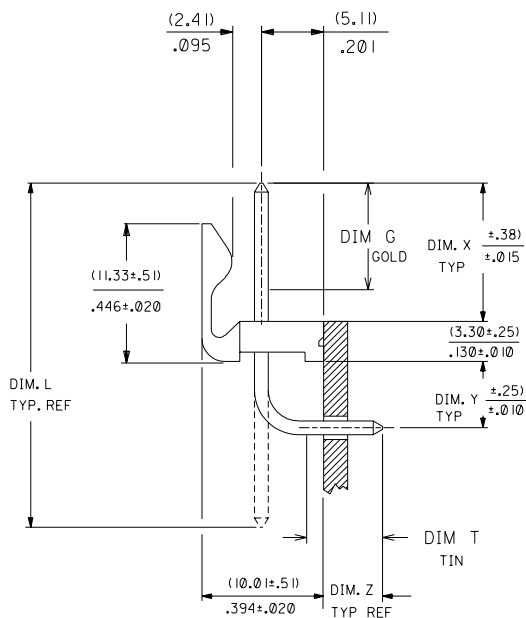




NOTES:

- PRECEDING ENG. NO. IN CHART DESIGNATES STANDARD PRODUCT.
- SOLDERABILITY: WHEN PARTS ARE SOLDERED AT A TEMPERATURE OF 230°C (446°F) FOR 5 SECONDS, EACH SOLDERED SURFACE SHALL BE A MINIMUM OF 95% COVERED WITH A SMOOTH CONTINUOUS ADHERENT COATING. FOR OTHER INFORMATION SEE ES-152.
- PIN PUSH OUT FORCE: PRIOR TO SOLDERING, A 3 POUND MINIMUM FORCE (IN EITHER DIRECTION) SHALL BE REQUIRED TO PUSH THE PIN OUT OF THE HEADER.
- FOR ADDITIONAL INFORMATION AND TESTING PROCEDURES SEE PS-08-50.
- PARTS ARE STACKABLE END TO END ON (3.96)/.156 CENTERS.
- FOR PART WITH PEGS SEE DWG NO. SDA-42492
- BURRS DUE TO CUTTING OFF OF PINS MUST NOT VARY FROM CENTERLINE OF PIN AT DATUM -D- BY MORE THAN .008 IN ANY DIRECTION.

MATERIAL: HEADER: GLASS FILLED POLYESTER, 94V-0, MOLDED NATURAL (WHITE).
PIN: BRASS

PLATINGS:

(102) ELECTRO TIN .000450/.000200 OVER .000200/.000100 COPPER
(567) SELECT GOLD 15 M.I. MIN, SELECT TIN/LEAD 100 M.I. MIN., OVER NICKEL
(569) SELECT GOLD 30 M.I. MIN, SELECT TIN/LEAD 100 M.I. MIN., OVER NICKEL
FOR ADDITIONAL INFORMATION SE SDES-88.

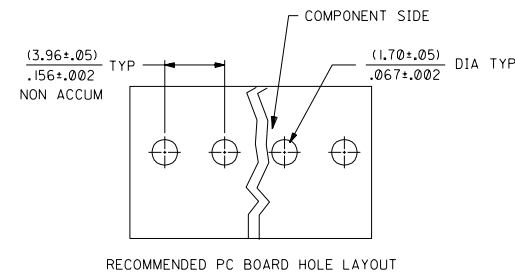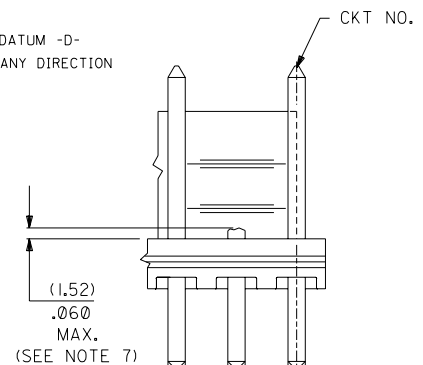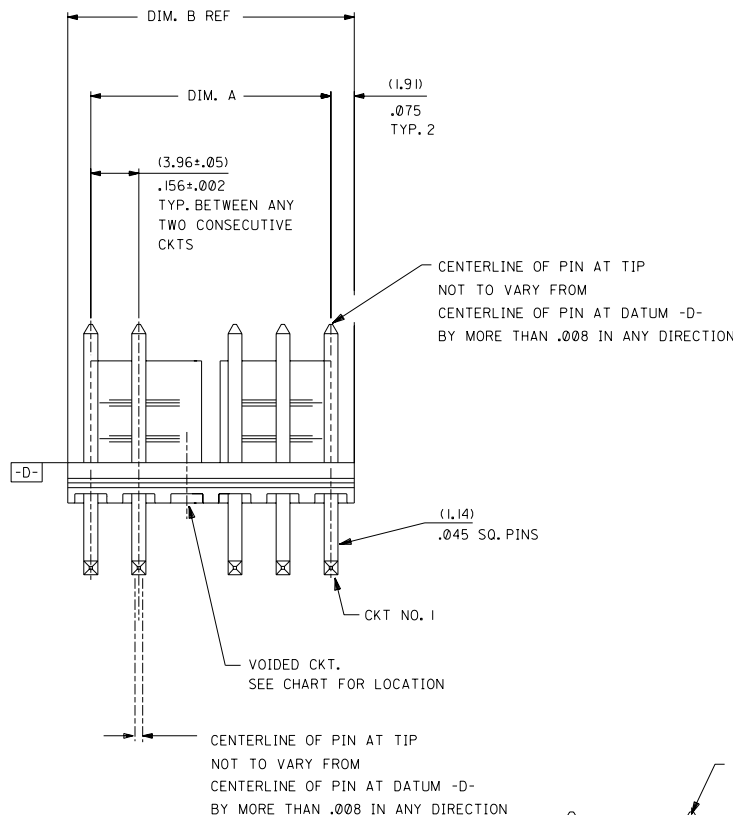

NO. OF CKT'S.	DIM. A	DIM. B
2	(3.96±.05) .156±.002	(7.77) .306
3	(7.92±.08) .312±.003	(11.73) .462
4	(11.89±.08) .468±.003	(15.70) .618
5	(15.85±.10) .624±.004	(19.66) .774
6	(19.81±.10) .780±.004	(23.62) .930
7	(23.77±.10) .936±.004	(27.58) 1.086
8	(27.74±.13) 1.092±.005	(31.55) 1.242
9	(31.70±.13) 1.248±.005	(35.51) 1.398
10	(35.66±.13) 1.404±.005	(39.47) 1.554
11	(39.62±.15) 1.560±.006	(43.43) 1.710
12	(43.59±.15) 1.716±.006	(47.40) 1.866
13	(47.55±.15) 1.872±.006	(51.36) 2.022
14	(51.51±.18) 2.028±.007	(55.32) 2.178
15	(55.47±.18) 2.184±.007	(59.28) 2.334
16	(59.44±.18) 2.340±.007	(63.25) 2.490
17	(63.40±.20) 2.496±.008	(67.21) 2.646
18	(67.36±.20) 2.652±.008	(71.17) 2.802

6	E
5	E2
4	E1
3	E
2	E
1	E2

MFG. SH. REV.

		E2		REL SHT 5 UCP2003-0755 11/6/2002 SAMIEC	DIMENSIONS SHOWN (METRIC) INCH UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°		▽ = 0 ▽ = 0 2.002 REVISE ONLY ON CAD SYSTEM										
		E1		REL SHT 4 UCR2002-0555 12/17/01 SAMIEC	INCH METRIC		TITLE FRICTION LOCK HEADER ASS'Y .156 Q BENT SQ PINS, W/O PEGS 41792 SERIES DWG.										
		E		ADD PACK SPEC UCR2002-0087 7/26/01 SAMIEC	<table><tr><td>3 PLACE</td><td>±</td><td></td></tr><tr><td>2 PLACE</td><td>±</td><td>±</td></tr><tr><td>1 PLACE</td><td></td><td>±</td></tr></table>		3 PLACE	±		2 PLACE	±	±	1 PLACE		±	MOLEX INCORPORATED SHEET NO. DATE LITTLE, ILL. 60532 U.S.A. 1 OF 6 09/09/87	
3 PLACE	±																
2 PLACE	±	±															
1 PLACE		±															
					DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		PART NO. DRWG. NO.										
					SEE CHART SDA-41792												
L.T.R.		REVISIONS		L.T.R.	REVISIONS		FILE NAME S41792X1										
					DRWG. BY SAMIEC CHK'D. BY PATEL APP'D. BY LENZ SCALE 1"		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.										
							DIV. SIZE KK C										

I3		I2		I1		I0		9		8		7		6		41792		4		3		2		1				
ENG. NO.		HEADER NO.		PIN NO.		PLATING		DIM. L		DIM. X		DIM. G GOLD		DIM. Y		DIM. Z		DIM. T TIN		DIM. W		NO OF CKTS		VOID CKTS		PACKAGING		
J	A-41792-0019/0035		41790-0002/0018		2161-37(501)		501		(27.94) 1.100		(11.43) .450		() OVERALL		(5.41) .213		(3.96) .156		() N/A		90°		2-18				BULK PER PK-41792-002	
	A-41792-0036/0050		41790-0002/0018		2161-37(102)		102		(27.94) 1.100		(11.43) .450		() N/A		(5.41) .213		(3.96) .156		() OVERALL		90°		4-18		4		BULK PER PK-41792-002	
I	A-41792-0051/0067		41790-0002/0018		2161-64(102)		102		(29.85) 1.175		(13.28) .523		() N/A		(5.41) .213		(4.01) .158		() OVERALL		90°		2-18				BULK PER PK-41792-002	
	A-41792-0068/0084		41790-0002/0018		2161-64(501)		501		(29.85) 1.175		(13.28) .523		() OVERALL		(5.41) .213		(4.01) .158		() N/A		90°		2-18				BULK PER PK-41792-002	
	A-41792-0085/0101		41790-0002/0018		2161-64(503)		503		(29.85) 1.175		(13.28) .523		() OVERALL		(5.41) .213		(4.01) .158		() N/A		90°		2-18				BULK PER PK-41792-002	
	A-41792-0102/0118		41790-0002/0018		2161-37(122)		122		(27.94) 1.100		(11.43) .450		() N/A		(5.41) .213		(3.96) .156		() OVERALL		90°		2-18				BULK PER PK-41792-002	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru