


# JD SERIES KEYLOCK SWITCHES

## 4 TUMBLER LOCK

SPECIFICATIONS	FEATURES
<b>Contact ratings:</b> Max. resistive loads: 4A @ 125 VAC, 2A @ 250 VAC <b>Initial contact resistance:</b> 20mΩ max. <b>Insulation resistance:</b> 10,000 megohms min. <b>Dielectric strength:</b> 1000 V rms min. <b>Operating temperature range:</b> -30°C to +85°C <b>Electrical Life:</b> 6,000 cycles at full load	<ul style="list-style-type: none"> <li>Single and double pole options.</li> <li>Up to four positions.</li> <li>Momentary and/or maintained switching.</li> <li>Multiple key-pull position options.</li> <li>45° or 90° indexing.</li> </ul>
AGENCY RECOGNITION	<b>CONTACTS:</b> Gold over silver over copper alloy <b>LOCK:</b> Nickel plated zinc alloy <b>CASE:</b> Glass filled polyester Mounting Nut: Nickel Plated zinc alloy <b>KEYS:</b> Nickel plated brass (2 keys with code stamped on case)
SPECIFICATIONS	

ORDERFORMAT:	Series	Lock Function	Key Code
For complete model no., fill in boxes with selected options shown below.	<b>JD</b>	<input type="text"/>	<input type="text"/>
Example of complete model no. -		<b>Maintained</b>	
<b>JD7509OA126</b>		7509A 7509B (STD) 7509C 7509D 7509E 7509F (STD) 7509G 7509H 7509I 7509J (STD) 7509N 7509O (STD) 7509P 7509Q (STD) 7509R 7509S (STD) 7509DAB	SP, 45°, Key pull position 1 DP, 45°, Key pull position 1 SP, 45°, Key pull position 3 DP, 45°, Key pull position 3 SP, 45°, Key pull position 1, 3 DP, 45°, Key pull position 1, 3 SP, 45°, Key pull position 1 DP, 45°, Key pull position 1 SP, 45°, Key pull position 1, 2, 3 DP, 45°, Key pull position 1, 2, 3 SP, 90°, Key pull position 1 DP, 90°, Key pull position 1 SP, 90°, Key pull position 2 DP, 90°, Key pull position 2 SP, 90°, Key pull position 1, 2 DP, 90°, Key pull position 1, 2 DP, 45°, Key pull position 1, 2, 3, 4
		<b>Momentary</b>	<b>A126 (STD)</b> Other Codes Available
		7510A (STD) 7510B 7510E (STD) 7510F 7510I (STD) 7510J	SP, 45°, Key pull position 1 DP, 45°, Key pull position 1 SP, 45°, Key pull position 1 DP, 45°, Key pull position 1 SP, 45°, Key pull position 1 DP, 45°, Key pull position 1

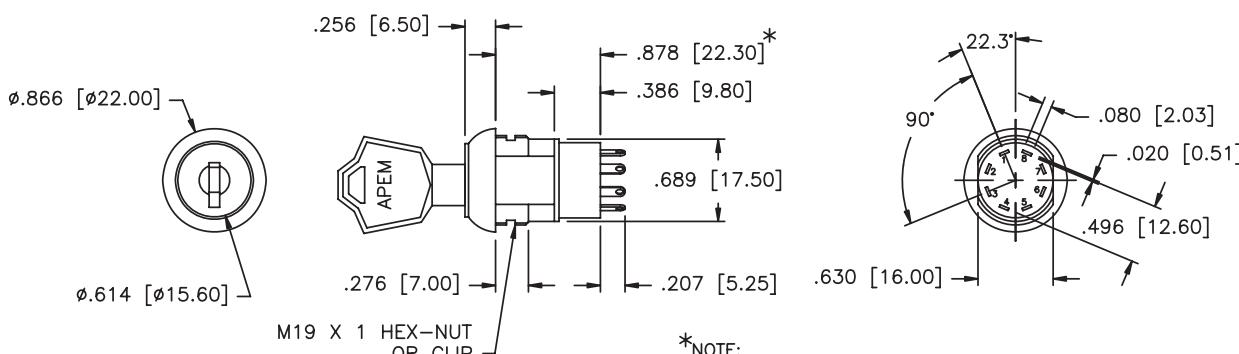

\*NOTE:  
LOCK BODY LENGTH FOR MOMENTARY  
KEYLOCKS IS 1.07 [27.30]

# JD SERIES KEYLOCK SWITCHES

## 4 TUMBLER LOCK

R

LOCK CONFIGURATION (View from Front)	INDEXING	NO. POLES	MODEL NUMBER	CONNECTED TERMINALS				KEY PULL POSITIONS
				POS. 1	POS. 2	POS. 3	POS. 4	
 POS 1: Contact 1 is closed, contacts 2 and 3 are open. POS 2: Contact 1 is open, contacts 2 and 3 are closed. POS 3: Contact 1 is closed, contacts 2 and 3 are open. POS 4: Contact 1 is open, contacts 2 and 3 are closed.	45°	SP DP	JD7509A JD7509B (STD)	8-1	1-2	2-3	—	POS 1
				8-1 4-5	1-2 5-6	2-3 6-7	—	
 POS 1: Contact 1 is closed, contacts 2 and 3 are open. POS 2: Contact 1 is open, contacts 2 and 3 are closed. POS 3: Contact 1 is closed, contacts 2 and 3 are open. POS 4: Contact 1 is open, contacts 2 and 3 are closed.	45°	SP DP	JD7509C JD7509D	8-1	1-2	2-3	—	POS 3
				8-1 4-5	1-2 5-6	2-3 6-7	—	
 POS 1: Contact 1 is closed, contacts 2 and 3 are open. POS 2: Contact 1 is open, contacts 2 and 3 are closed. POS 3: Contact 1 is closed, contacts 2 and 3 are open. POS 4: Contact 1 is open, contacts 2 and 3 are closed.	45°	SP DP	JD7509E JD7509F (STD)	8-1	1-2	2-3	—	POS 1 & 3
				8-1 4-5	1-2 5-6	2-3 6-7	—	
 POS 1: Contact 1 is closed, contacts 2 and 3 are open. POS 2: Contact 1 is open, contacts 2 and 3 are closed. POS 3: Contact 1 is closed, contacts 2 and 3 are open. POS 4: Contact 1 is open, contacts 2 and 3 are closed.	45°	SP DP	JD7509G JD7509H (STD)	8-1	1-2	7-8	—	POS 1
				8-1 4-5	1-2 5-6	7-8 3-4	—	
 POS 1: Contact 1 is closed, contacts 2 and 3 are open. POS 2: Contact 1 is open, contacts 2 and 3 are closed. POS 3: Contact 1 is closed, contacts 2 and 3 are open. POS 4: Contact 1 is open, contacts 2 and 3 are closed.		SP DP	JD7509I JD7509J (STD)	8-1	1-2	7-8	—	POS 1, 2 & 3
				8-1 4-5	1-2 5-6	7-8 3-4	—	
 POS 1: Contact 1 is closed, contact 2 is open. POS 2: Contact 1 is open, contact 2 is closed. POS 3: Contact 1 is closed, contact 2 is open. POS 4: Contact 1 is open, contact 2 is closed.	90°	SP DP	JD7509N JD7509O (STD)	8-1	1-3	—	—	POS 1
				8-1 4-5	1-3 5-7	—	—	
 POS 1: Contact 1 is closed, contact 2 is open. POS 2: Contact 1 is open, contact 2 is closed. POS 3: Contact 1 is closed, contact 2 is open. POS 4: Contact 1 is open, contact 2 is closed.	90°	SP DP	JD7509P JD7509Q (STD)	8-1	1-3	—	—	POS 2
				8-1 4-5	1-3 5-7	—	—	
 POS 1: Contact 1 is closed, contact 2 is open. POS 2: Contact 1 is open, contact 2 is closed. POS 3: Contact 1 is closed, contact 2 is open. POS 4: Contact 1 is open, contact 2 is closed.	90°	SP DP	JD7509R JD7509S (STD)	8-1	1-3	—	—	POS 1 & 2
				8-1 4-5	1-3 5-7	—	—	
 POS 1: Contact 1 is closed, contacts 2 and 3 are open. POS 2: Contact 1 is open, contacts 2 and 3 are closed. POS 3: Contact 1 is closed, contacts 2 and 3 are open. POS 4: Contact 1 is open, contacts 2 and 3 are closed.	45°	DP	JD7509DAB	8-1	1-2	2-3	3-4	POS 1, 2, 3 & 4
				—	—	—	—	
 POS 1: Contact 1 is closed, contact 2 is open. POS 2: Contact 1 is open, contact 2 is closed. POS 3: Contact 1 is closed, contact 2 is open. POS 4: Contact 1 is open, contact 2 is closed.	45° (MOMENTARY)	SP DP	JD7510A (STD) JD7510B	8-1	1-2	—	—	POS 1
				8-1 1-2	1-2 5-6	—	—	
 POS 1: Contact 1 is closed, contacts 2 and 3 are open. POS 2: Contact 1 is open, contacts 2 and 3 are closed. POS 3: Contact 1 is closed, contacts 2 and 3 are open. POS 4: Contact 1 is open, contacts 2 and 3 are closed.	45° (MOMENTARY)	SP DP	JD7510E (STD) JD7510F	8-1	1-2	7-8	—	POS 1
				8-1 4-5	1-2 5-6	7-8 3-4	—	
 POS 1: Contact 1 is closed, contact 2 is open. POS 2: Contact 1 is open, contact 2 is closed. POS 3: Contact 1 is closed, contact 2 is open. POS 4: Contact 1 is open, contact 2 is closed.	45°/90° (MOMENTARY)	SP	JD7510G	7-1	1-2	6-7	—	POS 1 & 3
				—	—	—	—	
 POS 1: Contact 1 is closed, contact 2 is open. POS 2: Contact 1 is open, contact 2 is closed. POS 3: Contact 1 is closed, contact 2 is open. POS 4: Contact 1 is open, contact 2 is closed.	45° (MOMENTARY)	SP DP	JD7510I (STD) JD7510J	8-1	1-2	7-8	—	POS 1
				8-1 4-5	1-2 5-6	7-8 3-4	—	

LEGEND

- = KEY PULL POSITIONS
- = DETENT POSITIONS
- ◊ = MOMENTARY POSITIONS

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)