

|        |      |
|--------|------|
| ANGLES | + 2° |
| WEIGHT |      |


CHARACTERISTICS ARE AT Vs=5.00 WITH 4.7K OUTPUT TO MINUS WITH TA= -40°C TO +125°C UNLESS OTHERWISE SPECIFIED

SS495A

SS495 SERIES CHART 1










| PARAMETER                              | CONDITIONS                   | MIN     | TYP     | MAX   | UNITS     |
|----------------------------------------|------------------------------|---------|---------|-------|-----------|
| SENSITIVITY                            | TA = 25°C                    | 3.00    | 3.125   | 3.25  | mV/GAUSS  |
| NULL                                   | TA = 25°C                    | 2.425   | 2.50    | 2.575 | VOLTS     |
| SUPPLY CURRENT                         | TA = 25°C                    |         | 7       | 8.7   | mA        |
| OUTPUT CURRENT SOURCE<br>SINK          | Vs > 4.5                     | 1mA     | 1.5mA   |       |           |
|                                        | Vs > 4.5                     | .6mA    | 1.5mA   |       |           |
|                                        | Vs > 5.0                     | 1mA     | 1.5mA   |       |           |
| RESPONSE TIME                          |                              |         | 3μS     |       |           |
| OUTPUT VOLTAGE SWING<br>VOM -<br>VOM + | -B APPLIED                   | .4      | .2      |       | VOLTS     |
|                                        | +B APPLIED                   | Vs - .4 | Vs - .2 |       | VOLTS     |
| B LIMITS FOR LINEAR<br>OPERATION       | -B MAX                       | -600    | -670    |       | GAUSS     |
|                                        | +B MAX                       | +600    | +670    |       | GAUSS     |
| Vnull DRIFT                            | B = 0, TA = 25°C TO 125°C    | -.06    |         | +.06  | % / °C    |
| Vnull DRIFT                            | B = 0, TA = -125°C TO +150°C | -.08    |         | +.08  | % / °C    |
| SENSITIVITY DRIFT                      | TA=+25°C TO +150°C           | -.01    |         | +.05  | % / °C    |
| SENSITIVITY DRIFT                      | TA=-40°C TO +25°C            | 0       |         | +.06  | % / °C    |
| LINEARITY                              | B = -600 TO +600             | 0       | -1.0    | -1.5  | % OF SPAN |
| SUPPLY VOLTAGE                         | -40°C TO +125°C              | 4.5     | 5.0     | 10.5  | VOLTS     |
| OPERATING TEMP                         | SEE MAX TEMPERATURE CHART    | -40     |         | +150  | °C        |

BLOCK DIAGRAM CURRENT SINKING OR SOURCING OUTPUT

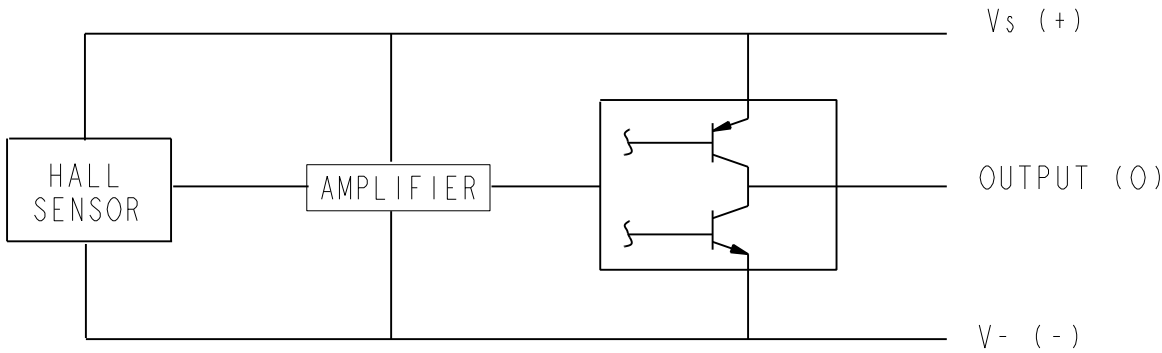

ABSOLUTE MAXIMUM CHARACTERISTICS

| CHARACTERISTIC | SYMBOL | TEST CONDITION  | MIN  | MAX | UNITS |
|----------------|--------|-----------------|------|-----|-------|
| SUPPLY VOLTAGE | Vcc    |                 | -0.5 | 11  | V     |
| OUTPUT VOLTAGE | Vout   |                 | -0.5 | 11  | V     |
| OUTPUT CURRENT | Iout   | SOURCE OR SINK  |      | 10  | mA    |
| TEMPERATURE    | TA     | OPERATING       | -55  | 150 | °C    |
|                | TS     | STORAGE (Vcc=0) | -55  | 165 | °C    |

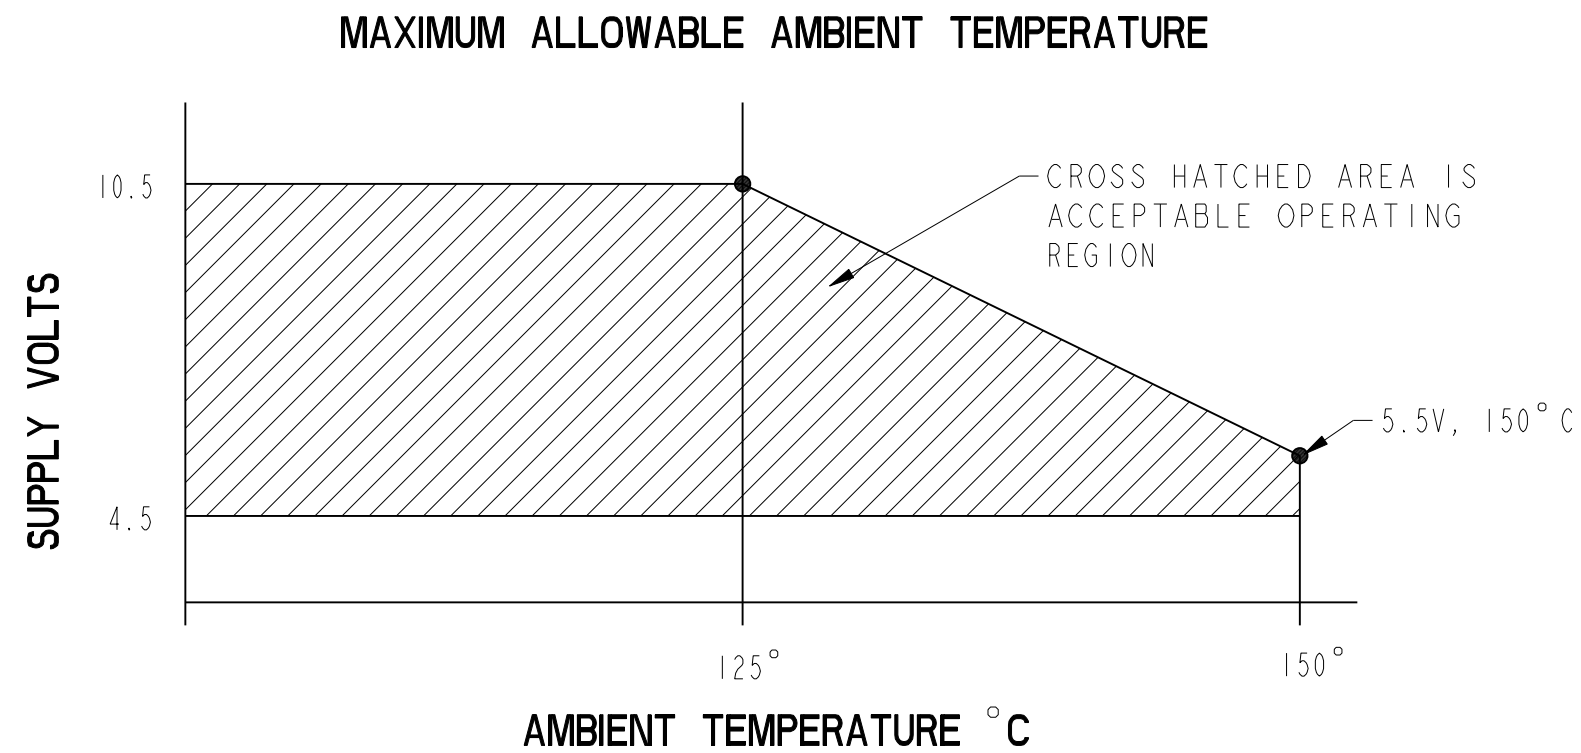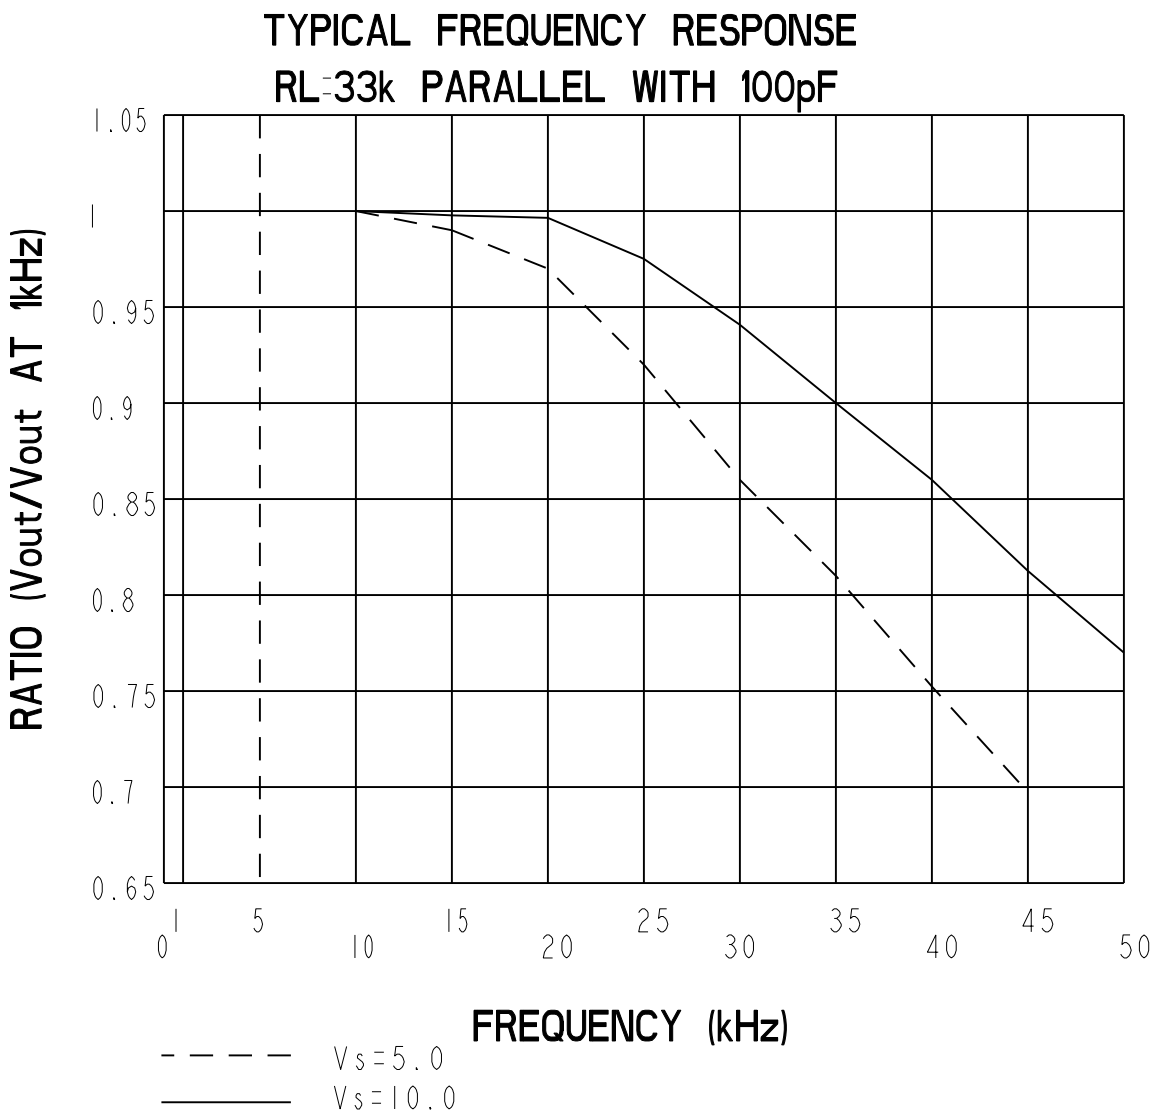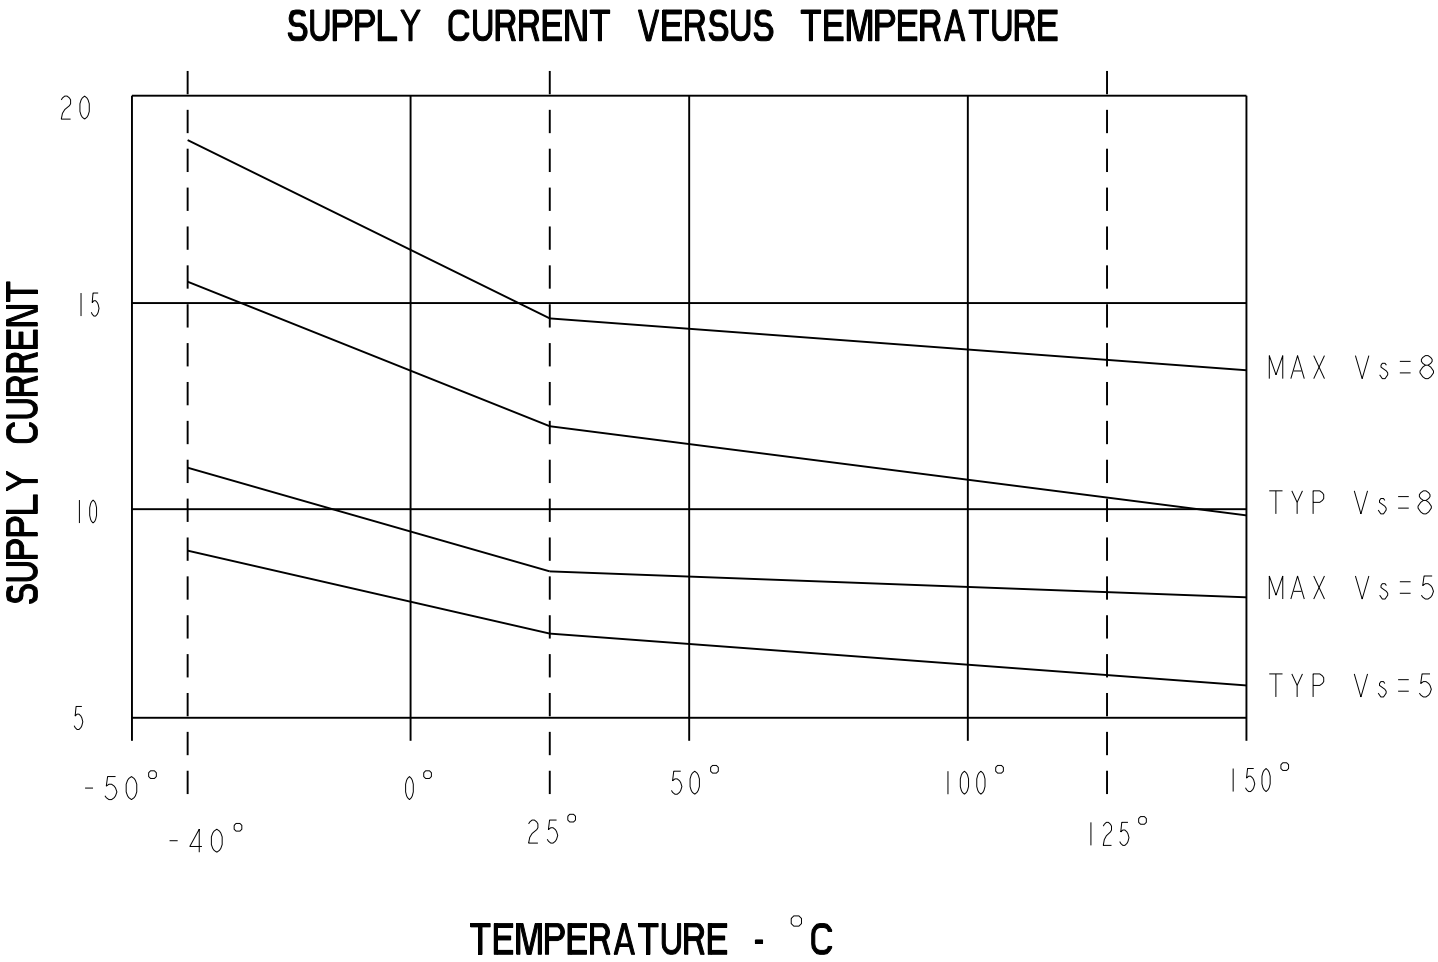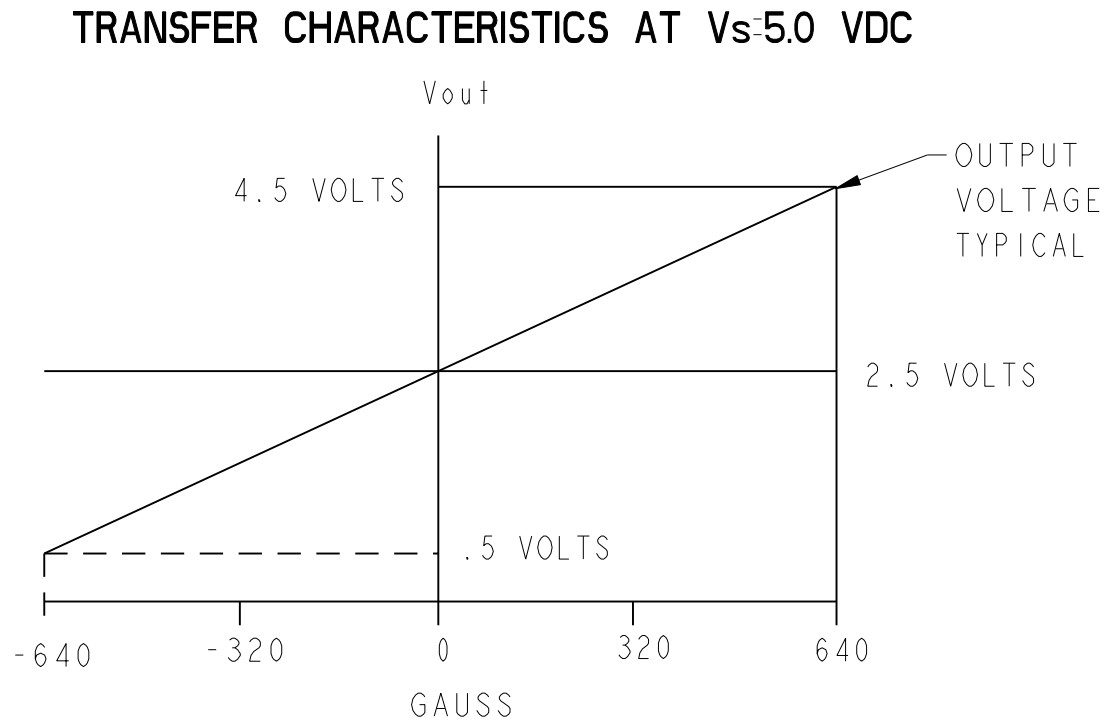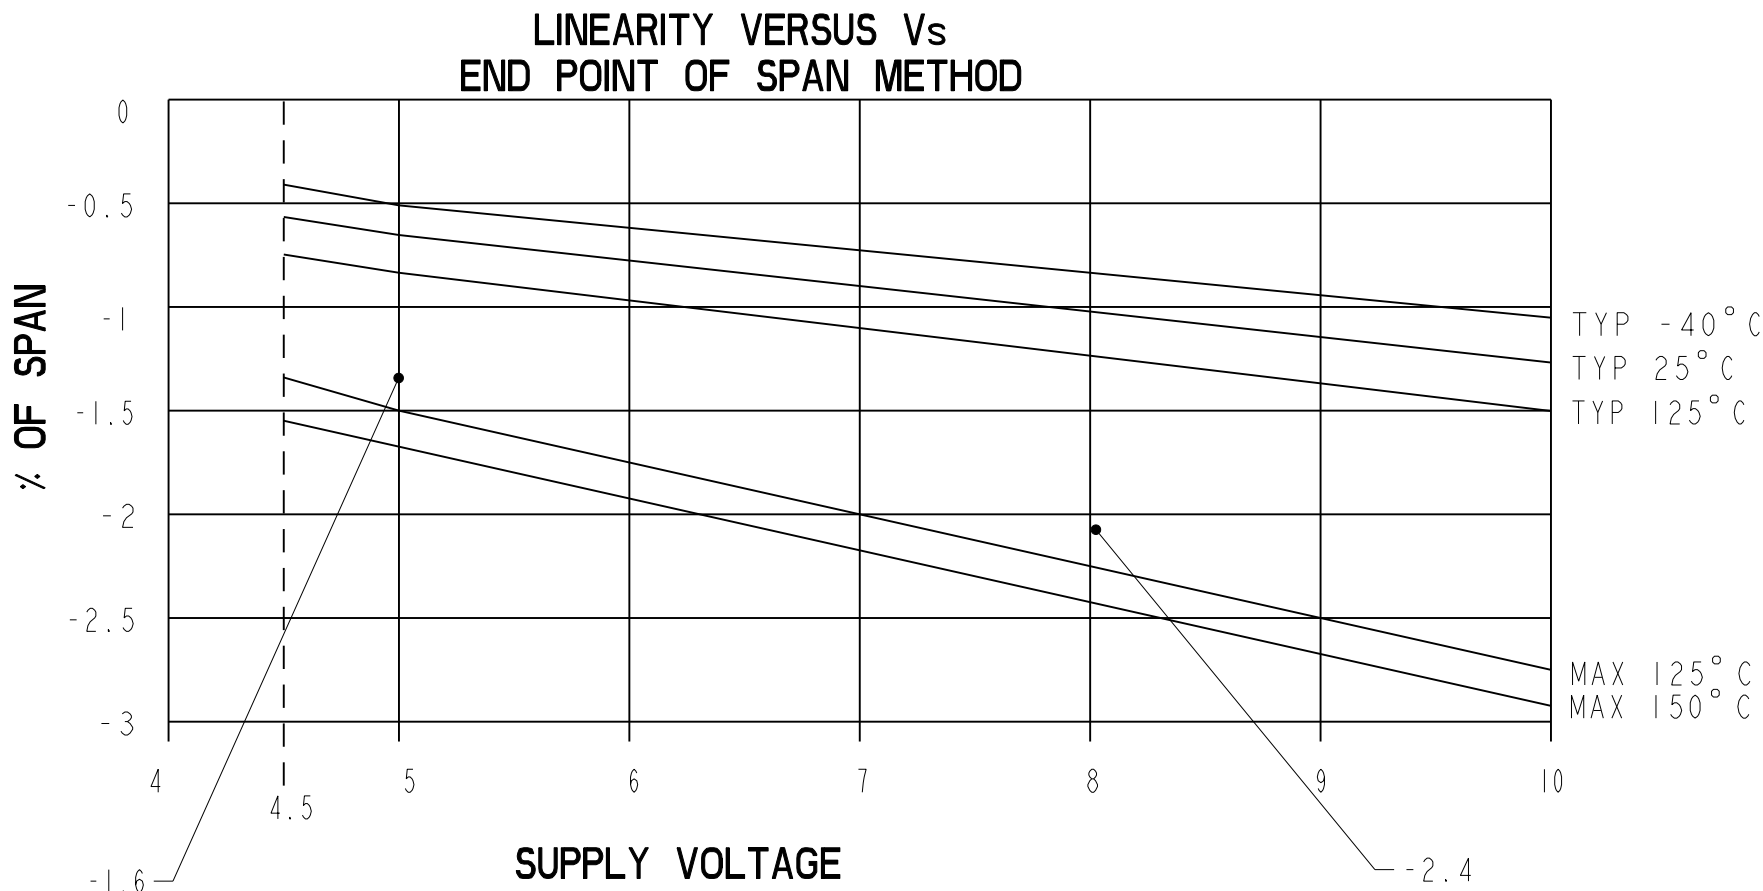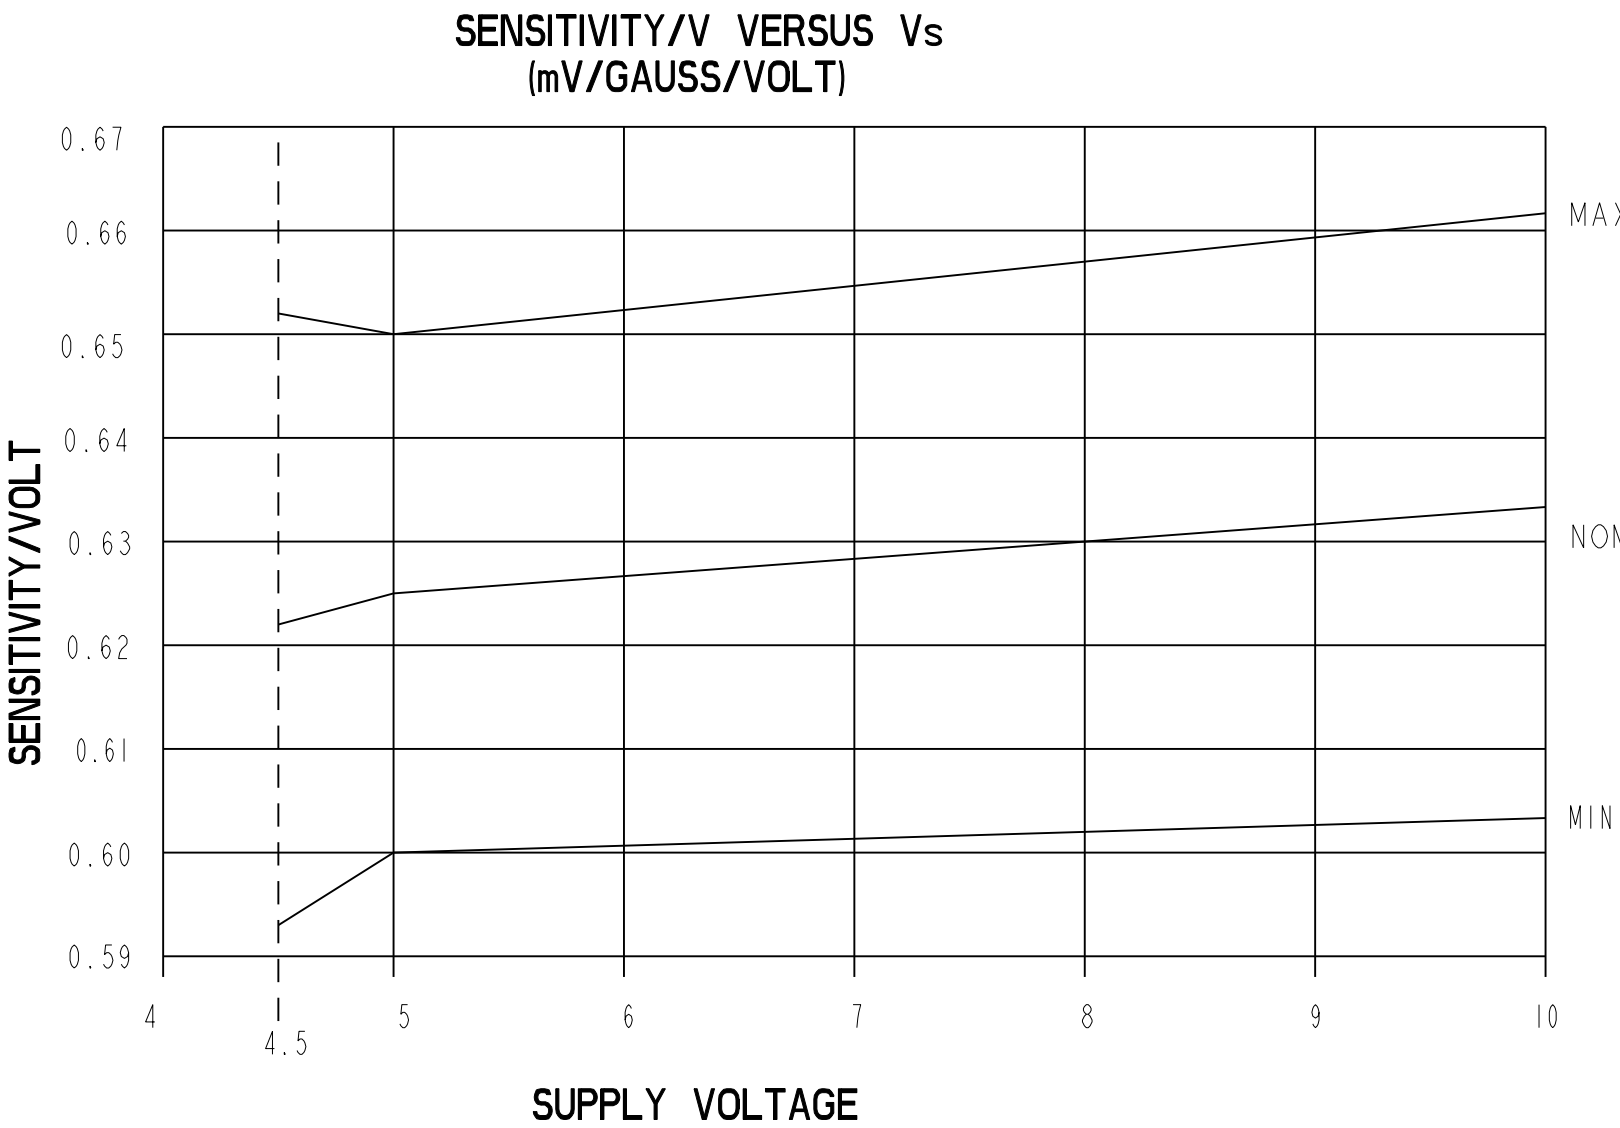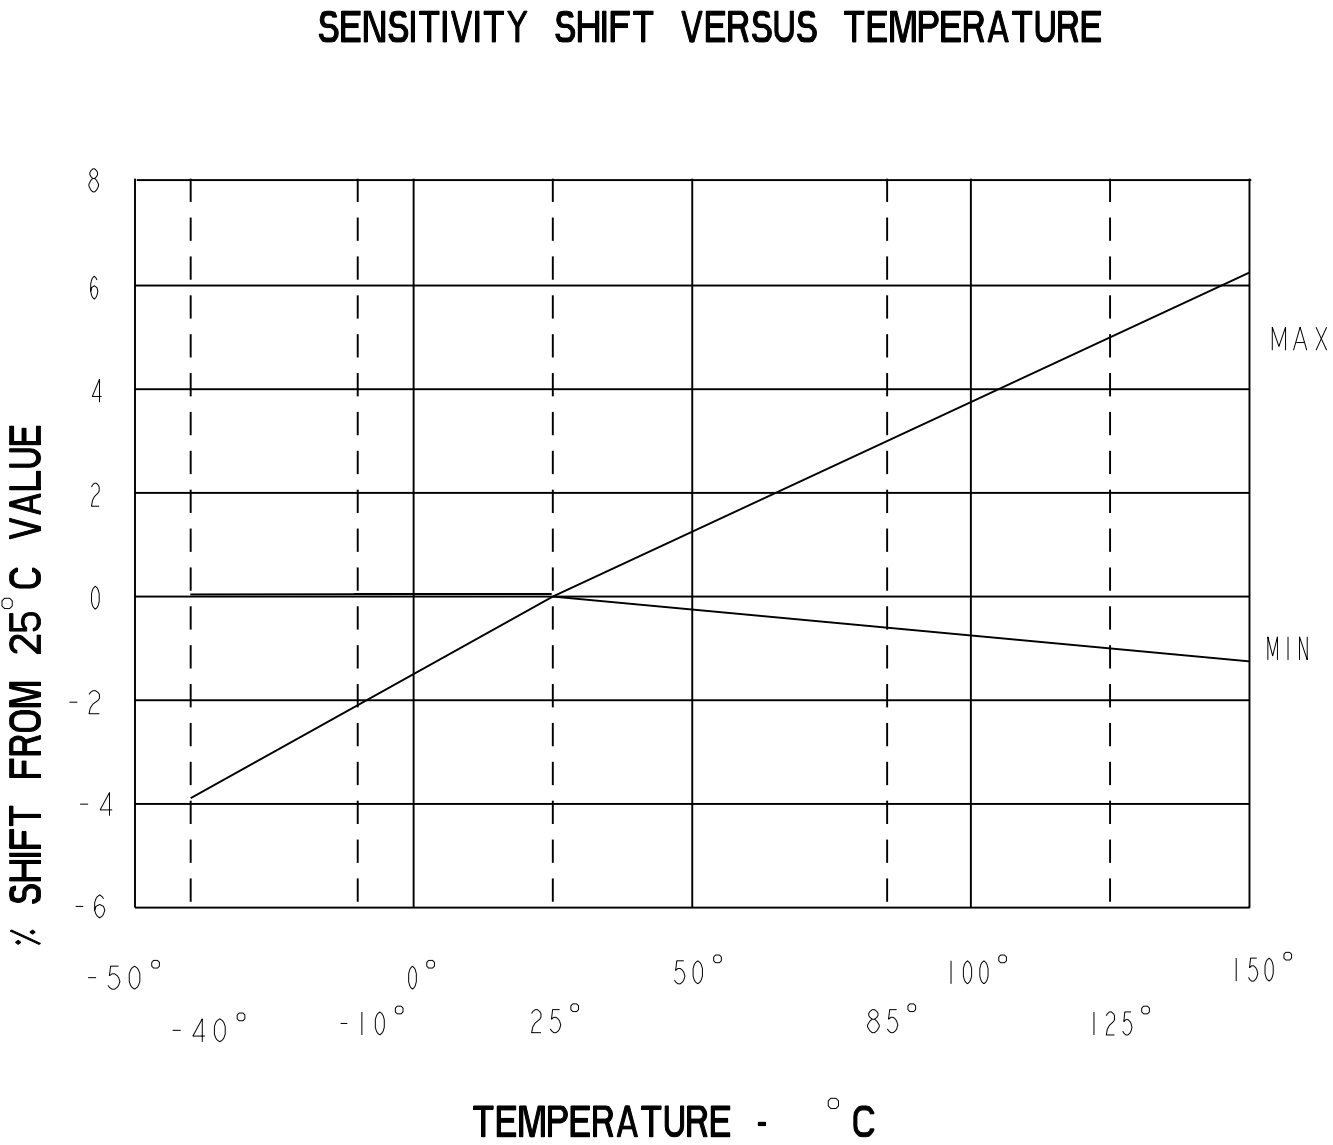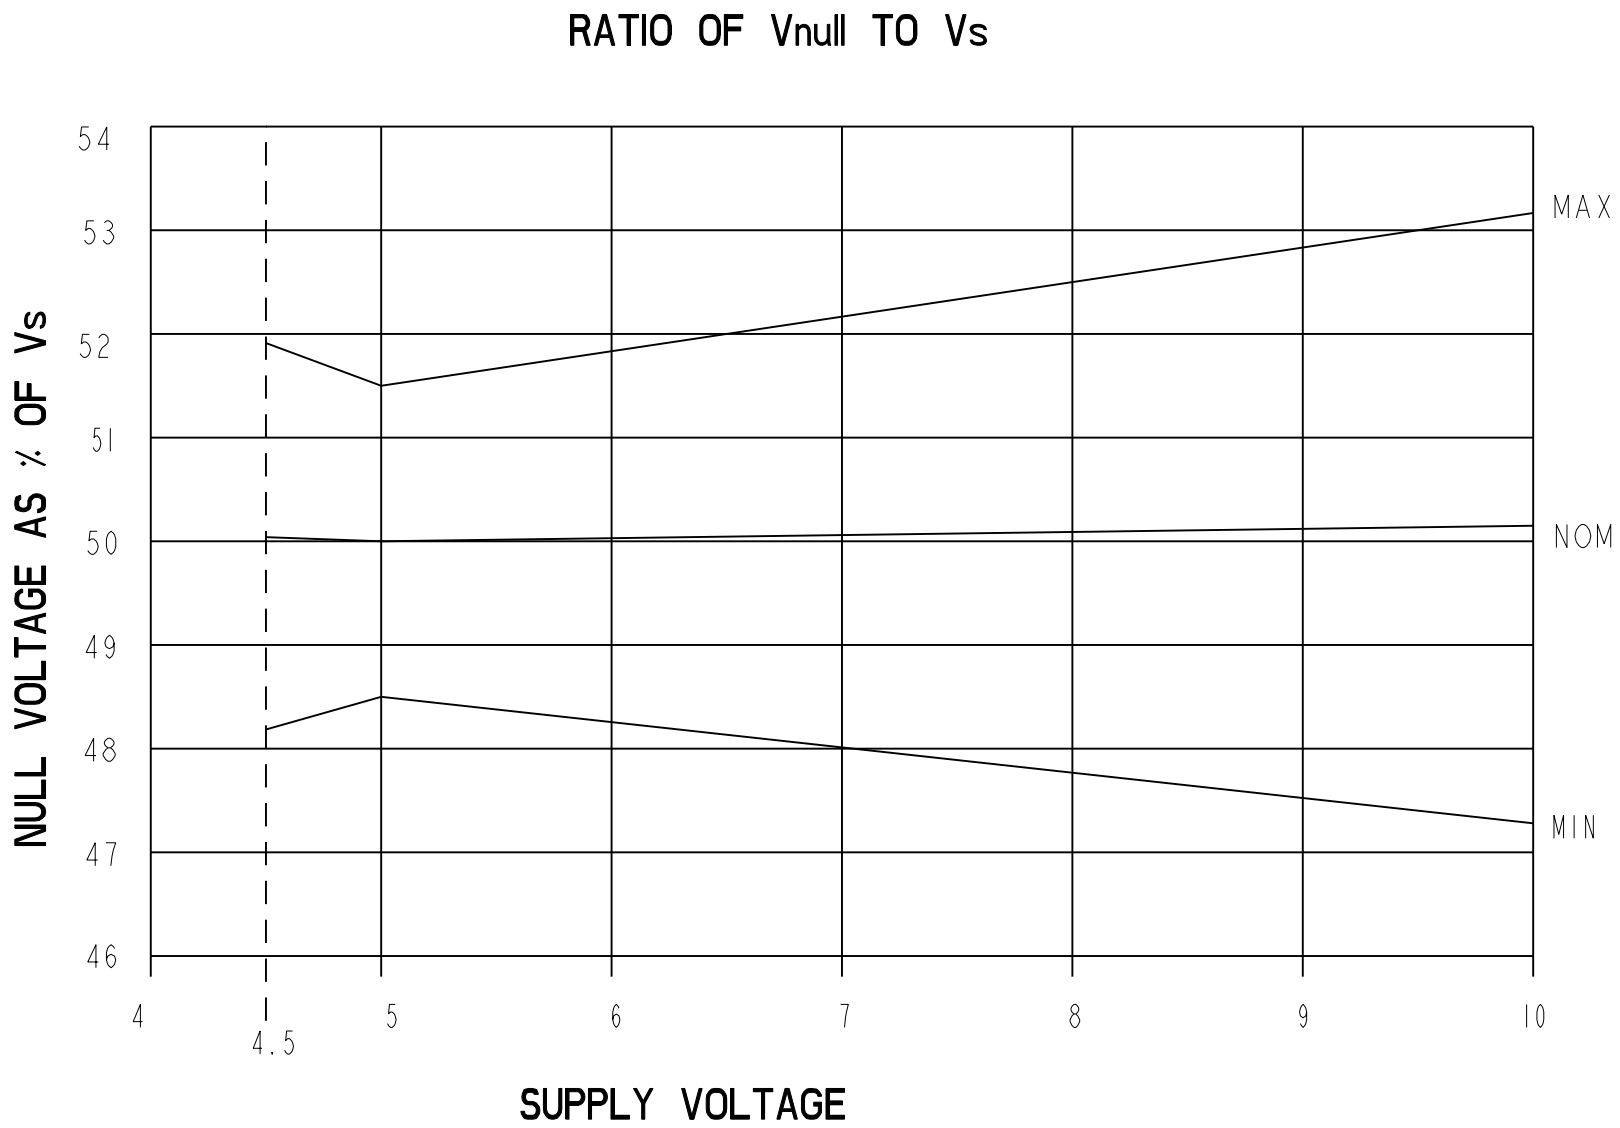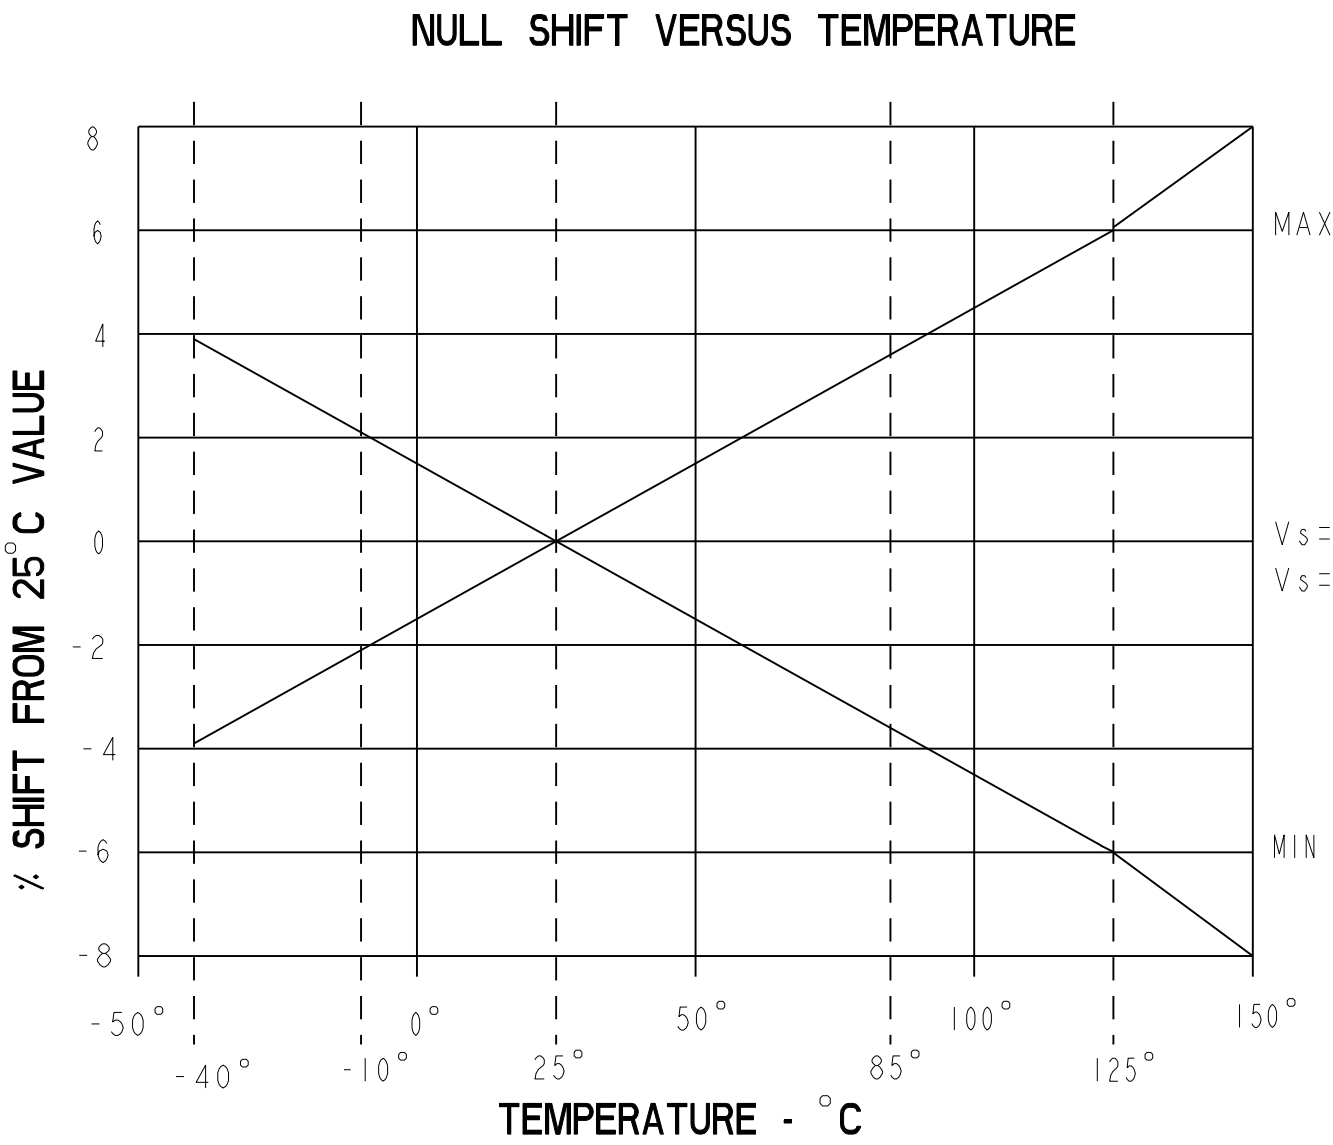

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE 91929

**MICRO SWITCH**  
a Honeywell Division

**MINIATURE RATIONETRIC  
LINEAR HALL EFFECT SENSOR**

**SS495 SERIES CHART 1**

|                                           |              |
|-------------------------------------------|--------------|
| THIRD ANGLE PROJECTION                    |              |
| SCALE                                     | NONE         |
| DO NOT SCALE PRINT                        |              |
| UNLESS OTHERWISE SPECIFIED TOLERANCES ARE |              |
| ONE PLACE                                 | (.0) +.030   |
| TWO PLACE                                 | (.00) +.015  |
| THREE PLACE                               | (.000) +.005 |
| ANGLES                                    | +2°          |
| WEIGHT                                    |              |

|                                                                                       |              |
|---------------------------------------------------------------------------------------|--------------|
| THIRD ANGLE PROJECTION                                                                |              |
|  |              |
| SCALE                                                                                 | NONE         |
| DO NOT SCALE PRINT                                                                    |              |
| UNLESS OTHERWISE SPECIFIED<br>TOLERANCES ARE                                          |              |
| ONE PLACE                                                                             | (.0) +.030   |
| TWO PLACE                                                                             | (.00) +.015  |
| THREE PLACE                                                                           | (.000) +.005 |
| ANGLES                                                                                | + 2°         |
| WEIGHT                                                                                |              |


CHARACTERISTICS ARE AT Vs=5.00 WITH 4.7K OUTPUT TO MINUS WITH TA: -40°C TO +125°C UNLESS OTHERWISE SPECIFIED

| PARAMETER                     | CONDITIONS                     | MIN    | TYP    | MAX   | UNITS     |
|-------------------------------|--------------------------------|--------|--------|-------|-----------|
| SENSITIVITY                   | TA = 25° C                     | 2.969  | 3.125  | 3.281 | mV/GAUSS  |
| NULL                          | TA = 25° C                     | 2.400  | 2.50   | 2.600 | VOLTS     |
| SUPPLY CURRENT                | TA = 25° C                     |        | 7      | 8.7   | mA        |
| OUTPUT CURRENT                | Vs > 4.5                       | 1mA    | 1.5mA  |       |           |
| SINK                          | Vs > 4.5                       | .6mA   | 1.5mA  |       |           |
| SINK                          | Vs > 5.0                       | 1mA    | 1.5mA  |       |           |
| RESPONSE TIME                 |                                |        | 3μS    |       |           |
| OUTPUT VOLTAGE SWING          |                                |        |        |       |           |
| VOM -                         | -B APPLIED                     | .4     | .2     |       | VOLTS     |
| VOM +                         | +B APPLIED                     | Vs -.4 | Vs -.2 |       | VOLTS     |
| B LIMITS FOR LINEAR OPERATION | -B MAX                         | -600   | -670   |       | GAUSS     |
|                               | +B MAX                         | +600   | +670   |       | GAUSS     |
| Vnull DRIFT                   | B = 0, TA = 25° C TO 125° C    | -.07   |        | +.07  | % /° C    |
| Vnull DRIFT                   | B = 0, TA = +125° C TO +150° C | -.08   |        | +.08  | % /° C    |
| SENSITIVITY DRIFT             | TA=+25° C TO +150° C           | -.02   |        | +.06  | % /° C    |
| SENSITIVITY DRIFT             | TA=-40° C TO +25° C            | -.01   |        | +.07  | % /° C    |
| LINEARITY                     | B = -600 TO +600               | 0      | -1.0   | -1.5  | % OF SPAN |
| SUPPLY VOLTAGE                | -40° C TO +125° C              | 4.5    | 5.0    | 10.5  | VOLTS     |
| OPERATING TEMP                | SEE MAX TEMPERATURE CHART      | -40    |        | +150  | ° C       |

SS495A2











SS495 SERIES CHART 1

BLOCK DIAGRAM CURRENT SINKING OR SOURCING OUTPUT

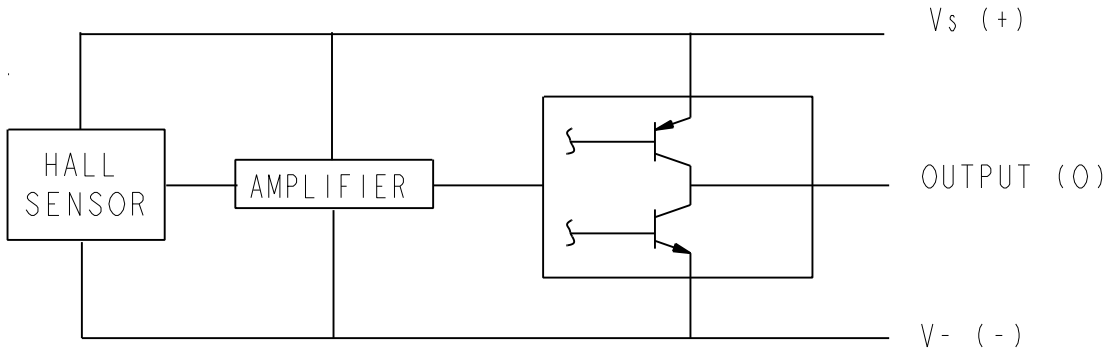

ABSOLUTE MAXIMUM CHARACTERISTICS

| CHARACTERISTIC | SYMBOL | TEST CONDITION  | MIN  | MAX | UNITS |
|----------------|--------|-----------------|------|-----|-------|
| SUPPLY VOLTAGE | Vcc    |                 | -0.5 | 11  | V     |
| OUTPUT VOLTAGE | Vout   |                 | -0.5 | 11  | V     |
| OUTPUT CURRENT | Iout   | SOURCE OR SINK  | 10   |     | mA    |
| TEMPERATURE    | TA     | OPERATING       | -55  | 150 | °C    |
|                | TS     | STORAGE (Vcc=0) | -55  | 165 | °C    |

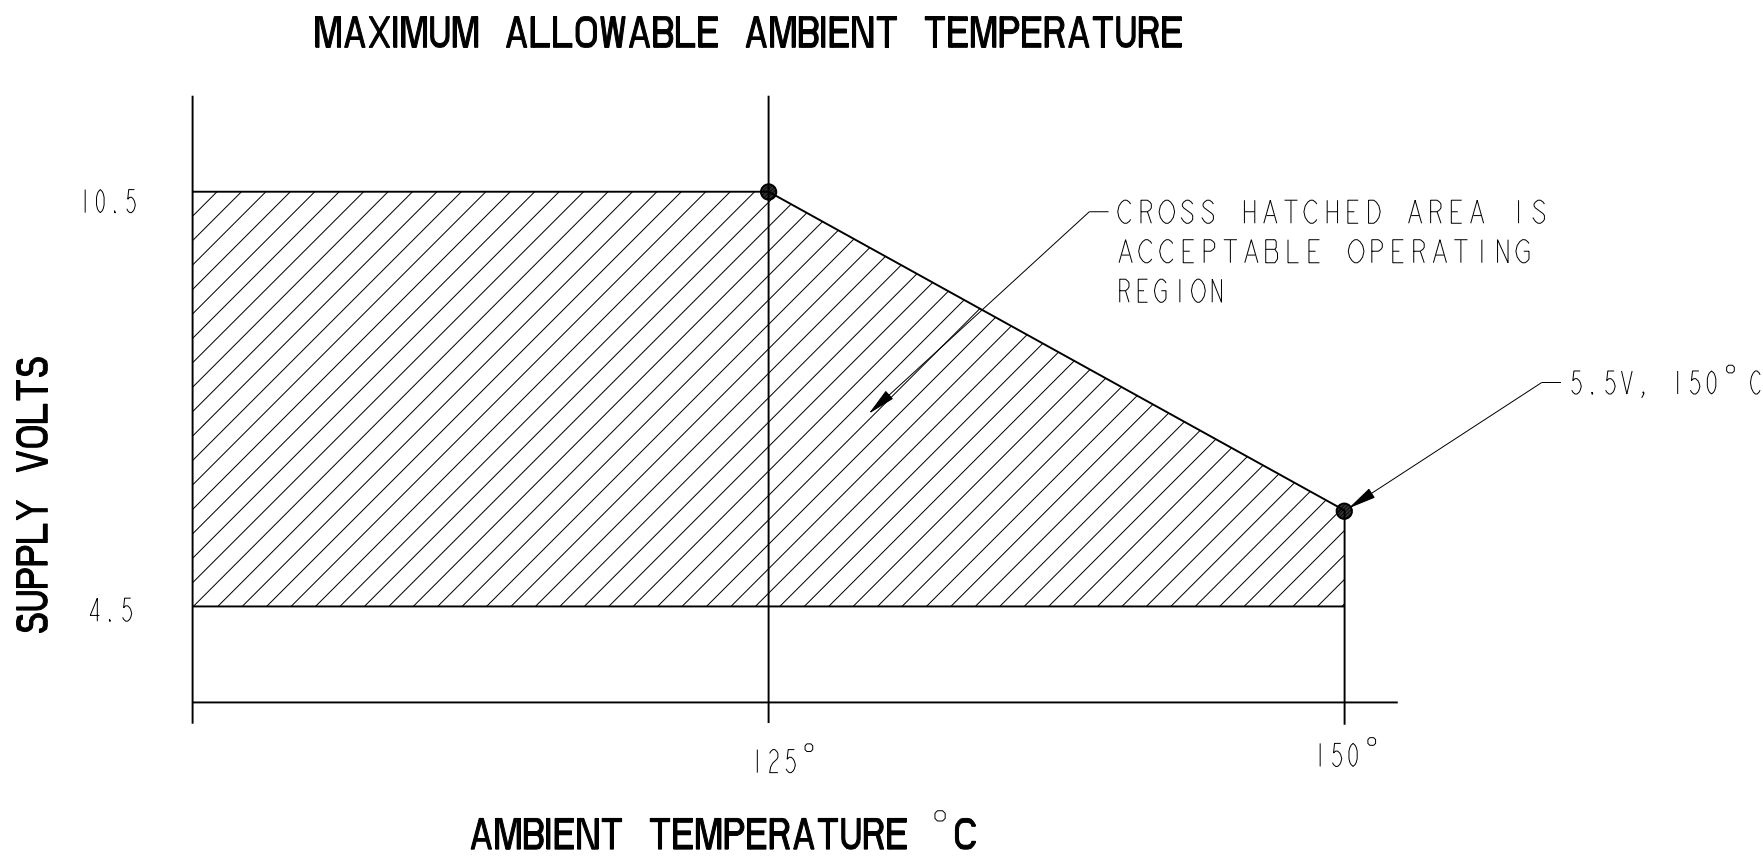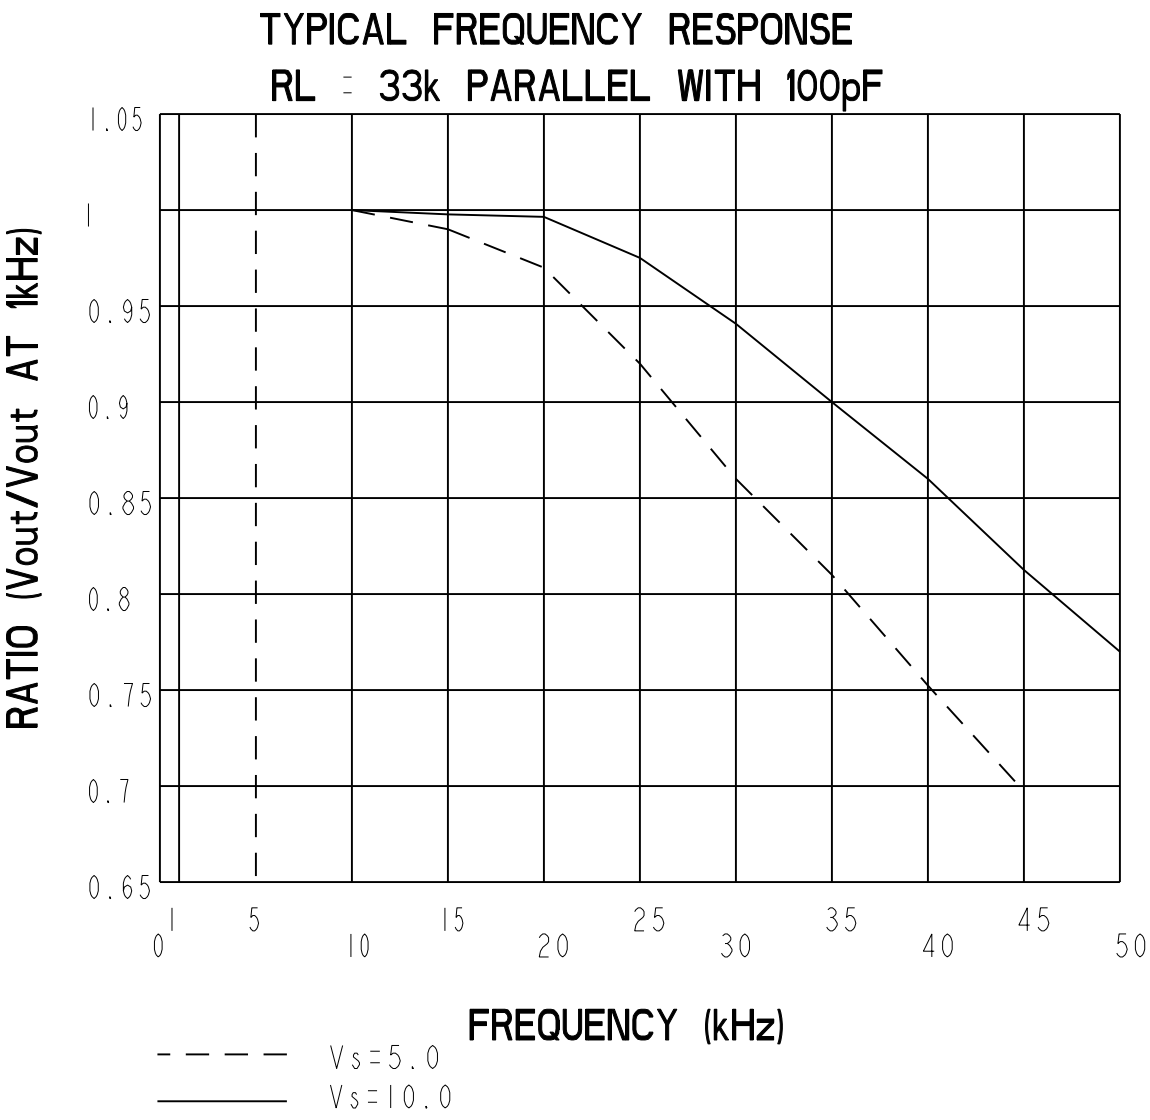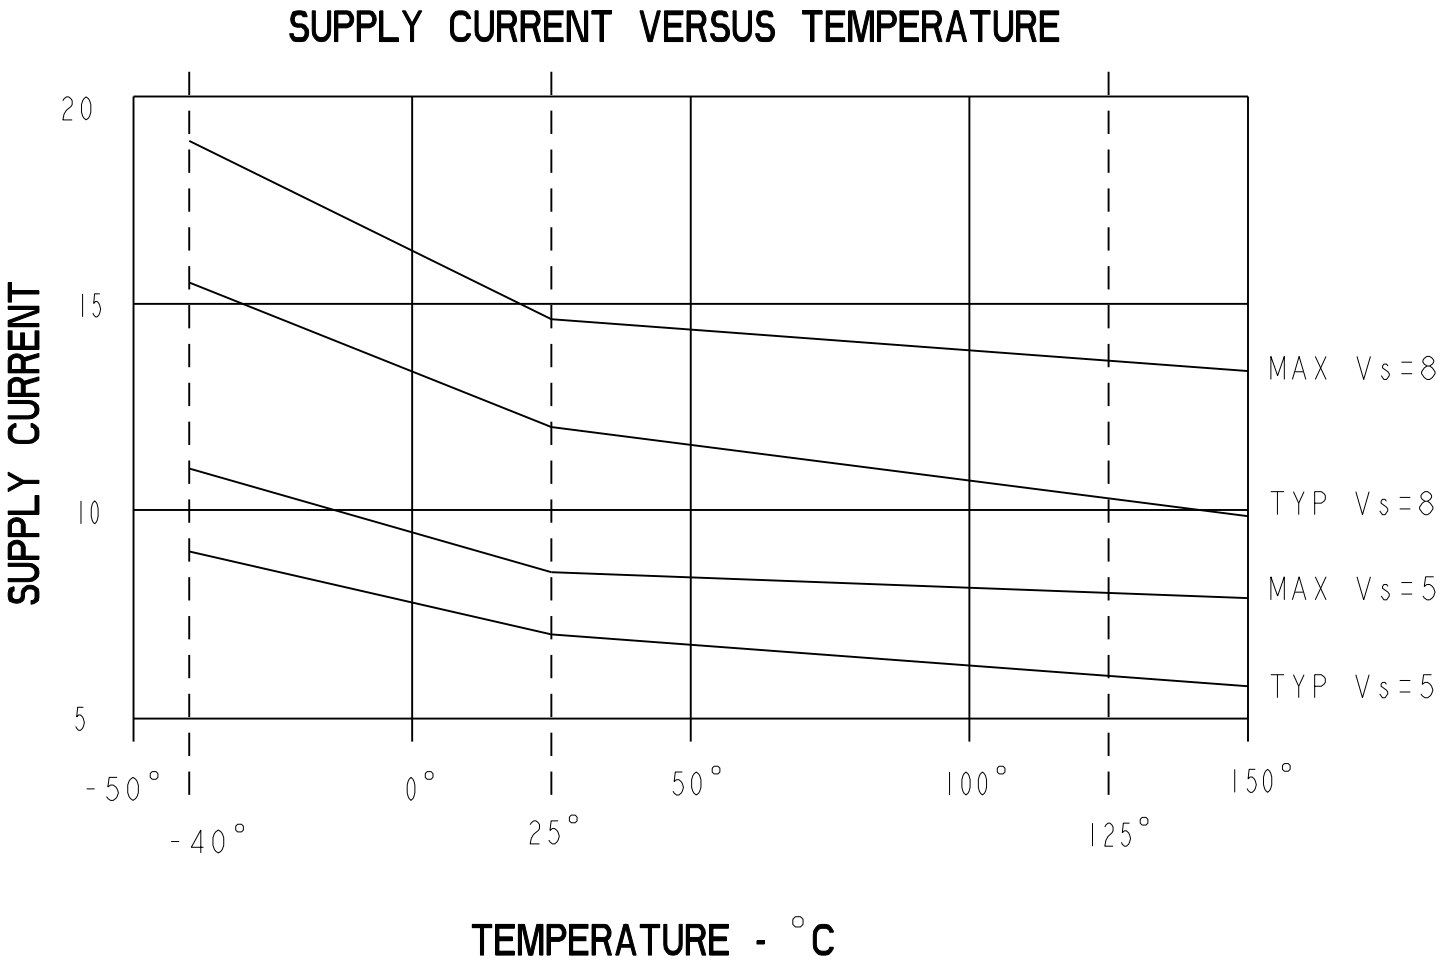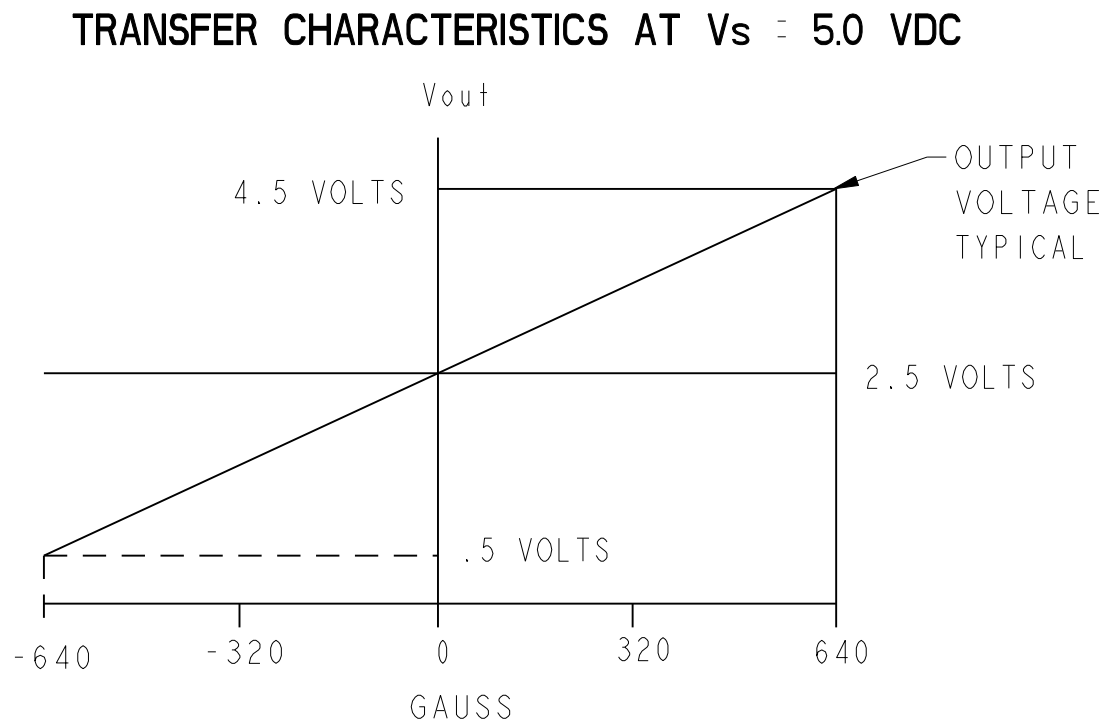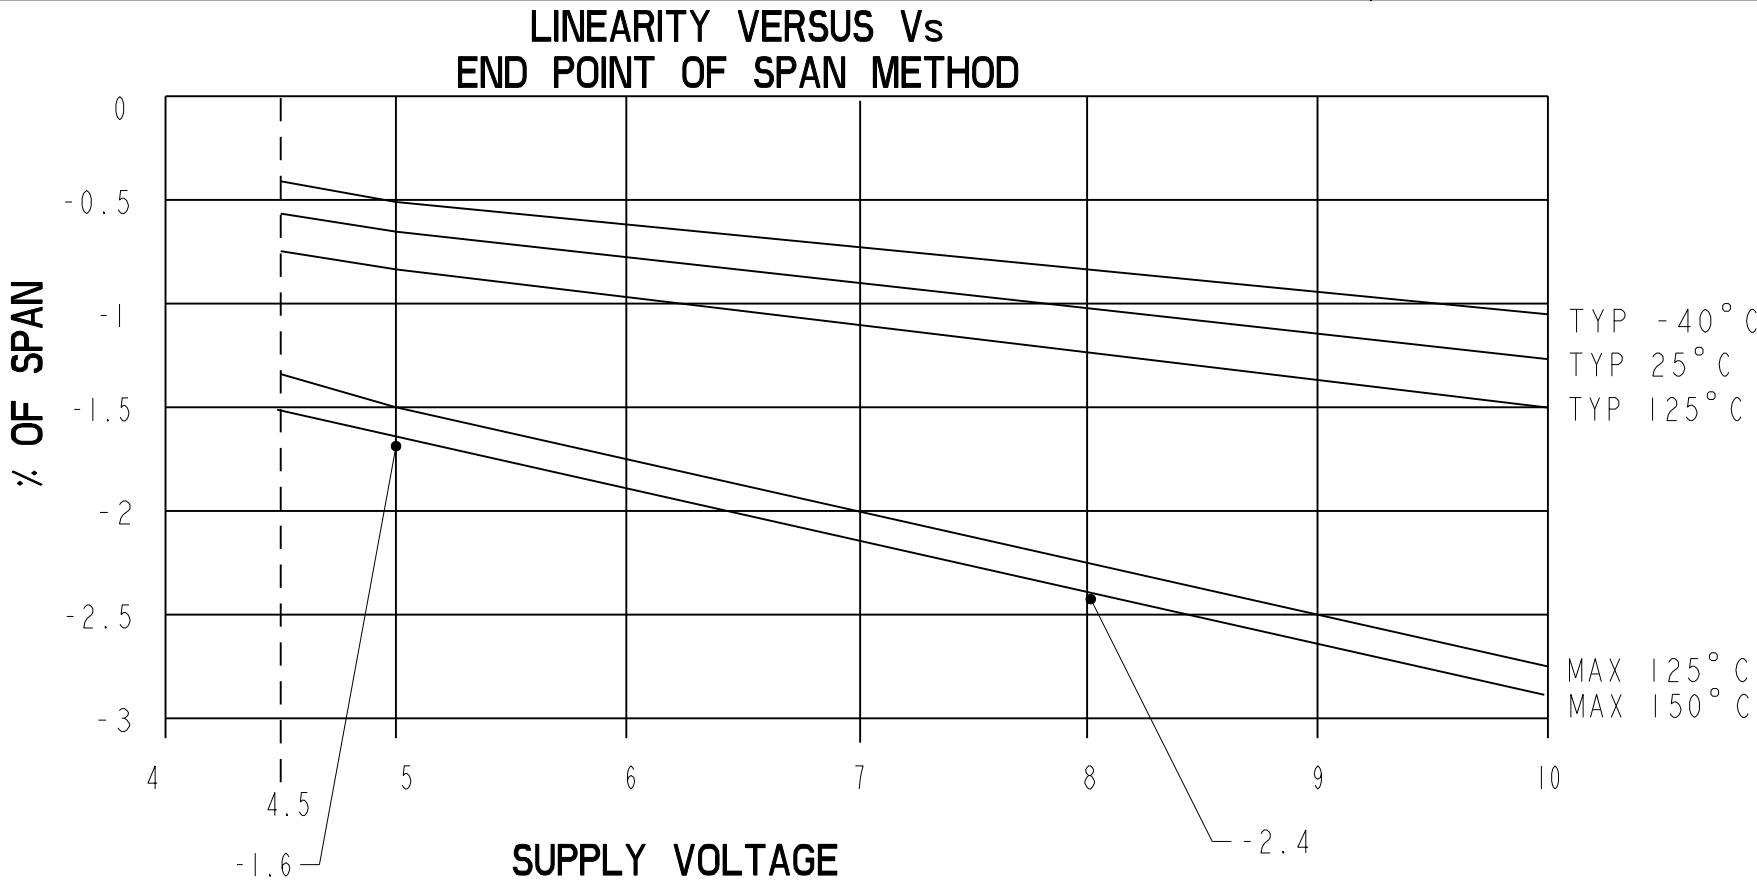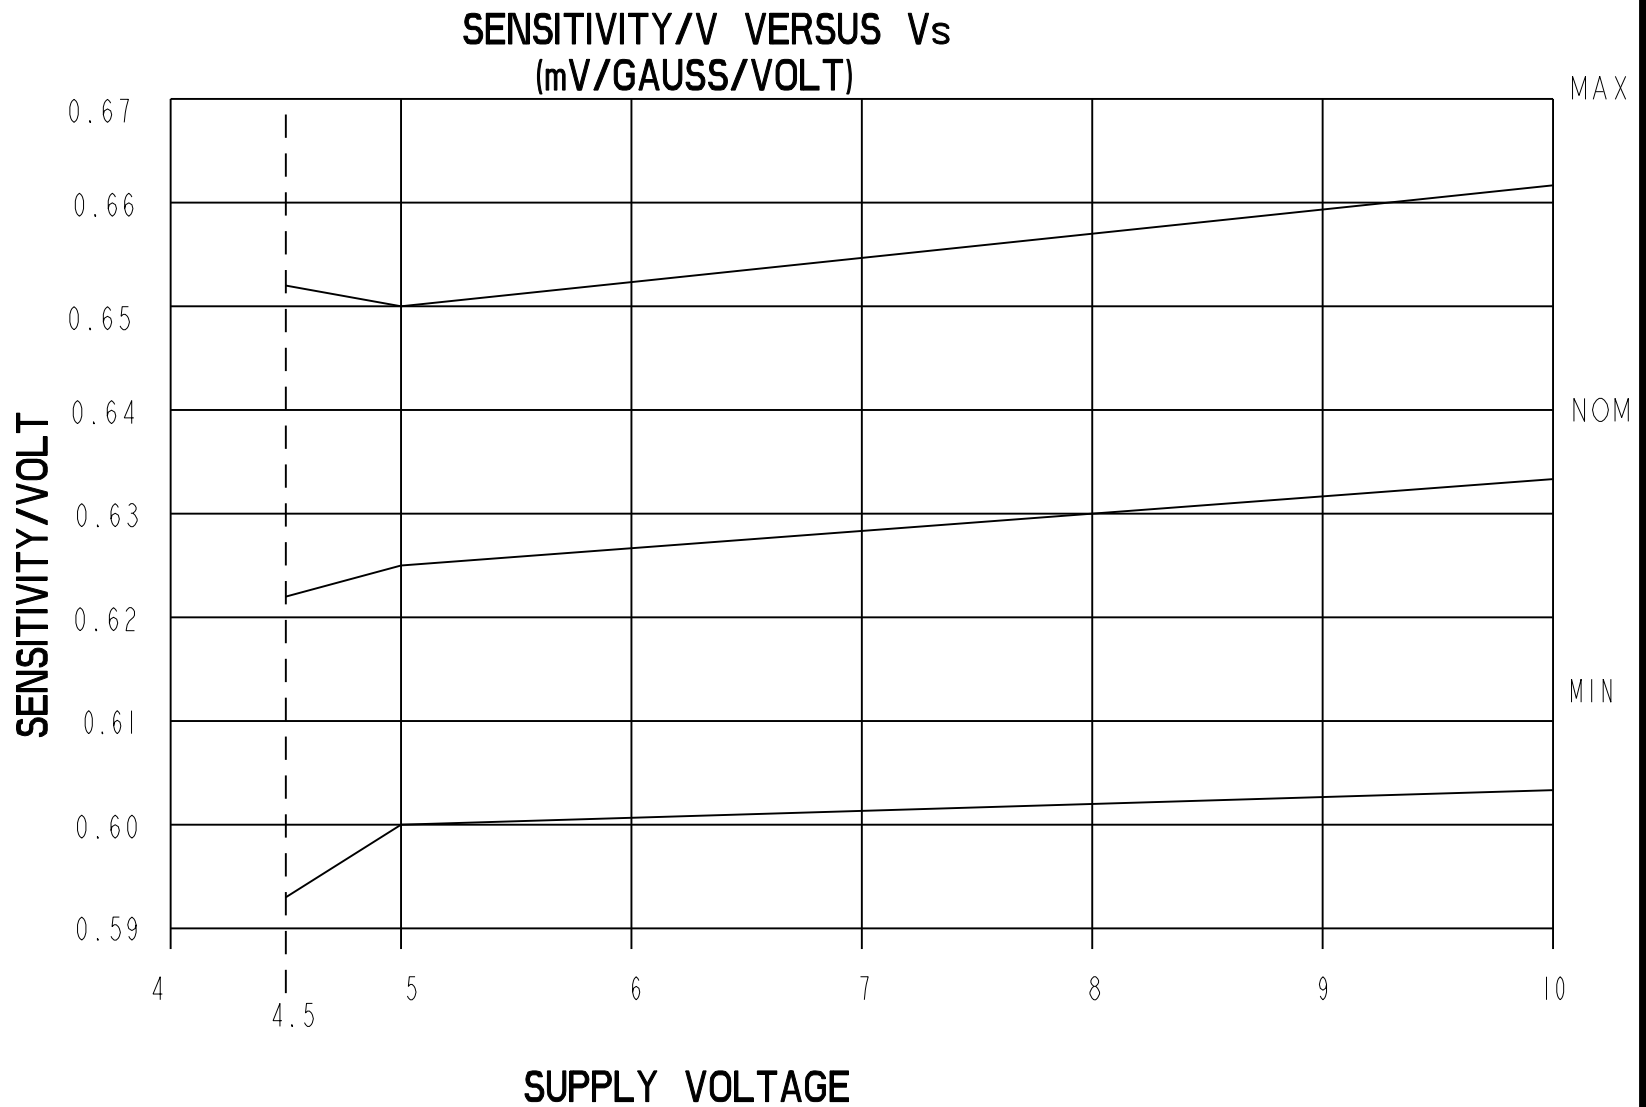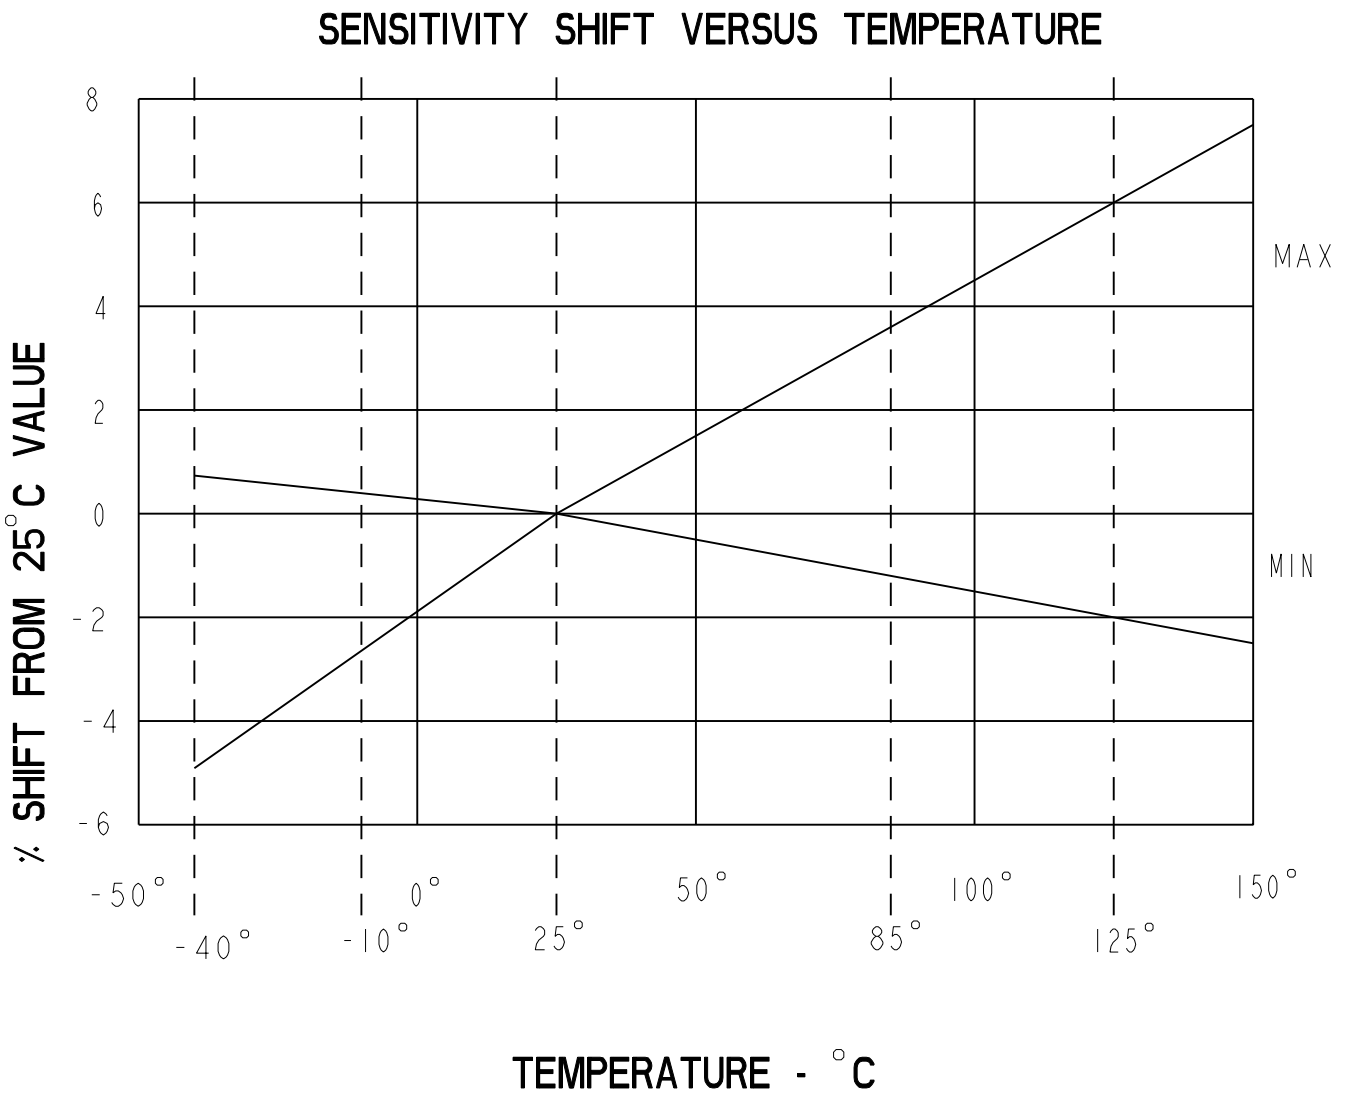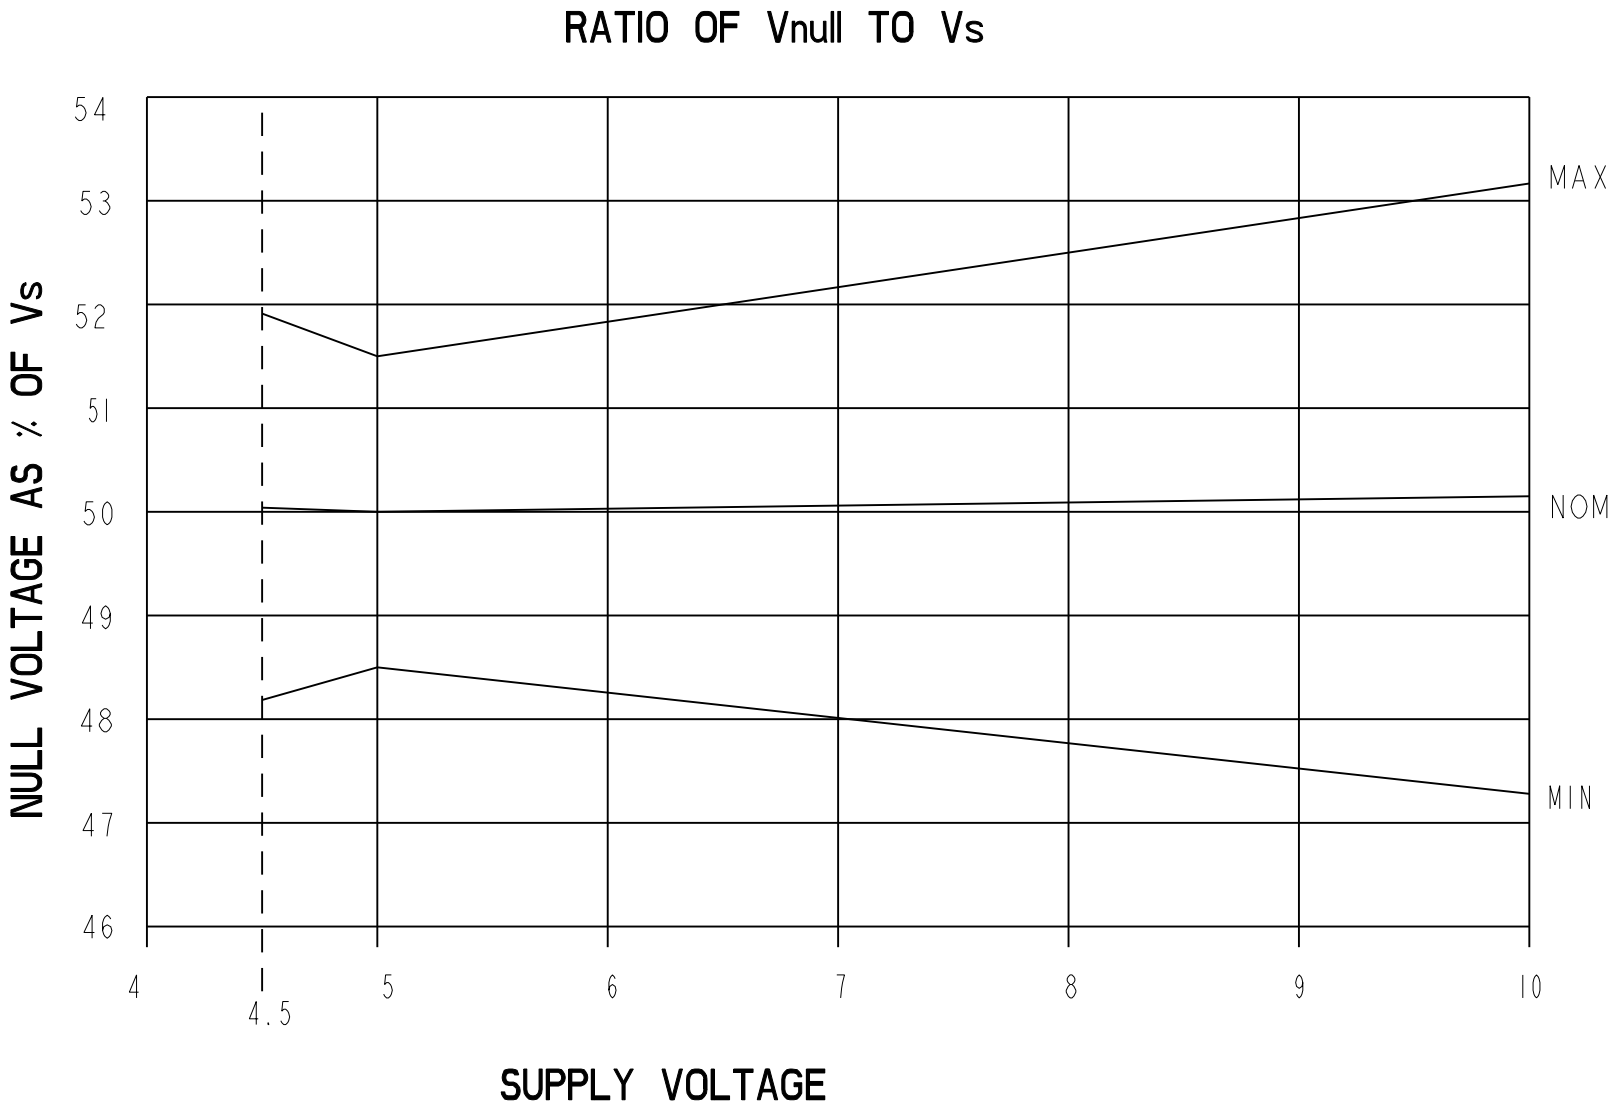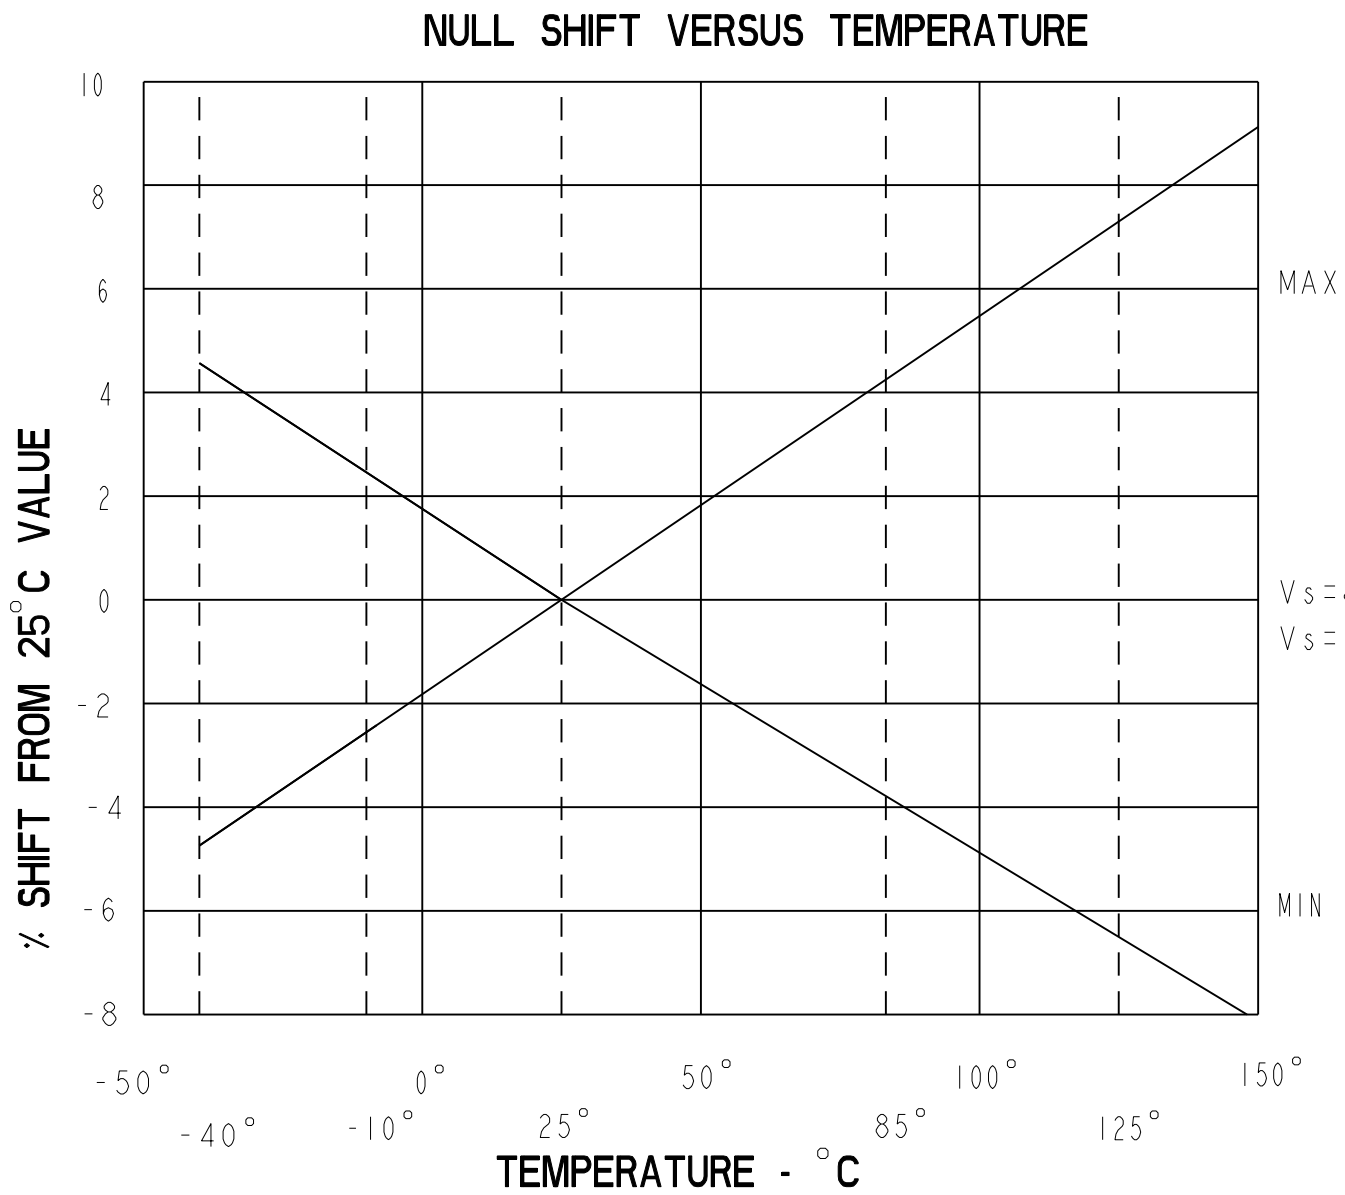


CHARACTERISTICS ARE AT Vs=5.00 WITH 4.7K OUTPUT TO MINUS WITH TA= -40°C TO +125°C UNLESS OTHERWISE SPECIFIED

SS495B

SS495 SERIES CHART 1






| PARAMETER                     | CONDITIONS                   | MIN     | TYP     | MAX   | UNITS     |
|-------------------------------|------------------------------|---------|---------|-------|-----------|
| SENSITIVITY                   | TA = 25°C                    | 2.875   | 3.125   | 3.375 | mV/GAUSS  |
| NULL                          | TA = 25°C                    | 2.35    | 2.50    | 2.650 | VOLTS     |
| SUPPLY CURRENT                | TA = 25°C                    |         | 7       | 8.7   | mA        |
| OUTPUT CURRENT SOURCE         | Vs > 4.5                     | 1mA     | 1.5mA   |       |           |
| SINK                          | Vs > 4.5                     | .6mA    | 1.5mA   |       |           |
| SINK                          | Vs > 5.0                     | 1mA     | 1.5mA   |       |           |
| RESPONSE TIME                 |                              |         | 3μs     |       |           |
| OUTPUT VOLTAGE SWING          |                              |         |         |       |           |
| VOM -                         | -B APPLIED                   | .4      | .2      |       | VOLTS     |
| VOM +                         | +B APPLIED                   | Vs - .4 | Vs - .2 |       | VOLTS     |
| B LIMITS FOR LINEAR OPERATION | -B MAX                       | -600    | -670    |       | GAUSS     |
|                               | +B MAX                       | +600    | +670    |       | GAUSS     |
| Vnull DRIFT                   | B = 0, TA = 25°C TO 125°C    | -.08    |         | +.08  | % / °C    |
| Vnull DRIFT                   | B = 0, TA = +125°C TO +150°C | -.08    |         | +.08  | % / °C    |
| SENSITIVITY DRIFT             | TA=+25°C TO +150°C           | -.02    |         | +.08  | % / °C    |
| SENSITIVITY DRIFT             | TA=-40°C TO +25°C            | -.02    |         | +.08  | % / °C    |
| LINEARITY                     | B = -600 TO +600             | 0       | -1.0    | -1.5  | % OF SPAN |
| SUPPLY VOLTAGE                | -40°C TO +125°C              | 4.5     | 5.0     | 10.5  | VOLTS     |
| OPERATING TEMP                | SEE MAX TEMPERATURE CHART    | -40     |         | +150  | °C        |

BLOCK DIAGRAM CURRENT SINKING OR SOURCING OUTPUT





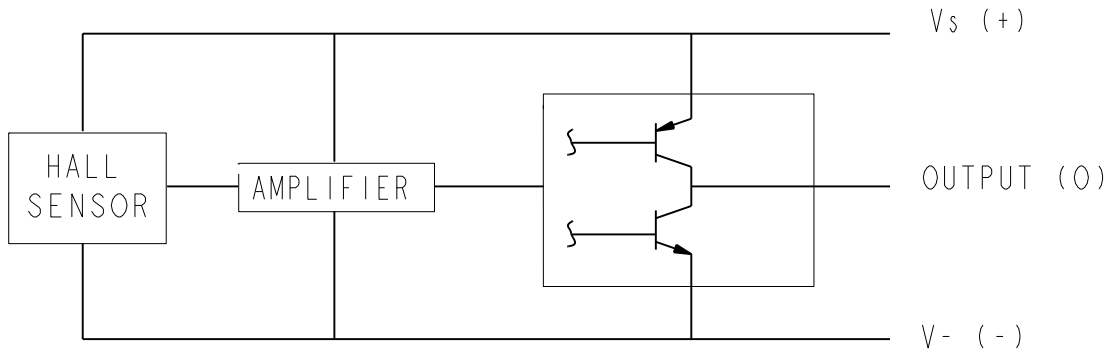


ABSOLUTE MAXIMUM CHARACTERISTICS

| CHARACTERISTIC | SYMBOL | TEST CONDITION  | MIN  | MAX | UNITS |
|----------------|--------|-----------------|------|-----|-------|
| SUPPLY VOLTAGE | Vcc    |                 | -0.5 | 11  | V     |
| OUTPUT VOLTAGE | Vout   |                 | -0.5 | 11  | V     |
| OUTPUT CURRENT | Iout   | SOURCE OR SINK  | 10   |     | mA    |
| TEMPERATURE    | TA     | OPERATING       | -55  | 150 | °C    |
|                | TS     | STORAGE (Vcc=0) | -55  | 165 | °C    |

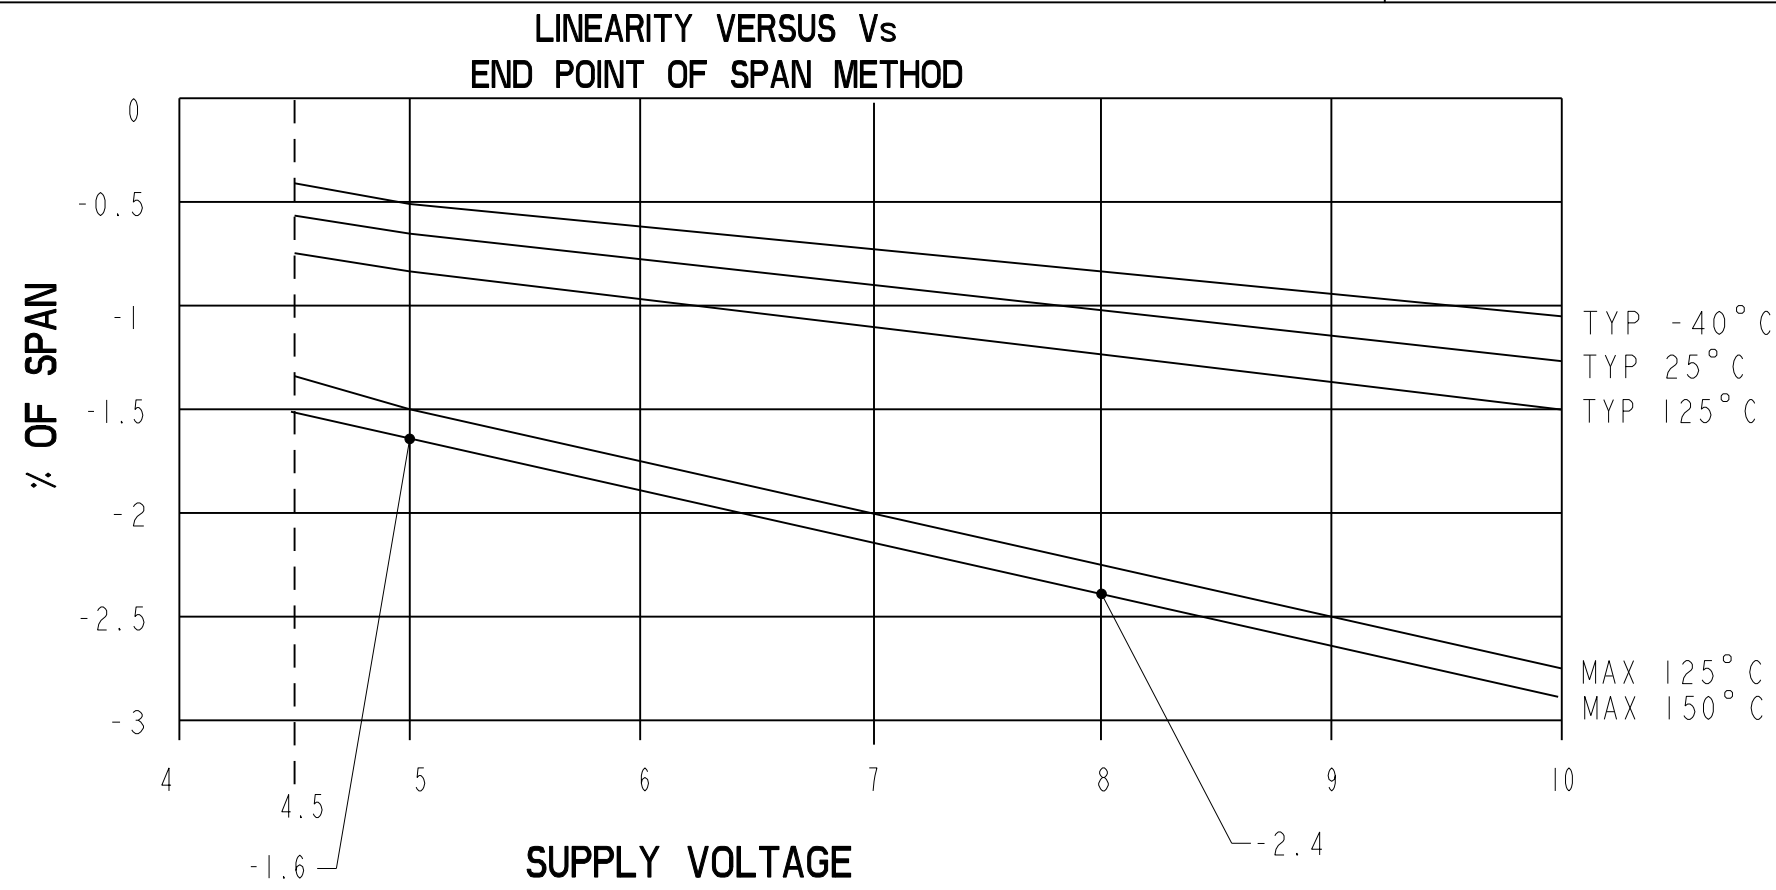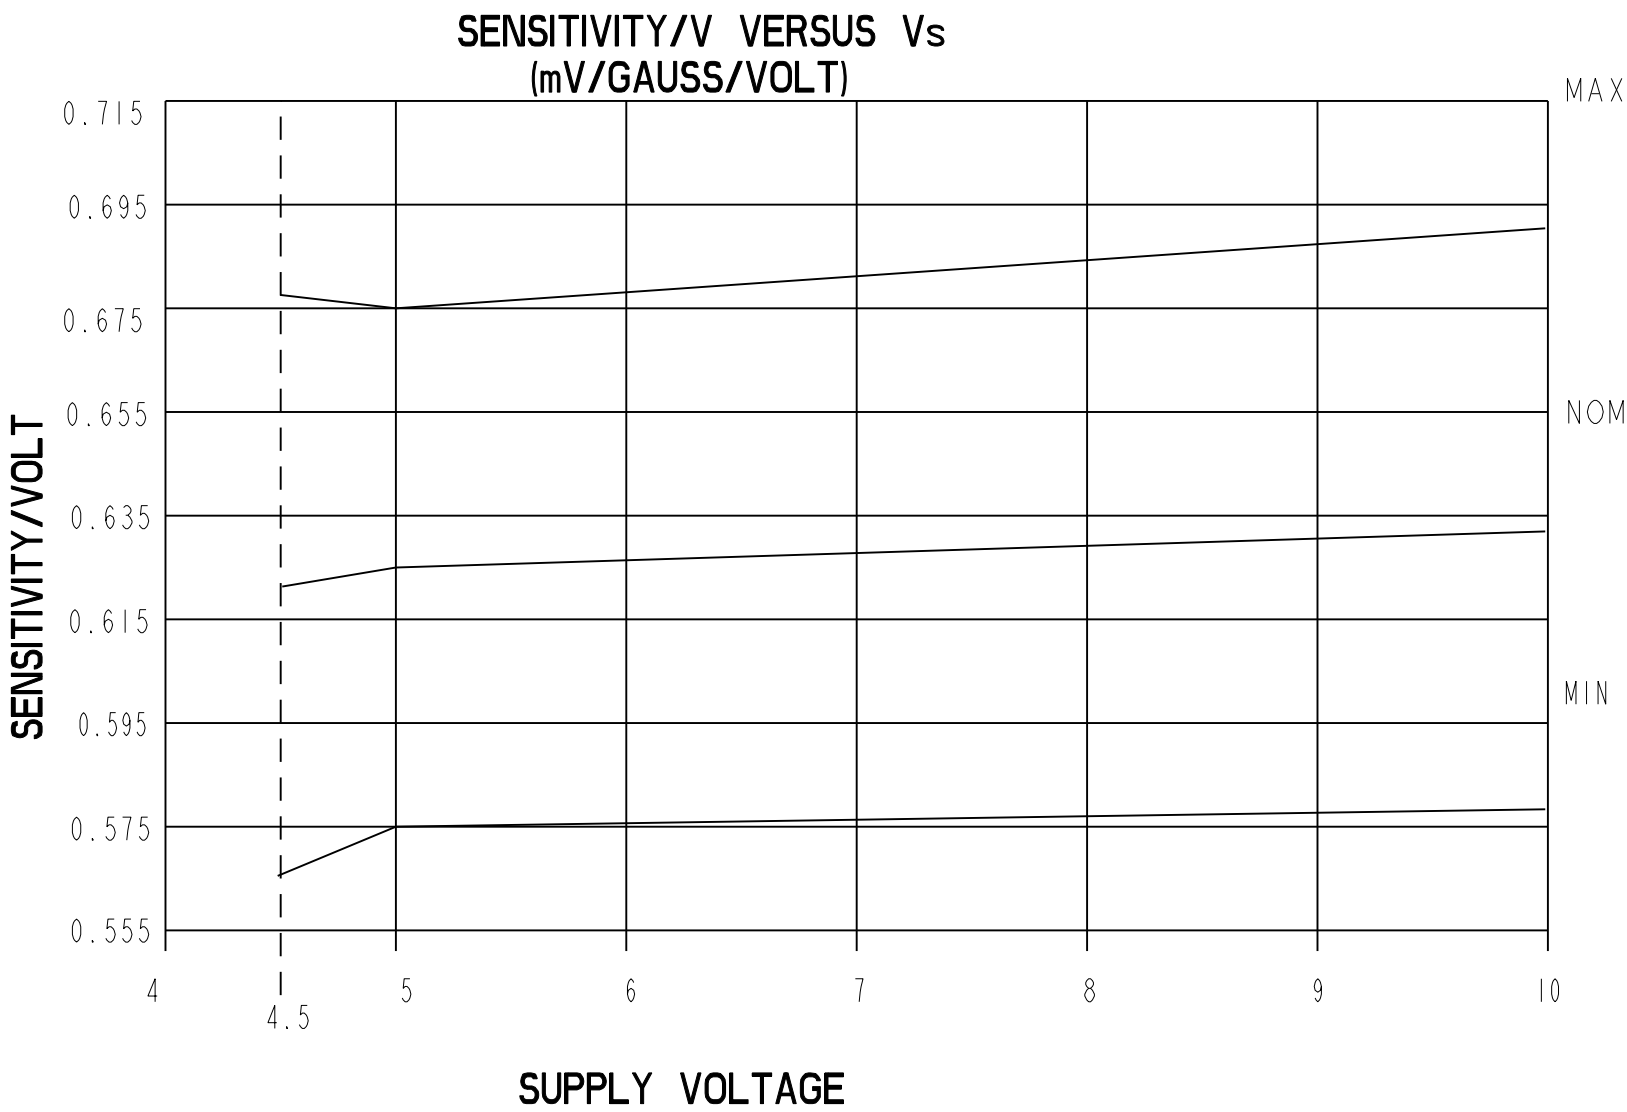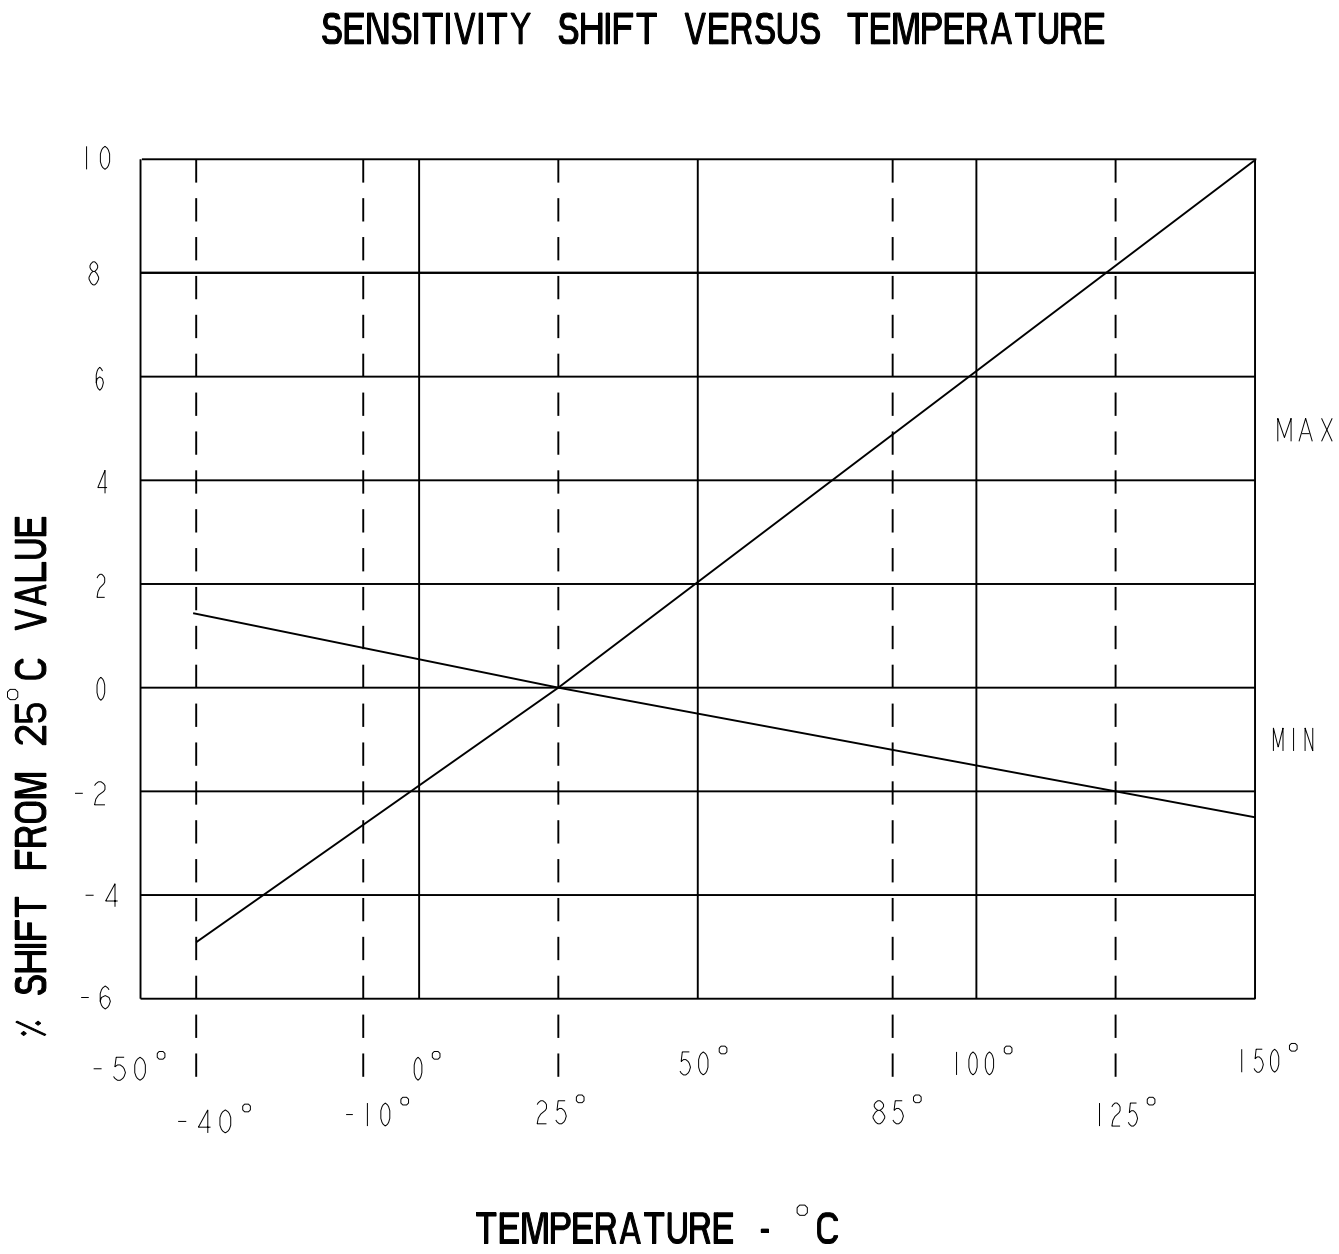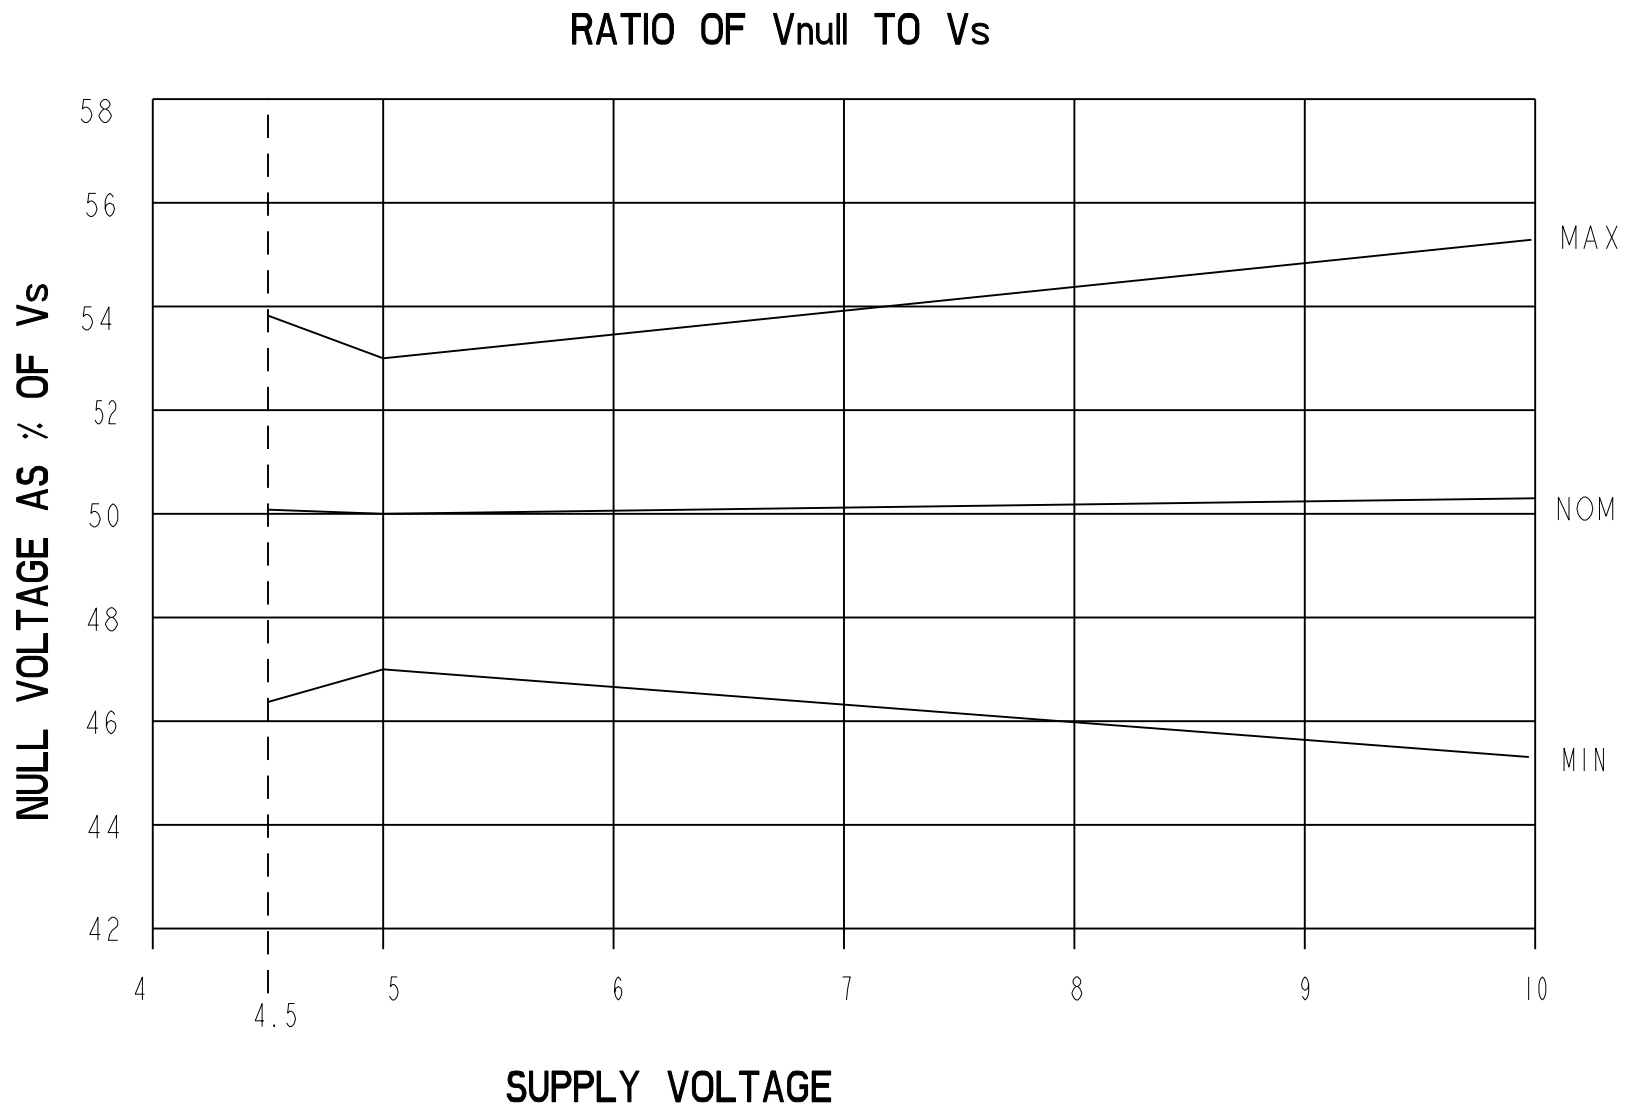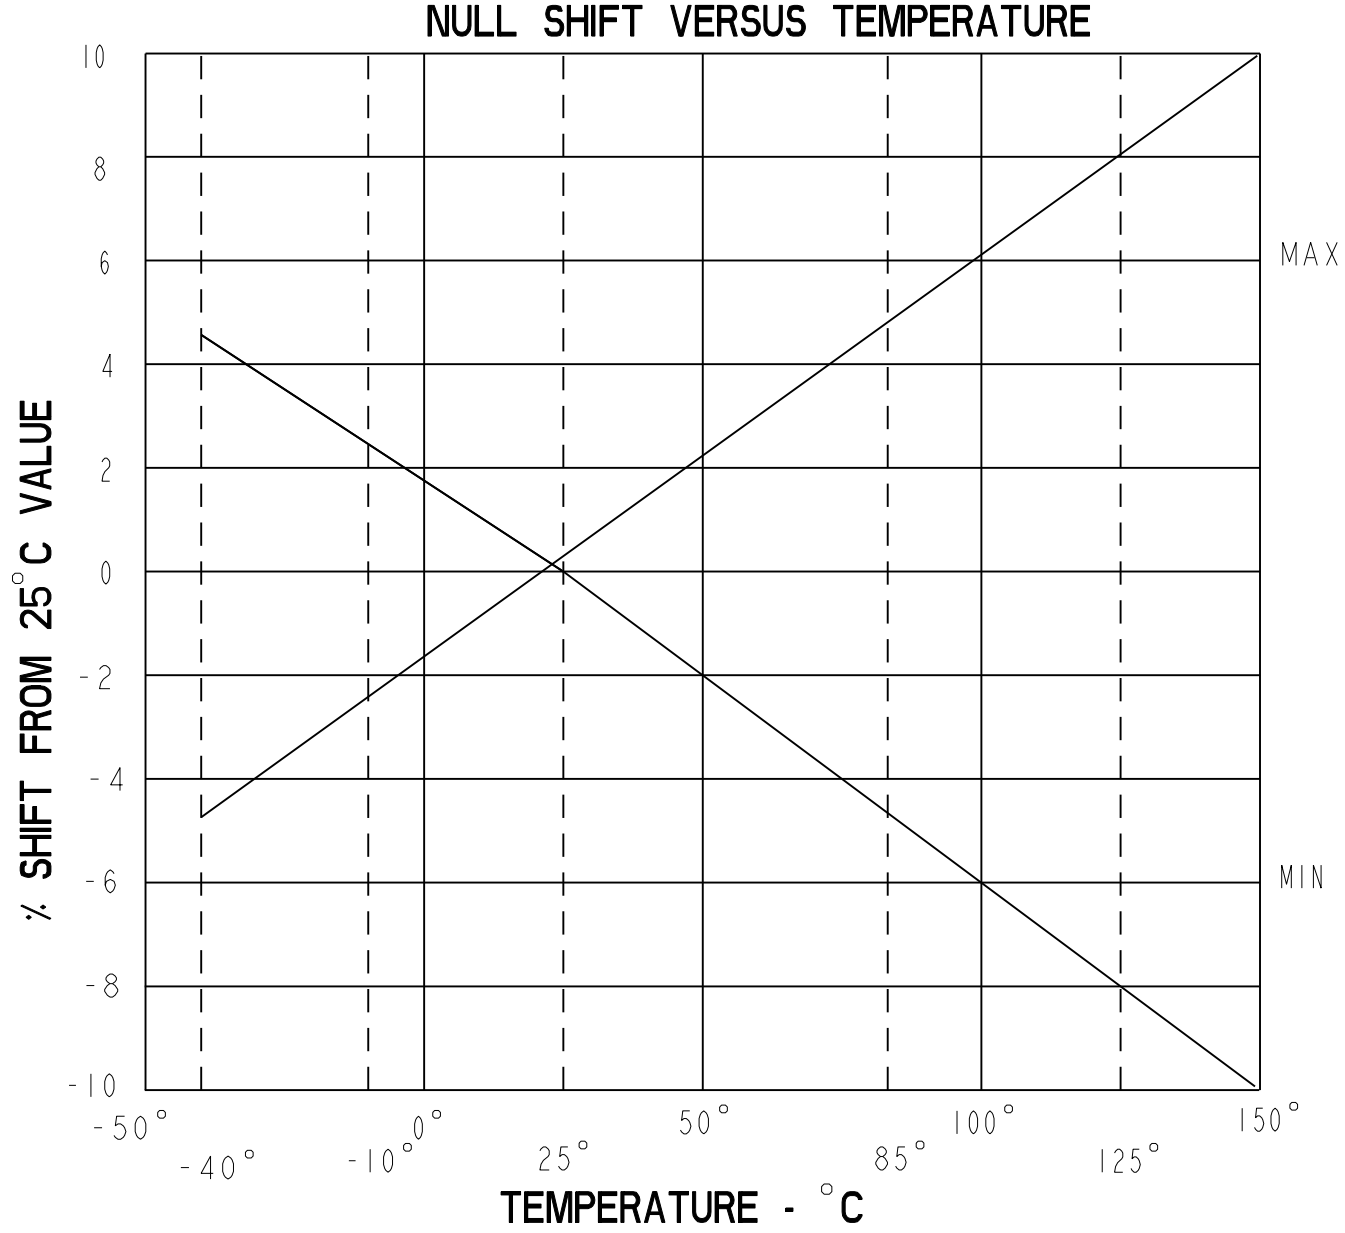

TRANSFER CHARACTERISTICS AT Vs = 5.0 VDC

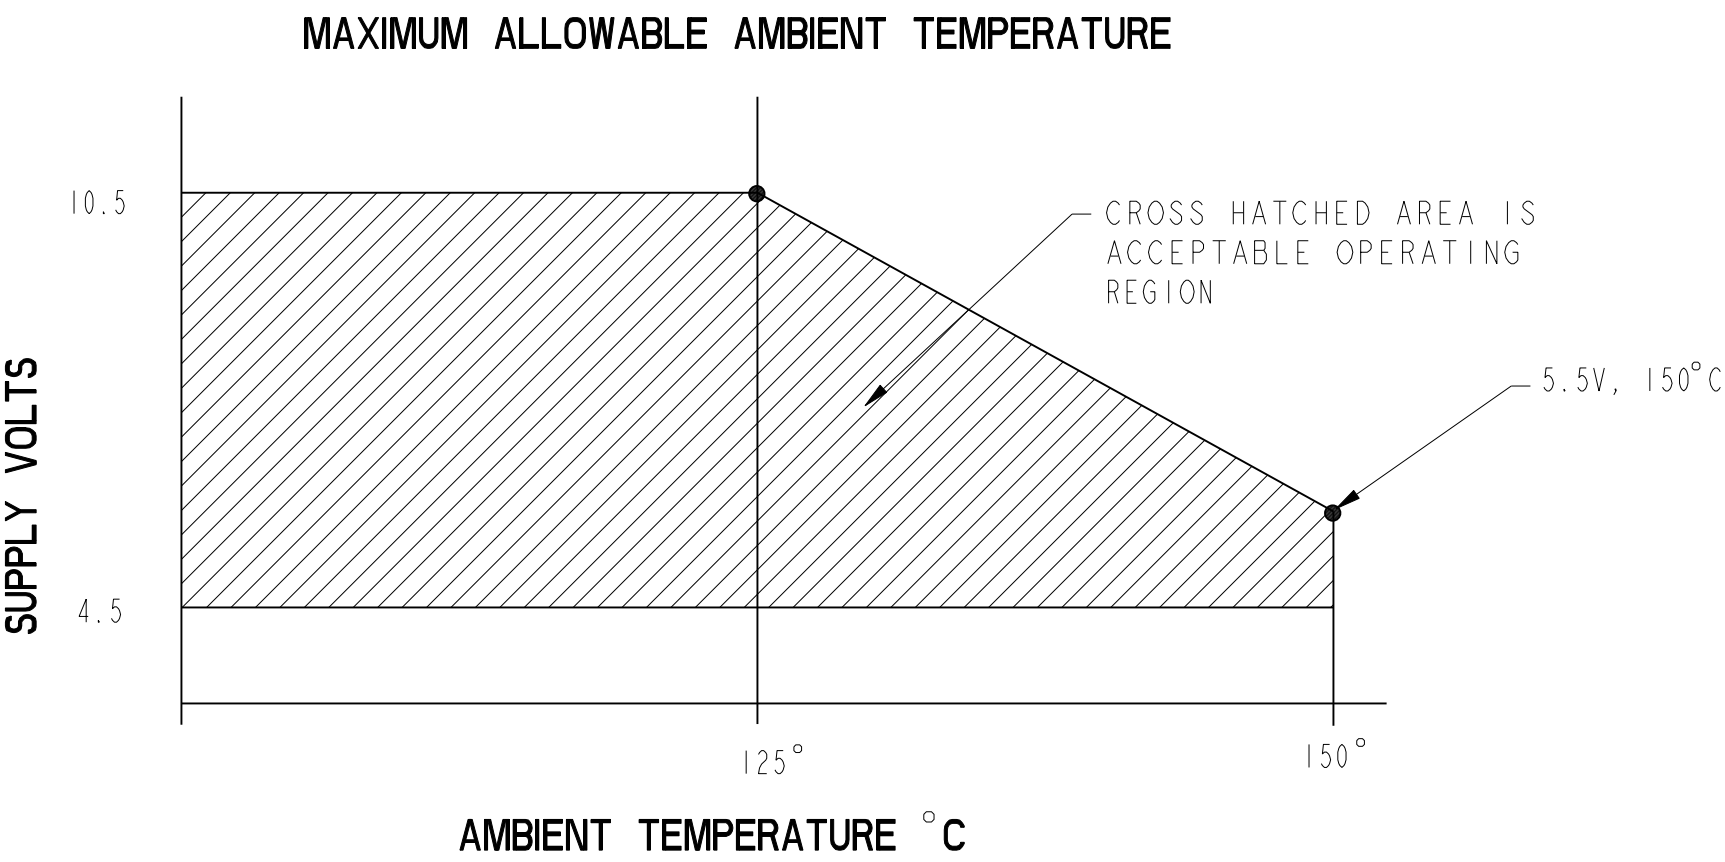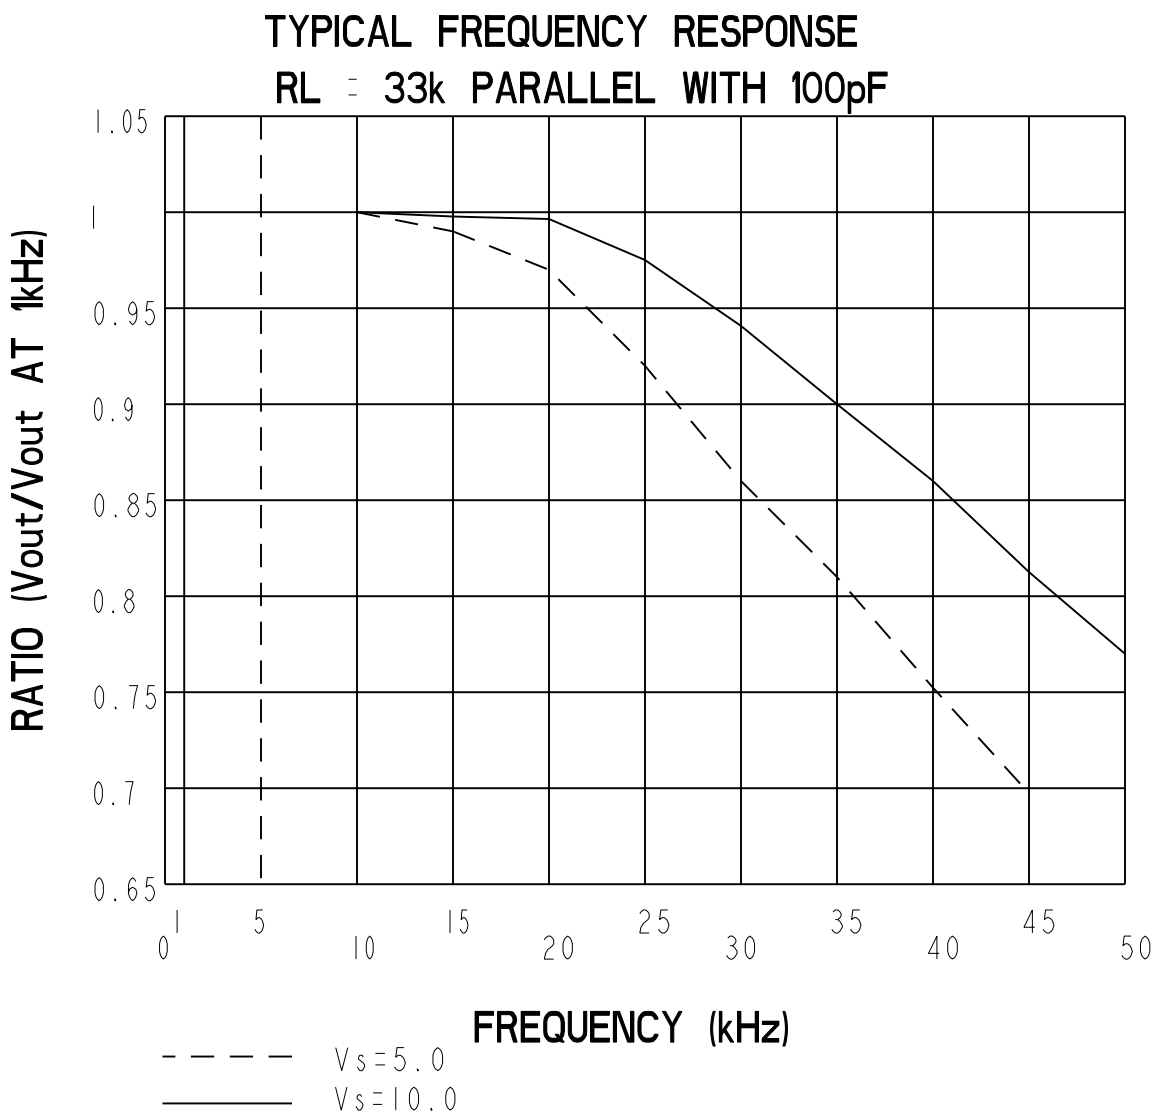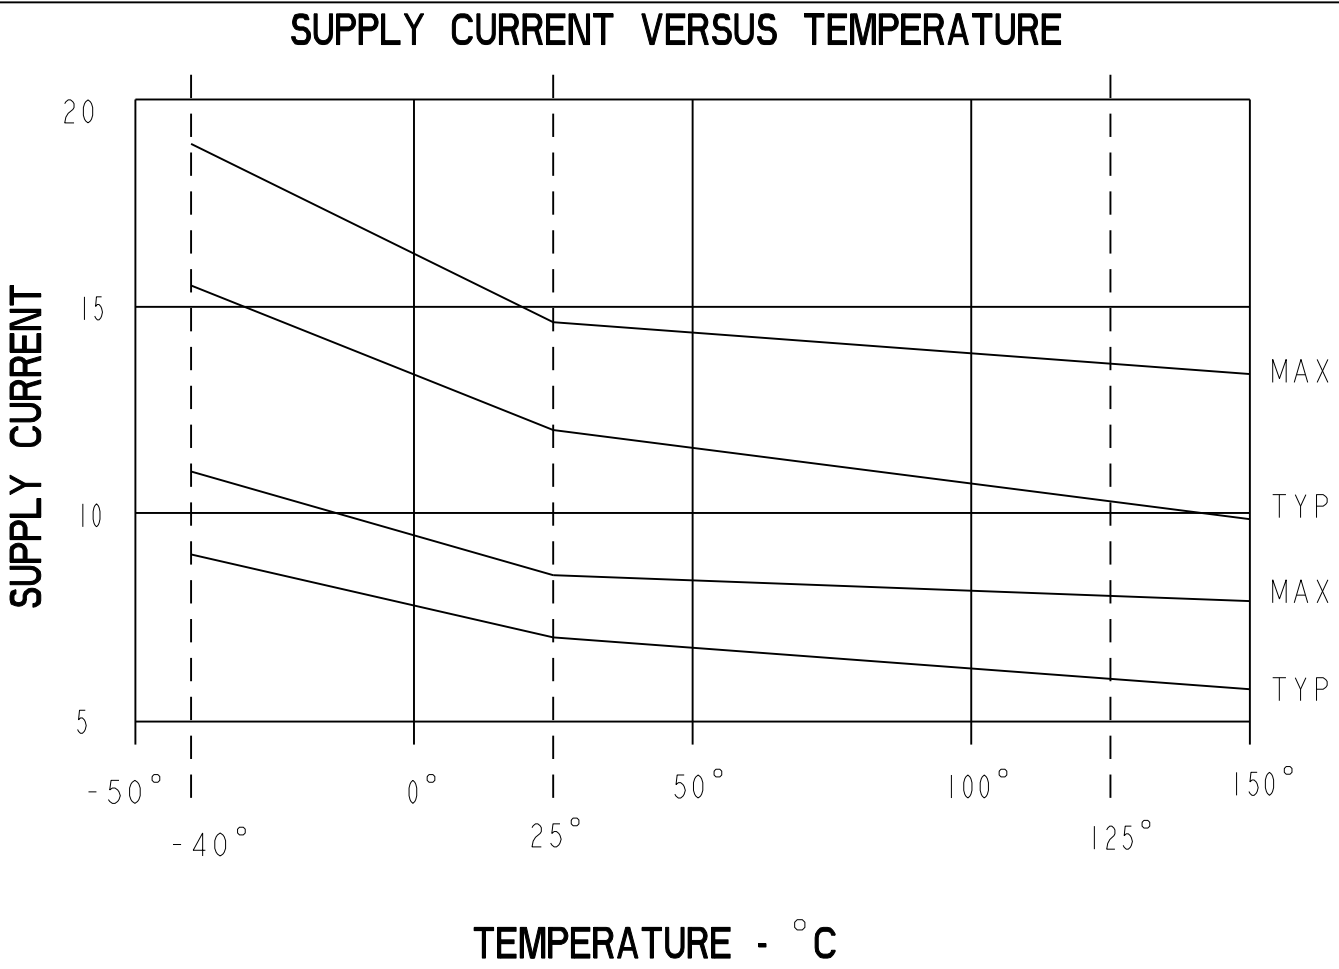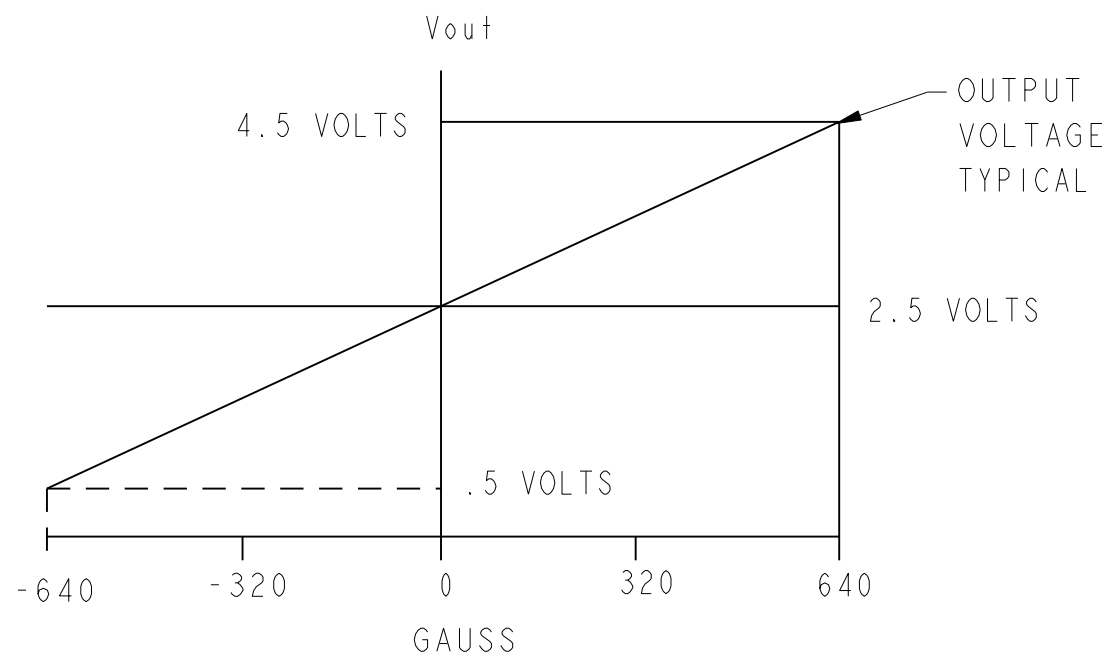

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE 91929  
MICRO SWITCH  
a Honeywell Division

MINIATURE RATIONETRIC  
LINEAR HALL EFFECT SENSOR

CATALOG LISTING  
SS495 SERIES CHART 1

|                                           |              |
|-------------------------------------------|--------------|
| THIRD ANGLE PROJECTION                    |              |
| SCALE                                     | NONE         |
| DO NOT SCALE PRINT                        |              |
| UNLESS OTHERWISE SPECIFIED TOLERANCES ARE |              |
| ONE PLACE                                 | (.0) +.030   |
| TWO PLACE                                 | (.00) +.015  |
| THREE PLACE                               | (.000) +.005 |
| ANGLES                                    | + 2°         |
| WEIGHT                                    |              |

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)