TAPE PACKING OPTIONS

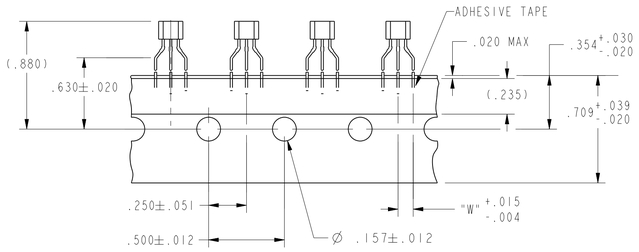

TAPE DIMENSIONS

TAPE STYLE

AMMOPACK STYLE "T2" 12 14



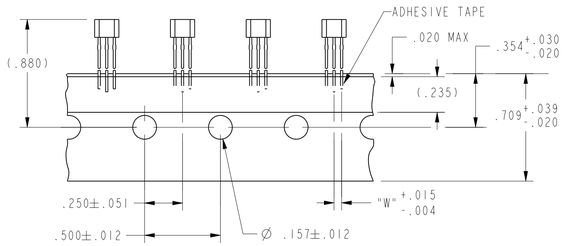

TAPE DIMENSIONS

AMMOPACK STYLE "T3" 12 14





TAPE DIMENSIONS

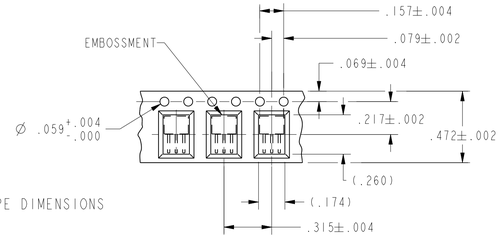

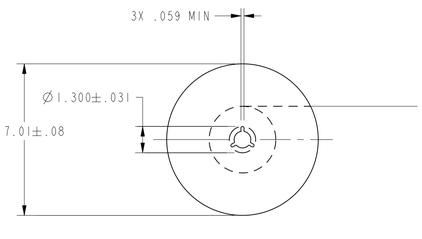

DIRECTION OF FEED FROM REEL

TAPE STYLE "P" 15

NOTES

1. CENTERLINE OF HALL CELL
2. THE + MAGNETIC FLUX IS IN THE DIRECTION SHOWN (THIS ASSUMES THE CONVENTION THAT THE DIRECTION OF THE EXTERNAL FLUX OF A MAGNET IS FROM THE NORTH TO THE SOUTH POLE OF THE MAGNET)
3. THE DEVICE CANNOT BE DAMAGED BY MAGNETIC OVERDRIVE
4. OUTPUT TYPE - RATIOMETRIC
5. LEADS MUST BE ADEQUATELY SUPPORTED DURING ANY FORMING/SHEERING OPERATION TO ASSURE THAT THE LEADS ARE NOT STRESSED WITHIN THE PLASTIC
6. PCB WAVE SOLDERING GUIDELINES ARE AS FOLLOWS: 250°C PEAK FOR 10 S MAX OR 260° C PEAK FOR 5 S MAX.
7. BURRS ARE ALLOWED ONLY IF FULL LENGTH OF LEADS WILL PASS THROUGH Ø.023 HOLE.
8. LEAD REFERENCE DIMENSIONS DO NOT INCLUDE SOLDER THICKNESS
9. DIMENSION REFERS TO THE LOCATION OF LEAD CENTERLINES AS THE EXIT THE PLASTIC PACKAGE
10. SOME COMBINATIONS OF BASIC LISTING AND PACKAGE OPTIONS MAY NOT BE AVAILABLE
11. ABSOLUTE MAXIMUM RATINGS ARE THE EXTREME LIMITS THE DEVICE WILL MOMENTARILY WITHSTAND WITHOUT DAMAGE TO THE DEVICE. ELECTRICAL AND MAGNETIC CHARACTERISTICS ARE NOT GUARANTEED IF THE RATED VOLTAGE AND/OR CURRENTS ARE EXCEEDED NOR WILL THE DEVICE NECESSARILY OPERATE AT ABSOLUTE MAXIMUM RATINGS
12. LEAD STRAIGHTNESS MAY BE DETERIORATED ON SOME UNITS BY BULK PACKAGING. APPLICATIONS HAVING A CRITICAL LEAD STRAIGHTNESS REQUIREMENT SHOULD USE A TAPE PACKAGING OPTION
13. AMMOPACK STYLE "T2" & "T3". 24 SWITCHES BETWEEN FOLDS, SKIP 1 SPACE AT FOLD. MAY BE REFERRED TO AS "FAN FOLD"
14. MOLDED PART DIMENSIONS DO NOT INCLUDE FLASH. FLASH IS LIMITED TO .005 MAX
15. TAPE AND AMMOPACK PER EIA-468
16. POCKET TAPE PER EIA-481

CATALOG LISTING	TAPE STYLE	DIM "L"	DIM "W"	COMMENTS 11
SS495A	NONE	.590	.050	BULK - 1000/BAG
SS495A-T2	T2	.590	.100	5000/BOX
SS495A-T3	T3	.590	.050	5000/BOX
SS495A-S	NONE	.125	.050	BULK - 1000/BAG
SS495A-SP	P	.125	.050	1000/PACKET TAPE AND REEL
SS495A1	NONE	.590	.050	BULK - 1000/BAG
SS495A1-T2	T2	.590	.100	5000/BOX
SS495A1-T3	T3	.590	.050	5000/BOX
SS495A1-S	NONE	.125	.050	BULK - 1000/BAG
SS495A1-SP	P	.125	.050	1000/PACKET TAPE AND REEL
SS495A2	NONE	.590	.050	BULK - 1000/BAG
SS495A2-S	NONE	.125	.050	BULK - 1000/BAG
SS495A2-SP	P	.125	.050	1000/PACKET TAPE AND REEL
SS495A2-T2	T2	.590	.100	5000/BOX
SS495A2-T3	T3	.590	.050	5000/BOX
SS495A-L	NONE	.735	.050	BULK - 1000/BAG
SS495A1-L	NONE	.735	.050	BULK - 1000/BAG
SS495A2-L	NONE	.735	.050	BULK - 1000/BAG
SS495B	NONE	.590	.050	BULK - 1000/BAG
SS495B-T2	T2	.590	.100	5000/BOX
SS495B-T3	T3	.590	.050	5000/BOX
SS495B-S	NONE	.125	.050	BULK - 1000/BAG
SS495B-SP	P	.125	.050	1000/PACKET TAPE AND REEL

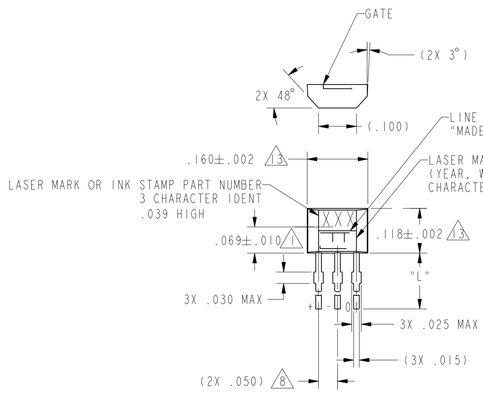

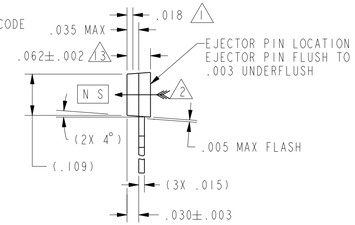

OPTIONAL SURFACE MOUNT LEAD STYLE





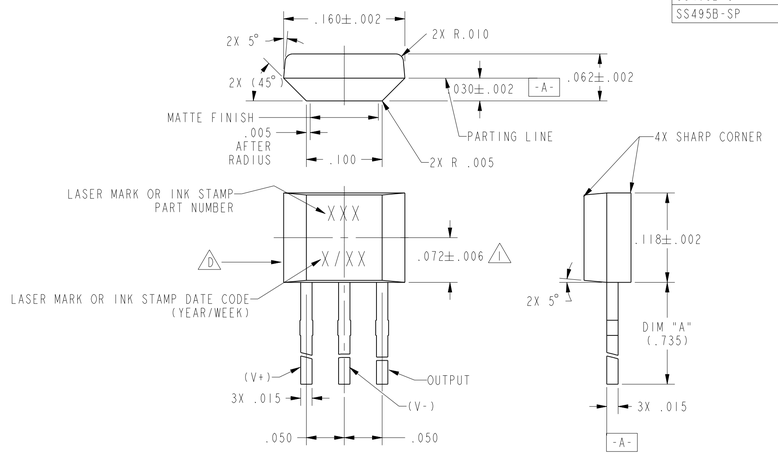

LEAD STYLES L ONLY

SCALE 10:1

CAUTION ELECTROSTATIC SENSITIVE DEVICES DO NOT OPEN OR HANDLE EXCEPT AT A STATIC FREE WORKSTATION

ESD SENSITIVITY: CLASS 3

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE 91929

MICRO SWITCH a Honeywell Division

MINIATURE RATIOMETRIC LINEAR HALL EFFECT SENSOR

CATALOG LISTING

SS495 SERIES CHART 1

THIRD ANGLE PROJECTION

SCALE 5:1

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	+.030
TWO PLACE	(.00)	+.015
THREE PLACE	(.000)	+.005
ANGLES		+2°

WEIGHT

MSS495 SERIES CHART 1 | DRAWING NUMBER 14 | ISSUE | PAGE 1 OF 5 | RELEASE NO. PR-21283 | REPLACES

REVISIONS
C 0034535 PES 26 OCT 97

PTC/CAD 2D | DRAWN C. S. 14 APR 02 | CHECK | SAV 4 APR 02 | CHECK | CHECK | CHECK

CHARACTERISTICS ARE AT Vs=5.00 WITH 4.7K OUTPUT TO MINUS WITH TA= -40°C TO +125°C UNLESS OTHERWISE SPECIFIED

SS495A

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
SENSITIVITY	TA = 25° C	3.00	3.125	3.25	mV/GAUSS
NULL	TA = 25° C	2.425	2.50	2.575	VOLTS
SUPPLY CURRENT	TA = 25° C		7	8.7	mA
OUTPUT CURRENT SOURCE	Vs > 4.5	1mA	1.5mA		
SINK	Vs > 4.5	.6mA	1.5mA		
SINK	Vs > 5.0	1mA	1.5mA		
RESPONSE TIME			3µS		
OUTPUT VOLTAGE SWING					
VOM -	-B APPLIED	.4	.2		VOLTS
VOM +	+B APPLIED	Vs -.4	Vs -.2		VOLTS
B LIMITS FOR LINEAR	-B MAX	-600	-670		GAUSS
OPERATION	+B MAX	+600	+670		GAUSS
Vnull DRIFT	B = 0, TA = 25°C TO 125°C	-.06		+.06	% /° C
Vnull DRIFT	B = 0, TA = -125°C TO +150°C	-.08		+.08	% /° C
SENSITIVITY DRIFT	TA=+25° C TO +150° C	-.01		+.05	% /° C
SENSITIVITY DRIFT	TA=-40° C TO +25° C	0		+.06	% /° C
LINEARITY	B = -600 TO +600	0	-1.0	-1.5	% OF SPAN
SUPPLY VOLTAGE	-40° C TO +125° C	4.5	5.0	10.5	VOLTS
OPERATING TEMP	SEE MAX TEMPERATURE CHART	-40		+150	°C

BLOCK DIAGRAM CURRENT SINKING OR SOURCING OUTPUT

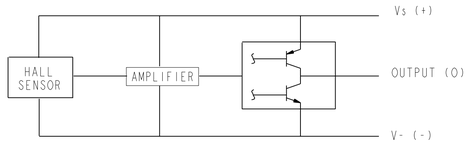

ABSOLUTE MAXIMUM CHARACTERISTICS (10)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN	MAX	UNITS
SUPPLY VOLTAGE	Vcc		-0.5	11	V
OUTPUT VOLTAGE	Vout		-0.5	11	V
OUTPUT CURRENT	Iout	SOURCE OR SINK		10	mA
TEMPERATURE	TA	OPERATING	-55	150	°C
	Ts	STORAGE (Vcc=0)	-55	165	°C

NULL SHIFT VERSUS TEMPERATURE

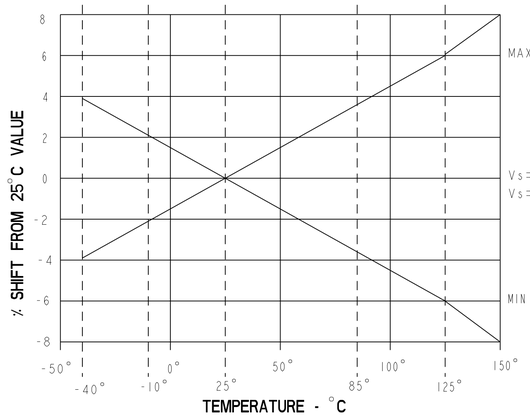

RATIO OF Vnull TO Vs

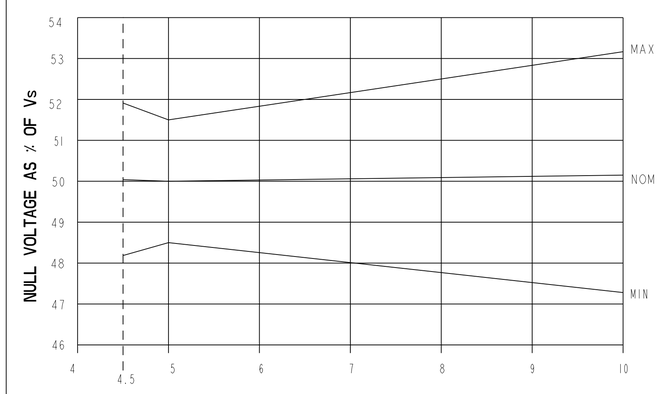

SENSITIVITY SHIFT VERSUS TEMPERATURE

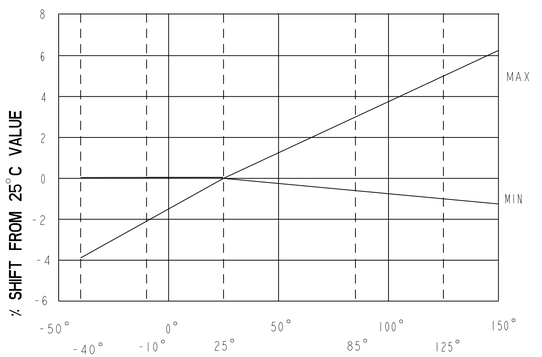

SENSITIVITY/V VERSUS Vs
(mV/GAUSS/VOLT)

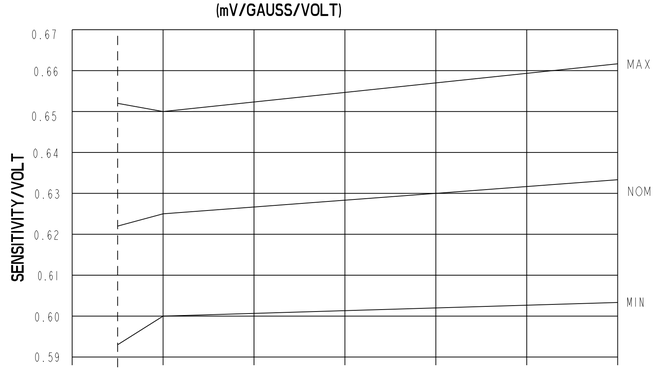

LINEARITY VERSUS Vs
END POINT OF SPAN METHOD

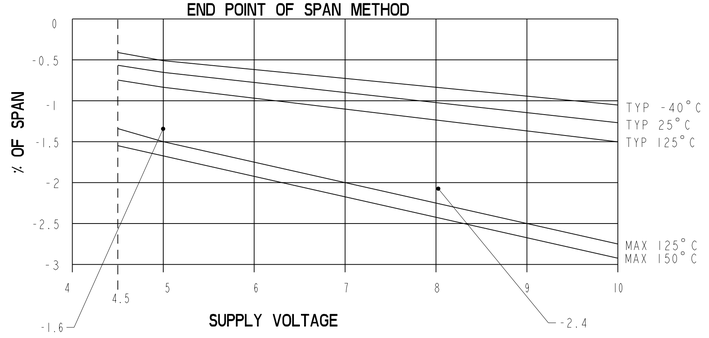

TRANSFER CHARACTERISTICS AT Vs=5.0 VDC

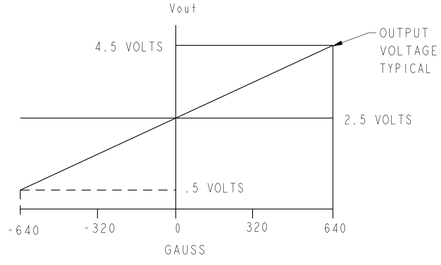

SUPPLY CURRENT VERSUS TEMPERATURE

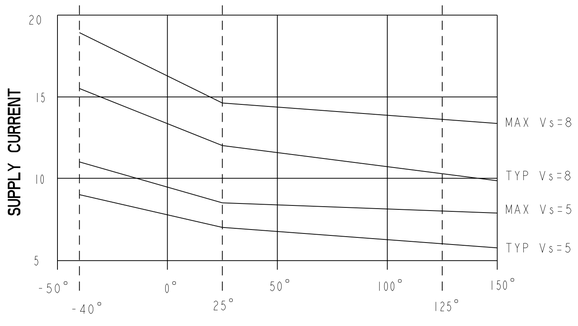

TYPICAL FREQUENCY RESPONSE
RL=33k PARALLEL WITH 100pF

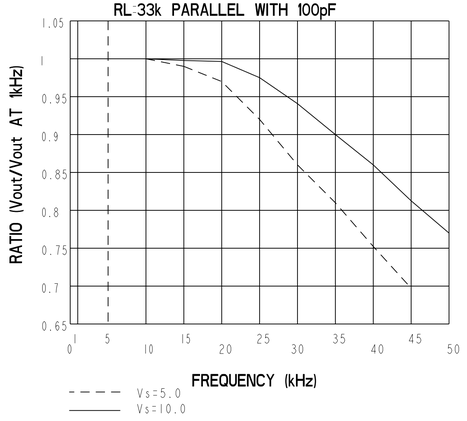

MAXIMUM ALLOWABLE AMBIENT TEMPERATURE

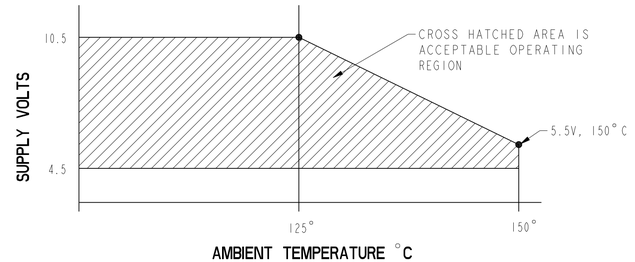

CAUTION ELECTROSTATIC SENSITIVE DEVICES DO NOT OPEN OR HANDLE EXCEPT AT A STATIC FREE WORKSTATION

ESD SENSITIVITY: CLASS 3

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE #1929

MICRO SWITCH a Honeywell Division

MINIATURE RATIOMETRIC LINEAR HALL EFFECT SENSOR

CATALOG LISTING: SS495 SERIES CHART 1

THIRD ANGLE PROJECTION

SCALE NONE

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0) +.030
TWO PLACE	(.00) +.015
THREE PLACE	(.000) +.005
ANGLES	+2°

WEIGHT

M SS495 SERIES CHART 1 | DRAWING NUMBER 14 | ISSUE | PAGE 2 OF 5 | RELEASE NO. PR-1283 | REPLACES -

REVISIONS
C 0034535 PRS 26 OCT 07

PTC/CAD 20 | DRAWN C S L 4 APR 02 | CHECK | SAV 4 APR 02 | CHECK | CHECK

CHARACTERISTICS ARE AT Vs=5.00 WITH 4.7K OUTPUT TO MINUS WITH TA= -40°C TO +125°C UNLESS OTHERWISE SPECIFIED

SS495A1

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
SENSITIVITY	TA = 25° C	3.031	3.125	3.219	mV/GAUSS
NULL	TA = 25° C	2.425	2.50	2.575	VOLTS
SUPPLY CURRENT	TA = 25° C		7	8.7	mA
OUTPUT CURRENT SOURCE	Vs > 4.5	1mA	1.5mA		
SINK	Vs > 4.5	.6mA	1.5mA		
SINK	Vs > 5.0	1mA	1.5mA		
RESPONSE TIME			3µS		
OUTPUT VOLTAGE SWING					
VOM -	-B APPLIED	.4	.2		VOLTS
VOM +	+B APPLIED	Vs -.4	Vs -.2		VOLTS
B LIMITS FOR LINEAR	-B MAX	-600	-670		GAUSS
OPERATION	+B MAX	+600	+670		GAUSS
Vnull DRIFT	B = 0, TA = 25°C TO 125°C	-.04		+.04	% / °C
Vnull DRIFT	B = 0, TA = +125°C TO +150°C	-.08		+.08	% /°C
SENSITIVITY DRIFT	TA=+25° C TO +150° C	-.01		+.05	% /°C
SENSITIVITY DRIFT	TA=-40° C TO +25° C	0		+.06	% /°C
LINEARITY	B = -600 TO +600	0	-1.0	-1.5	% OF SPAN
SUPPLY VOLTAGE	-40°C TO +125°C	4.5	5.0	10.5	VOLTS
OPERATING TEMP	SEE MAX TEMPERATURE CHART	-40		+150	° C

BLOCK DIAGRAM CURRENT SINKING OR SOURCING OUTPUT

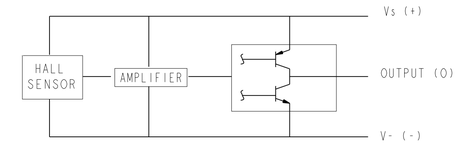

ABSOLUTE MAXIMUM CHARACTERISTICS ⚠10

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN	MAX	UNITS
SUPPLY VOLTAGE	Vcc		-0.5	11	V
OUTPUT VOLTAGE	Vout		-0.5	11	V
OUTPUT CURRENT	Iout	SOURCE OR SINK		10	mA
TEMPERATURE	TA	OPERATING	-55	150	°C
	Ts	STORAGE (Vcc=0)	-55	165	°C

NULL SHIFT VERSUS TEMPERATURE

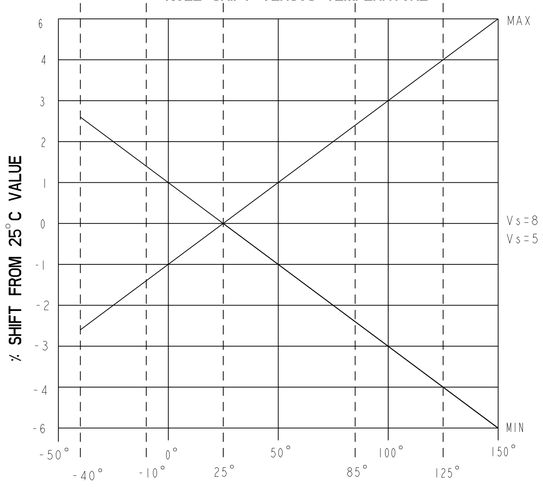

RATIO OF Vnull TO Vs

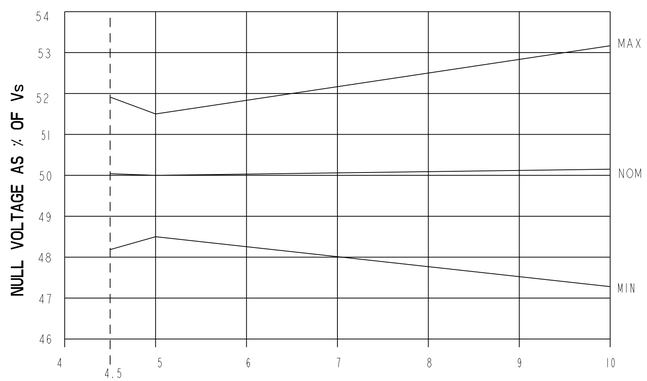

SENSITIVITY SHIFT VERSUS TEMPERATURE

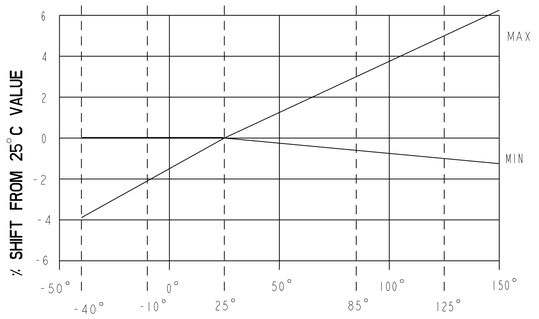

SENSITIVITY/V VERSUS Vs (mV/GAUSS/VOLT)

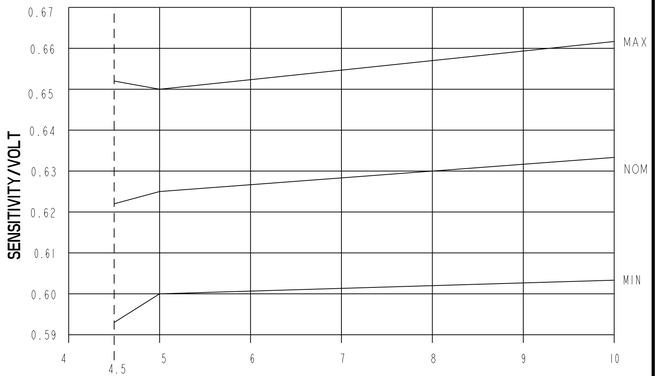

LINEARITY VERSUS Vs END POINT OF SPAN METHOD

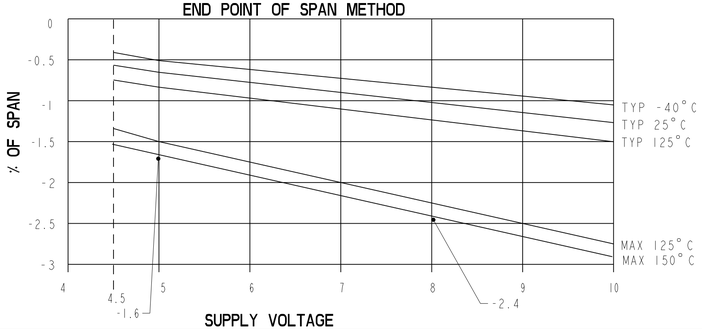

TRANSFER CHARACTERISTICS AT Vs = 5.0 VDC

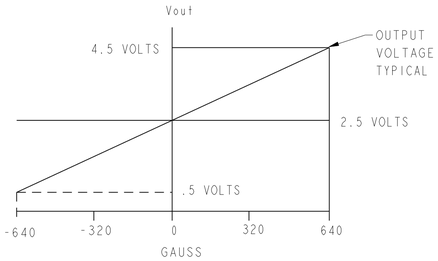

SUPPLY CURRENT VERSUS TEMPERATURE

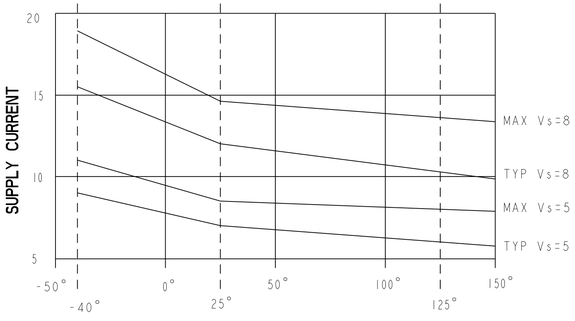

TYPICAL FREQUENCY RESPONSE RL=33k PARALLEL WITH 100pF

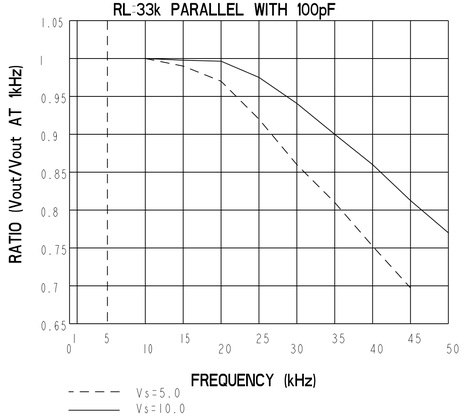

MAXIMUM ALLOWABLE AMBIENT TEMPERATURE

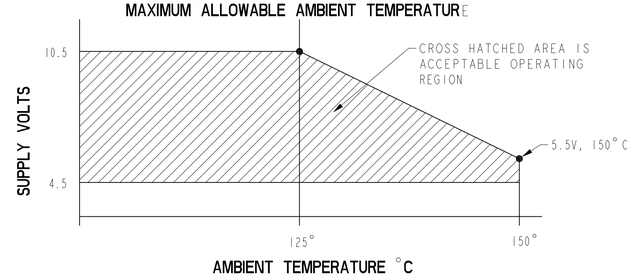

CAUTION ELECTROSTATIC SENSITIVE DEVICES DO NOT OPEN OR HANDLE EXCEPT AT A STATIC FREE WORKSTATION

ESD SENSITIVITY: CLASS 3

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE 91929

MICRO SWITCH a Honeywell Division

MINIATURE RATIOMETRIC LINEAR HALL EFFECT SENSOR

CATALOG LISTING: SS495 SERIES CHART 1

THIRD ANGLE PROJECTION

SCALE NONE

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	+.030
TWO PLACE	(.00)	+.015
THREE PLACE	(.000)	+.005
ANGLES		+2°

WEIGHT

M SS495 SERIES CHART 1 | DRAWING NUMBER 14 | ISSUE | PAGE 3 OF 5 | RELEASE NO. PR-21283 | REPLACES -

REVISIONS: C 0034535 PRS 26 OCT 07

DRAWN C S L 15 APR 02 | CHECK | SAV 5 APR 02 | CHECK | CHECK | PTC/CAD 2D

CHARACTERISTICS ARE AT Vs=5.00 WITH 4.7K OUTPUT TO MINUS WITH TA= -40°C TO +125°C UNLESS OTHERWISE SPECIFIED

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
SENSITIVITY	TA = 25°C	2.969	3.125	3.281	mV/GAUSS
NULL	TA = 25°C	2.400	2.50	2.600	VOLTS
SUPPLY CURRENT	TA = 25°C		7	8.7	mA
OUTPUT CURRENT SOURCE	Vs > 4.5	1mA	1.5mA		
SINK	Vs > 4.5	.6mA	1.5mA		
SINK	Vs > 5.0	1mA	1.5mA		
RESPONSE TIME			3µS		
OUTPUT VOLTAGE SWING					
VOM -	-B APPLIED	.4	.2		VOLTS
VOM +	+B APPLIED	Vs -.4	Vs -.2		VOLTS
B LIMITS FOR LINEAR	-B MAX	-600	-670		GAUSS
OPERATION	+B MAX	+600	+670		GAUSS
Vnull DRIFT	B = 0, TA = 25°C TO 125°C	-.07		+.07	% /°C
Vnull DRIFT	B = 0, TA = +125°C TO +150°C	-.08		+.08	% /°C
SENSITIVITY DRIFT	TA=+25°C TO +150°C	-.02		+.06	% /°C
SENSITIVITY DRIFT	TA=-40°C TO +25°C	-.01		+.07	% /°C
LINEARITY	B = -600 TO +600	0	-1.0	-1.5	% OF SPAN
SUPPLY VOLTAGE	-40°C TO +125°C	4.5	5.0	10.5	VOLTS
OPERATING TEMP	SEE MAX TEMPERATURE CHART	-40		+150	°C

BLOCK DIAGRAM CURRENT SINKING OR SOURCING OUTPUT

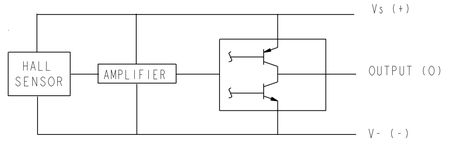

ABSOLUTE MAXIMUM CHARACTERISTICS (10)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN	MAX	UNITS
SUPPLY VOLTAGE	Vcc		-0.5	11	V
OUTPUT VOLTAGE	Vout		-0.5	11	V
OUTPUT CURRENT	Iout	SOURCE OR SINK		10	mA
TEMPERATURE	TA	OPERATING	-55	150	°C
	Ts	STORAGE (Vcc=0)	-55	165	°C

NULL SHIFT VERSUS TEMPERATURE

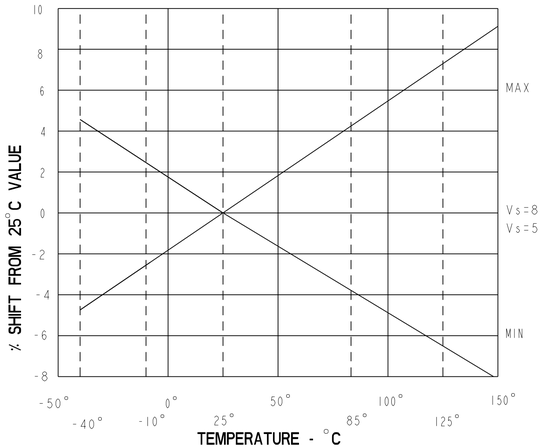

RATIO OF Vnull TO Vs

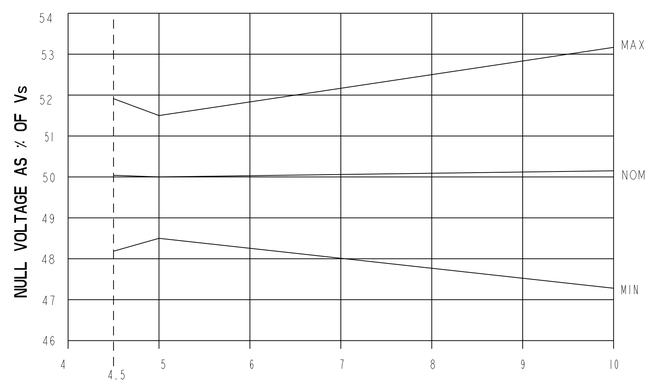

SENSITIVITY SHIFT VERSUS TEMPERATURE

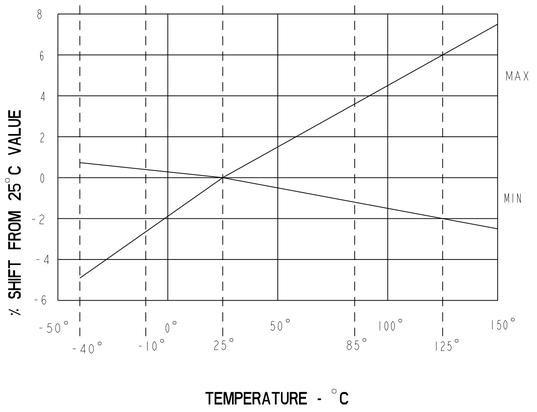

SENSITIVITY/V VERSUS Vs
(mV/GAUSS/VOLT)

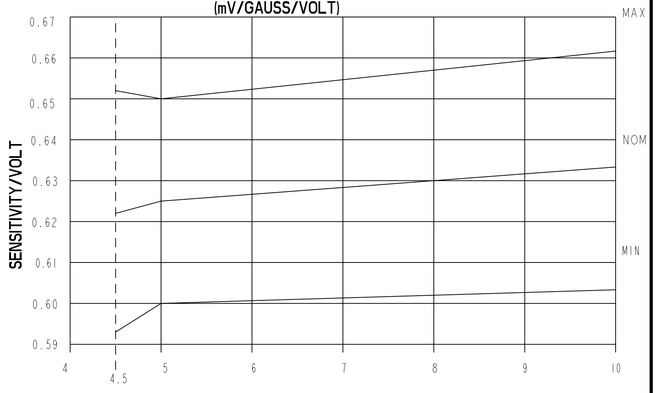

LINEARITY VERSUS Vs
END POINT OF SPAN METHOD

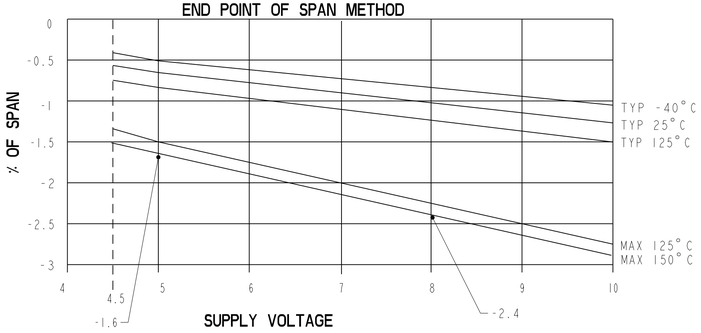

TRANSFER CHARACTERISTICS AT Vs = 5.0 VDC

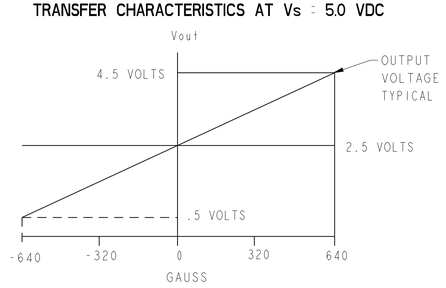

SUPPLY CURRENT VERSUS TEMPERATURE

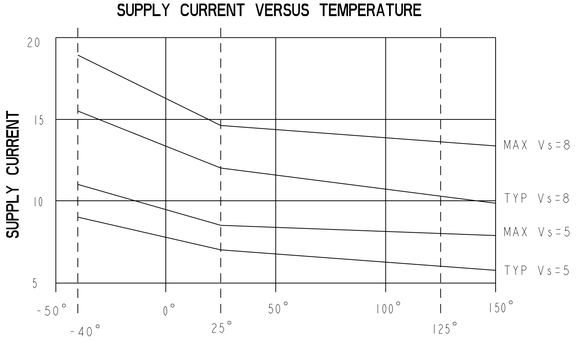

TYPICAL FREQUENCY RESPONSE
RL = 33k PARALLEL WITH 100pF

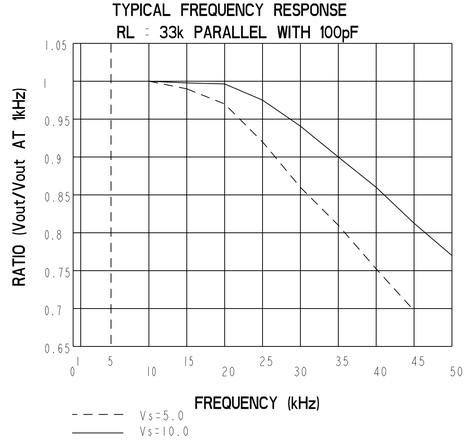

MAXIMUM ALLOWABLE AMBIENT TEMPERATURE

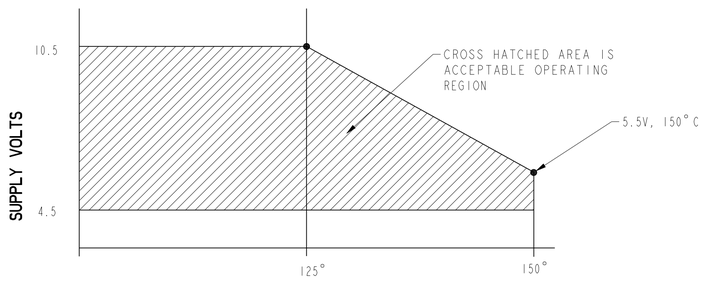

CAUTION
ELECTROSTATIC SENSITIVE DEVICES
DO NOT OPEN OR HANDLE EXCEPT AT A STATIC FREE WORKSTATION
ESD SENSITIVITY: CLASS 3

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE 91929		CATALOG LISTING
MICRO SWITCH a Honeywell Division	MINIATURE RATIOMETRIC LINEAR HALL EFFECT SENSOR	SS495 SERIES CHART 1

THIRD ANGLE PROJECTION

SCALE NONE

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0) +.030
TWO PLACE	(.00) +.015
THREE PLACE	(.000) +.005
ANGLES	+2°

WEIGHT

MSS495 SERIES CHART 1 | PAGE 4 OF 5 | RELEASE NO. PR-22532 | REPLACES -

DRAWING NUMBER 14 | ISSUE | CHECK

REVISIONS
C 0034535 PC 26 OCT 07

DRAWN C S L 15 APR 02 | CHECK SAV 5 APR 02 | CHECK | CHECK | CHECK | PTC/CAD 2D

CHARACTERISTICS ARE AT Vs=5.00 WITH 4.7K OUTPUT TO MINUS WITH TA= -40°C TO +125°C UNLESS OTHERWISE SPECIFIED

SS495B

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
SENSITIVITY	TA = 25°C	2.875	3.125	3.375	mV/GAUSS
NULL	TA = 25°C	2.35	2.50	2.650	VOLTS
SUPPLY CURRENT	TA = 25°C		7	8.7	mA
OUTPUT CURRENT SOURCE	Vs > 4.5	1mA	1.5mA		
SINK	Vs > 4.5	.6mA	1.5mA		
SINK	Vs > 5.0	1mA	1.5mA		
RESPONSE TIME			3µS		
OUTPUT VOLTAGE SWING					
VOM -	-B APPLIED	.4	.2		VOLTS
VOM +	+B APPLIED	Vs -.4	Vs -.2		VOLTS
B LIMITS FOR LINEAR	-B MAX	-600	-670		GAUSS
OPERATION	+B MAX	+600	+670		GAUSS
Vnull DRIFT	B = 0, TA = 25°C TO 125°C	-.08		+.08	% /°C
Vnull DRIFT	B = 0, TA = +125°C TO +150°C	-.08		+.08	% /°C
SENSITIVITY DRIFT	TA=+25°C TO +150°C	-.02		+.08	% /°C
SENSITIVITY DRIFT	TA=-40°C TO +25°C	-.02		+.08	% /°C
LINEARITY	B = -600 TO +600	0	-1.0	-1.5	% OF SPAN
SUPPLY VOLTAGE	-40°C TO +125°C	4.5	5.0	10.5	VOLTS
OPERATING TEMP	SEE MAX TEMPERATURE CHART	-40		+150	°C

BLOCK DIAGRAM CURRENT SINKING OR SOURCING OUTPUT

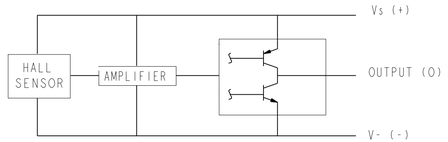

ABSOLUTE MAXIMUM CHARACTERISTICS (10)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN	MAX	UNITS
SUPPLY VOLTAGE	Vcc		-0.5	11	V
OUTPUT VOLTAGE	Vout		-0.5	11	V
OUTPUT CURRENT	Iout	SOURCE OR SINK		10	mA
TEMPERATURE	TA	OPERATING	-55	150	°C
	Ts	STORAGE (Vcc=0)	-55	165	°C

NULL SHIFT VERSUS TEMPERATURE

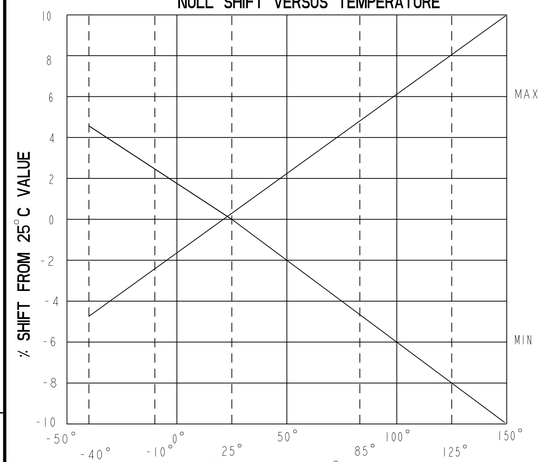

RATIO OF Vnull TO Vs

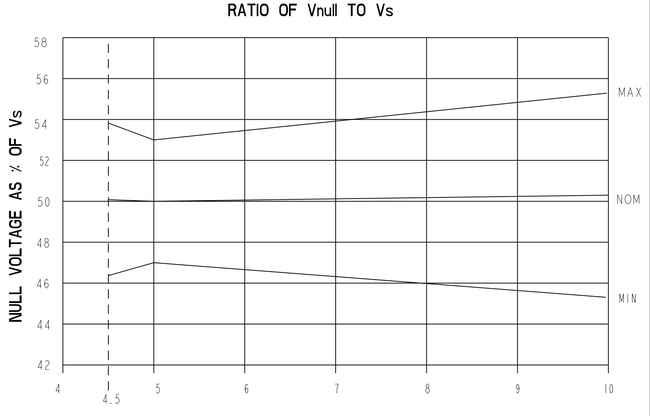

SENSITIVITY SHIFT VERSUS TEMPERATURE

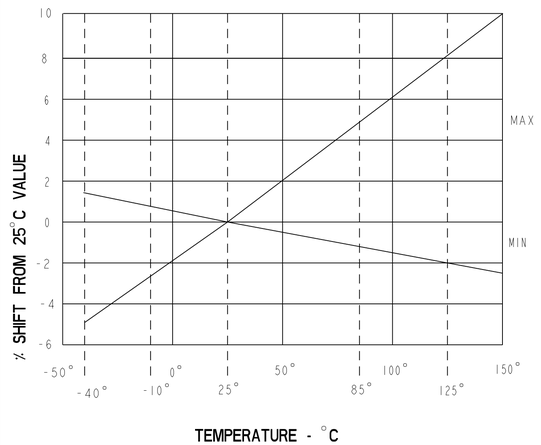

SENSITIVITY/V VERSUS Vs
(mV/GAUSS/VOLT)

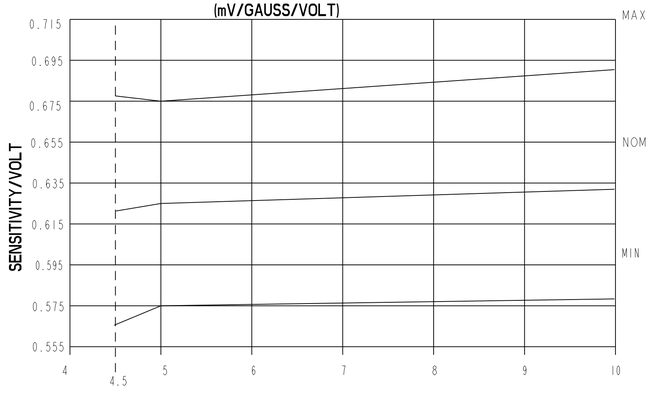

LINEARITY VERSUS Vs
END POINT OF SPAN METHOD

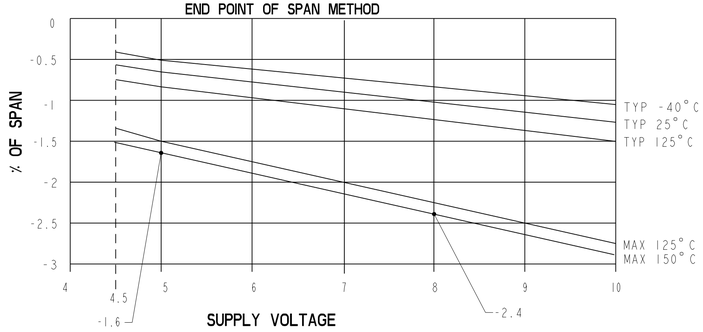

TRANSFER CHARACTERISTICS AT Vs = 5.0 VDC

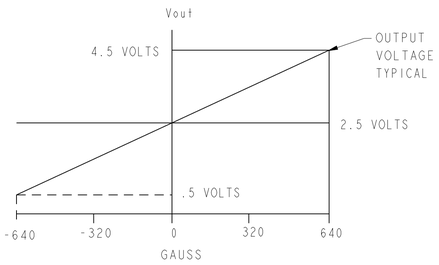

SUPPLY CURRENT VERSUS TEMPERATURE

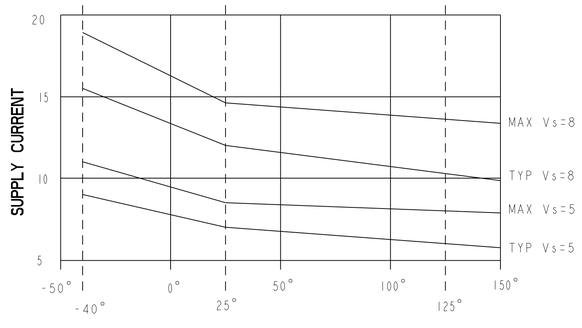

TYPICAL FREQUENCY RESPONSE
RL = 33k PARALLEL WITH 100pF

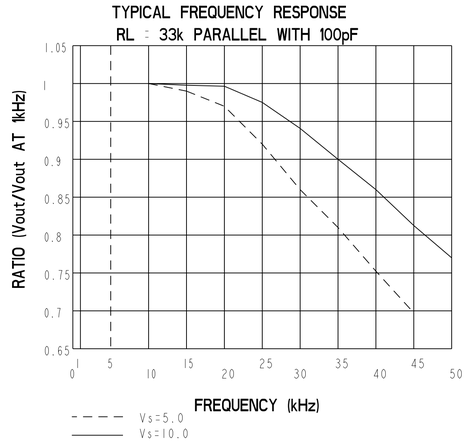

MAXIMUM ALLOWABLE AMBIENT TEMPERATURE

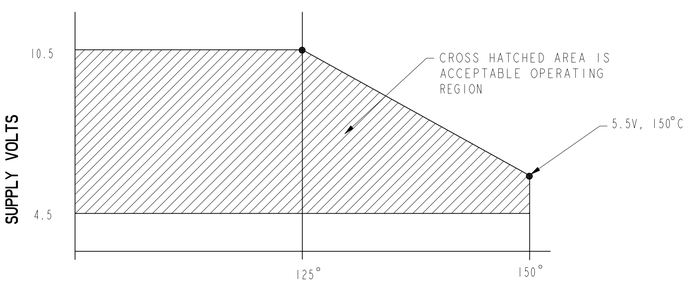

CAUTION ELECTROSTATIC SENSITIVE DEVICES DO NOT OPEN OR HANDLE EXCEPT AT A STATIC FREE WORKSTATION

ESD SENSITIVITY: CLASS 3

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE 91929

MICRO SWITCH a Honeywell Division

MINIATURE RATIOMETRIC LINEAR HALL EFFECT SENSOR

CATALOG LISTING: SS495 SERIES CHART 1

THIRD ANGLE PROJECTION

SCALE NONE

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	+.030
TWO PLACE	(.00)	+.015
THREE PLACE	(.000)	+.005
ANGLES		+2°

WEIGHT

M SS495 SERIES CHART 1

M SS495 SERIES CHART 1 | PAGE 5 OF 5 | RELEASE NO. PR 24063 | DRAWING NUMBER 14 | ISSUE | CHECK | REVISIONS | C 0034535 PRI 26 OCT 07 | CHECK | SAV 5 APR 02 | CHECK | 5 APR 02 | DRAWN C S L | PTC/CAD 2D | REPLACES

LifeElectronics
Живое партнерство

ООО «ЛайфЭлектроникс» **“LifeElectronics” LLC**

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru