

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0878240004](#)
Status: **Active**
Description: 1.27mm (.050") Signal Pitch, 0.80mm (.031") SCSI Pitch, 1.27mm (.050") Power Pitch
SAS Receptacle, Vertical, Surface Mount, with Surface Mount Solder Tab, 4.6mm
(.180") PCB Thickness, 29 Circuits, with Cap, Tray, Leadfree

Documents:

[3D Model](#) [Product Specification PS-87824-029 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


CSA LR19980
UL E29179

General

Product Family I/O Connectors
Series [87824](#)
Application Board-to-Board
Comments With Pick-and-Place Cap
Component Type Receptacle
Product Name SAS
Type N/A

Physical

Boot Color N/A
Circuits (Loaded) 29
Circuits (maximum) 29
Circuits Detail Signal 7, SCSI 7, Power 15
Color - Resin Black
Durability (mating cycles max) 500
Flammability 94V-0
Gender Female
Keying to Mating Part Yes
Lock to Mating Part None
Material - Metal Brass, Phosphor Bronze
Material - Plating Mating Gold
Material - Plating Termination Tin
Number of Rows 2
Orientation Vertical
PCB Locator Yes
PCB Retention Yes
PCB Thickness Recommended (in) 0.063 In
PCB Thickness Recommended (mm) 1.60 mm
Packaging Type Tray
Panel Mount Yes
Pitch - Mating Interface (in) 0.031 In, 0.050 In
Pitch - Mating Interface (mm) 0.80 mm, 1.27 mm
Pitch - Term. Interface (in) 0.031 In, 0.050 In
Pitch - Term. Interface (mm) 0.80 mm, 1.27 mm
Plating min: Mating (µin) 30
Plating min: Mating (µm) 0.76
Plating min: Termination (µin) 102
Plating min: Termination (µm) 2.54
Polarized to Mating Part Yes
Polarized to PCB Yes
Surface Mount Compatible (SMC) N/A

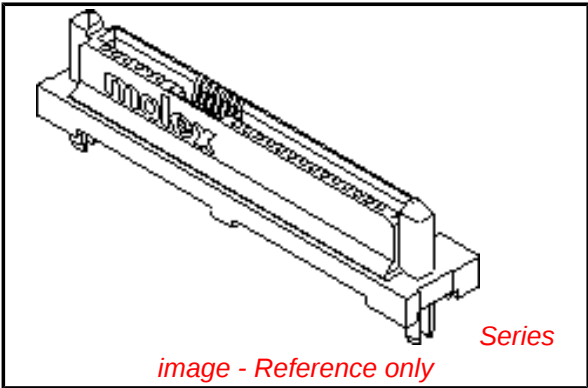

EU RoHS

**ELV and RoHS
Compliant**

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Halogen-Free

**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

China RoHS



Search Parts in this Series

[87824Series](#)





Mates With

SFF-8482 Hard Disk Drive and Backplane
Plug. [87679](#) Serial ATA Device Plug with
Latch. [87703](#) Serial ATA Device Plug
without Jumper. [87799](#) Serial ATA Device
Plug with Jumper

Temperature Range - Operating	0°C to +55°C
Termination Interface: Style	Surface Mount
Waterproof / Dustproof	No
Wire Size AWG	N/A
Electrical	
Current - Maximum per Contact	1.5A
Shielded	No
Voltage - Maximum	30V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	10
Lead-free Process Capability	Reflow Capable (SMT only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	260
Material Info	
Reference - Drawing Numbers	
Product Specification	PS-87824-029
Sales Drawing	SD-87824-031



This document was generated on 04/09/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

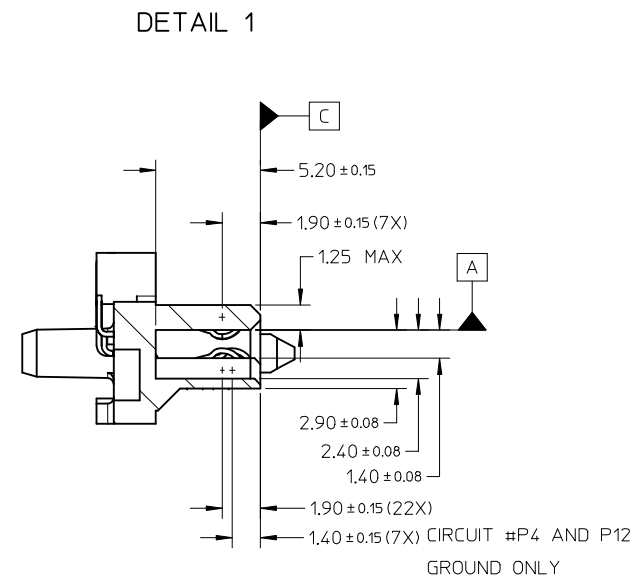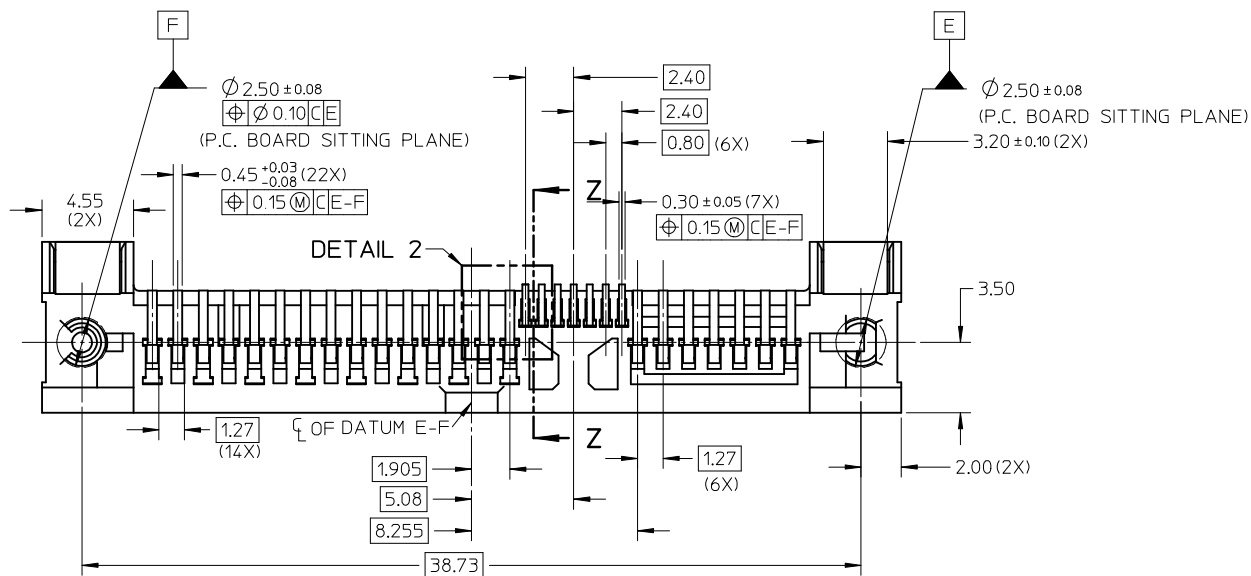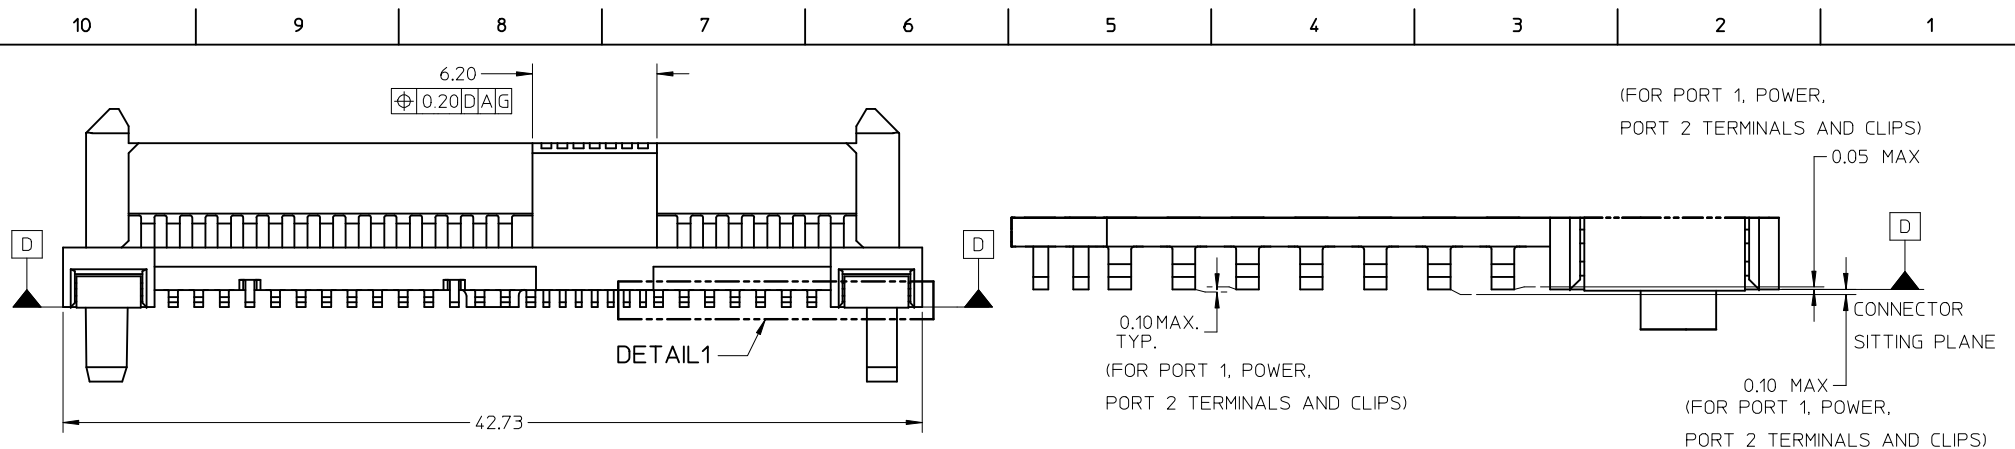


REVISED		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION	
EC NO.	DATE	DRW	CHK	APP	REV	mm	INCH	NTS	METRIC	MM ONLY	METRIC	MM ONLY	METRIC
52009-0197	2008/09/15	KHLIM	KHLIM	BOKOK	1	± ---	± ---	4 PLACES	± ---	± ---	4 PLACES	± ---	± ---
52009-0197	2008/09/16	KHLIM	KHLIM	BOKOK	2	± ---	± ---	3 PLACES	± ---	± ---	3 PLACES	± ---	± ---
52009-0197	2008/09/16	KHLIM	KHLIM	BOKOK	3	± 0.20	± ---	2 PLACES	± 0.20	± ---	2 PLACES	± 0.20	± ---
52009-0197	2008/09/16	KHLIM	KHLIM	BOKOK	4	± ---	± ---	1 PLACE	± ---	± ---	1 PLACE	± ---	± ---
ANGULAR ± 3 °						DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		SHEET NO. 2 OF 4	

PART NO	PACKAGING	QUANTITY	PICK & PLACE CAP	DIM S (2X) PEG HEIGHT	PCB THICKNESS
87824-0004	TRAY	50/TRAY	YES	3.70	4.57±0.10
87824-0008	TRAY	30/TRAY	NO	3.70	4.57±0.10
87824-0010	TAPE AND REEL	350/REEL	YES	3.70	4.57±0.10
87824-0013	TRAY	50/TRAY	YES	2.00	2.54±0.10
87824-0014	TRAY	30/TRAY	NO	2.00	2.54±0.10
87824-0015	TAPE AND REEL	350/REEL	YES	2.00	2.54±0.10

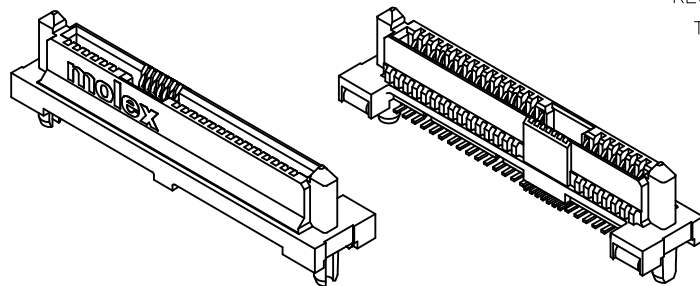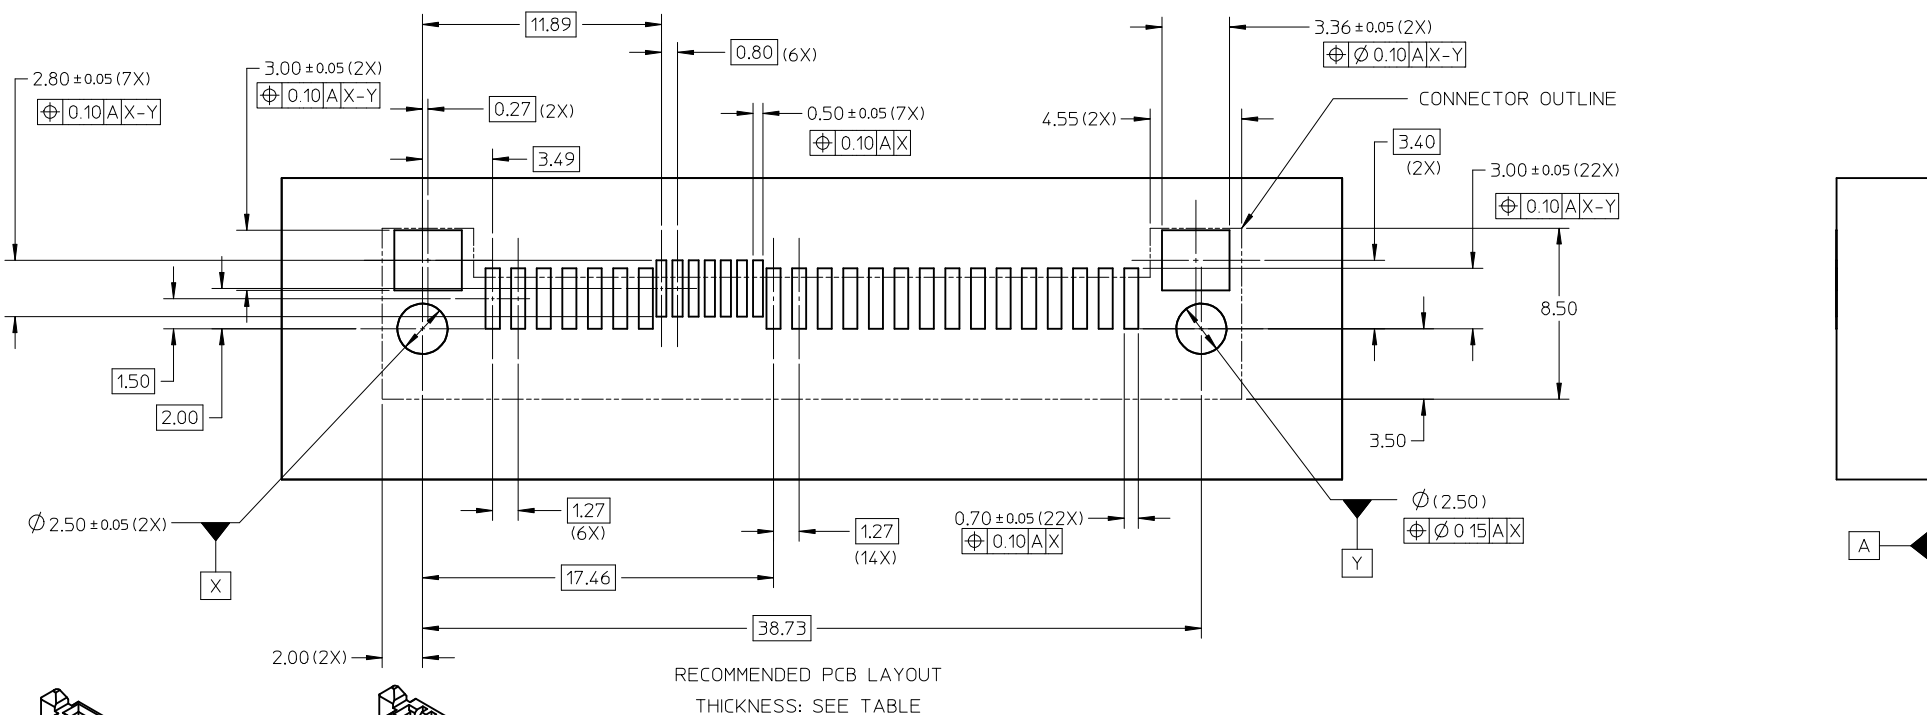


REVISED EC NO: S2009-0197 DRWN:KHLIM CHKD:CGOH APPR:BOKOK A	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ◁=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	TITLE SERIAL ATTACH SCSI STD HEIGHT BACKPLANE SMT RECEPT (WITH SOLDER TAB)	MOLEX INCORPORATED	DOCUMENT NO. SD-87824-031	SHEET NO. 3 OF 4
				mm	INCH	DRAWN BY KHLIM	DATE 2005/07/07						
			4 PLACES	± ---	± ---	CHECKED BY SHFONG	DATE 2005/07/15						
			3 PLACES	± ---	± ---	APPROVED BY SKTOH	DATE 2005/07/15						
			2 PLACES	± 0.20	± ---	MATERIAL NO. SEE TABLE							
			1 PLACE	± ---	± ---	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							
			ANGULAR ± 3 °		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

TAPE AND REEL PACKAGING

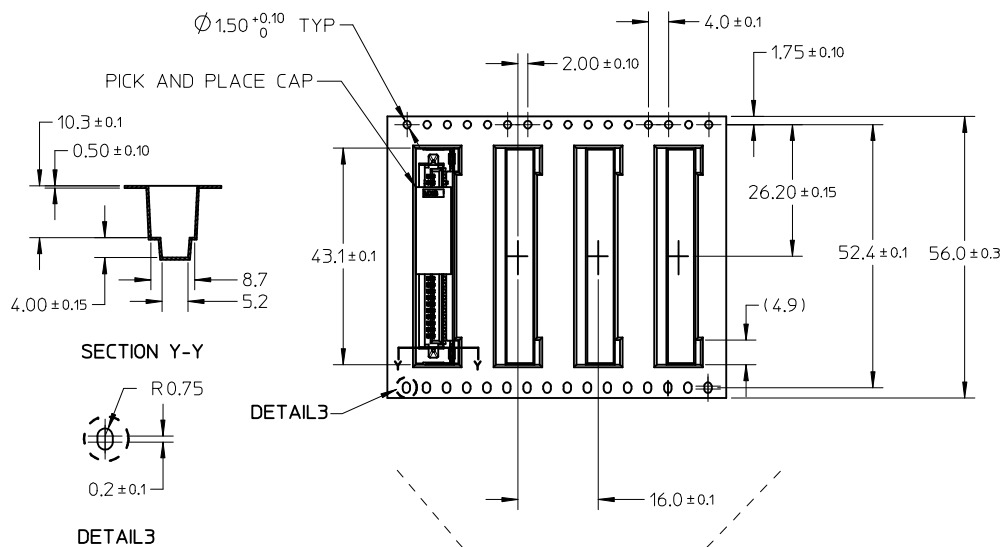


NOTES:

1. LEADER AND TRAILER TAPE

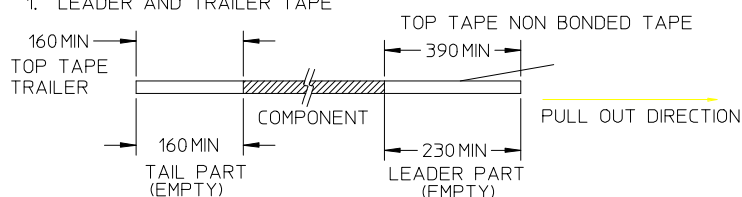


2. PEELING OFF FORCE OF THE TOP TAPE: 80gf MAX.
(PEELING DIRECTION AS SHOWN IN FOLLOWING FIGURE)




3. PACKAGING QTY: 350 PCS/REEL
4. PACKAGING STANDARD IS AS PER EIA-481.
5. CONNECTOR COMES WITH PICK AND PLACE CAP.

TRAY PACKAGING

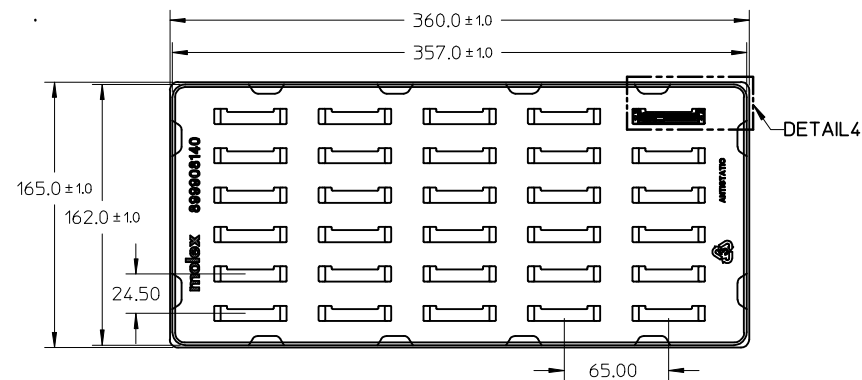

NOTES:

1. PACKAGING QTY: 30PCS/TRAY
2. NO PICK AND PLACE CAP

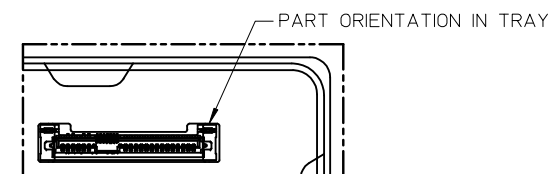

DETAIL4

REVISED	EC NO: S2009-0197	2008/09/15	2008/09/16	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE	
	DRW:KHLIM						MM ONLY	NTS	METRIC		PROJECTION	
	CHKD:CGOH						DRAWN BY	DATE	TITLE			
	APPR:BOBOK											
	A											
			</									

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru