


### ESE24 Detector Switches

Type: **ESE24**

Bidirectional operation, midpoint auto-return Type

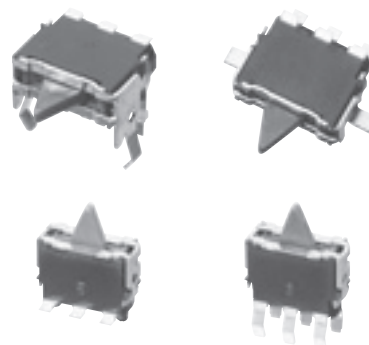


#### ■ Features

- A lever-type detector switch with high reliability using sliding mechanical contacts
- Long over-travel (through-operation available)
- Used as an operation switch (an input device)

#### ■ Recommended Applications

- Detection of media in portable electronic equipment (CD-ROM, DVD, Digital still cameras, etc.)
- Operating switches for other electronic equipment.

#### ■ Explanation of Part Number

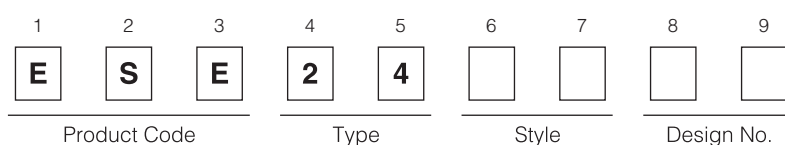

| 6th & 7th | Mounting Method & Style              |
|-----------|--------------------------------------|
| SV        | Vertical type for wave soldering     |
| SH        | Horizontal type for wave soldering   |
| MV        | Vertical type for reflow soldering   |
| MH        | Horizontal type for reflow soldering |

#### ■ Specifications

|                                 |                                                                                                                                                                                                              |                                                      |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|
| Rating                          | 50 $\mu$ A 3 V DC to 10 mA 5 V DC (Resistive load)                                                                                                                                                           |                                                      |
| Contact Resistance              | 500 m $\Omega$ max. (Initial)                                                                                                                                                                                |                                                      |
| Insulation Resistance           | 100 M $\Omega$ min. (at 100 V DC for 1 minute)                                                                                                                                                               |                                                      |
| Dielectric Withstanding Voltage | 100 V AC (50 Hz or 60 Hz) for 1 minute                                                                                                                                                                       |                                                      |
| Operating Force                 | 350 mN max.                                                                                                                                                                                                  |                                                      |
| Mounting Height                 | <ul style="list-style-type: none"> <li>· ESE24SV Type 5.6 mm</li> <li>· ESE24SH Type 4.65 mm</li> <li>· ESE24MV Type 5.6 mm</li> <li>· ESE24MH Type 3.0 mm</li> </ul>                                        |                                                      |
| Poles and Throws                | 1-pole 2-throws (OFF at midpoint)                                                                                                                                                                            |                                                      |
| Full Travel (Pushing distance)  | <ul style="list-style-type: none"> <li>· ESE24SV Type 6.1 mm (2.45 mm)</li> <li>· ESE24SH Type 2.6 mm (2.45 mm)</li> <li>· ESE24MV Type 6.1 mm (2.45 mm)</li> <li>· ESE24MH Type 1.4 mm (2.45 mm)</li> </ul> |                                                      |
| Operating Life                  | 50,000 cycles min.                                                                                                                                                                                           |                                                      |
| Temperature Range               | -10 $^{\circ}$ C to +70 $^{\circ}$ C (Standard), -40 $^{\circ}$ C to +85 $^{\circ}$ C (Automotive)                                                                                                           |                                                      |
| Heat Resistance                 | +80 $^{\circ}$ C for 96 hours                                                                                                                                                                                |                                                      |
| Low Temperature Resistance      | -25 $^{\circ}$ C for 96 hours                                                                                                                                                                                |                                                      |
| Humidity Resistance             | +40 $^{\circ}$ C 90 % to 95 % RH for 96 hours                                                                                                                                                                |                                                      |
| Minimum Quantity/Packing Unit   | ESE24MH, MV, SV, SH                                                                                                                                                                                          | 200 pcs. Polyethylene Bag (Bulk)* <sup>1</sup>       |
|                                 | ESE24MH□T                                                                                                                                                                                                    | 1,000 pcs. Embossed Taping (Reel Pack)* <sup>2</sup> |
|                                 | ESE24MV□T                                                                                                                                                                                                    | 500 pcs. Embossed Taping (Reel Pack)                 |
| Quantity/Carton                 | ESE24MH, MV, SV, SH                                                                                                                                                                                          | 10,000 pcs. Polyethylene Bag (Bulk)                  |
|                                 | ESE24MH□T                                                                                                                                                                                                    | 6,000 pcs. Embossed Taping (Reel Pack)               |
|                                 | ESE24MV□T                                                                                                                                                                                                    | 3,000 pcs. Embossed Taping (Reel Pack)               |

\*1 ESE24SH type: 160 pcs. (Polyethylene Bag), 8,000 pcs. (Reel Pack)  
 \*2 ESE24SV, ESE24SH are excluded

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.  
 Should a safety concern arise regarding this product, please be sure to contact us immediately.


## ■ Dimensions in mm (not to scale)

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>No. 1</b> ESE24SV3 Vertical type for wave soldering<br/>1-pole 2-throws</p> <p>7.05 to 7.55 (Pushing position)<br/>4.45 (Rotative center)</p> <p>PWB mounting hole for reference<br/>(Pitch tolerance: <math>\pm 0.05</math>)<br/>(PWB thickness=0.8)</p> <p>6-<math>\phi 1.10^{+0.05}_0</math></p> <p>7.5<br/>4.3<br/>2.7<br/>2.9<br/>2.5<br/>2.5<br/>1.0<br/>3.0<br/>1.0<br/>2.9<br/>3.8<br/>0.3<br/>1.4<br/>2.7<br/>5.6<br/>0.2<br/>6.1 (Full position)<br/>8.05 (ON starting position)<br/>8.55<br/>29°24'<br/>68°26'</p>                                     | <p><b>No. 2</b> ESE24SH1 Horizontal type for wave soldering<br/>1-pole 2-throws</p> <p>8.4<br/>7.25<br/>2.5<br/>2.5<br/>1.6<br/>2.55<br/>2.75<br/>3.55 to 4.05 (Pushing position)<br/>0.95 (Rotative center)</p> <p>PWB mounting hole for reference<br/>(Pitch tolerance: <math>\pm 0.05</math>)<br/>(PWB thickness=0.8)</p> <p>2-<math>\phi 1.20^{+0.05}_0</math><br/>3-<math>\phi 1.10^{+0.05}_0</math></p> <p>7.5<br/>4.3<br/>2.7<br/>2.6 (Full position)<br/>4.55 (ON starting position)<br/>5.05<br/>3.5<br/>4.65<br/>3.65<br/>1.0<br/>3.0<br/>1.65<br/>2.1<br/>10.2<br/>29°24'<br/>68°26'</p>                                                                                                               |
| <p><b>No. 3</b> ESE24MV1 Vertical type for reflow soldering<br/>1-pole 2-throws<br/>ESE24MV1T (Embossed Taping)</p> <p>7.05 to 7.55 (Pushing position)<br/>4.45 (Rotative center)</p> <p>PWB mounting hole for reference<br/>(Tolerance: <math>\pm 0.05</math>)</p> <p>2-<math>\phi 1.10^{+0.05}_0</math></p> <p>5.50<br/>3.60<br/>5.80<br/>2.50<br/>2.50<br/>6-1.40<br/>7.5<br/>4.3<br/>2.7<br/>2.9<br/>2.5<br/>2.5<br/>1.0<br/>3.0<br/>1.0<br/>4.0<br/>5.4<br/>5.6<br/>0.2<br/>6.1 (Full position)<br/>8.05 (ON starting position)<br/>8.55<br/>29°24'<br/>68°26'</p> | <p><b>No. 4</b> ESE24MH1 Horizontal type for reflow soldering<br/>1-pole 2-throws<br/>ESE24MH1T (Embossed Taping)</p> <p>0.25<br/>7.25<br/>0.25<br/>2.00<br/>7.50<br/>2.00<br/>1.60<br/>4.50<br/>2.20<br/>2.50<br/>2.50<br/>3-1.40<br/>PWB mounting hole for reference<br/>(Tolerance: <math>\pm 0.05</math>)</p> <p>2-<math>\phi 0.70</math> (Hole)<br/>positioning boss</p> <p>1.5<br/>7.5<br/>1.5<br/>4.3<br/>2.7<br/>2.9<br/>2.5<br/>2.5<br/>1.0<br/>3.0<br/>0.5<br/>2.0<br/>1.0<br/>0.6<br/>0.1<br/>C0.2<br/>1.4 (Full position)<br/>3.35 (ON starting position)<br/>4.7<br/>1.6<br/>3.85<br/>1.2<br/>0.9<br/>0.2<br/>2.35 to 2.85 (Pushing position)<br/>0.25 (Rotative center)</p> <p>Positioning boss</p> |

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.  
Should a safety concern arise regarding this product, please be sure to contact us immediately.

### Circuit Diagram

1-pole 2-throws (N . O)




| Terminal No.<br>Lever position | ① | c | ② |
|--------------------------------|---|---|---|
| (F)                            |   | ○ |   |
| (a)                            | ○ | ○ |   |
| (b)                            |   | ○ | ○ |

### Packaging Specifications


Standard Reel Dimensions in mm (not to scale)

#### Taping Reel

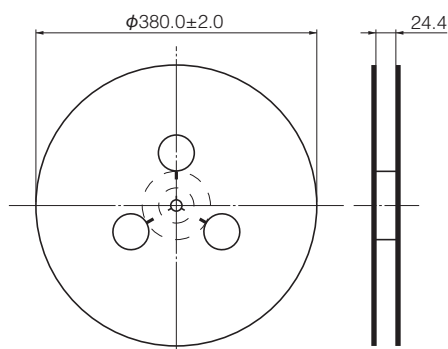


#### Embossed Carrier Taping

ESE24MH□T

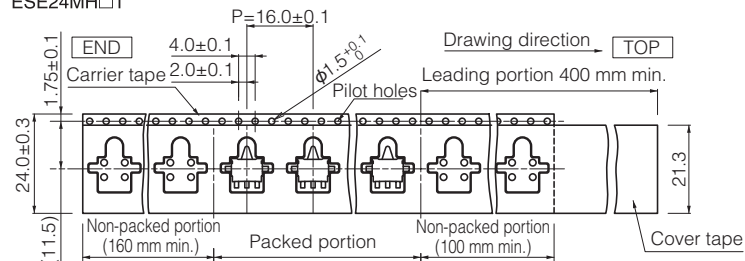

ESE24MV□T

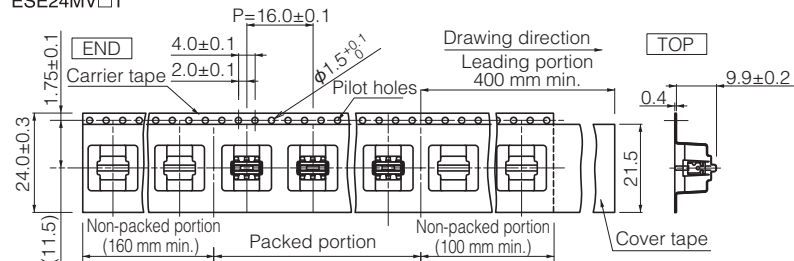

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Panasonic:

[ESE-24CMV1TEE](#) [ESE-24MH1T](#) [ESE-24MV1](#) [ESE-24SH1](#) [ESE-24SV3](#) [ESE-24CSV3](#) [ESE-24MV1T](#) [ESE-24CSH1](#) [ESE-24CSV6](#) [ESE-24SH6](#) [ESE-24MV6T](#) [ESE-24SV6](#) [ESE-24CMH6T](#) [ESE-24MH6T](#) [ESE-24CMH1T](#) [ESE-24CMV6T](#) [ESE-24CSH6](#) [ESE-24CMV1T](#) [ESE-24CMV9T](#) [ESE-24CMH9T](#)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)