

**CX** series Chip Type, High Voltage / Long Life



- High reliability, High voltage (to 50V).
- Low ESR, High ripple current.
- Long life of 1500 to 3000 hours at 125°C.
- SMD type : Lead free reflow soldering condition at 260°C peak complete correspondence.
- Adapted to the RoHS directive (2002/95/EC).

**CX**



## Specifications


| Item                                                 | Performance Characteristics                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                       |                                                     |
|------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------------------------------------|
| Category Temperature Range                           | -55 to +125°C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                       |                                                     |
| Rated Voltage Range                                  | 16 to 50V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                       |                                                     |
| Rated Capacitance Range                              | 5.6 to 390μF                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                       |                                                     |
| Capacitance Tolerance                                | ±20% at 120Hz, 20°C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                       |                                                     |
| Tangent of loss angle (tan δ)                        | Less than or equal to the specified value at 120Hz, 20°C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                       |                                                     |
| ESR (※ 1)                                            | Less than or equal to the specified value at 100kHz, 20°C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                       |                                                     |
| Leakage Current (※ 2)                                | Less than or equal to the specified value . After 2 minutes' application of rated voltage at 20°C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                       |                                                     |
| Temperature Characteristics<br>(Max.Impedance Ratio) | Z+125°C / Z+20°C ≤ 1.25 (100kHz)<br>Z-55°C / Z+20°C ≤ 1.25                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                       |                                                     |
| Endurance                                            | The specifications listed at below shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 3000 hours (φD = 6.3:1500hours) at 125°C.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Capacitance change    | Within ± 20% of initial capacitance value (※ 3)     |
|                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | tan δ                 | 150% or less of the initial specified value         |
|                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | ESR (※ 1)             | 150% or less of the initial specified value         |
|                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Leakage current (※ 2) | Less than or equal to the initial specified value   |
| Damp Heat<br>(Steady State)                          | The specifications listed at below shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 60°C, 90% RH.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Capacitance change    | Within ± 20% of initial capacitance value (※ 3)     |
|                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | tan δ                 | 150% or less of the initial specified value         |
|                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | ESR (※ 1)             | 150% or less of the initial specified value         |
|                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Leakage current (※ 2) | Less than or equal to the initial specified value   |
| Resistance to<br>Soldering Heat                      | After soldering the capacitor under the soldering conditions prescribed here, the capacitor shall meet the specifications listed at right, provided that it's temperature profile is measured at the capacitor top and the terminal.<br>Pre-heating shall be done at 150 to 200°C and for 60 to 180 sec.<br>The duration for over +230°C temperature at capacitor surface shall not exceed 60 seconds.<br>In the case of peak temp, less than 250°C, reflow soldering shall be two times maximum.<br>In the case of peak temp, less than 260°C, reflow soldering shall be once.<br>Measurement for solder temperature profile shall be made at the capacitor top and the terminal. | Capacitance change    | Within ± 10% of the initial capacitance value (※ 3) |
|                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | tan δ                 | 130% or less than the initial specified value       |
|                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | ESR (※ 1)             | 130% or less than the initial specified value       |
|                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Leakage current (※ 2) | Less than or equal to the initial specified value   |
| Marking                                              | Navy blue print on the case top                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                       |                                                     |

※ 1 ESR should be measured at both of the terminal ends closest where the terminals protrude through the plastic platform.


※ 2 Conditioning : If any doubt arises, measure the leakage current after the voltage treatment of applying DC rated voltage continuously to the capacitor for 120 minutes at 105°C.

※ 3 Initial value : The value before test of examination of resistance to soldering.

## Dimensions

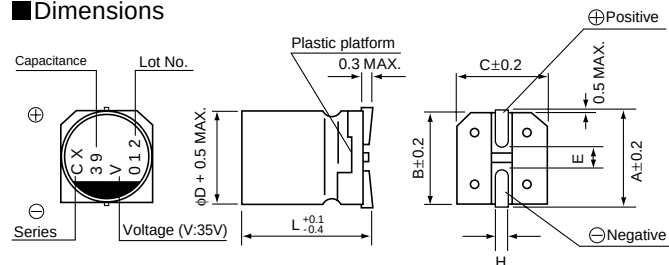

## Type numbering system (Example : 35V 39μF)

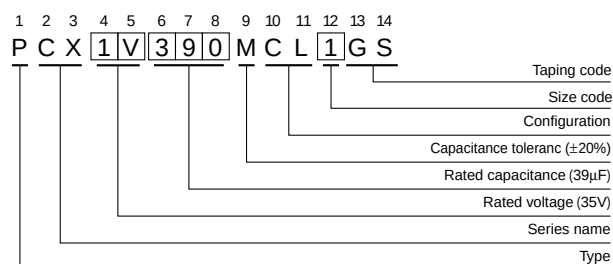

|      | (mm)       |            |            |            |            |            |            |
|------|------------|------------|------------|------------|------------|------------|------------|
| Size | φ6.3×6L    | φ8×7L      | φ8×10L     | φ8×12L     | φ10×8L     | φ10×10L    | φ10×12.7L  |
| φD   | 6.3        | 8.0        | 8.0        | 8.0        | 10.0       | 10.0       | 10.0       |
| L    | 5.9        | 6.9        | 9.9        | 11.9       | 7.9        | 9.9        | 12.6       |
| A    | 7.3        | 9.0        | 9.0        | 9.0        | 11.0       | 11.0       | 11.0       |
| B    | 6.6        | 8.3        | 8.3        | 8.3        | 10.3       | 10.3       | 10.3       |
| C    | 6.6        | 8.3        | 8.3        | 8.3        | 10.3       | 10.3       | 10.3       |
| E    | 2.1        | 3.2        | 3.2        | 3.2        | 4.6        | 4.6        | 4.6        |
| H    | 0.5 to 0.8 | 0.8 to 1.1 | 0.8 to 1.1 | 0.8 to 1.1 | 0.8 to 1.1 | 0.8 to 1.1 | 0.8 to 1.1 |

## Voltage

|      |    |    |    |    |    |
|------|----|----|----|----|----|
| V    | 16 | 20 | 25 | 35 | 50 |
| Code | C  | D  | E  | V  | H  |

● Dimension table in next page.

## ■ Standard Ratings

| Rated Voltage<br>(V)(code) | Surge Voltage<br>(V) | Rated Capacitance<br>(μF) | Case Size<br>φD × L (mm) | tan δ | Leakage Current<br>(μA) | ESR (mΩ)<br>(at 100kHz 20°C) | Rated Ripple<br>(mArms) |                     | Part Number    |
|----------------------------|----------------------|---------------------------|--------------------------|-------|-------------------------|------------------------------|-------------------------|---------------------|----------------|
|                            |                      |                           |                          |       |                         |                              | ≤105°C (*3)             | 105°C < ≤125°C (*3) |                |
| 16<br>(1C)                 | 18.4                 | 47                        | 6.3 × 6                  | 0.12  | 150                     | 55                           | 1000                    | 390                 | PCX1C470MCL1GS |
|                            |                      | 82                        | 8 × 7                    | 0.12  | 262                     | 45                           | 1300                    | 530                 | PCX1C820MCL1GS |
|                            |                      | 150                       | ▲ 8 × 10                 | 0.12  | 480                     | 28                           | 2000                    | 780                 | PCX1C151MCL6GS |
|                            |                      | 150                       | 10 × 8                   | 0.12  | 480                     | 33                           | 1900                    | 830                 | PCX1C151MCL1GS |
|                            |                      | 220                       | 8 × 12                   | 0.12  | 704                     | 27                           | 2300                    | 870                 | PCX1C221MCL1GS |
|                            |                      | 270                       | 10 × 10                  | 0.12  | 864                     | 27                           | 2300                    | 830                 | PCX1C271MCL1GS |
| 20<br>(1D)                 | 23.0                 | 390                       | 10 × 12.7                | 0.12  | 1248                    | 26                           | 2700                    | 1040                | PCX1C391MCL1GS |
|                            |                      | 33                        | 6.3 × 6                  | 0.12  | 132                     | 60                           | 900                     | 380                 | PCX1D330MCL1GS |
|                            |                      | 56                        | 8 × 7                    | 0.12  | 224                     | 50                           | 1300                    | 500                 | PCX1D560MCL1GS |
|                            |                      | 120                       | ▲ 8 × 10                 | 0.12  | 480                     | 29                           | 1900                    | 770                 | PCX1D121MCL6GS |
|                            |                      | 120                       | 10 × 8                   | 0.12  | 480                     | 35                           | 1800                    | 810                 | PCX1D121MCL1GS |
|                            |                      | 150                       | 8 × 12                   | 0.12  | 600                     | 28                           | 2200                    | 860                 | PCX1D151MCL1GS |
| 25<br>(1E)                 | 28.7                 | 180                       | 10 × 10                  | 0.12  | 720                     | 28                           | 2300                    | 800                 | PCX1D181MCL1GS |
|                            |                      | 270                       | 10 × 12.7                | 0.12  | 1080                    | 27                           | 2700                    | 1020                | PCX1D271MCL1GS |
|                            |                      | 22                        | 6.3 × 6                  | 0.12  | 110                     | 65                           | 900                     | 360                 | PCX1E220MCL1GS |
|                            |                      | 39                        | 8 × 7                    | 0.12  | 195                     | 55                           | 1200                    | 480                 | PCX1E390MCL1GS |
|                            |                      | 82                        | ▲ 8 × 10                 | 0.12  | 410                     | 30                           | 1900                    | 760                 | PCX1E820MCL6GS |
|                            |                      | 82                        | 10 × 8                   | 0.12  | 410                     | 36                           | 1800                    | 800                 | PCX1E820MCL1GS |
| 35<br>(1V)                 | 40.2                 | 120                       | ▲ 8 × 12                 | 0.12  | 600                     | 29                           | 2200                    | 850                 | PCX1E121MCL6GS |
|                            |                      | 120                       | 10 × 10                  | 0.12  | 600                     | 29                           | 2200                    | 790                 | PCX1E121MCL1GS |
|                            |                      | 180                       | 10 × 12.7                | 0.12  | 900                     | 28                           | 2600                    | 1010                | PCX1E181MCL1GS |
|                            |                      | 10                        | 6.3 × 6                  | 0.12  | 70                      | 85                           | 800                     | 310                 | PCX1V100MCL1GS |
|                            |                      | 18                        | 8 × 7                    | 0.12  | 126                     | 60                           | 1100                    | 450                 | PCX1V180MCL1GS |
|                            |                      | 39                        | ▲ 8 × 10                 | 0.12  | 273                     | 35                           | 1800                    | 700                 | PCX1V390MCL6GS |
| 50<br>(1H)                 | 57.5                 | 39                        | 10 × 8                   | 0.12  | 273                     | 41                           | 1700                    | 750                 | PCX1V390MCL1GS |
|                            |                      | 56                        | 8 × 12                   | 0.12  | 392                     | 33                           | 2000                    | 780                 | PCX1V560MCL1GS |
|                            |                      | 68                        | 10 × 10                  | 0.12  | 476                     | 30                           | 2200                    | 740                 | PCX1V680MCL1GS |
|                            |                      | 100                       | 10 × 12.7                | 0.12  | 700                     | 29                           | 2600                    | 990                 | PCX1V101MCL1GS |
|                            |                      | 5.6                       | 6.3 × 6                  | 0.12  | 56                      | 105                          | 700                     | 280                 | PCX1H5R6MCL1GS |
|                            |                      | 10                        | 8 × 7                    | 0.12  | 100                     | 75                           | 1000                    | 410                 | PCX1H100MCL1GS |
|                            |                      | 22                        | ▲ 8 × 10                 | 0.12  | 220                     | 37                           | 1700                    | 680                 | PCX1H220MCL6GS |
|                            |                      | 22                        | 10 × 8                   | 0.12  | 220                     | 56                           | 1400                    | 730                 | PCX1H220MCL1GS |
|                            |                      | 27                        | 8 × 12                   | 0.12  | 270                     | 35                           | 2000                    | 760                 | PCX1H270MCL1GS |
|                            |                      | 33                        | 10 × 10                  | 0.12  | 330                     | 31                           | 2200                    | 630                 | PCX1H330MCL1GS |
|                            |                      | 47                        | 10 × 12.7                | 0.12  | 470                     | 30                           | 2500                    | 970                 | PCX1H470MCL1GS |

(\*3) Ambient temperature of a capacitor

Rated ripple current (mArms) at 105°C 100kHz

No marked, [1] will be put at 12th digit of type numbering system.

▲: In this case, [6] will be put at 12th digit of type numbering system.

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please refer to page 3 for the minimum order quantity.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)