




REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	1	NEW DRAWING	22FEB2018	RS	AS

FLYING LEADS
OFF - (ON)

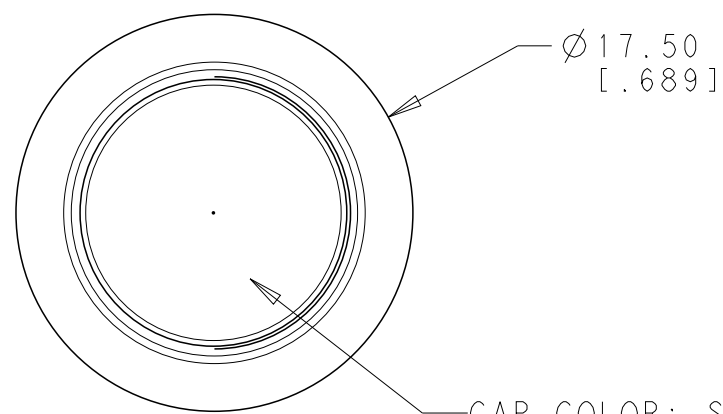

-CAP COLOR: SEE TABLE

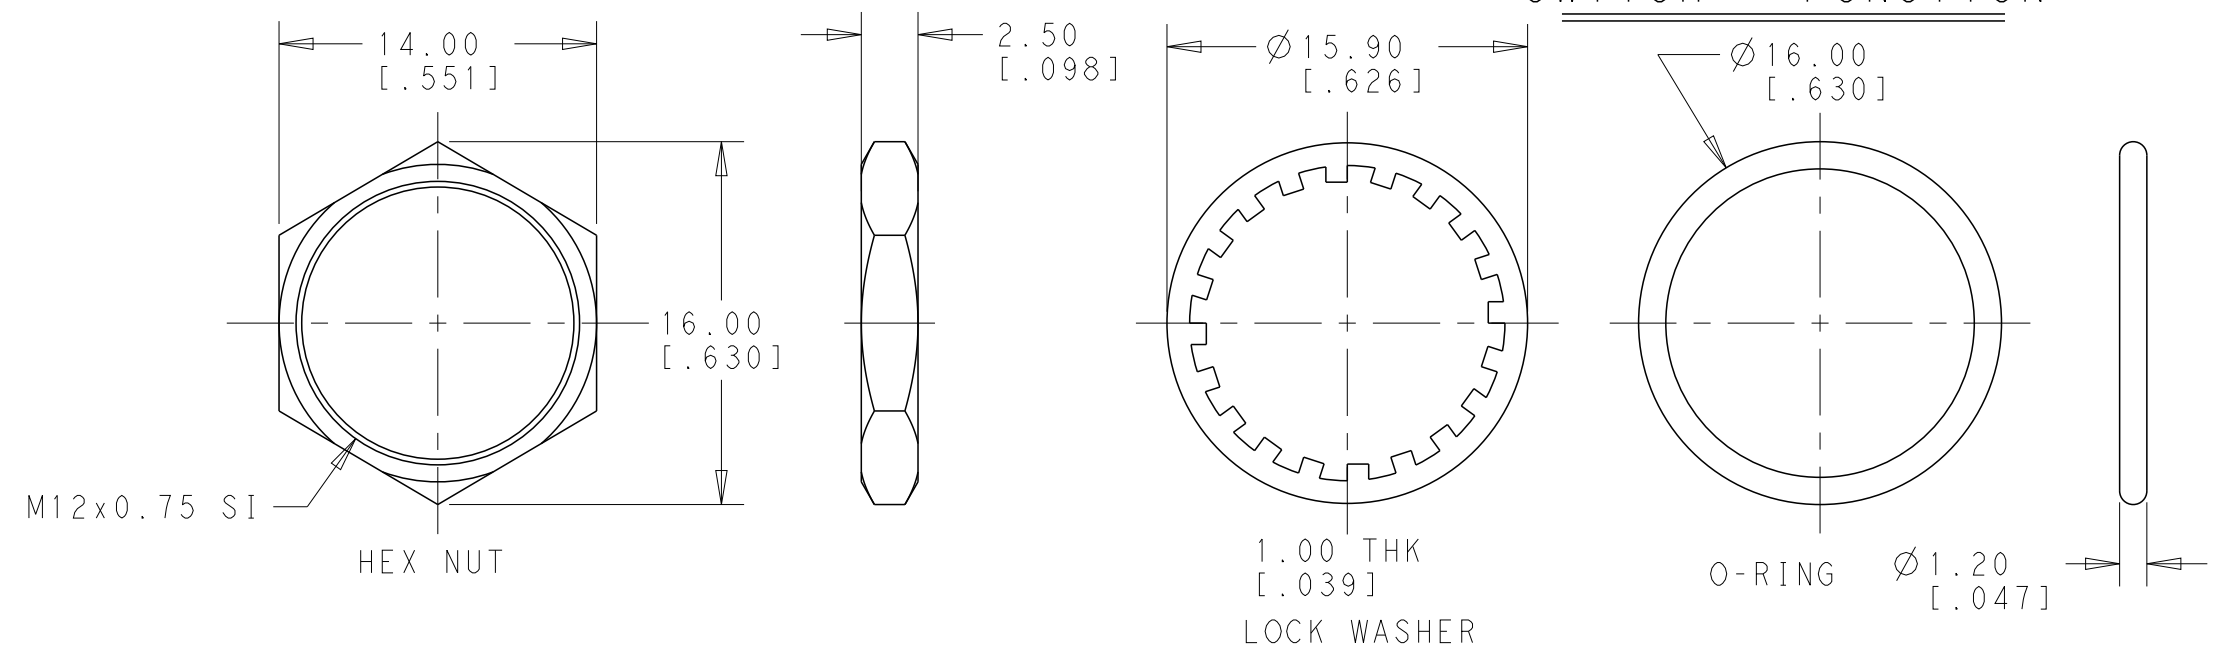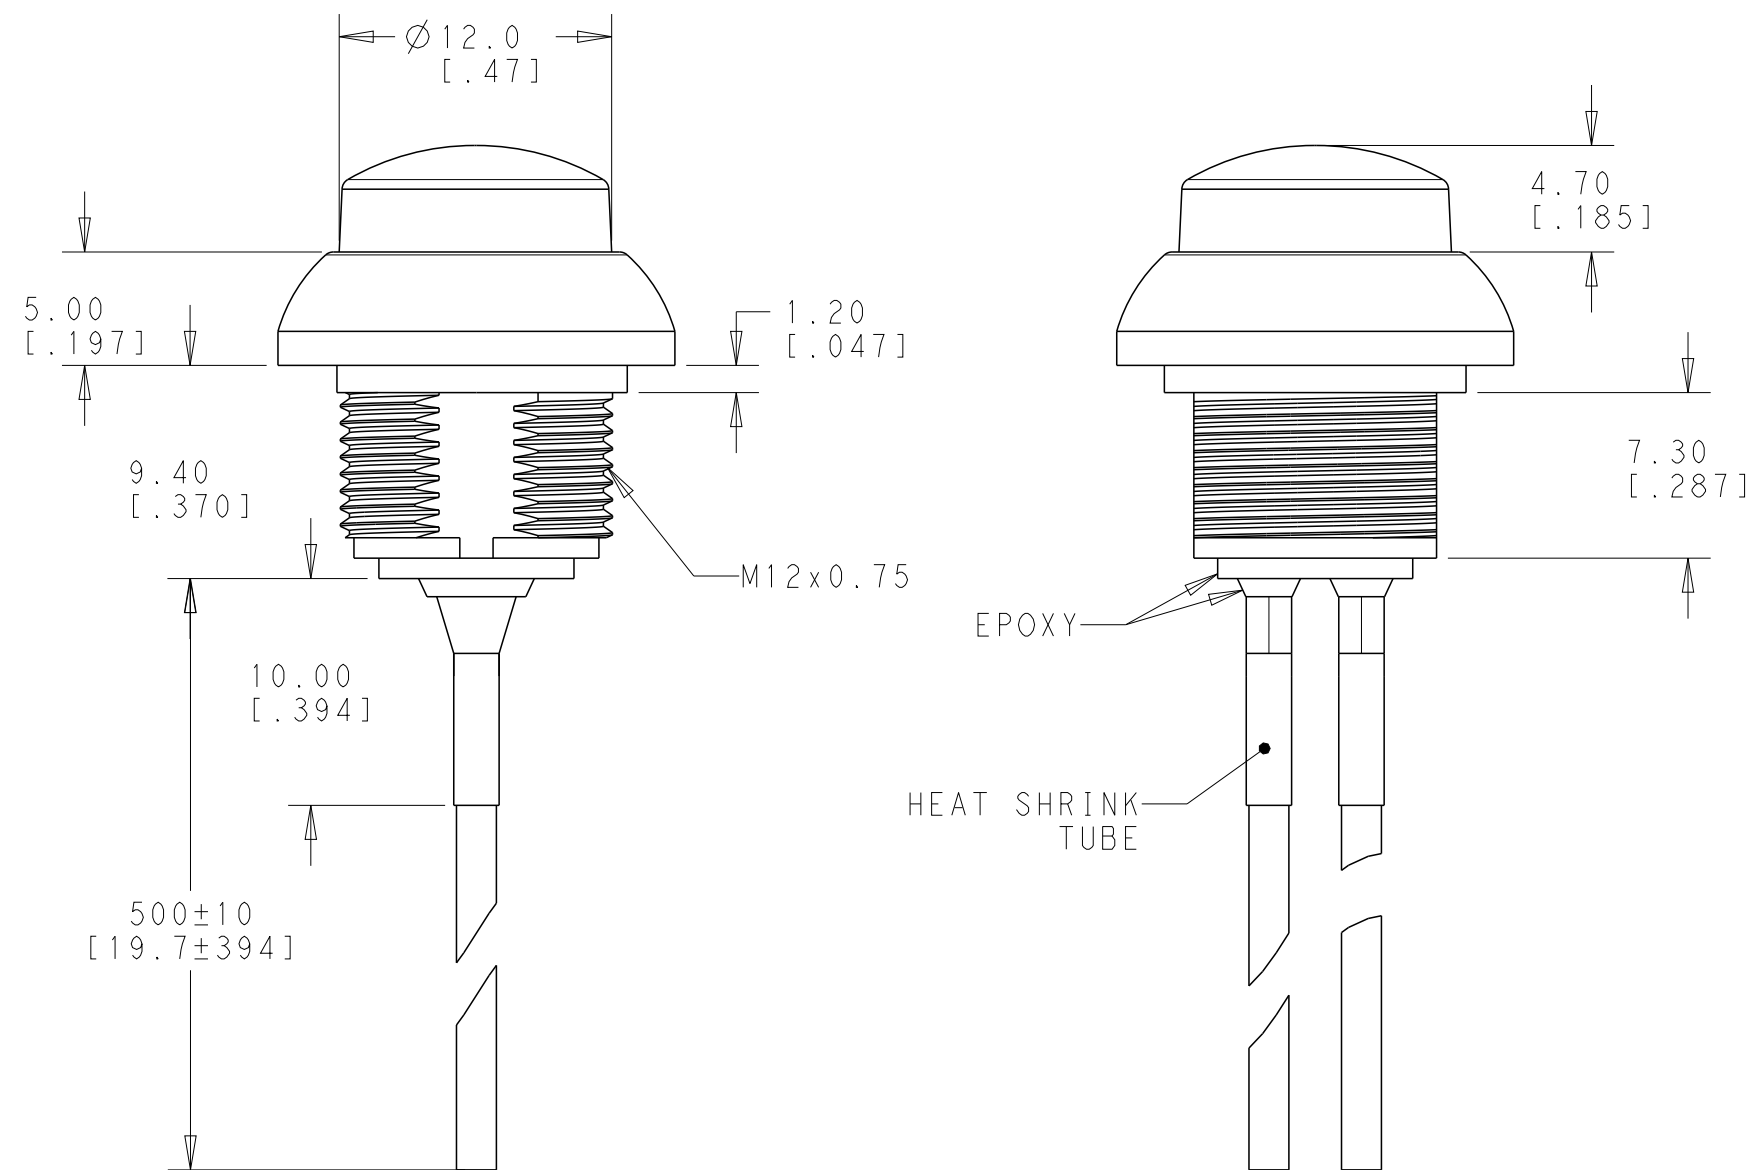

SPECIFICATIONS:

MAXIMUM CURRENT/VOLTAGE RATING WITH RESISTIVE LOAD:
400mA 32VAC, 200mA 50VDC, 125mA 125VAC

INITIAL CONTACT RESISTANCE: 100mΩ MAXIMUM, RESISTANCE OF THE WIRE NOT INCLUDED.

INSULATION RESISTANCE: 1 GΩ MINIMUM AT 500 VDC

DIELECTRIC STRENGTH: 1,500 VAC RMS

CONTACT BOUNCE: 10ms

ELECTRICAL LIFE AT FULL LOAD: 500,000 CYCLES

MECHANICAL LIFE: 1,000,000 CYCLES

TOTAL TRAVEL: 1.5 (.059)

TOTAL TRAVEL: 1.5 (0.059)
ACTUATION FORCE: 3 TO 6N

OPERATING TEMPERATURE: -30° TO 85° C

DEGREE OF PROTECTION: IP68, 1 HOUR @ 1 METER

TORQUE: 0.5N•m MAXIMUM APPLIED TO NUT

PACKAGING:

SWITCHES ARE BUNDLED. HARDWARE IS NOT ASSEMBLED TO THE SWITCH.



COMPLIANCE:

ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003(RoHS)

SOLDER PROCESSING:


MANUAL SOLDERING: SOLDER IRON, 30 WATTS, CONTROLLED AT 350° C, APPROXIMATELY 5 SECONDS WHILE APPLYING SOLDER.

1. HARDWARE IS SHIPPED UNASSEMBLED.

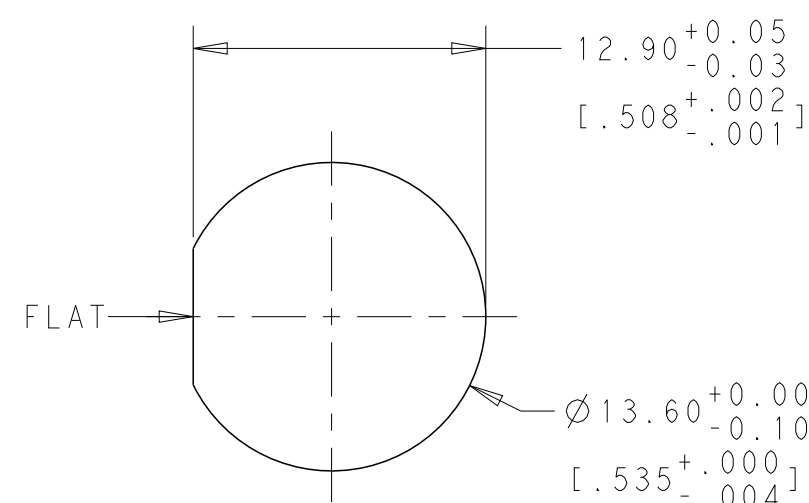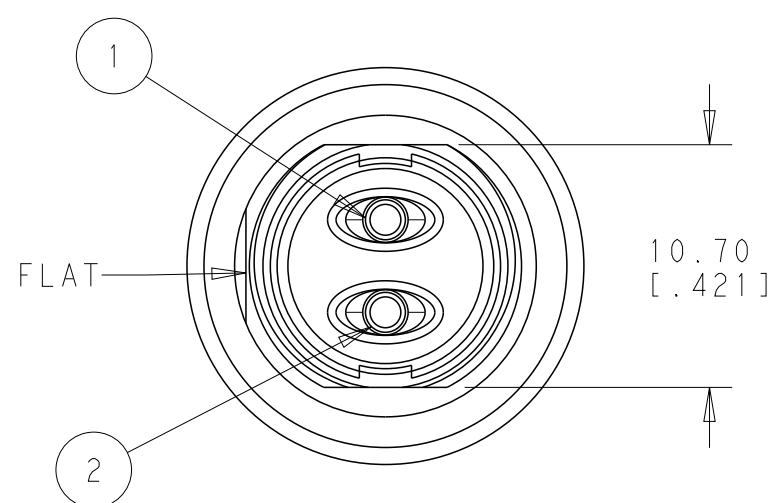

PANEL CUT-OUT
THICKNESS: 1.5mm~4.0mm
[.059~.157]


2	TERMINAL 2	BLACK
1	TERMINAL 1	BLACK
NO.	DESCRIPTION	WIRE COLOR

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 22FEB2018 RAVI.S		REV 22FEB2018 ALEXANDER SHARPE		DESCRIPTION: TE Connectivity		WIRE COLOR	
DIMENSIONS: mm[INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 22FEB2018 ALEXANDER SHARPE		NAME		SWITCH, PUSHBUTTON, HIGH CAP NO LED, FLYING LEADS WITH HEAT SHRINK, SEALED, OFF-(ON) AND ON-(OFF)	
		0 PLC ± 1 PLC ±0.4[.016] 2 PLC ±0.25[.010] 3 PLC ± 4 PLC ± ANGLES ±5°		PRODUCT SPEC -		APPLICATION SPEC -		RESTRICTED TO -	
MATERIAL - -		FINISH - -		WEIGHT -		SIZE A2		CAGE CODE 00779	
						DRAWING NO C-2329359		REV 1	
				CUSTOMER DRAWING		SCALE 3:2		SHEET 1 of 3	

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

Model No.	POS. 1	POS. 2
PB7	ON	MOM(OFF)
CONNECTED TERMINALS	CLOSE	OPEN
SCHEMATIC		

SWITCH FUNCTION

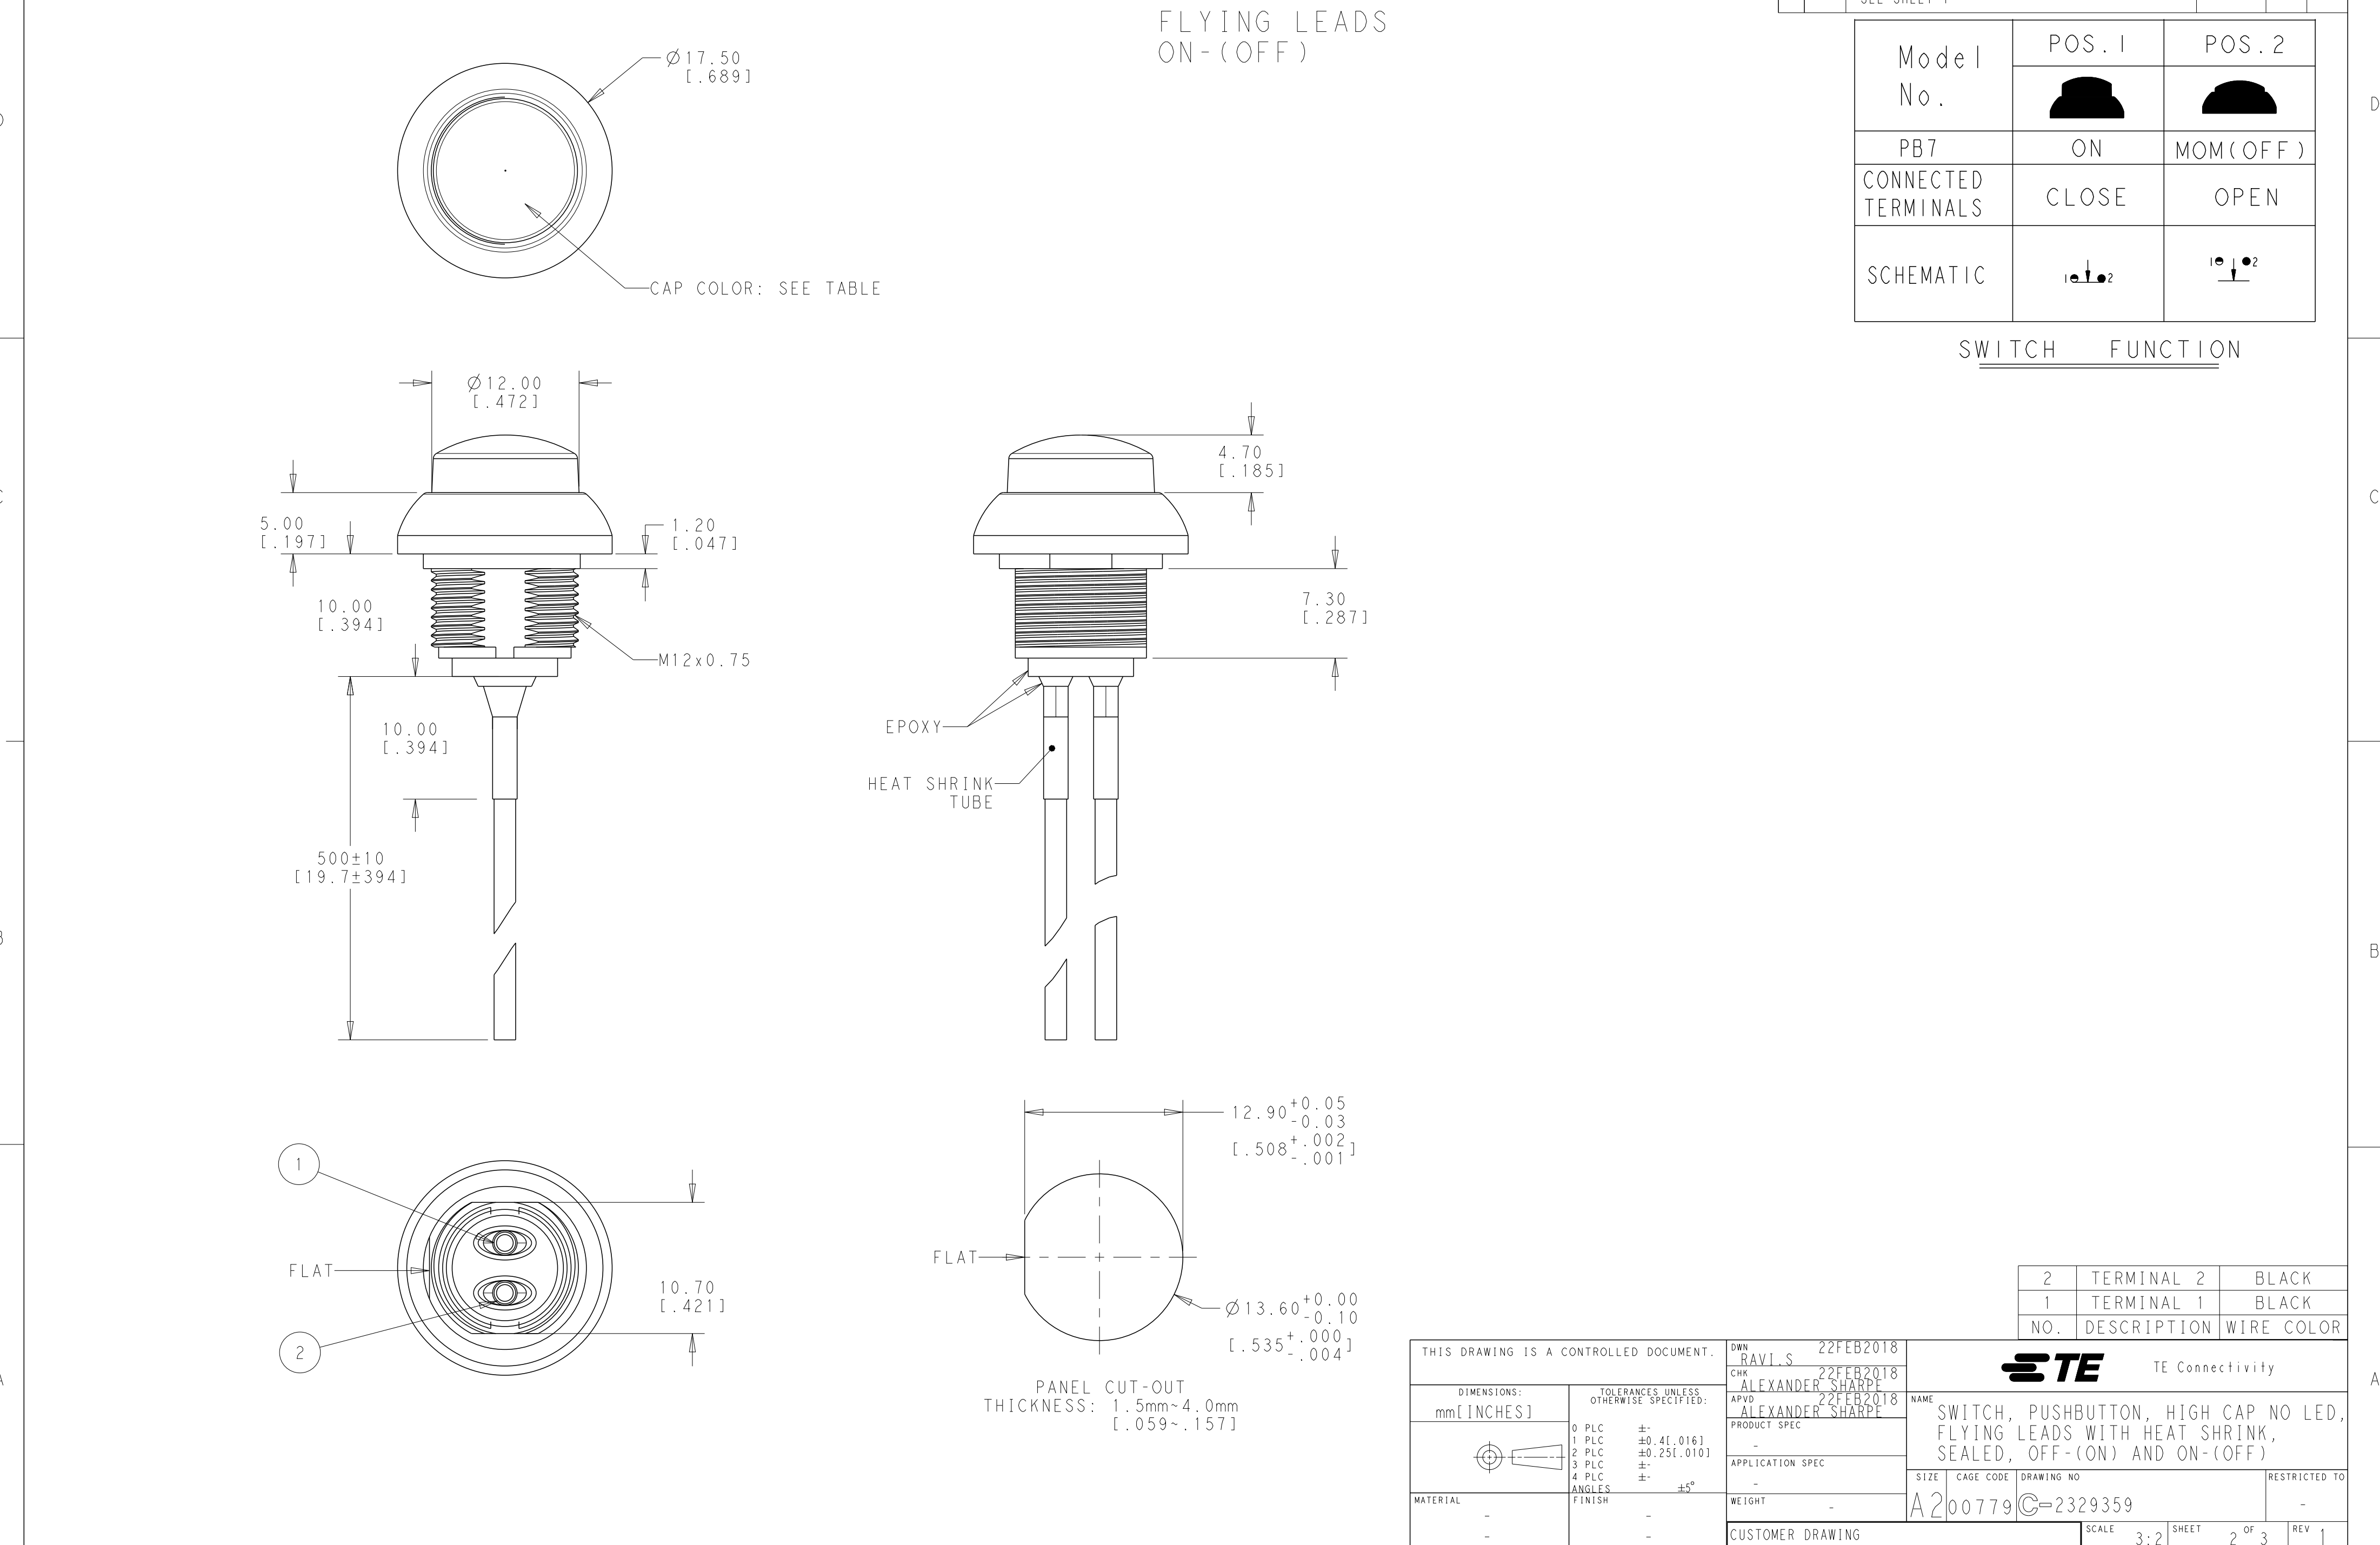

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
RAVL.S
22FEB2018

CHK
ALEXANDER SHARPE
22FEB2018

APVD
ALEXANDER SHARPE
22FEB2018

TE Connectivity

DIMENSIONS:
mm[INCHES]

0 PLC ±

1 PLC ±0.4[.016]

2 PLC ±0.25[.010]

3 PLC ±

4 PLC ±

ANGLES ±5°

FINISH

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

NAME

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

SWITCH, PUSHBUTTON, HIGH CAP NO LED, FLYING LEADS WITH HEAT SHRINK, SEALED, OFF-(ON) AND ON-(OFF)

A200779

C-2329359

SCALE 3:2

SHEET 2 OF 3

REV 1

THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION						REVISIONS			
© COPYRIGHT copyright_d8Ye-		ALL RIGHTS RESERVED.									
P	LTR	DESCRIPTION				DATE	DWN	APVD			

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

SINGLE POLE	ON-(OFF) MOMENTARY	FLYING LEADS WITH HEAT SHRINK TUBE	HIGH, SHINY BLUE	N/A	PB7B2HS7M1CAL00Y500	1-2329359-0
			HIGH, SHINY GREEN	N/A	PB7B2HS6M1CAL00Y500	2329359-9
			HIGH, SHINY YELLOW	N/A	PB7B2HS5M1CAL00Y500	2329359-8
			HIGH, SHINY RED	N/A	PB7B2HS3M1CAL00Y500	2329359-7
	OFF-(ON) MOMENTARY		HIGH, SHINY BLACK	N/A	PB7B2HS2M1CAL00Y500	2329359-6
			HIGH, SHINY BLUE	N/A	PB6B2HS7M1CAL00Y500	2329359-5
			HIGH, SHINY GREEN	N/A	PB6B2HS6M1CAL00Y500	2329359-4
			HIGH, SHINY YELLOW	N/A	PB6B2HS5M1CAL00Y500	2329359-3
			HIGH, SHINY RED	N/A	PB6B2HS3M1CAL00Y500	2329359-2
			HIGH, SHINY BLACK	N/A	PB6B2HS2M1CAL00Y500	2329359-1
POLE	THROW	TERMINAL TYPE	CAP TYPE & COLOR	LED COLOR	TE DESCRIPTIVE PART NUMBER	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 22FEB2018 RAVI.S CHK 22FEB2018 ALEXANDER SHARPE APVD 22FEB2018 ALEXANDER SHARPE		 TE Connectivity			
DIMENSIONS: mm[INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME SWITCH, PUSHBUTTON, HIGH CAP NO LED, FLYING LEADS WITH HEAT SHRINK, SEALED, OFF-(ON) AND ON-(OFF)			
		0 PLC ±- 1 PLC ±0.4[.016] 2 PLC ±0.25[.010] 3 PLC ±- 4 PLC ±- ANGLES ±5° FINISH		PRODUCT SPEC - APPLICATION SPEC - WEIGHT -		SIZE A2	
MATERIAL - -		WEIGHT -		CAGE CODE 00779		DRAWING NO C-2329359	
CUSTOMER DRAWING		SCALE 3:2		SHEET 3 OF 3		REV 1	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru