


LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			D	REVISED PER ECO-15-017919	04APR2016	AP	RP

D


C

B


A

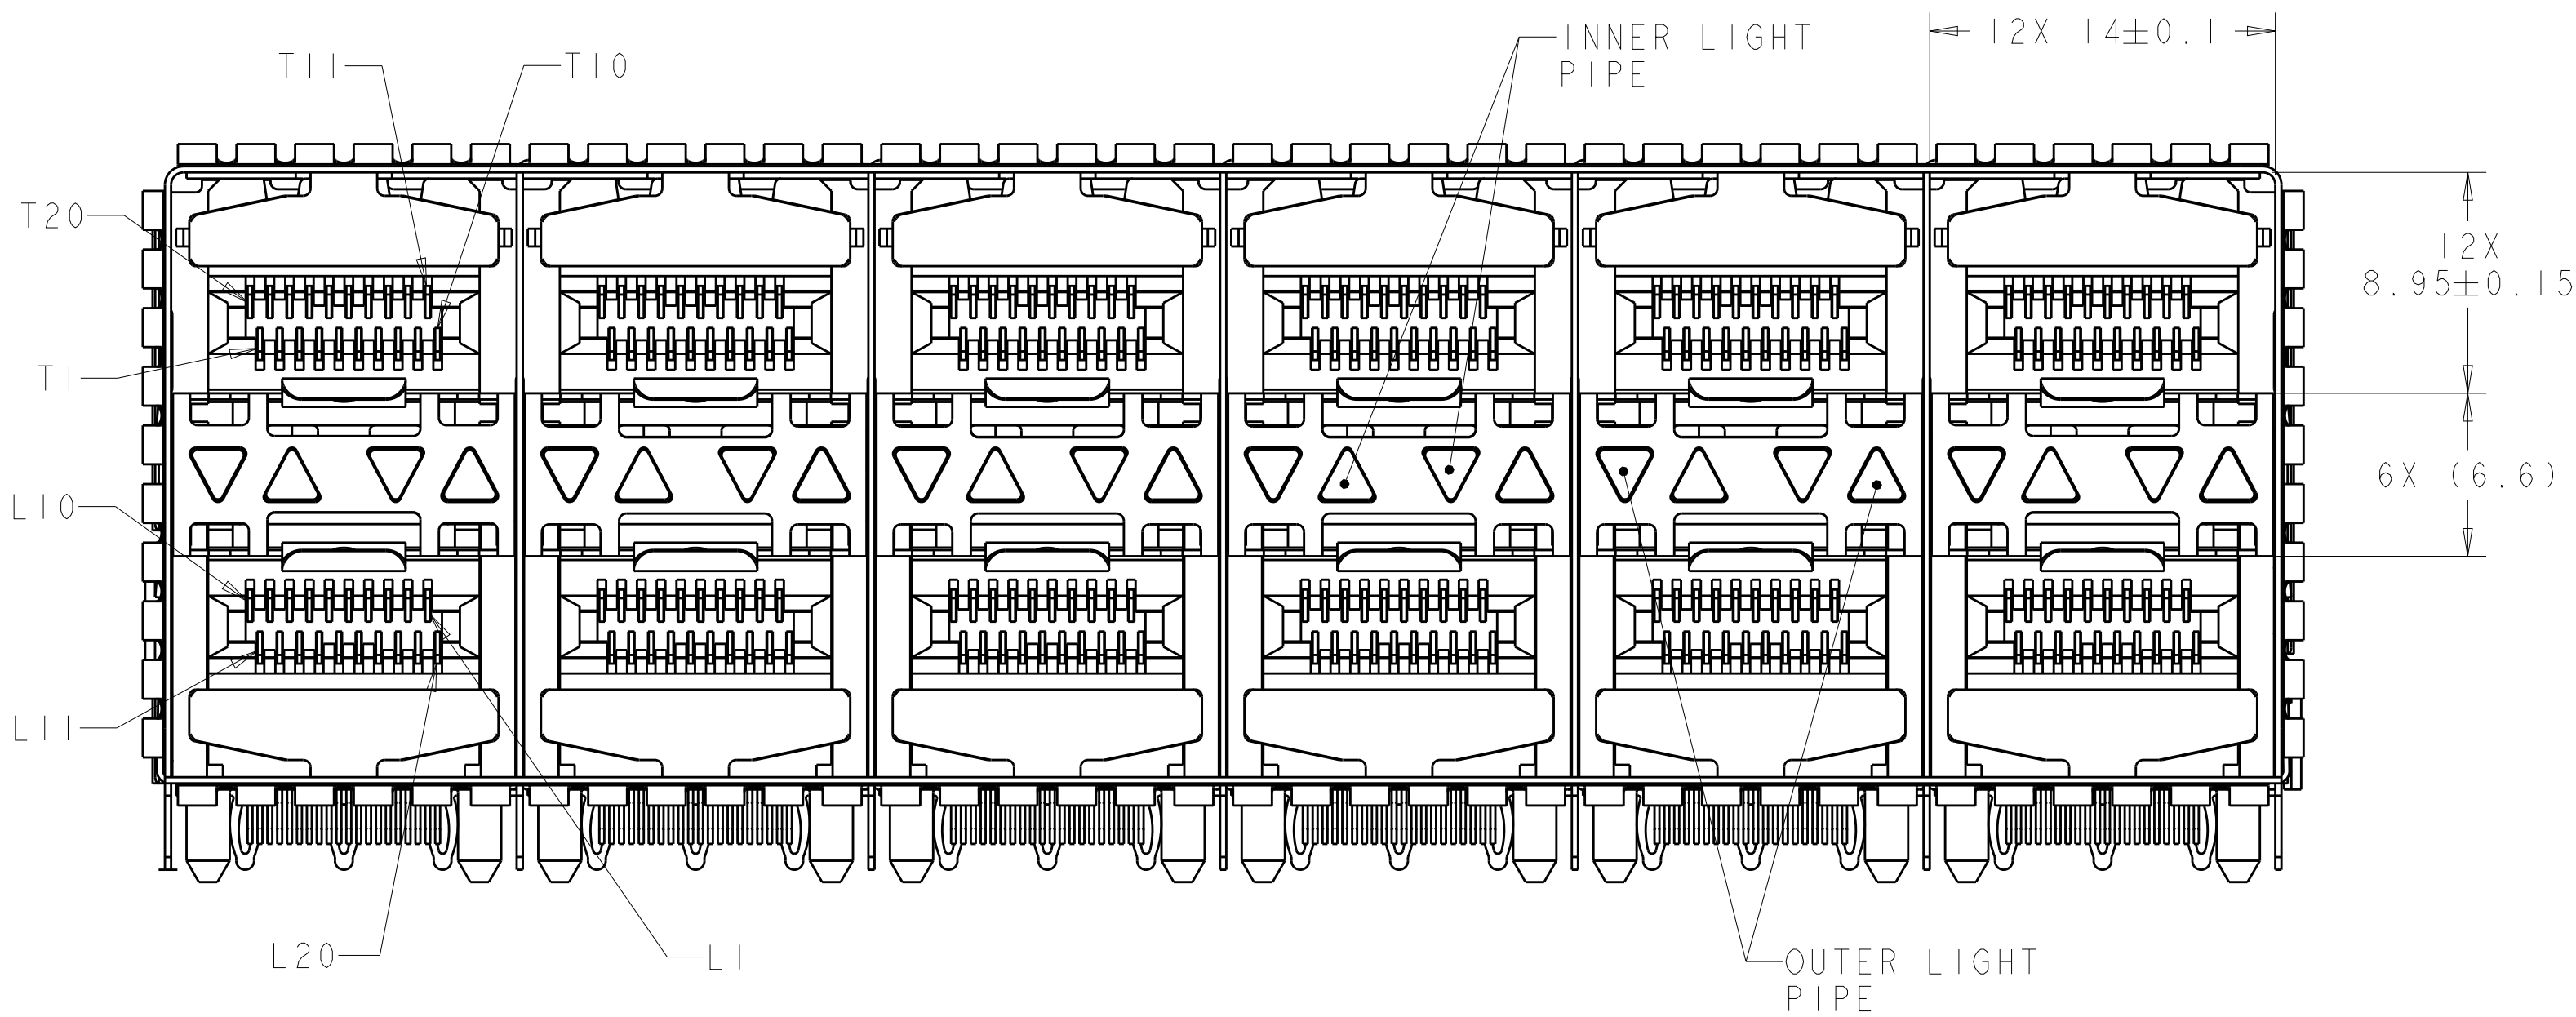

2007562-5 AS SHOWN

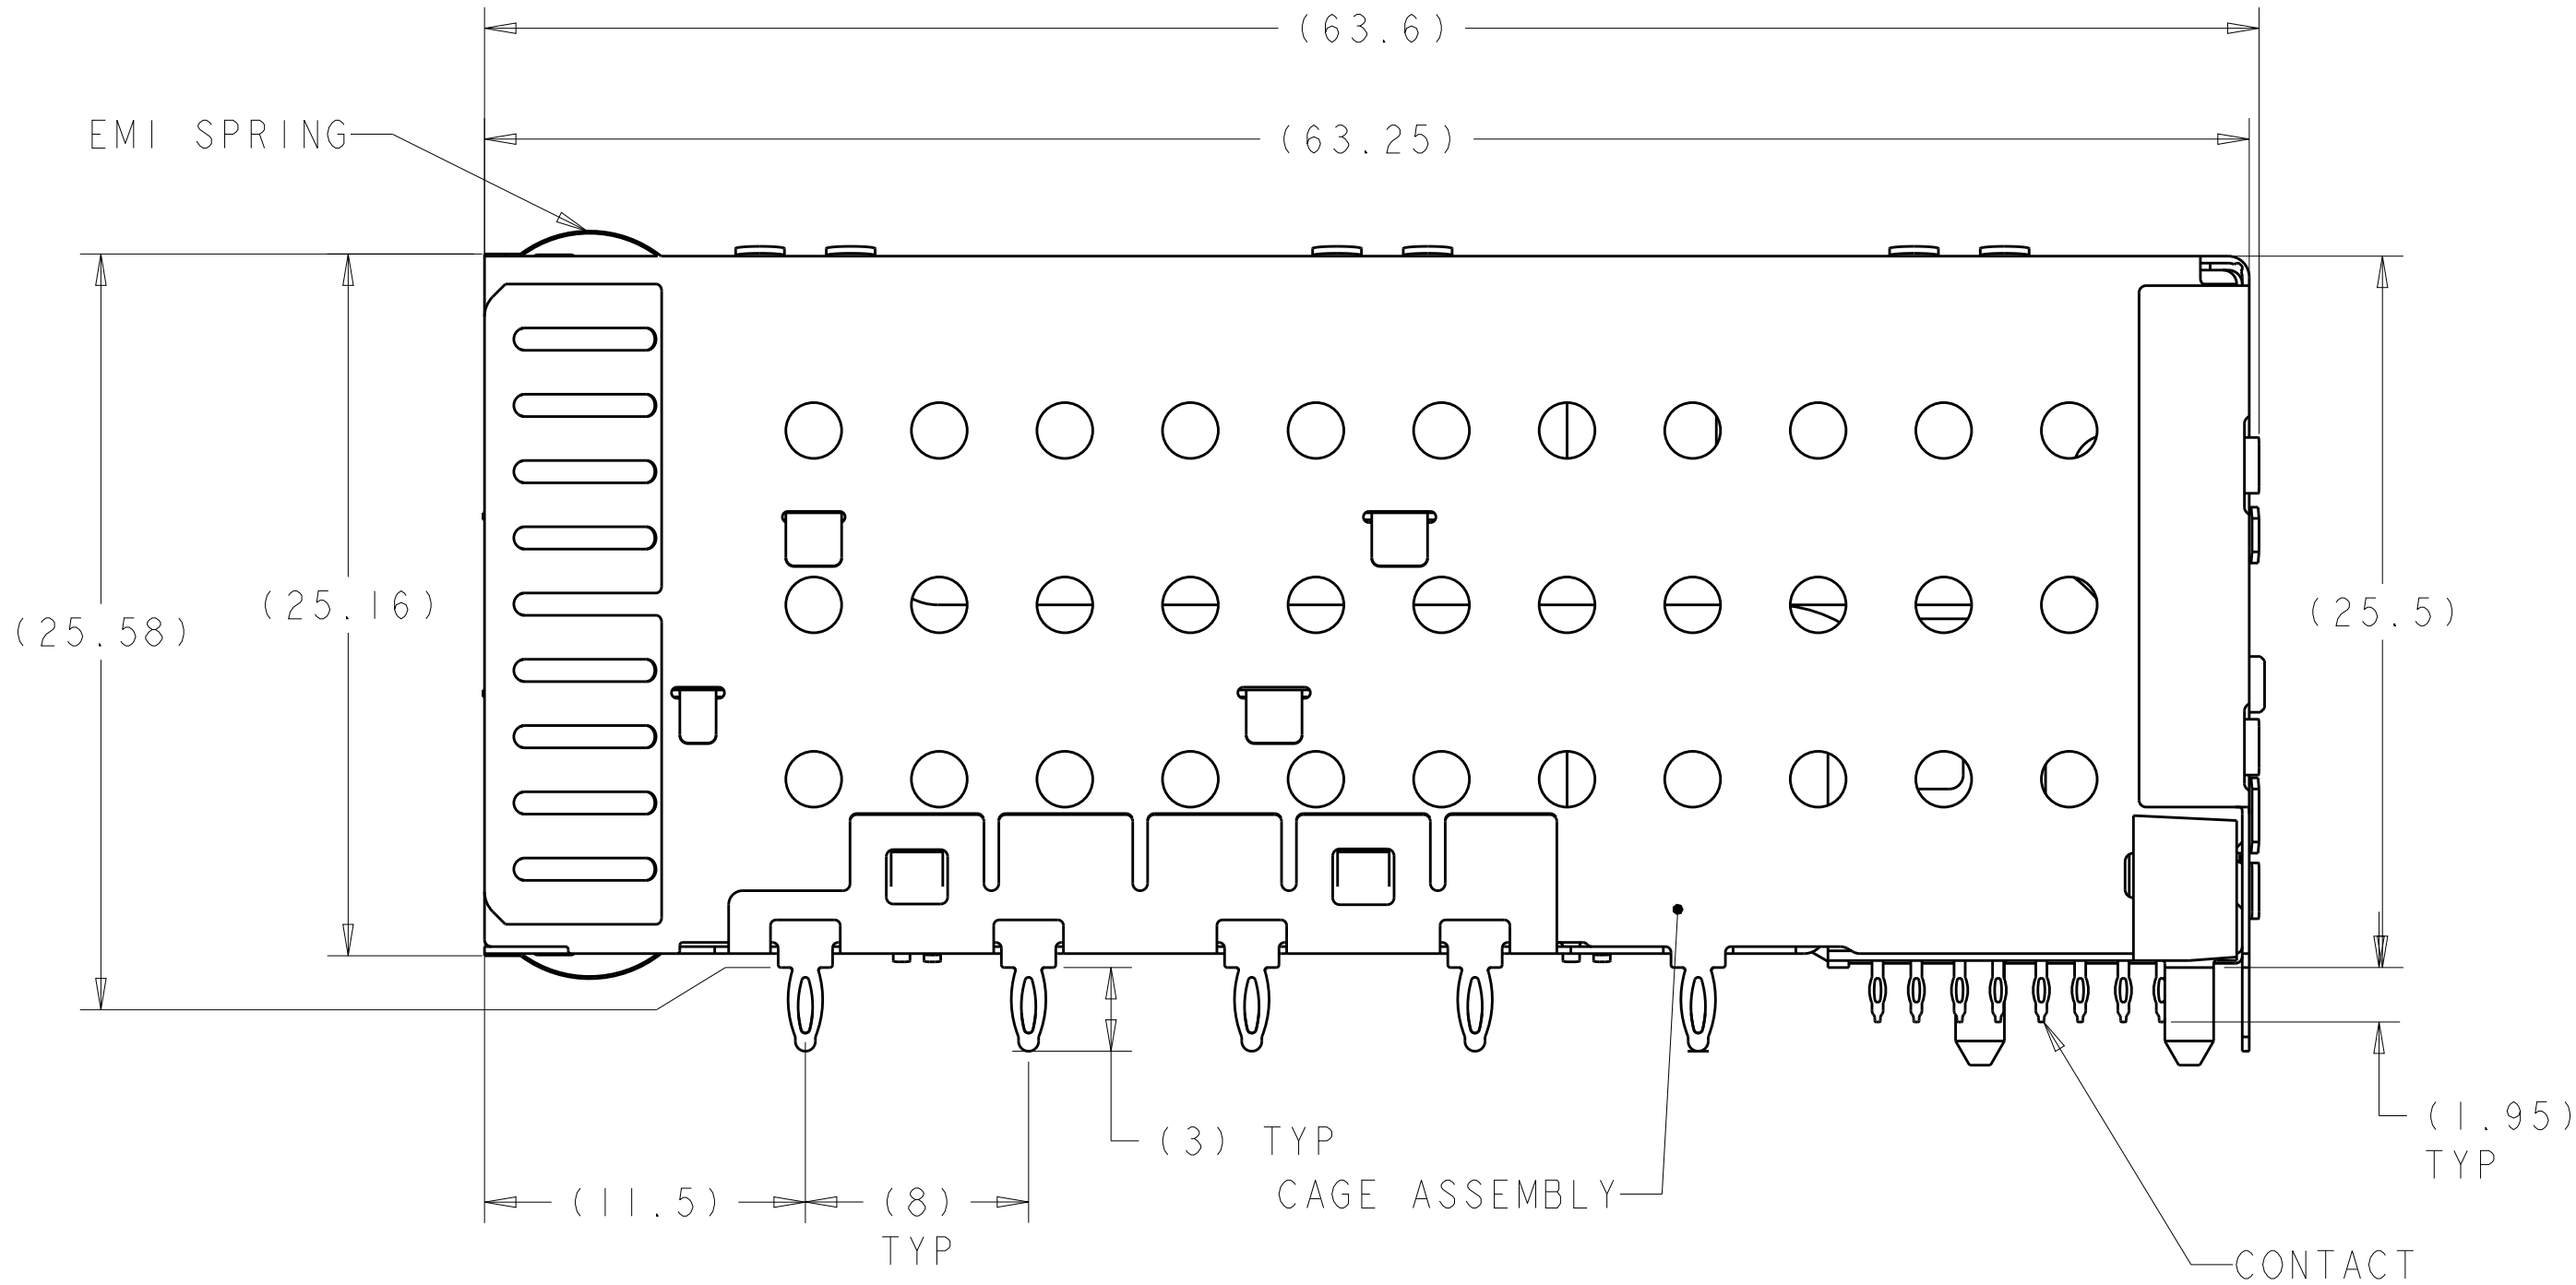


- 1 MATERIALS:
CAGE ASSEMBLY- NICKEL SILVER ALLOY PER ASTM B 122.
EMI SPRING- COPPER ALLOY.
HOUSING- BLACK LCP, UL 94V-0 RATED.
CHICKLET- BLACK LCP, UL 94V-0 RATED.
LIGHT PIPE- POLYCARBONATE, CLEAR.
INSERT- LCP, BLACK, UL 94V-0.
CONTACT- COPPER ALLOY.
- 2 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
3. MINIMUM PCB THICKNESS OF 1.5.
- 4 CONTACT FINISH- CONFORMS TO THE REQUIREMENTS OF TYCO ELECTRONICS PRODUCT SPECIFICATION 108-2331, BASED ON EIA/ECA-364-1000.01A, (CONTROLLED ENVIRONMENT APPLICATIONS) ON MATING INTERFACE, TIN-LEAD ON NEEDLE EYE.
- 5 CONTACT FINISH- CONFORMS TO THE REQUIREMENTS OF TYCO ELECTRONICS PRODUCT SPECIFICATION 108-2331 BASED ON EIA/ECA-364-1000.01A, (CONTROLLED ENVIRONMENT APPLICATIONS) ON MATING INTERFACE, TIN ON NEEDLE EYE.
- 6 FOR HOLE SIZE AND PLATINGS, SEE APPLICATION SPEC 114-13219.
- 7 THE ENTIRE AREA OF THE CONNECTOR FOOTPRINT, INDICATED BY THE DASHED LINE, TO BE CONSIDERED THE KEEPOUT AREA FOR COMPONENTS AND SIGNAL TRACES, TOP SIDE ONLY. TOP SIDE TRACES ALLOWED WITHIN CONNECTOR HOLE PATTERN.
- 8 LIGHT PIPE PAD LAYOUT IS FOR 0805 LOW PROFILE LED PACKAGE WITH A HEIGHT OF 0.8mm.
- 9 EMI SPRING FINISH: 0.8µm MINIMUM MATTE TIN OVER 0.8µm MINIMUM NICKEL, NONPLATED EDGES PERMISSIBLE.
- 10 ADDITIONAL COMPONENT LOCATED WITHIN LATCH PLATE FOR EMI SUPPRESSION.

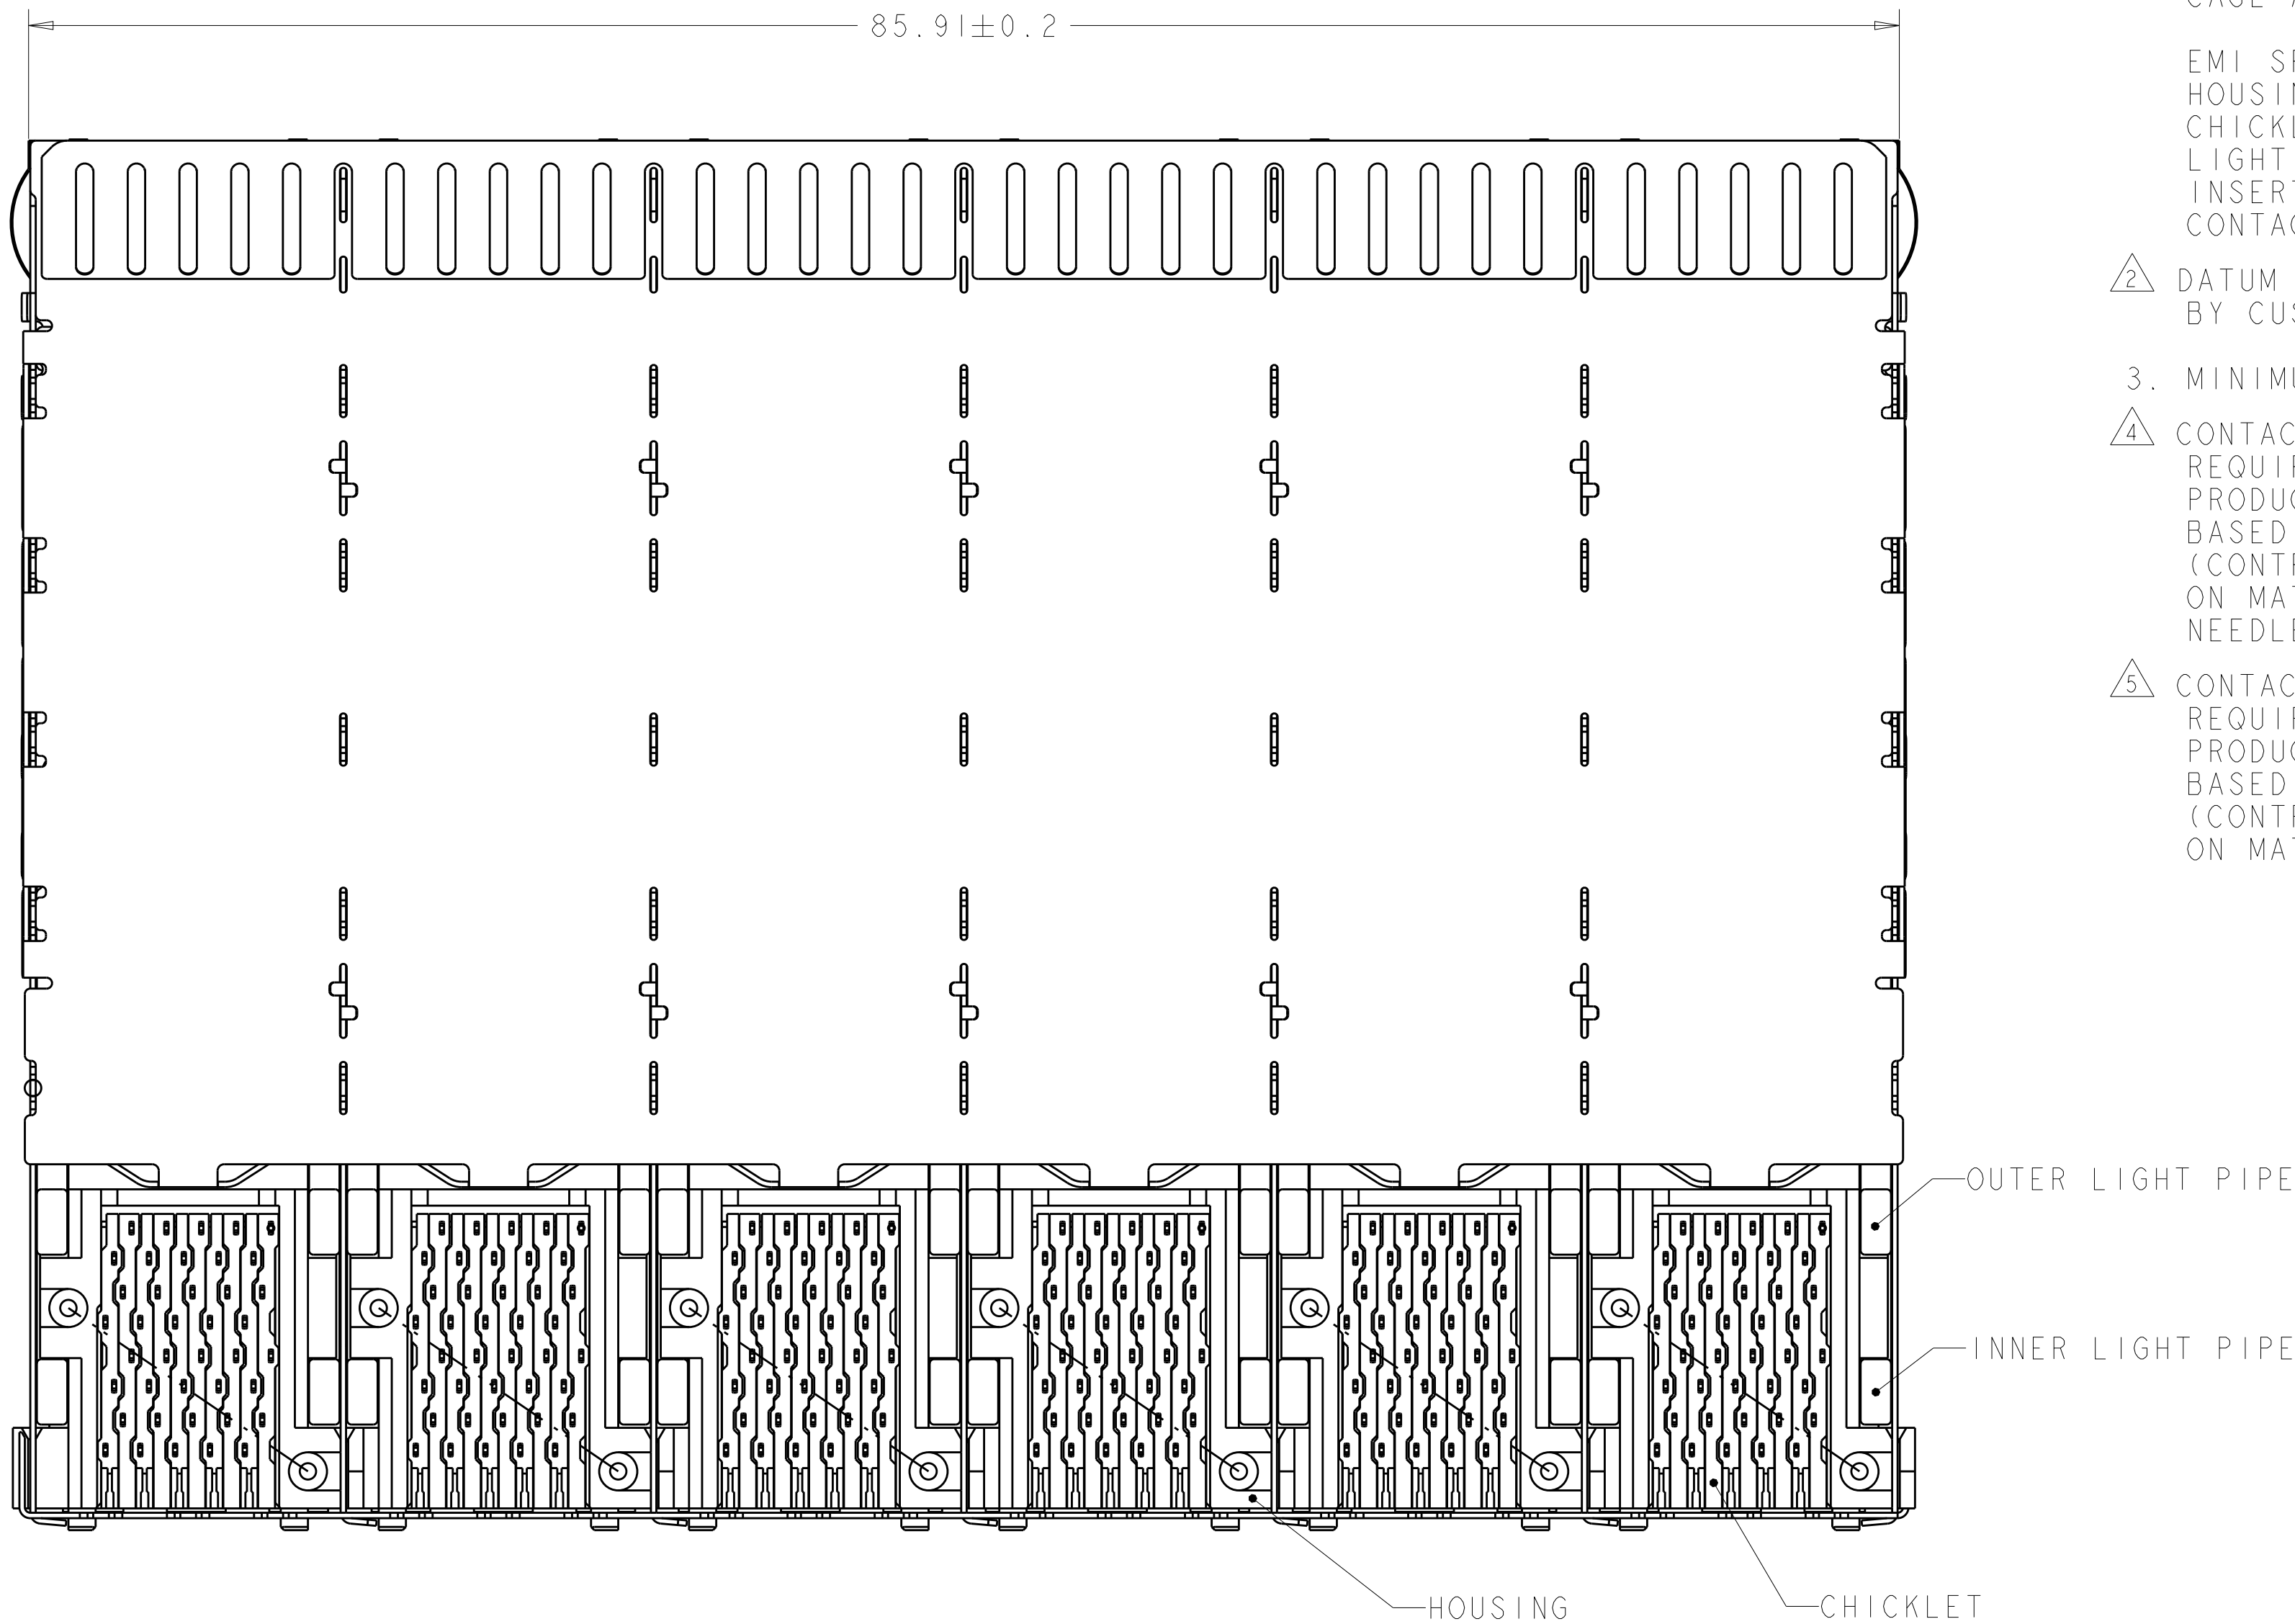


	YES 		NO LIGHT PIPES	I-2007562-8
			OUTER 2 LIGHT PIPES	I-2007562-7
			INNER 2 LIGHT PIPES	I-2007562-6
			4 LIGHT PIPES	I-2007562-5
	NO		NO LIGHT PIPES	2007562-8
			OUTER 2 LIGHT PIPES	2007562-7
			INNER 2 LIGHT PIPES	2007562-6
			4 LIGHT PIPES	2007562-5
SUPERSEDED	NO		NO LIGHT LIGHT PIPES	2007562-4
			OUTER 2 LIGHT PIPES	2007562-3
			INNER 2 LIGHT PIPES	2007562-2
			4 LIGHT PIPES	2007562-1
	ENHANCED EMI	FINISH	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER: ASME Y14.5M-2009		DWN: M. SHIRK 14JAN2008	TE Connectivity	
DIMENSIONS: mm		CHK: D. SZCZESNY 14JAN2008	NAME: CAGE AND PT CONNECTOR ASSEMBLY, WITH EMI SPRINGS, PRESS FIT, 2X6, STACKED SFP+	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: D. SZCZESNY 14JAN2008	SIZE: CAGE CODE: DRAWING NO: RESTRICTED TO	
0 PLC ±0.10		PRODUCT SPEC	A100779C=2007562	
1 PLC ±0.10		108-2331	SCALE: 4:1 SHEET 1 OF 4 REV D	
2 PLC ±0.10		APPLICATION SPEC		
3 PLC ±0.10		114-13219		
4 PLC ±		WEIGHT		
ANGLES		CUSTOMER DRAWING		
FINISH				


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

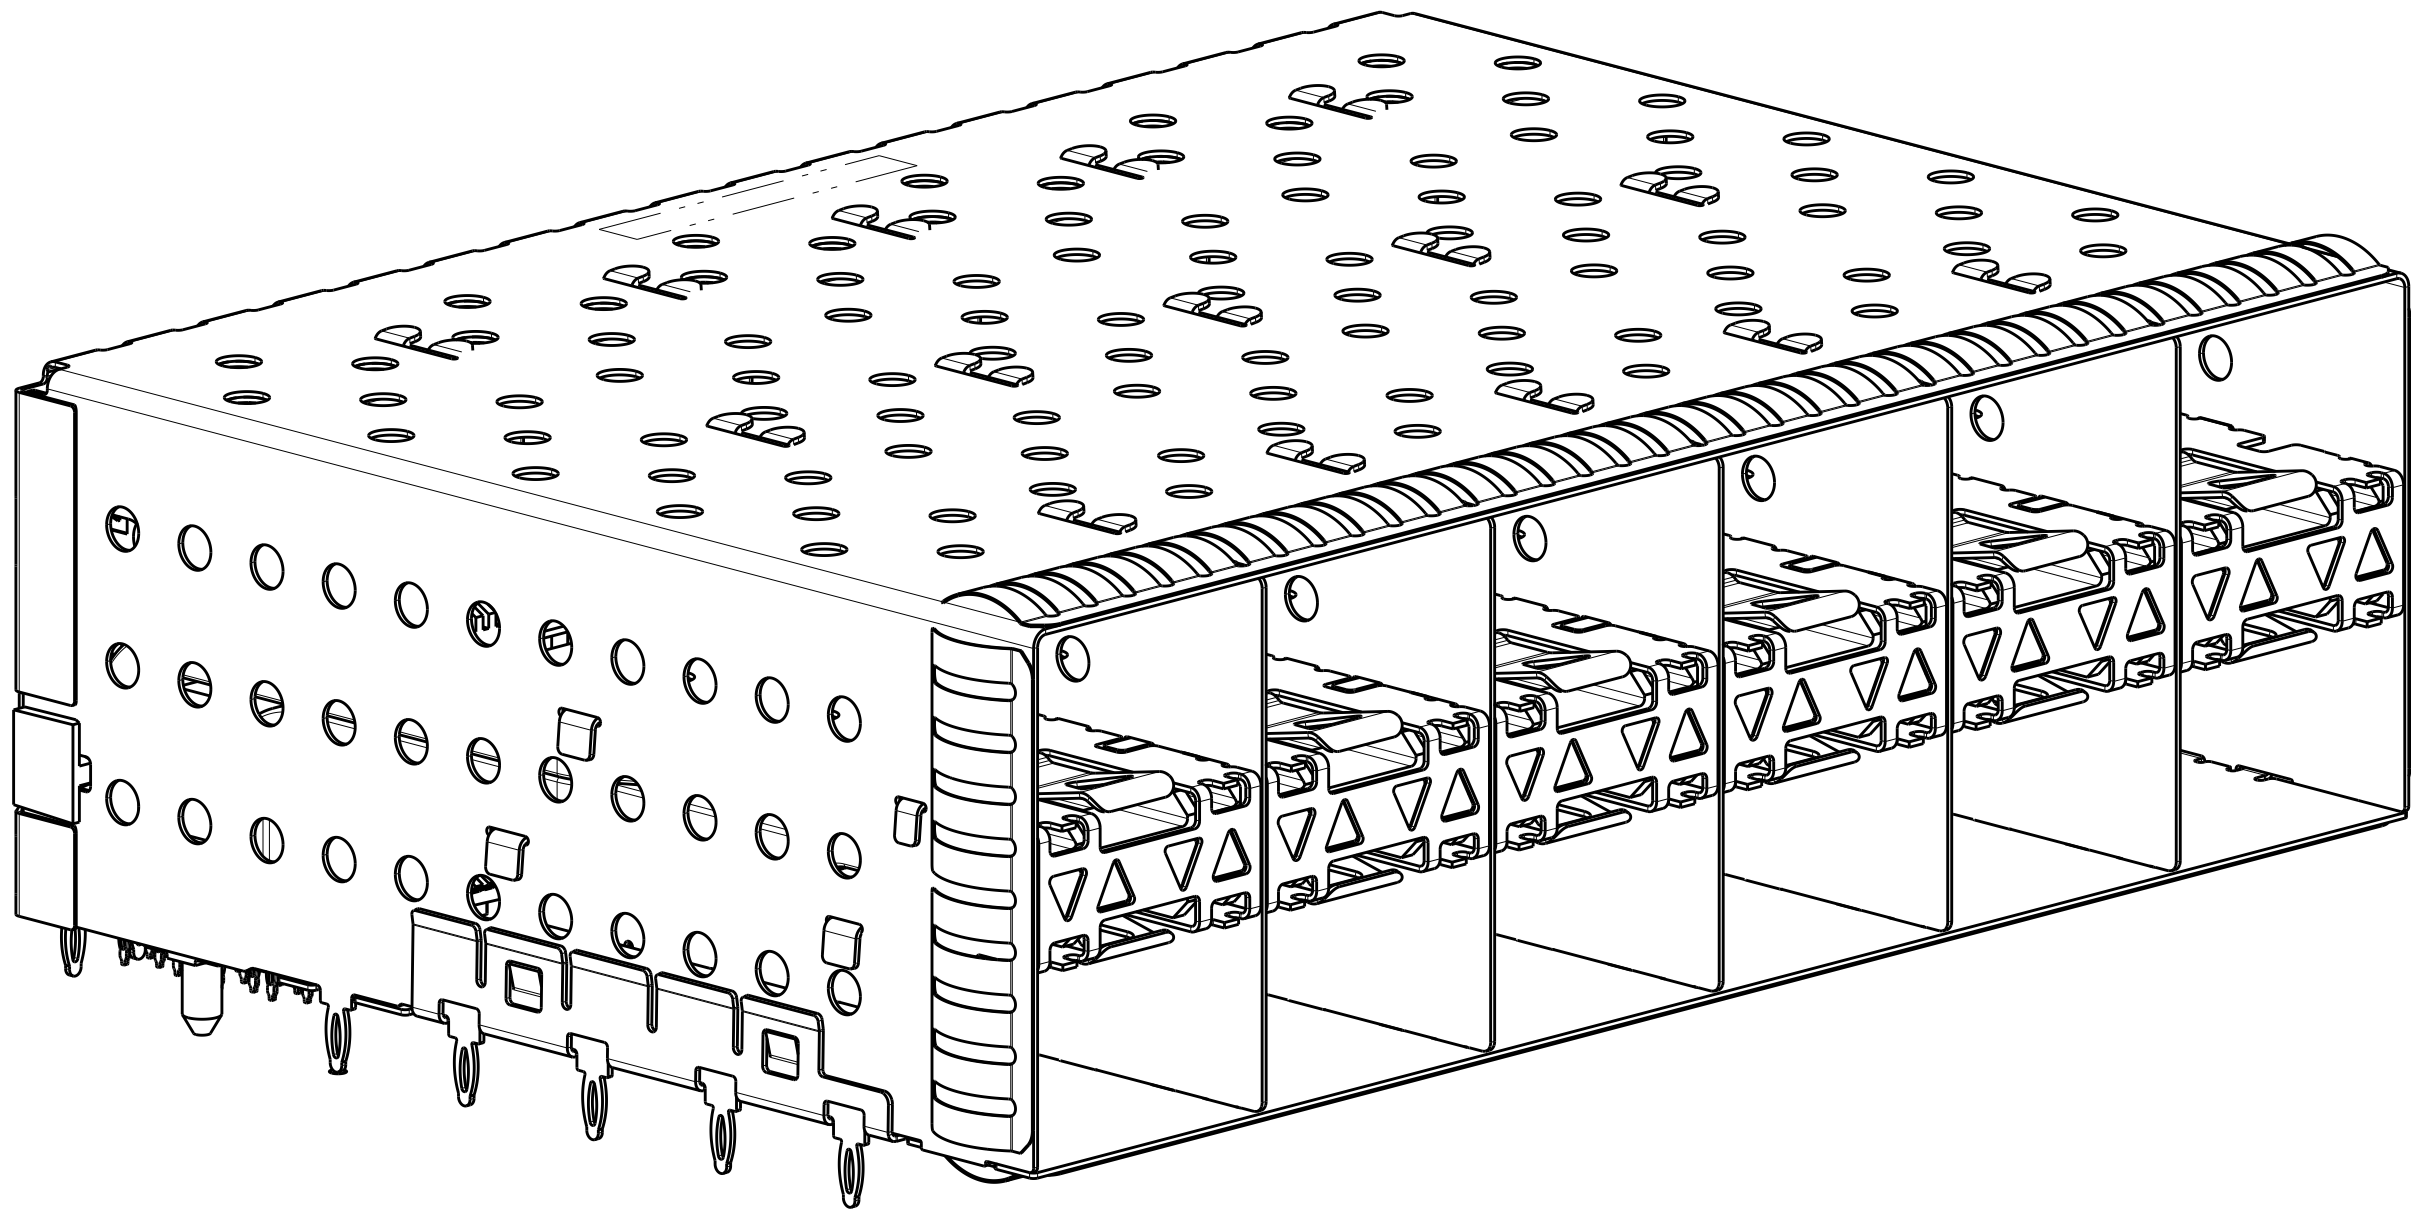


2007562-5 AND 1-2007562-5
SCALE 3:1

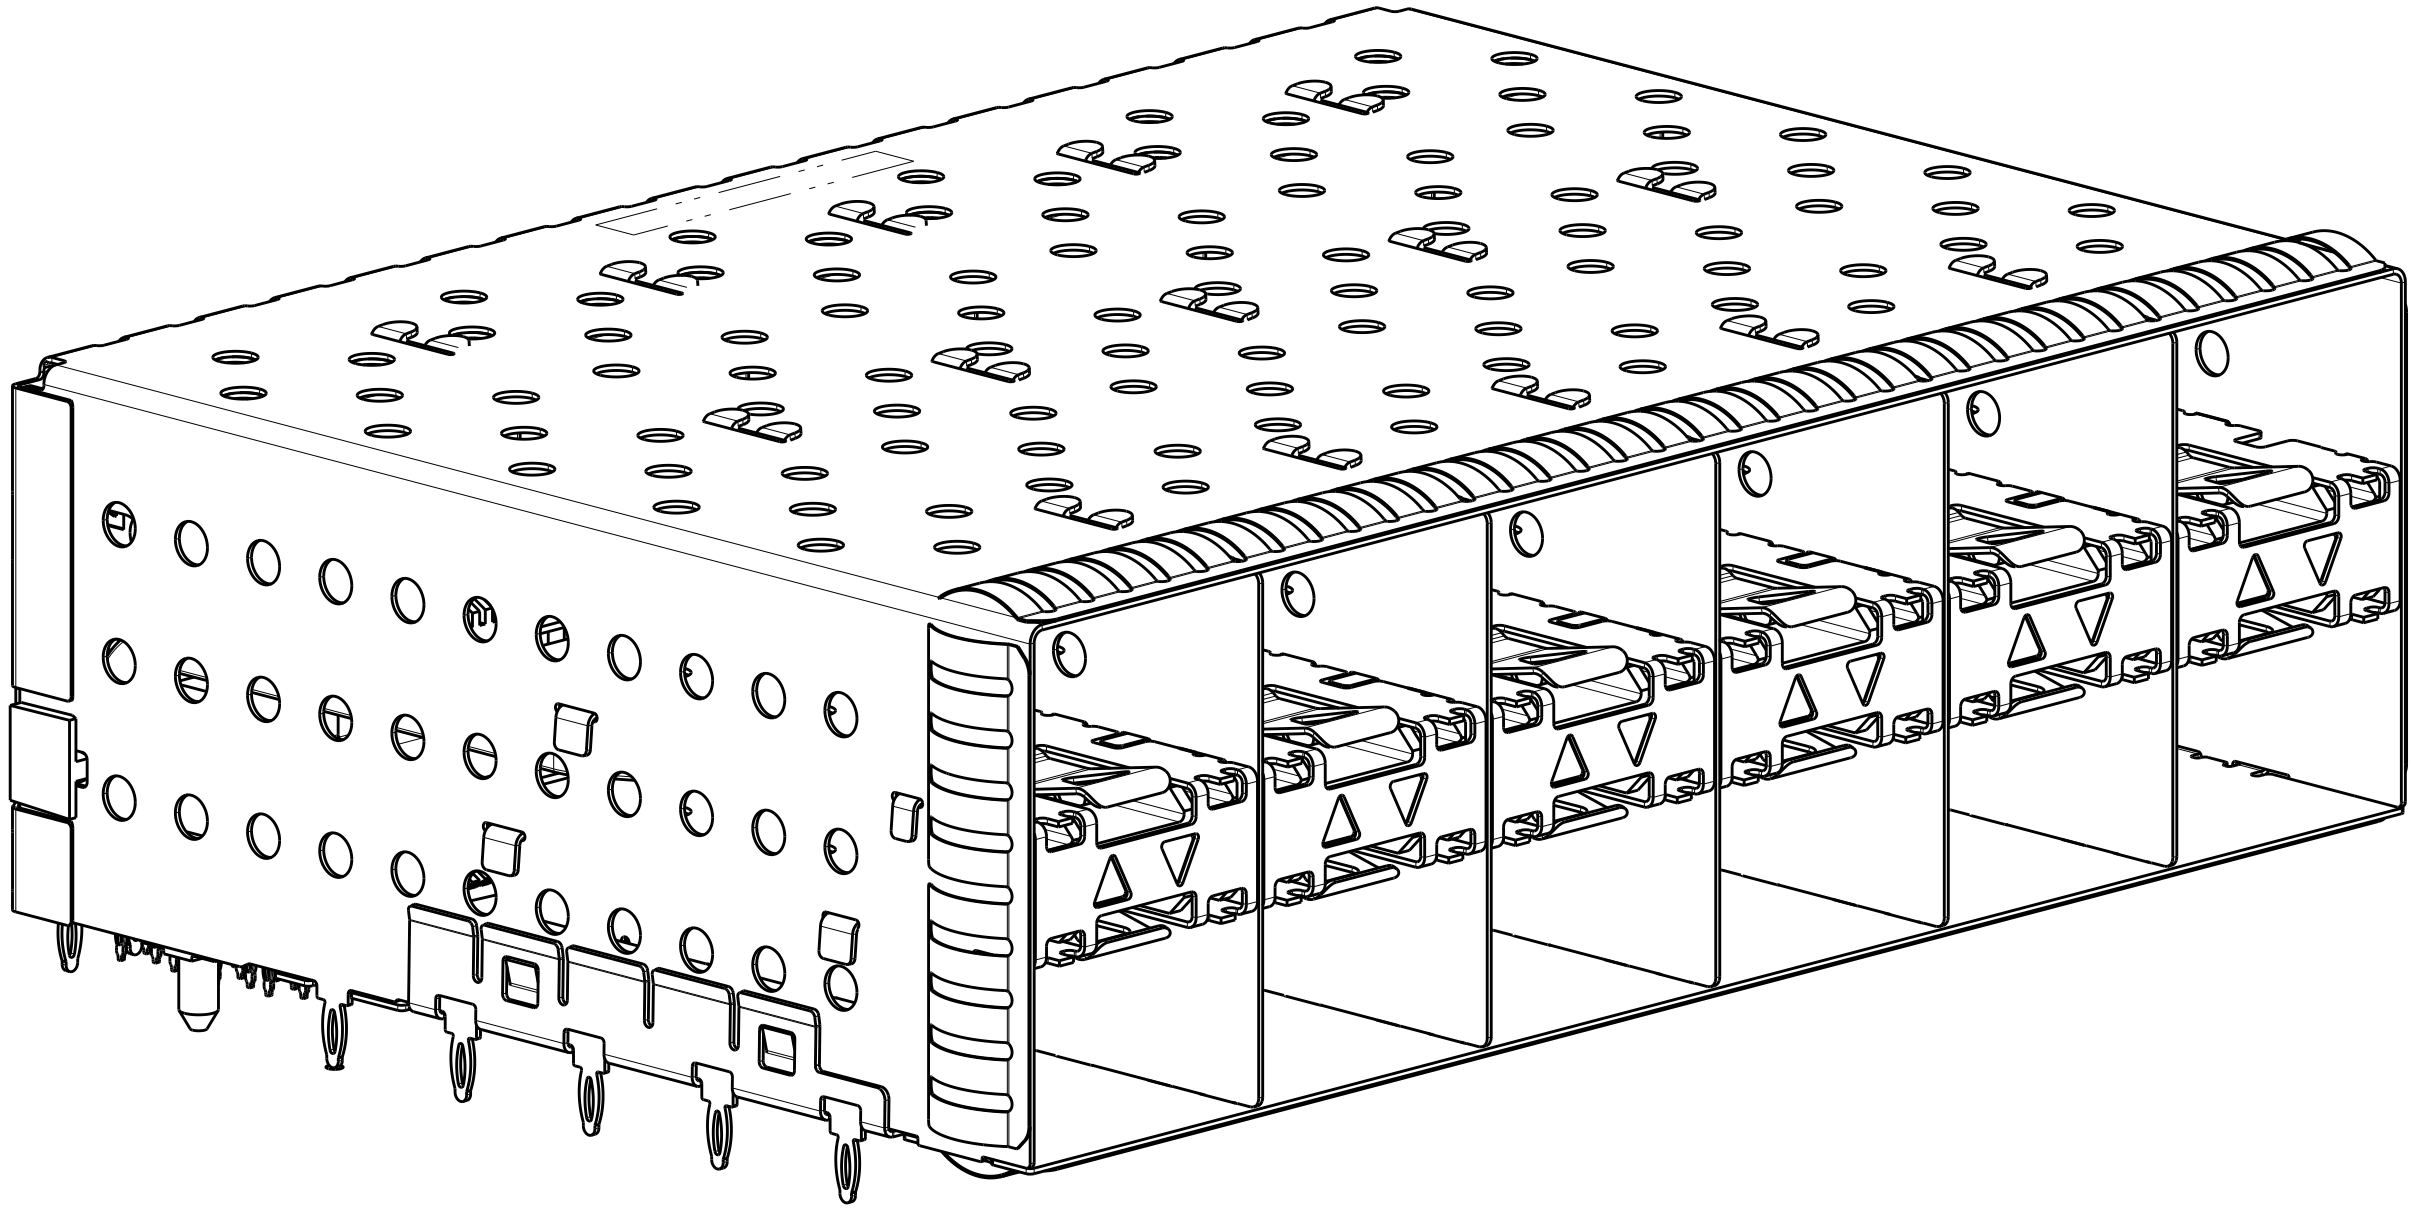

2007562-6 AND 1-2007562-6
SCALE 3:1

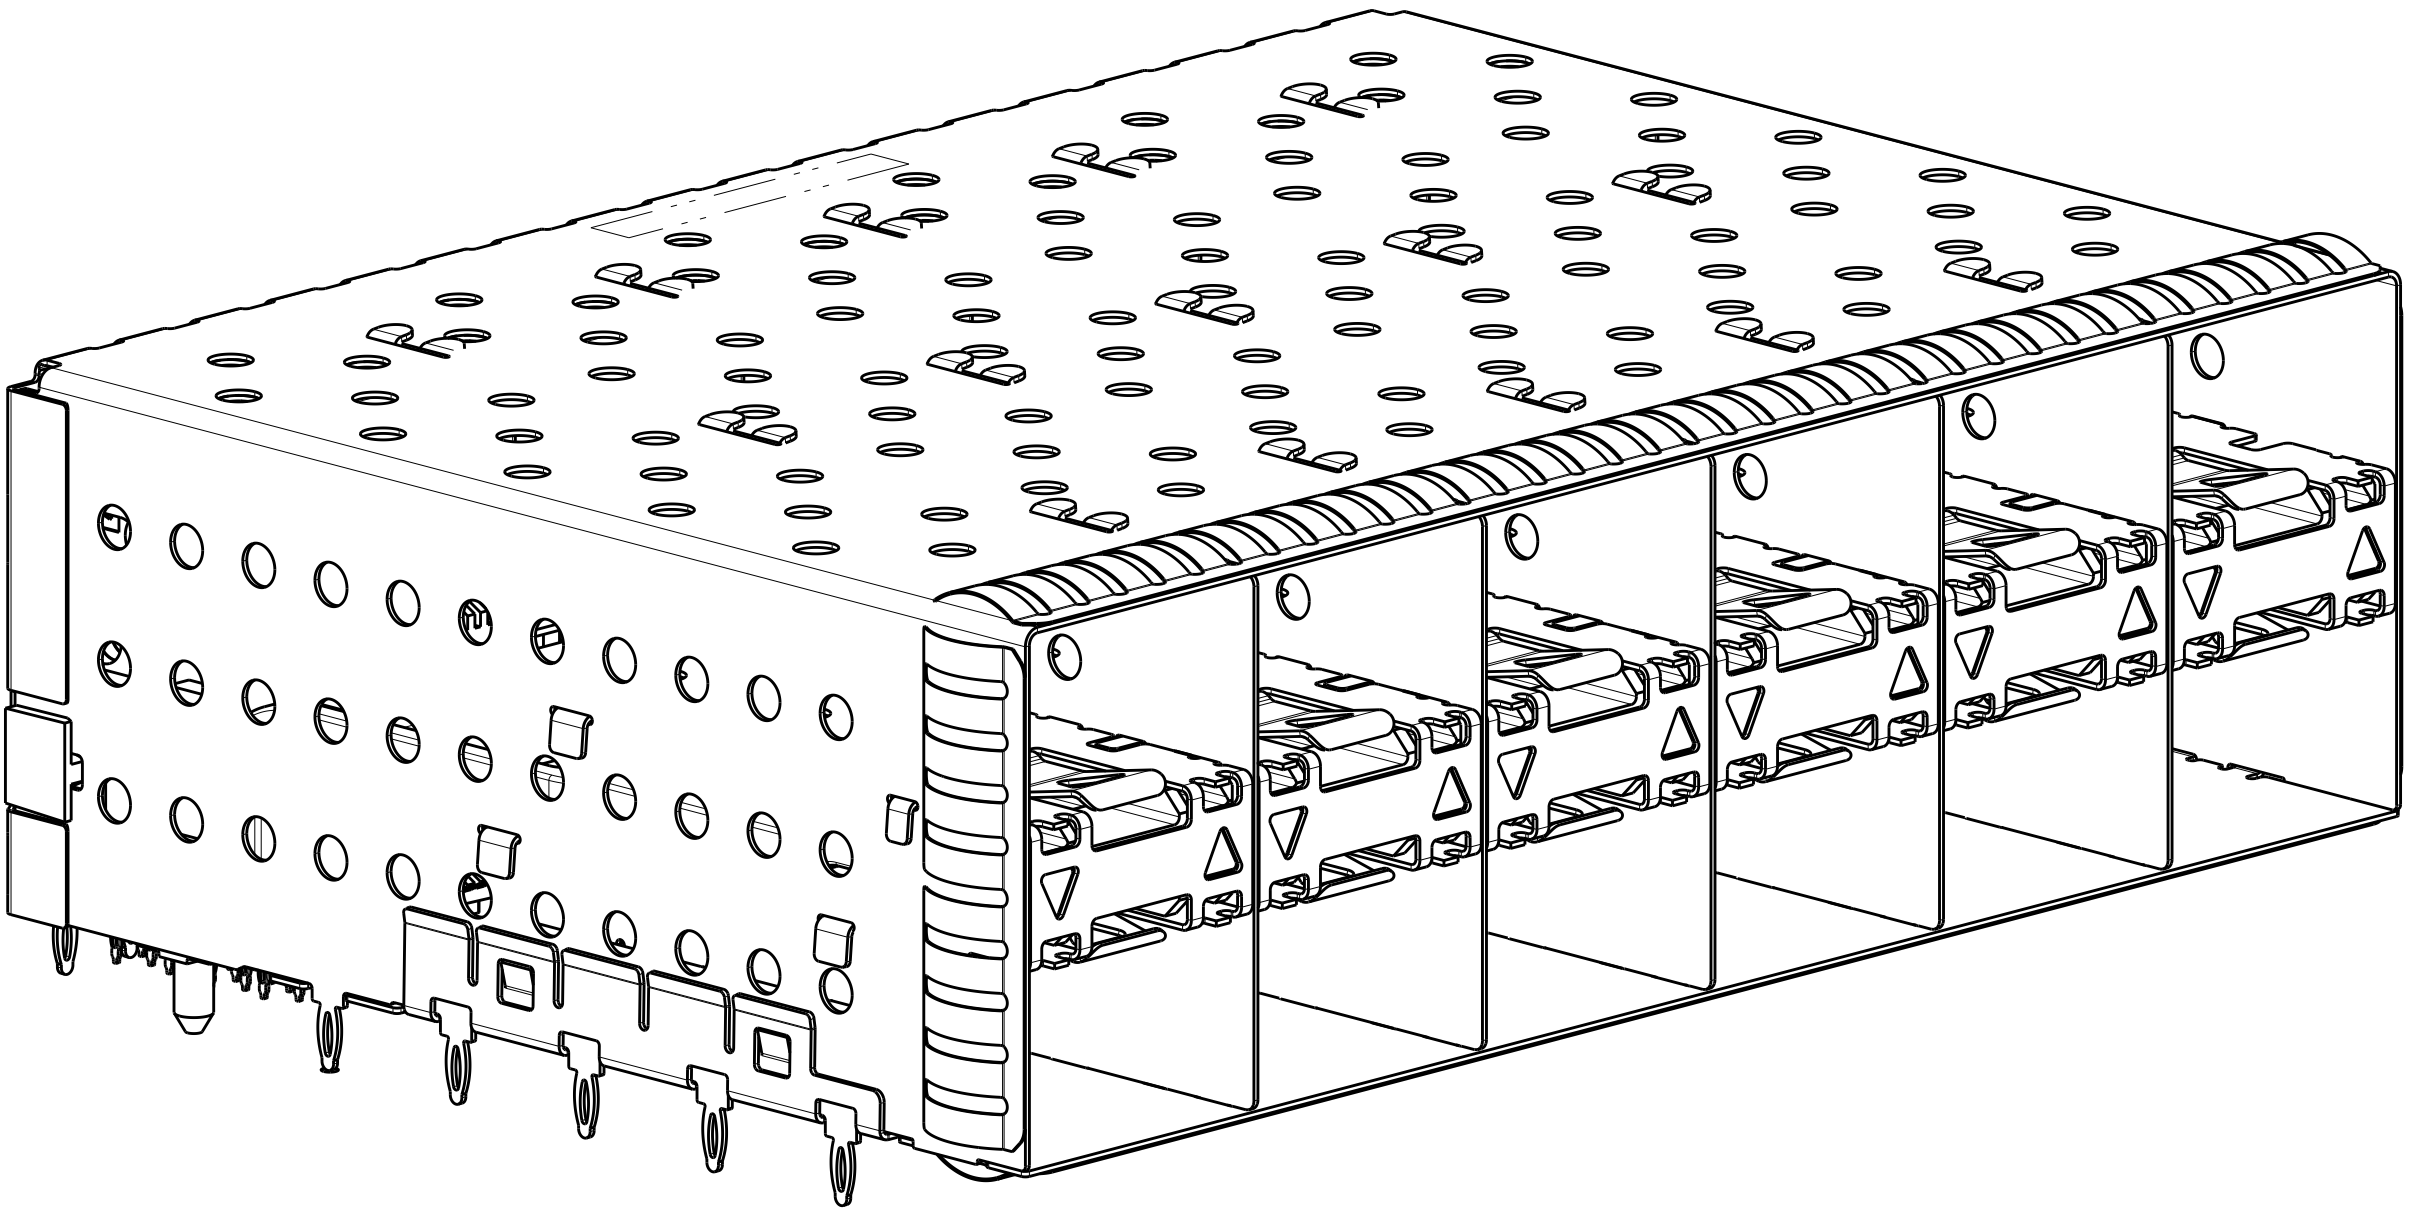

2007562-7 AND 1-2007562-7
SCALE 3:1


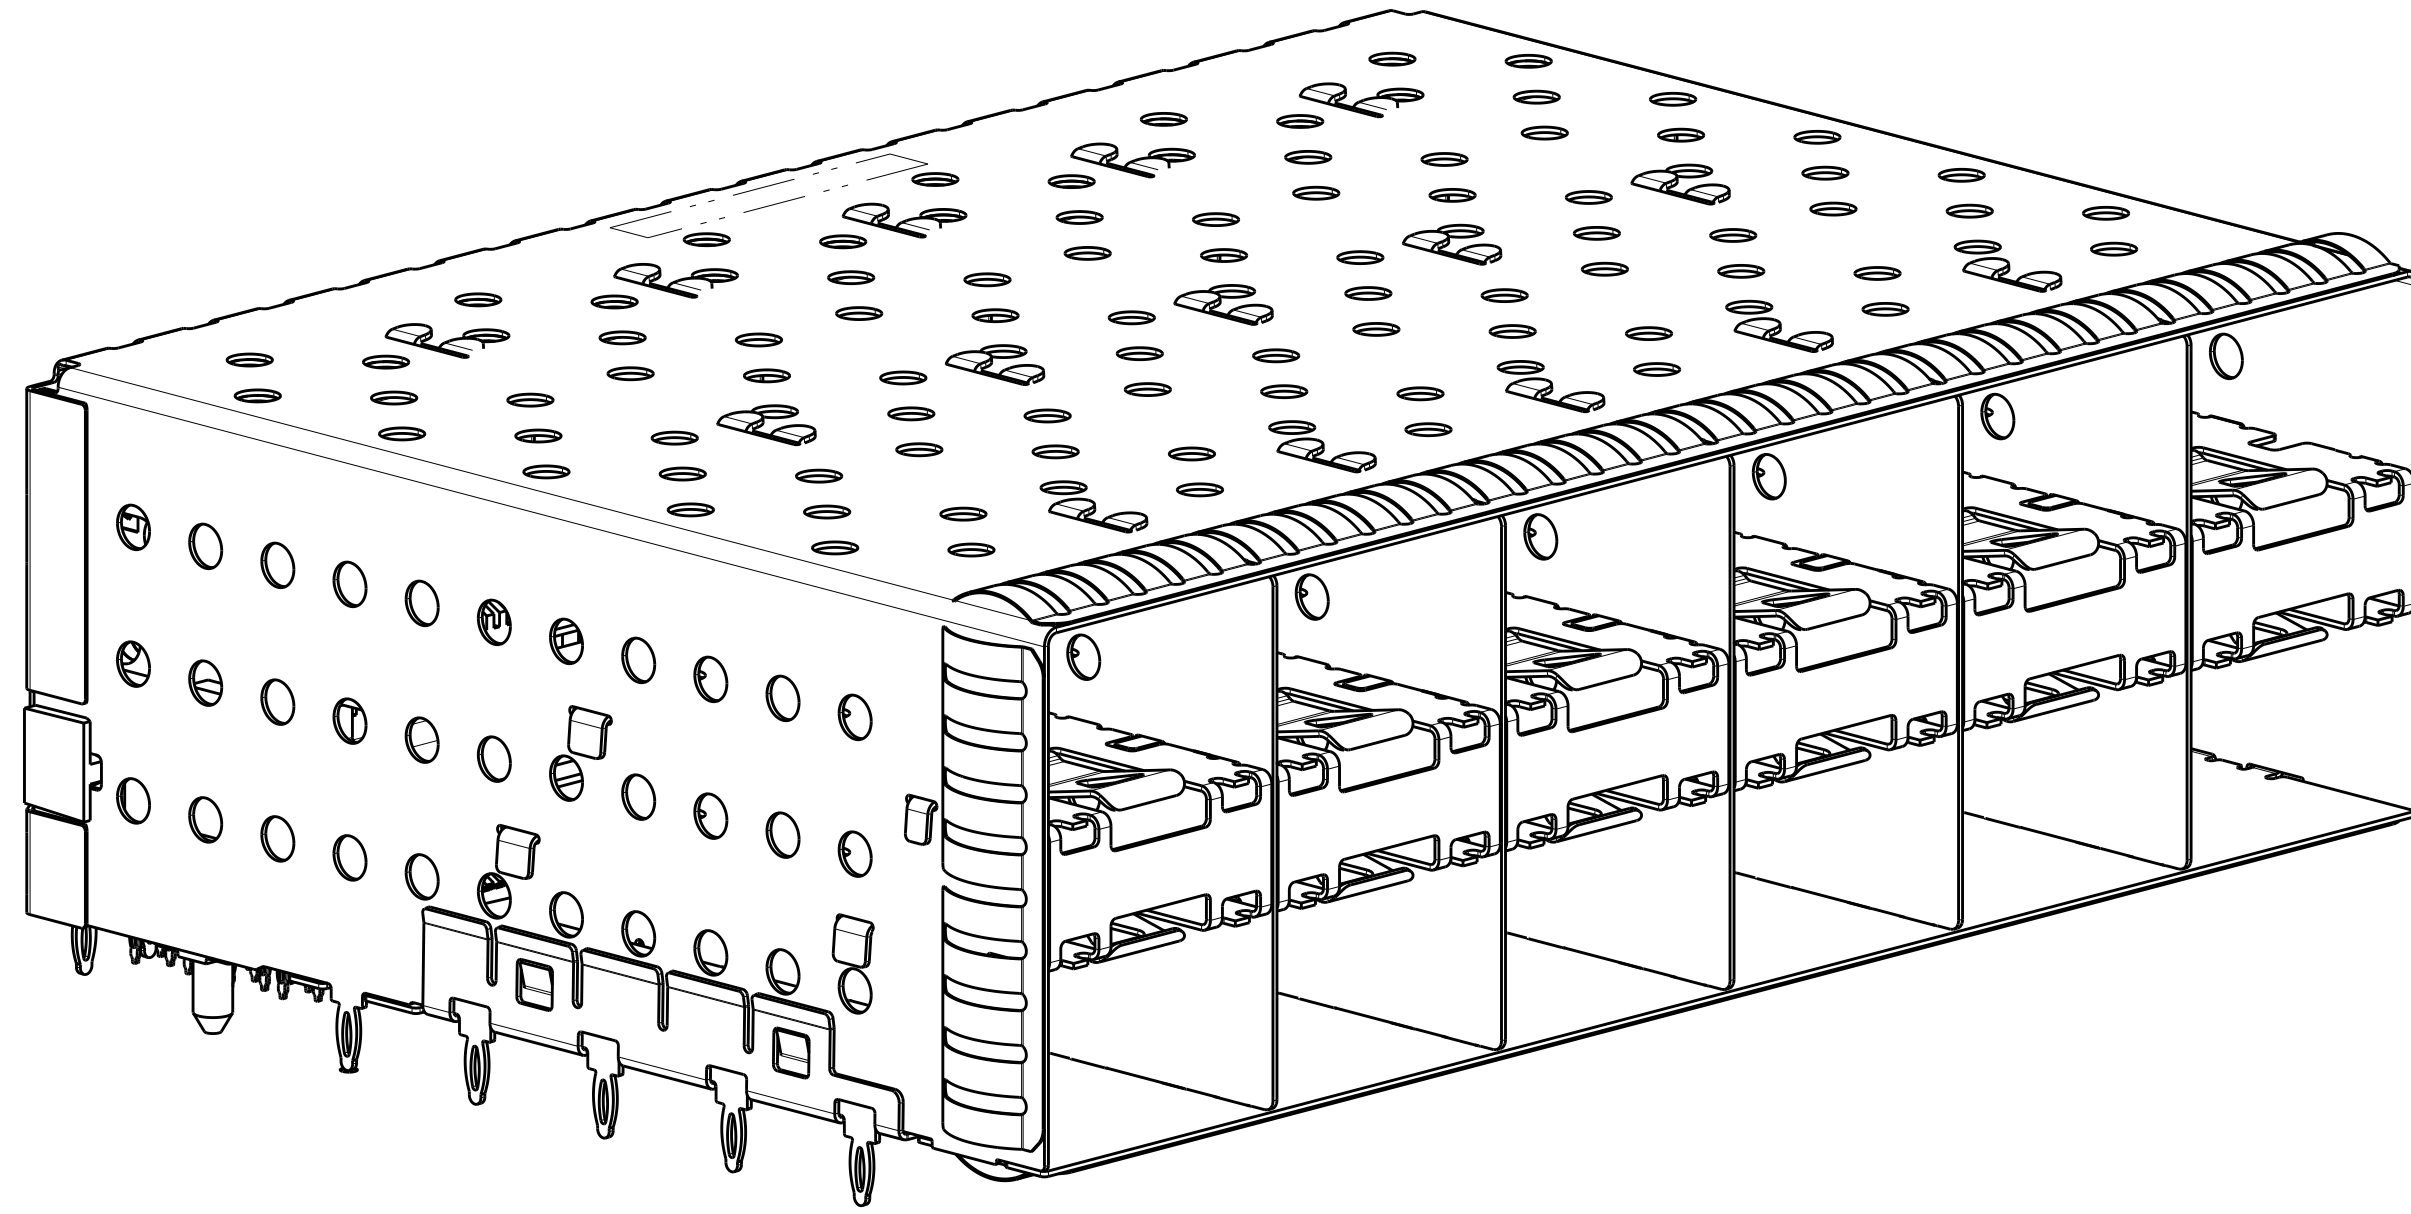


2007562-8 AND 1-2007562-8
SCALE 3:1

THIS DRAWING IS A CONTROLLED DOCUMENT DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009		DWN M. SHIRK	14JAN2008	 TE Connectivity	NAME CAGE AND PT CONNECTOR ASSEMBLY, WITH EMI SPRINGS, PRESS FIT, 2X6, STACKED SFP+
		CHK D. SZCZESNY	14JAN2008		
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. SZCZESNY	14JAN2008
mm		0 PLC ±0.10 1 PLC ±0.10 2 PLC ±0.10 3 PLC ±0.10 4 PLC ±0.10 ANGLES ±°			
				PRODUCT SPEC 108-2331	
MATERIAL		FINISH		APPLICATION SPEC	
				114-13219	
				WEIGHT -	
				SIZE CAGE CODE DRAWING NO A100779C=2007562	
				RESTRICTED TO -	
				SCALE 4:1 SHEET 2 OF 4 REV D	
				CUSTOMER DRAWING	

DATE DRAWING IS CANCELLED.		RECEIVED		BY	
COPYRIGHT 20		BT -		ALL RIGHTS RESERVED.	

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

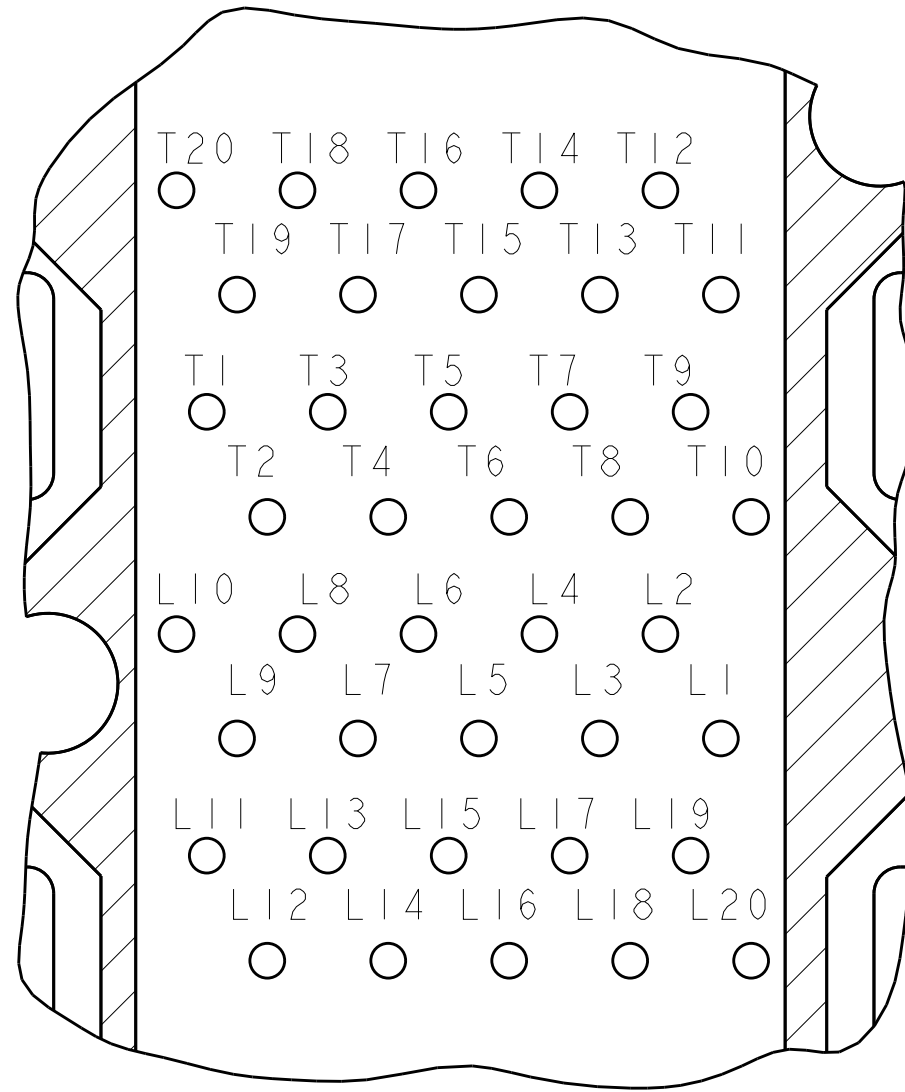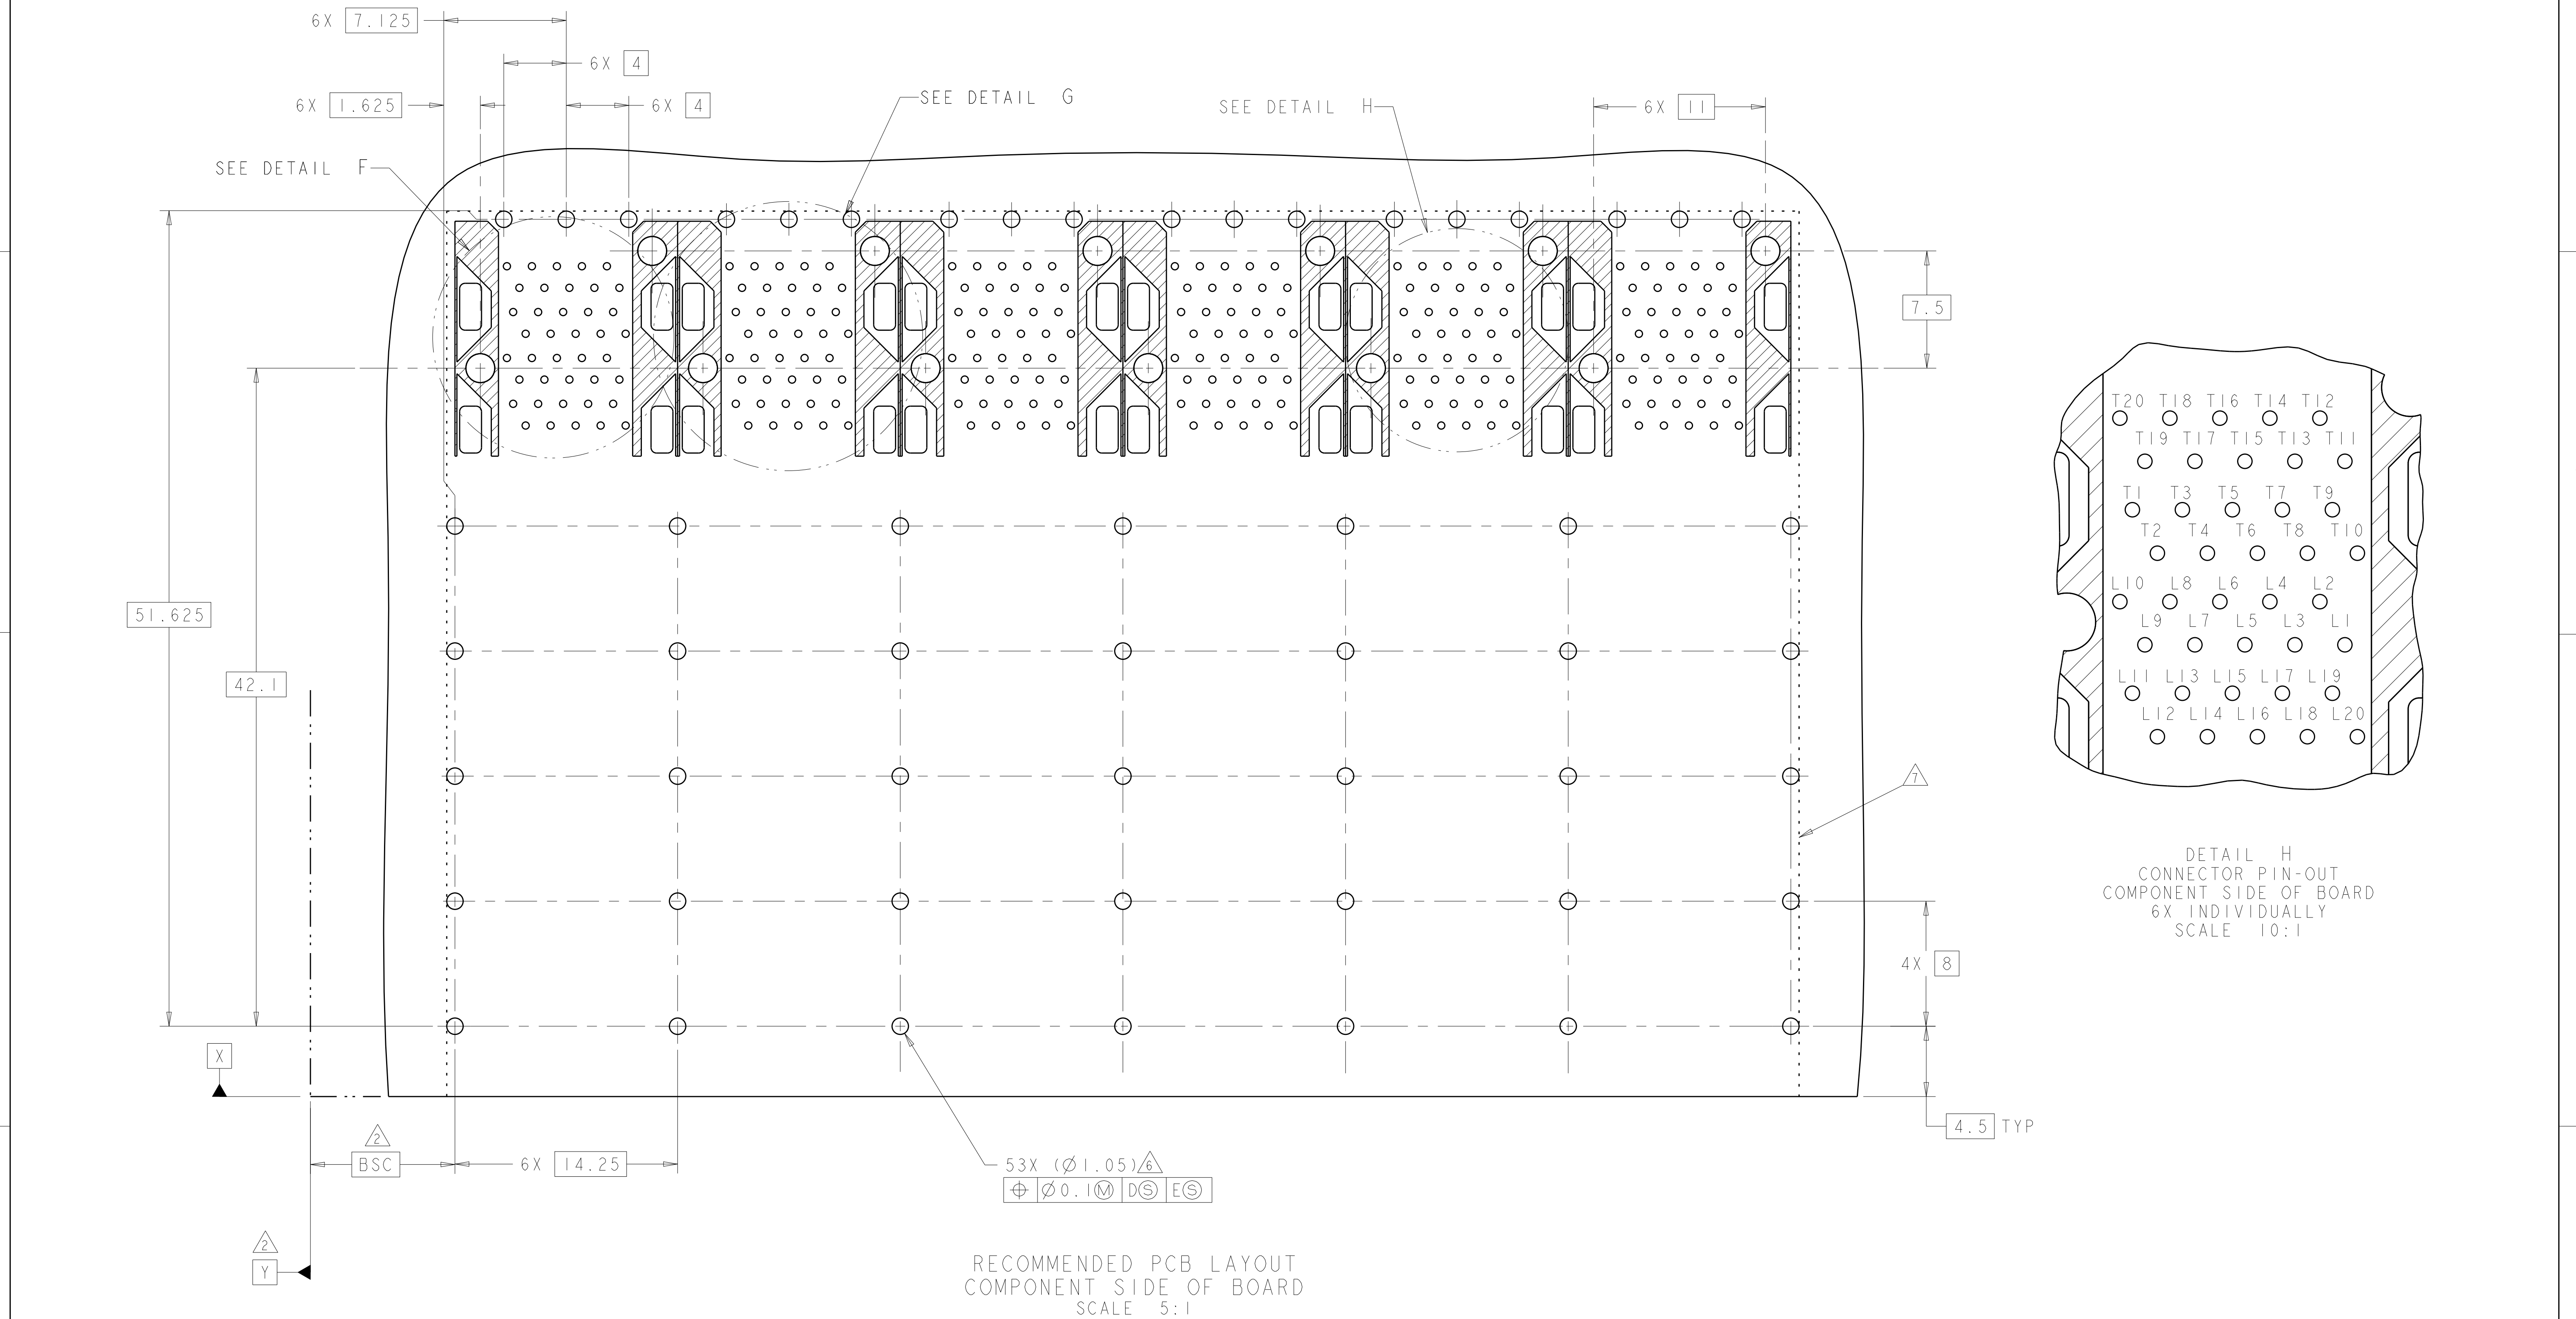

DETAIL H
CONNECTOR PIN-OUT
COMPONENT SIDE OF BOARD
6X INDIVIDUALLY
SCALE 10:1

THIS DRAWING IS A CONTROLLED DOCUMENT.
DIMENSIONING AND TOLERANCING
PER ASME Y14.5M-2009

DIMENSIONS:
mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±0.10
1 PLC ±0.10
2 PLC ±0.10
3 PLC ±0.10
4 PLC ±
ANGLES ±
FINISH

DWN
M. SHIRK
14JAN2008

CHK
D. SZCZESNY
14JAN2008

APVD
D. SZCZESNY
14JAN2008

PRODUCT SPEC
108-2331

APPLICATION SPEC
114-13219

WEIGHT
-

CUSTOMER DRAWING

NAME
CAGE AND PT CONNECTOR ASSEMBLY,
WITH EMI SPRINGS,
PRESS FIT, 2X6, STACKED SFP+

SIZE
A1

CAGE CODE
00779

DRAWING NO
C=2007562

RESTRICTED TO
-


SCALE
4:1

SHEET
3

OF
4

REV
D

TE Connectivity

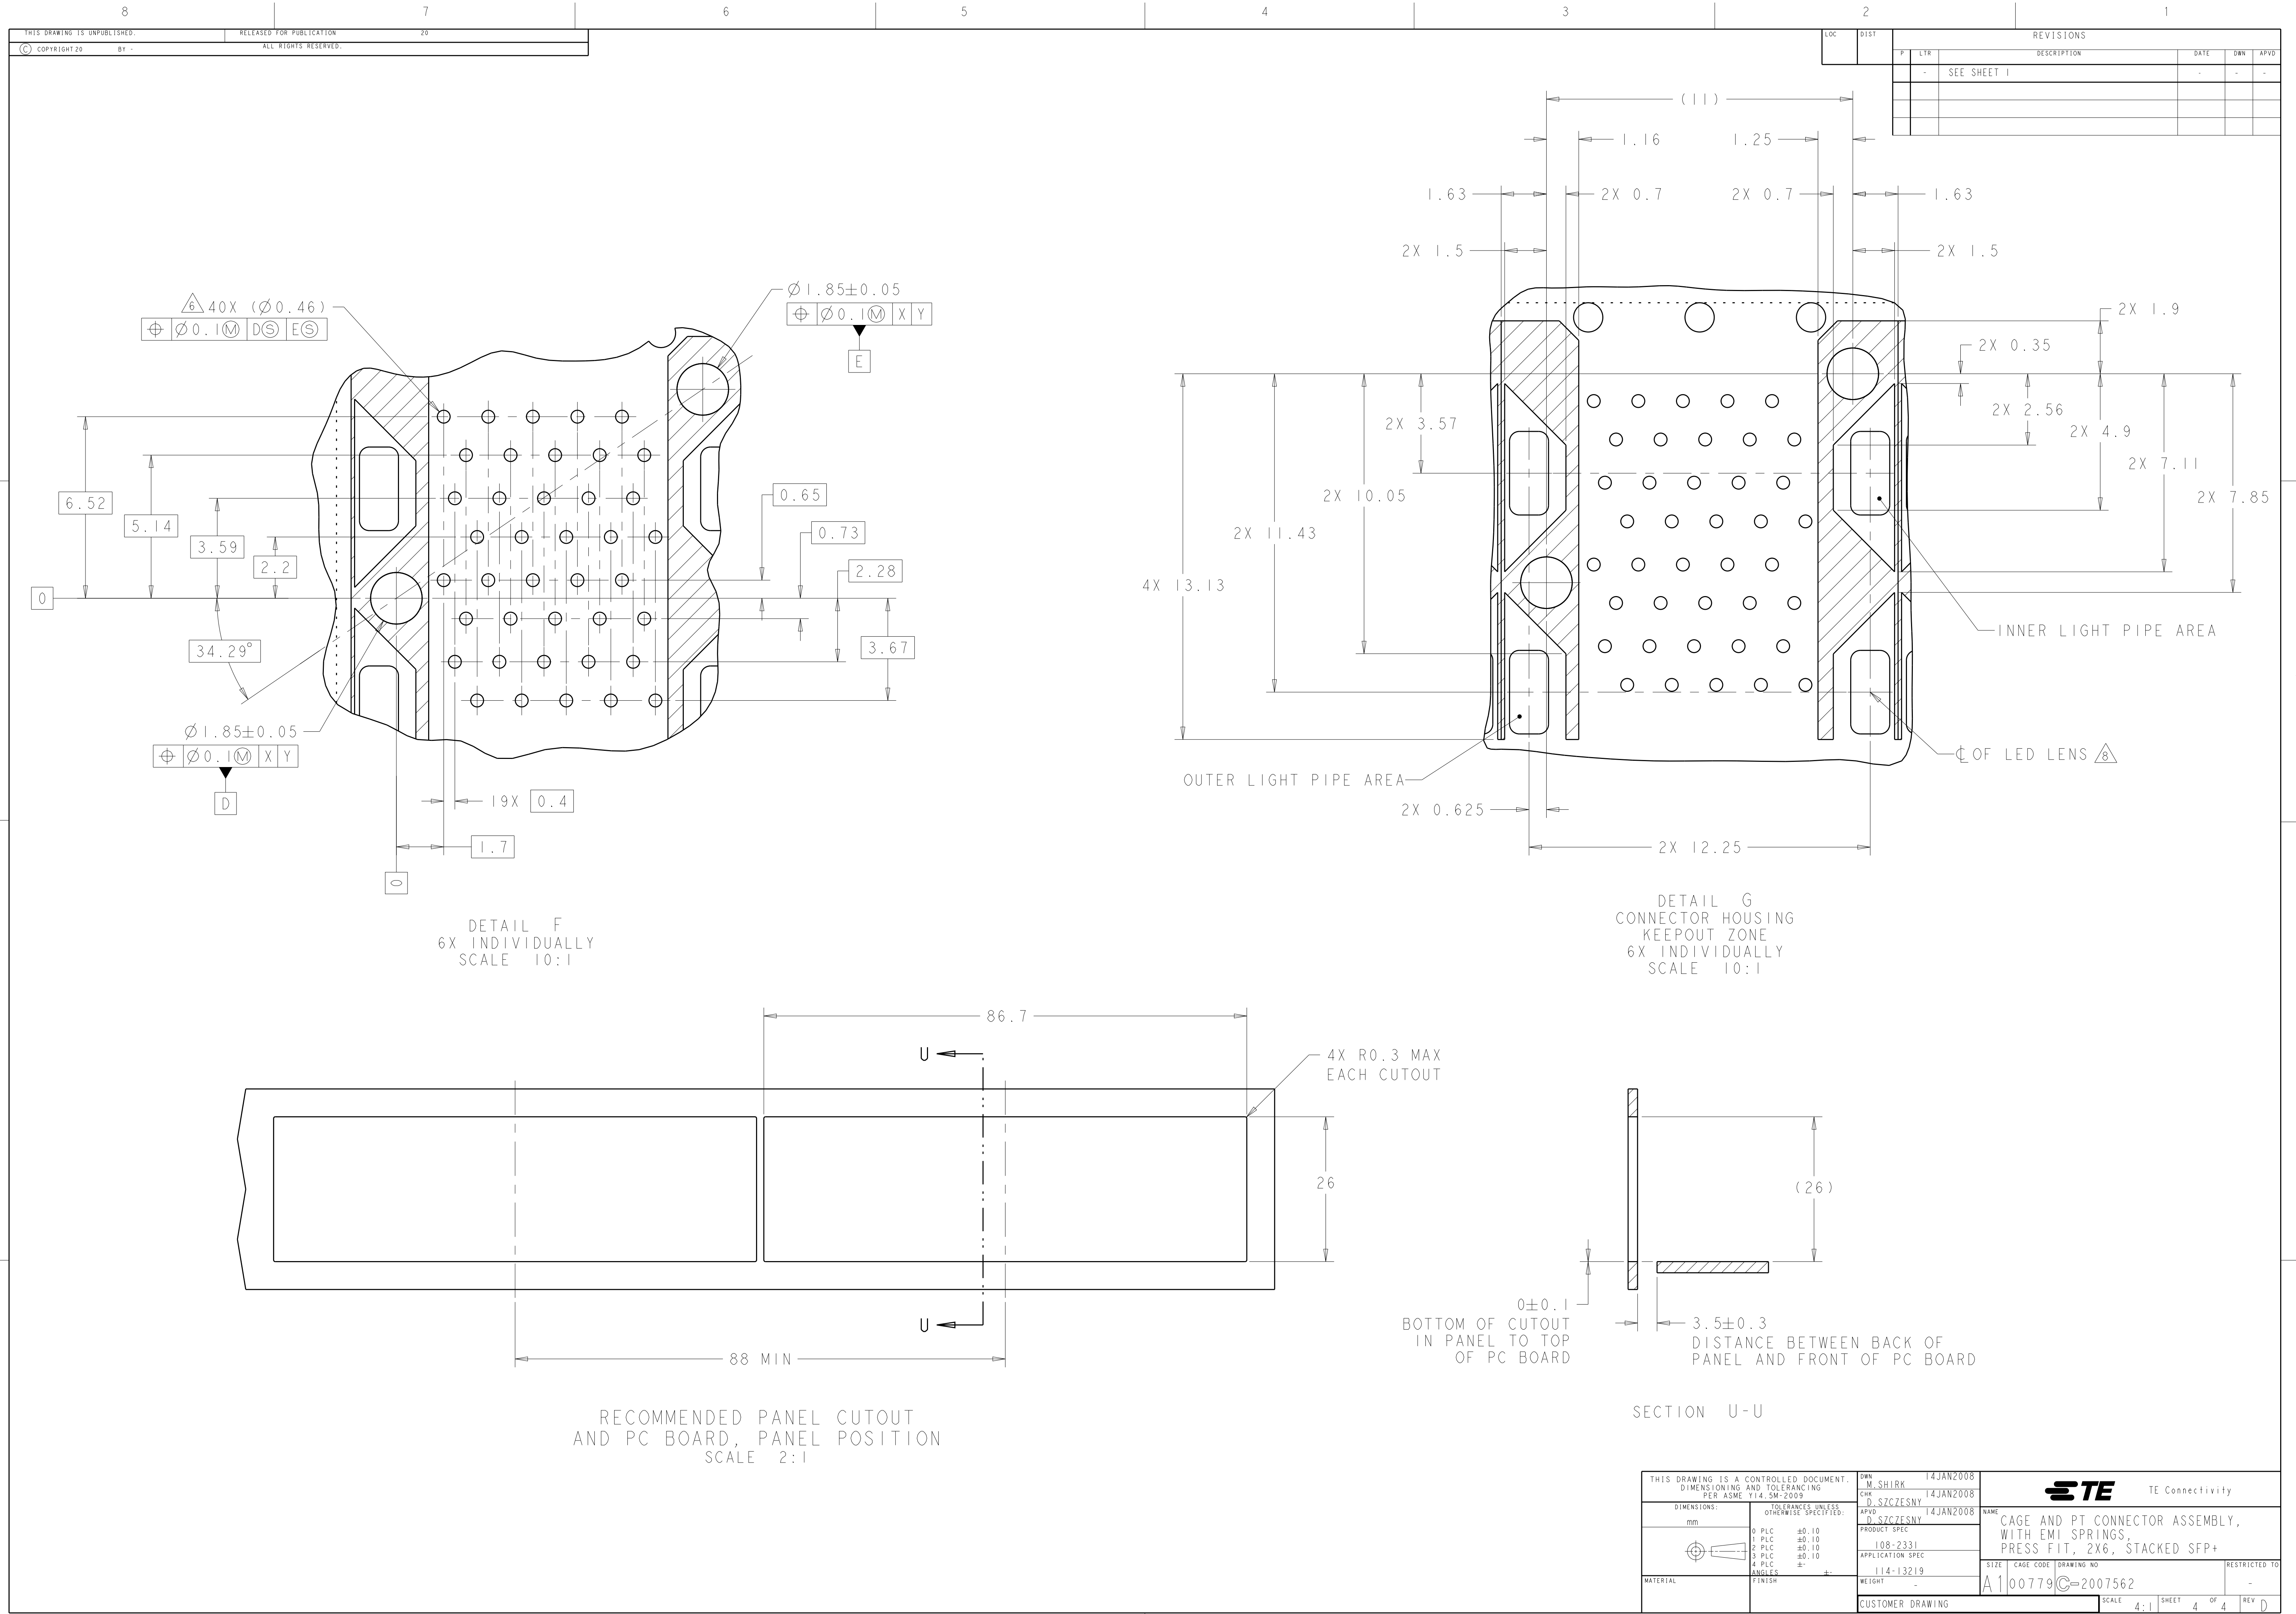

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru