



## Three Channel Digital Isolator

### Features

- Three-channel digital isolator
  - One receive & two transmit channels
- Powered from input signal, no  $V_{CC}$  required
- Small size and low external component count reduce system complexity while preserving system power density
- Operating input voltage = 3.3 V (typ.)
- DC Isolation voltage = 4242  $V_{DC}$
- AC Isolation voltage = 3000  $V_{RMS}$
- 10 mm x 10 mm Land Grid Array (LGA) package
- 8.6 mm creepage
- Safety Regulatory Approvals
  - IEC 60950-1
  - EN 60950-1
  - UL 60950-1

### Typical Applications

- 380 VDC Power Distribution
- High End Computing Systems
- Automated Test Equipment
- Industrial Systems
- High Density Power Supplies
- Communications Systems
- Transportation

### Product Description


The I13xL1A0 is a three-channel passive Digital Isolator which enables secondary referenced digital power system monitoring and control when used in conjunction with Vicor's Digital Supervisor and high performance power conversion, regulation, and transformation modules.

The I13xL1A0's passive design reduces system complexity, while its small footprint increases system power density.


### Standard Models

| Part Number       | Package Type     | Temperature              |
|-------------------|------------------|--------------------------|
| I13 <b>T</b> L1A0 | LGA (10 x 10 mm) | T-Grade (-40°C to 125°C) |
| I13 <b>M</b> L1A0 | LGA (10 x 10 mm) | M-Grade (-55°C to 125°C) |

## Typical Application

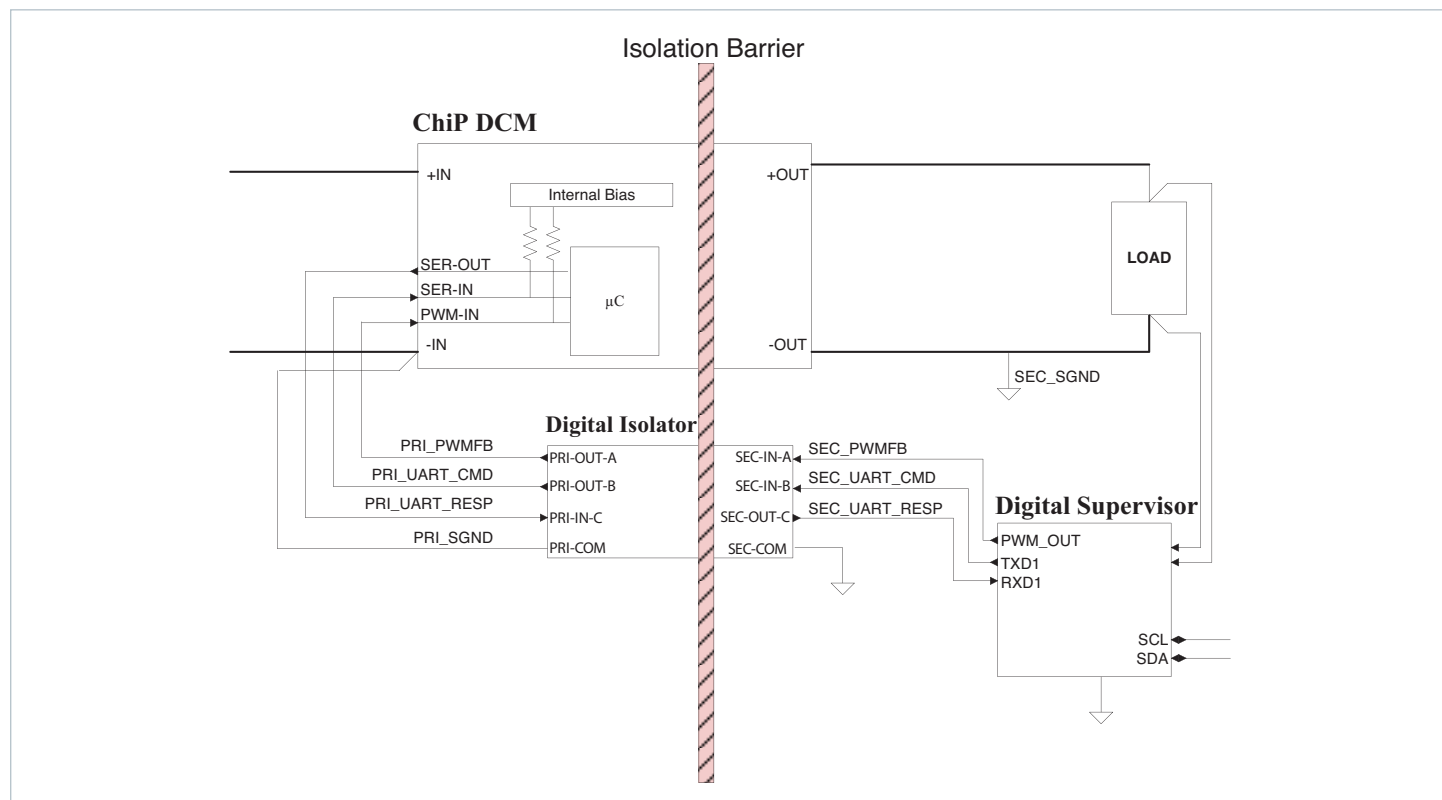


I13xL1A0 + Isolated Regulated DC/DC Converter Module and Digital Supervisor

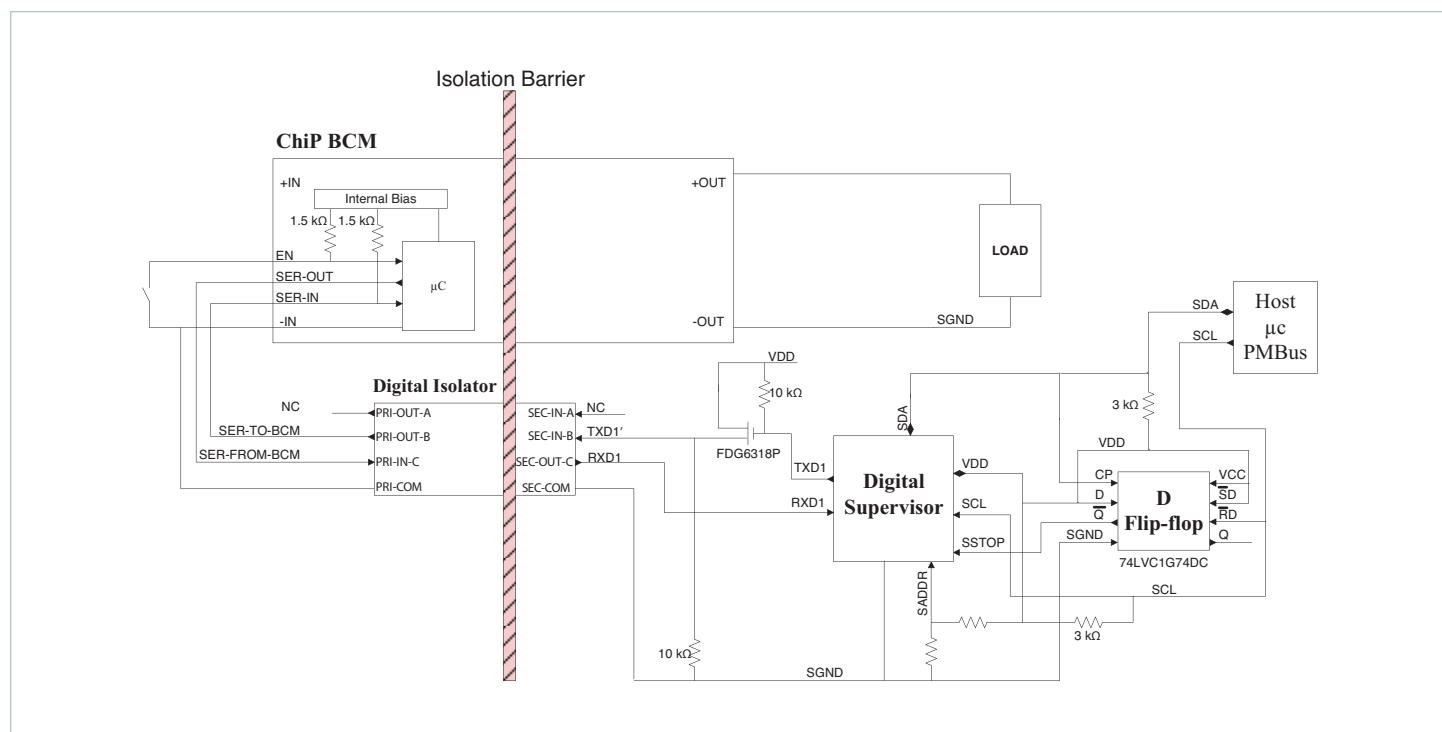

I13xL1A0 + Offline BCM and Digital Supervisor

## Pin Configuration

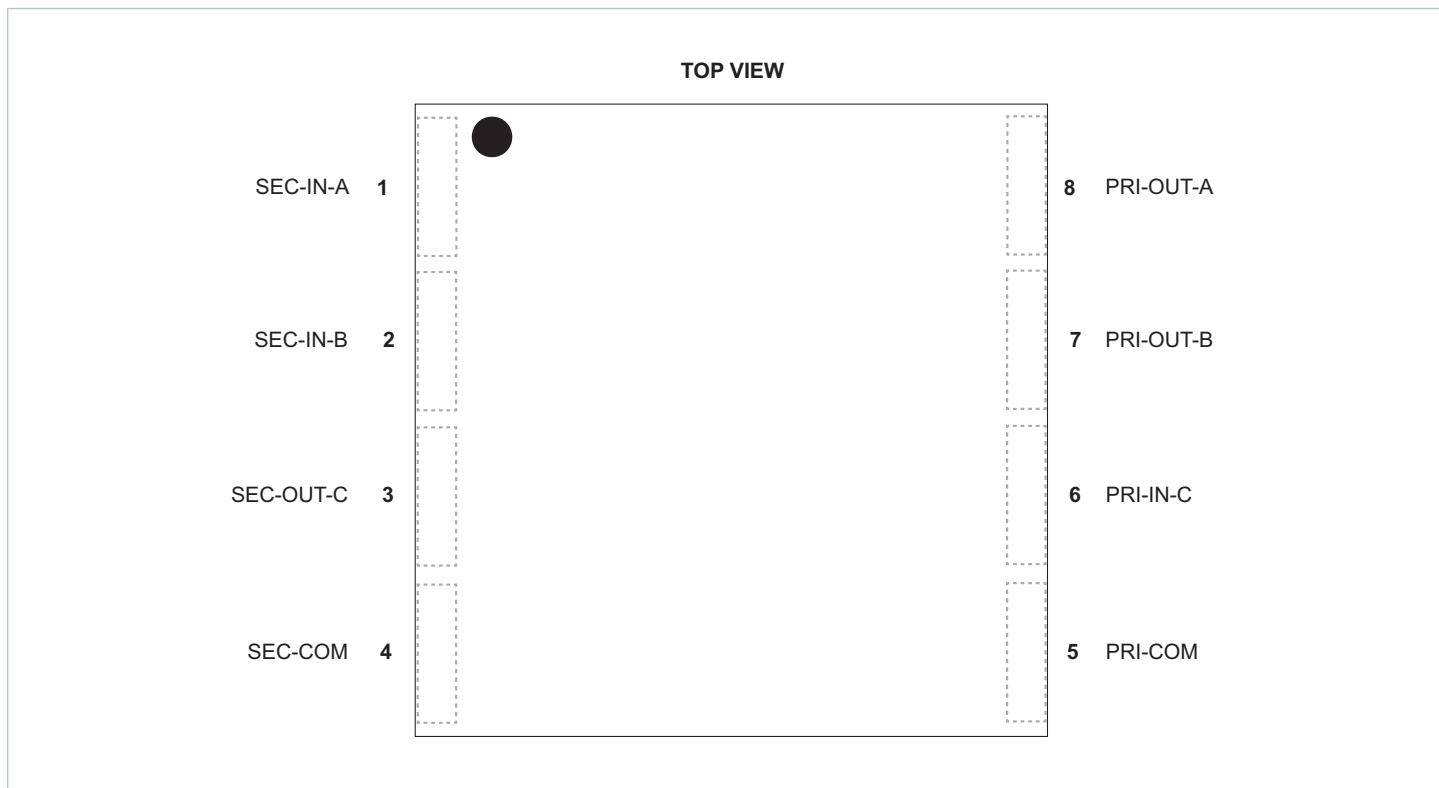

## Pin Description

| PIN Number | Signal Name | PIN Type                | Function                             |
|------------|-------------|-------------------------|--------------------------------------|
| 1          | SEC-IN-A    | INPUT                   | A channel input on secondary         |
| 2          | SEC-IN-B    | INPUT                   | B channel input on secondary         |
| 3          | SEC-OUT-C   | OUTPUT                  | C channel output on secondary        |
| 4          | SEC-COM     | COMMON (secondary side) | Reference for secondary side signals |
| 5          | PRI-COM     | COMMON (primary side)   | Reference for primary side signals   |
| 6          | PRI-IN-C    | INPUT                   | C channel input on primary           |
| 7          | PRI-OUT-B   | OUTPUT                  | B channel output on primary          |
| 8          | PRI-OUT-A   | OUTPUT                  | A channel output on primary          |

## Absolute Maximum Ratings

ABSOLUTE MAXIMUM ratings are stress ratings only. Operation at or beyond these maximum ratings can cause permanent damage to the device. Electrical specifications do not apply when operating beyond rated operating conditions. Operating beyond rated operating conditions for extended period of time may affect device reliability. All voltages are specified relative to the associated COMMON pin unless otherwise noted. Positive pin current represents current flowing out of the pin.

| Parameter                                    | Comments                     | Min   | Max | Unit |
|----------------------------------------------|------------------------------|-------|-----|------|
| Any input                                    |                              | -0.5  | 4.6 | V    |
| Any output                                   | Off state voltage            | -0.5  | 6   | V    |
|                                              | On state current             | -10   |     | mA   |
| Dielectric withstand<br>(PRI-COM to SEC-COM) | Reinforced insulation 1 min. | 4,242 |     | Vdc  |
|                                              |                              | 3,000 |     | Vrms |
| Operating Internal Temperature               | T grade                      | -40   | 125 | °C   |
|                                              | M grade                      | -55   | 125 | °C   |
| Storage Temperature                          | T grade                      | -40   | 125 | °C   |
|                                              | M grade                      | -65   | 125 | °C   |

## Electrical Specifications

Specifications apply with  $T_{INT} = 25^{\circ}\text{C}$  unless otherwise noted. **Boldface** specifications apply over the temperature range of  $-40^{\circ}\text{C} \leq T_{INT} \leq +125^{\circ}\text{C}$  (T-Grade), or  $-55^{\circ}\text{C} \leq T_{INT} \leq +125^{\circ}\text{C}$  (M-Grade).

| Attribute                      | Symbol       | Conditions / Notes                                                                          | Min        | Typ | Max       | Unit              |
|--------------------------------|--------------|---------------------------------------------------------------------------------------------|------------|-----|-----------|-------------------|
| Minimum pulse width            | $t_{PW-MIN}$ | $V_{IN} = 3.3\text{ V}$                                                                     | <b>84</b>  |     |           | ns                |
| Turn-on time                   | $t_{ON}$     | $V_{IN} = 3.3\text{ V}$                                                                     | <b>35</b>  | 45  | <b>58</b> | ns                |
| Output fall time at turn-on    | $t_{FALL}$   | Output with $1.5\text{ k}\Omega$ to $3.3\text{ V}$                                          |            | 22  | <b>26</b> | ns                |
| Turn-off time                  | $t_{OFF}$    | $V_{IN} = 0.0\text{ V}$                                                                     | <b>30</b>  | 55  | <b>84</b> | ns                |
| Output rise time at turn-off   | $t_{RISE}$   | Output with $1.5\text{ k}\Omega$ to $3.3\text{ V}$                                          |            | 65  | <b>95</b> | ns                |
| Common mode Transient Immunity | $V_{CMTI}$   | $V_{IN} = 0.0\text{ V}$ or $3.3\text{ V}$ , output = $1.5\text{ k}\Omega$ to $3.3\text{ V}$ | <b>3.0</b> |     |           | kV/ $\mu\text{s}$ |

## Signal Characteristics


Specifications apply with  $T_{INT} = 25^{\circ}\text{C}$  unless otherwise noted. **Boldface** specifications apply over the temperature range of  $-40^{\circ}\text{C} \leq T_{INT} \leq +125^{\circ}\text{C}$  (T-Grade), or  $-55^{\circ}\text{C} \leq T_{INT} \leq +125^{\circ}\text{C}$  (M-Grade).

| PRI-COM, SEC-COM                                                                                                                                                                                    |       |                      |              |                                            |     |     |     |      |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|----------------------|--------------|--------------------------------------------|-----|-----|-----|------|
| <ul style="list-style-type: none"> <li>PRI-COM and SEC-COM serve as the return current node for any channel inputs or outputs on each side of the Digital Isolator's isolation boundary.</li> </ul> |       |                      |              |                                            |     |     |     |      |
| SIGNAL TYPE                                                                                                                                                                                         | STATE | ATTRIBUTE            | SYMBOL       | CONDITIONS / NOTES                         | MIN | TYP | MAX | UNIT |
| COMMON MODE                                                                                                                                                                                         | Any   | Coupling Capacitance | $C_{IN-OUT}$ | $V_{CM} = 0\text{ V}$ , $f = 1\text{ MHz}$ |     | 7.5 |     | pF   |



| PRI-IN- <i>n</i> , SEC-IN- <i>n</i>                                                                                                                                                               |       |                   |          |                         |             |      |             |      |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------------------|----------|-------------------------|-------------|------|-------------|------|
| <ul style="list-style-type: none"> <li>PRI-IN-<i>n</i> and SEC-IN-<i>n</i> are the drive sides of each channel. The input characteristics are the same for each of the three channels.</li> </ul> |       |                   |          |                         |             |      |             |      |
| SIGNAL TYPE                                                                                                                                                                                       | STATE | ATTRIBUTE         | SYMBOL   | CONDITIONS / NOTES      | MIN         | TYP  | MAX         | UNIT |
| INPUT                                                                                                                                                                                             | OFF   | Input voltage     | $V_{IL}$ |                         | <b>0.00</b> |      | <b>1.96</b> | V    |
|                                                                                                                                                                                                   |       | Input capacitance | $C_{IN}$ |                         |             | 200  | <b>210</b>  | pF   |
|                                                                                                                                                                                                   | ON    | Input voltage     | $V_{IH}$ |                         | <b>2.5</b>  | 3.3  | <b>3.6</b>  | V    |
|                                                                                                                                                                                                   |       | Input current     | $I_{IH}$ | $V_{IN} = 3.3\text{ V}$ |             | 5.06 | <b>5.7</b>  | mA   |

| PRI-OUT- <i>n</i> , SEC-OUT- <i>n</i>                                                                                                                                                                  |       |                            |                   |                                                                                                               |             |      |            |               |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|----------------------------|-------------------|---------------------------------------------------------------------------------------------------------------|-------------|------|------------|---------------|
| <ul style="list-style-type: none"> <li>PRI-OUT-<i>n</i> and SEC-OUT-<i>n</i> are the receive sides of each channel. The output characteristics are the same for each of the three channels.</li> </ul> |       |                            |                   |                                                                                                               |             |      |            |               |
| SIGNAL TYPE                                                                                                                                                                                            | STATE | ATTRIBUTE                  | SYMBOL            | CONDITIONS / NOTES                                                                                            | MIN         | TYP  | MAX        | UNIT          |
| OUTPUT                                                                                                                                                                                                 | OFF   | Voltage level              | $V_{OH}$          | $R_{PULL-UP} = 1.5\text{ k}\Omega$ to $3.3\text{ V}$                                                          | <b>3.0</b>  | 3.3  |            | V             |
|                                                                                                                                                                                                        |       | Leakage current            | $I_{OUT-LEAKAGE}$ | $R_{PULL-UP} = 1.5\text{ k}\Omega$ to $3.3\text{ V}$                                                          |             | 700  | <b>870</b> | $\mu\text{A}$ |
|                                                                                                                                                                                                        |       | Capacitance                | $C_{OUT}$         | with $V_{OUT} = 3.3\text{ V}$                                                                                 |             | 9    | <b>13</b>  | pF            |
|                                                                                                                                                                                                        |       | External trace capacitance | $C_{OUT-EXT}$     |                                                                                                               |             |      | <b>TBD</b> | pF            |
|                                                                                                                                                                                                        | ON    | Voltage level              | $V_{OL}$          | $V_{IN} = 3.3\text{ V}$ , $R_{PULL-UP} = 1.5\text{ k}\Omega$ to $3.3\text{ V}$                                |             | 0.2  | <b>0.3</b> | V             |
|                                                                                                                                                                                                        |       | Drive current              | $I_{OL}$          | $V_{IN} = 3.3\text{ V}$ , $R_{PULL-UP} = 1.5\text{ k}\Omega$ to $3.3\text{ V}$ , for $V_{OUT} < 0.3\text{ V}$ | <b>2.00</b> | 2.07 |            | mA            |
|                                                                                                                                                                                                        |       | Ripple voltage             | $V_{RIPPLE}$      | $V_{IN} = 3.3\text{ V}$ , $R_{PULL-UP} = 1.5\text{ k}\Omega$ to $3.3\text{ V}$                                |             | 75   | 120        | mVpp          |
|                                                                                                                                                                                                        |       | Ripple frequency           | $f_{RIPPLE}$      | $V_{IN} = 3.3\text{ V}$ , $R_{PULL-UP} = 1.5\text{ k}\Omega$ to $3.3\text{ V}$                                | <b>75</b>   | 85   | <b>95</b>  | MHz           |


## Block Diagram

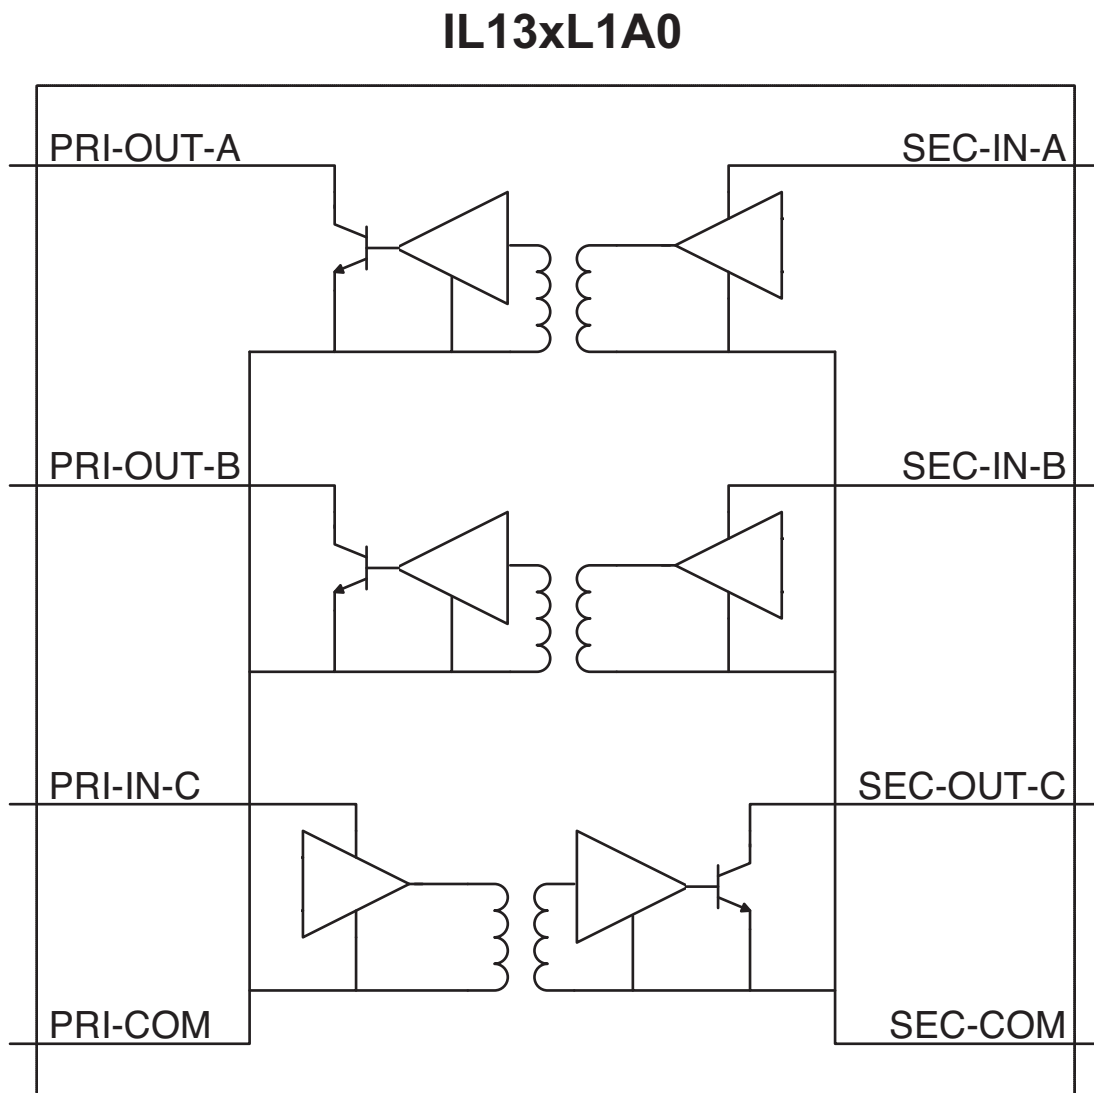

## Timing Definition and Typical Performance Characteristics

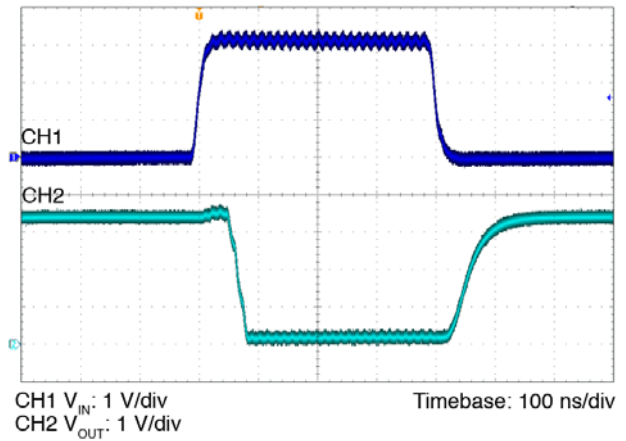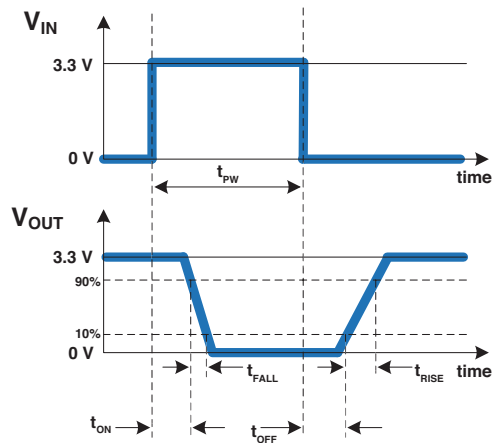

## Test Circuit

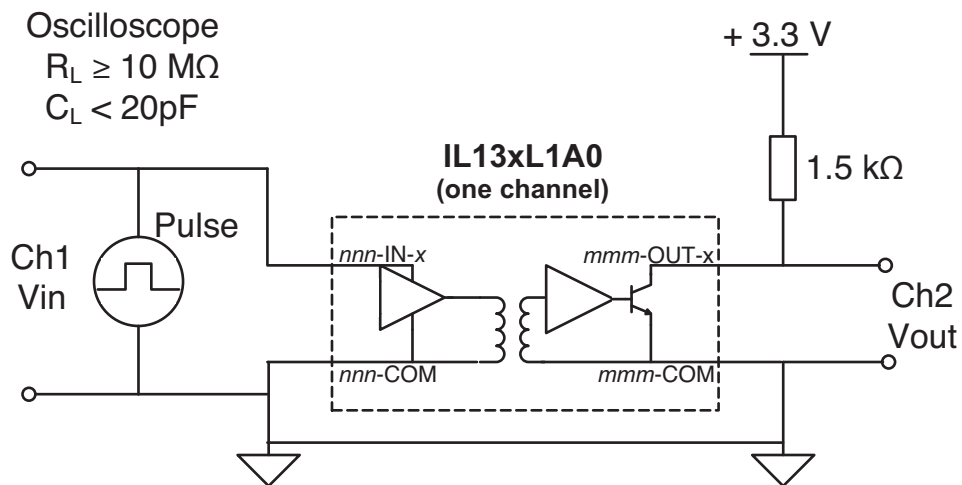

## Safety and Insulation Ratings, General Characteristics

Specifications apply with  $T_{INT} = 25^{\circ}\text{C}$  unless otherwise noted. **Boldface** specifications apply over the temperature range of  $-40^{\circ}\text{C} \leq T_{INT} \leq +125^{\circ}\text{C}$  (T-Grade), or  $-55^{\circ}\text{C} \leq T_{INT} \leq +125^{\circ}\text{C}$  (M-Grade).

| Attribute                                                                                                            | Symbol                | Conditions / Notes                                                         | Min             | Typ              | Max             | Unit       |
|----------------------------------------------------------------------------------------------------------------------|-----------------------|----------------------------------------------------------------------------|-----------------|------------------|-----------------|------------|
|                                                                                                                      |                       |                                                                            |                 |                  |                 |            |
| Safety and Insulation Ratings                                                                                        |                       |                                                                            |                 |                  |                 |            |
| Insulation resistance                                                                                                |                       | Tamb = 25 C, VDC = 500 Vdc                                                 | 500             |                  |                 | MΩ         |
| Creepage distance                                                                                                    |                       |                                                                            | 8.6             |                  |                 | mm         |
| Clearance distance                                                                                                   |                       |                                                                            | 8.6             |                  |                 | mm         |
| Insulation thickness (DTI)                                                                                           |                       |                                                                            | 0.4             |                  |                 | mm         |
| Mechanical                                                                                                           |                       |                                                                            |                 |                  |                 |            |
| Length                                                                                                               | L                     |                                                                            | 9.90 / [0.390]  | 10.00 / [0.394]  | 10.10 / [0.398] | mm / [in]  |
| Width                                                                                                                | W                     |                                                                            | 9.90 / [0.390]  | 10.00 / [0.394]  | 10.10 / [0.398] | mm / [in]  |
| Height                                                                                                               | H                     |                                                                            | 2.23 / [0.0917] | 2.41 / [0.0949]  | 2.49 / [0.0980] | mm / [in]  |
| Volume                                                                                                               | Vol                   |                                                                            |                 | 0.241 / [0.0147] |                 | cm³/ [in³] |
| Weight                                                                                                               | W                     |                                                                            |                 | 0.54 / [0.0019]  |                 | g / [oz]   |
| Pad finish                                                                                                           |                       | Nickel                                                                     | 5.0             |                  |                 | μm         |
|                                                                                                                      |                       | Palladium                                                                  | 0.3             |                  |                 |            |
|                                                                                                                      |                       | Gold                                                                       | 0.03            |                  |                 |            |
| Thermal                                                                                                              |                       |                                                                            |                 |                  |                 |            |
| Power dissipation                                                                                                    | P <sub>D</sub>        | All three channels ON,<br>V <sub>IN</sub> = 3.6 V, I <sub>OUT</sub> = 5 mA |                 |                  | 100             | mW         |
| Thermal resistance                                                                                                   | θ <sub>INT-PADS</sub> |                                                                            |                 | 38               |                 | °C/W       |
| Operating internal temperature<br>T <sub>INT</sub> is the hottest junction under<br>any specifed operating condition | T <sub>INT</sub>      | T grade                                                                    | -40             |                  | 125             | °C         |
|                                                                                                                      |                       | M grade                                                                    | -55             |                  | 125             | °C         |

## Safety and Insulation Ratings, General Characteristics (Cont.)

Specifications apply with  $T_{INT} = 25^{\circ}\text{C}$  unless otherwise noted. **Boldface** specifications apply over the temperature range of  $-40^{\circ}\text{C} \leq T_{INT} \leq +125^{\circ}\text{C}$  (T-Grade), or  $-55^{\circ}\text{C} \leq T_{INT} \leq +125^{\circ}\text{C}$  (M-Grade).

| Attribute                       | Symbol             | Conditions / Notes                                               | Min | Typ   | Max | Unit |
|---------------------------------|--------------------|------------------------------------------------------------------|-----|-------|-----|------|
|                                 |                    |                                                                  |     |       |     |      |
| Assembly                        |                    |                                                                  |     |       |     |      |
| Storage temperature             | T <sub>ST</sub>    | T grade                                                          | -40 |       | 125 | °C   |
|                                 |                    | M grade                                                          | -65 |       | 125 | °C   |
| Moisture sensitivity level      | MSL                | MSL 4, 72 hours out of bag                                       |     |       |     |      |
| ESD rating                      | ESD <sub>HBM</sub> | Human Body Model, "JEDEC JESD 22-A114C.01 "                      |     |       |     |      |
|                                 | ESD <sub>CDM</sub> | Charged Device Model, "JEDEC JESD 22-C101D"                      |     |       |     |      |
| Soldering                       |                    |                                                                  |     |       |     |      |
| Peak temperature during reflow  |                    | Under MSL 4 conditions above                                     | 235 | 245   | 260 | °C   |
| Maximum time above 217°C        |                    |                                                                  | 30  | 60    | 90  | s    |
| Peak heating rate during reflow |                    |                                                                  | 0.5 | 1.5   | 3.0 | °C/s |
| Peak cooling rate post reflow   |                    |                                                                  | 0.5 | 2.0   | 6.0 | °C/s |
| Reliability                     |                    |                                                                  |     |       |     |      |
| MTBF                            |                    | Telcordia Issue 2 - Method I Case 3<br>25°C; GB, GC, 100%        |     | 17.24 |     | MHrs |
|                                 |                    | MIL-HDBK-217 Plus Parts Count - 25°C<br>Ground Benign            |     | 13.83 |     | MHrs |
| Agency Approvals                |                    |                                                                  |     |       |     |      |
| Agency Approvals / Standards    |                    | cURus, cTÜVus, UL60950-1,<br>EN/IEC 60950-1                      |     |       |     |      |
|                                 |                    | CE Marked for Low Voltage Directive<br>and RoHS Recast Directive |     |       |     |      |

## Product Description

The Digital Isolator is a three channel, signal powered logic isolator. It uses an air core magnetic structure to couple power from the input of each channel to the receiver in the channel's output. The inputs are driven from a voltage driver source and require no series current limiting resistors; the outputs are open-collector, and perform a logical inversion of the input signal.

Digital Isolators are an effective alternative to optocouplers. Their low profile is valuable in high density power systems, their channel count is optimized for Vicor BCM and DCM converters.

Digital Isolators offer improved system reliability as there is no LED emitter to degrade with use, and no optical barrier to degrade with time.

All three channels have the same internal structure and nominal performance, but are grouped in a 2 transmit/ 1 receive configuration so that data can be transferred to and from the power converters in the system. A Digital Isolator channel performs a logical inversion on the data as it is transferred to the open collector output. The transmit and receive ports on each side of the isolation boundary have a common low side, to optimize package pin utilization.

## Design Guidelines


The Digital Isolator should be physically placed near its associated powertrain, across the isolation barrier of PCB. The maximum recommended trace length between any of the Digital Isolator (primary side) transmit and receive channels and the primary referenced control pins of the powertrain is 6".

The maximum recommended trace length between any of the Digital Isolator secondary referenced transmit and receive channels and the system Digital Supervisor i/o pin is 18".

All traces should be 8 mil wide, ½ oz. copper, or equivalent for series resistance purposes. While strict impedance control is not required for proper operation, the three channel signals on each side of the Digital Isolator should be routed in such a way as to minimize the likelihood of interference or stray noise pickup. A stripline or microstrip structure is recommended, with the common pin run as the shield or reference.

## Product Outline Drawing and Recommended Land Pattern

10 mm x 10 mm LGA (Land Grid Array)

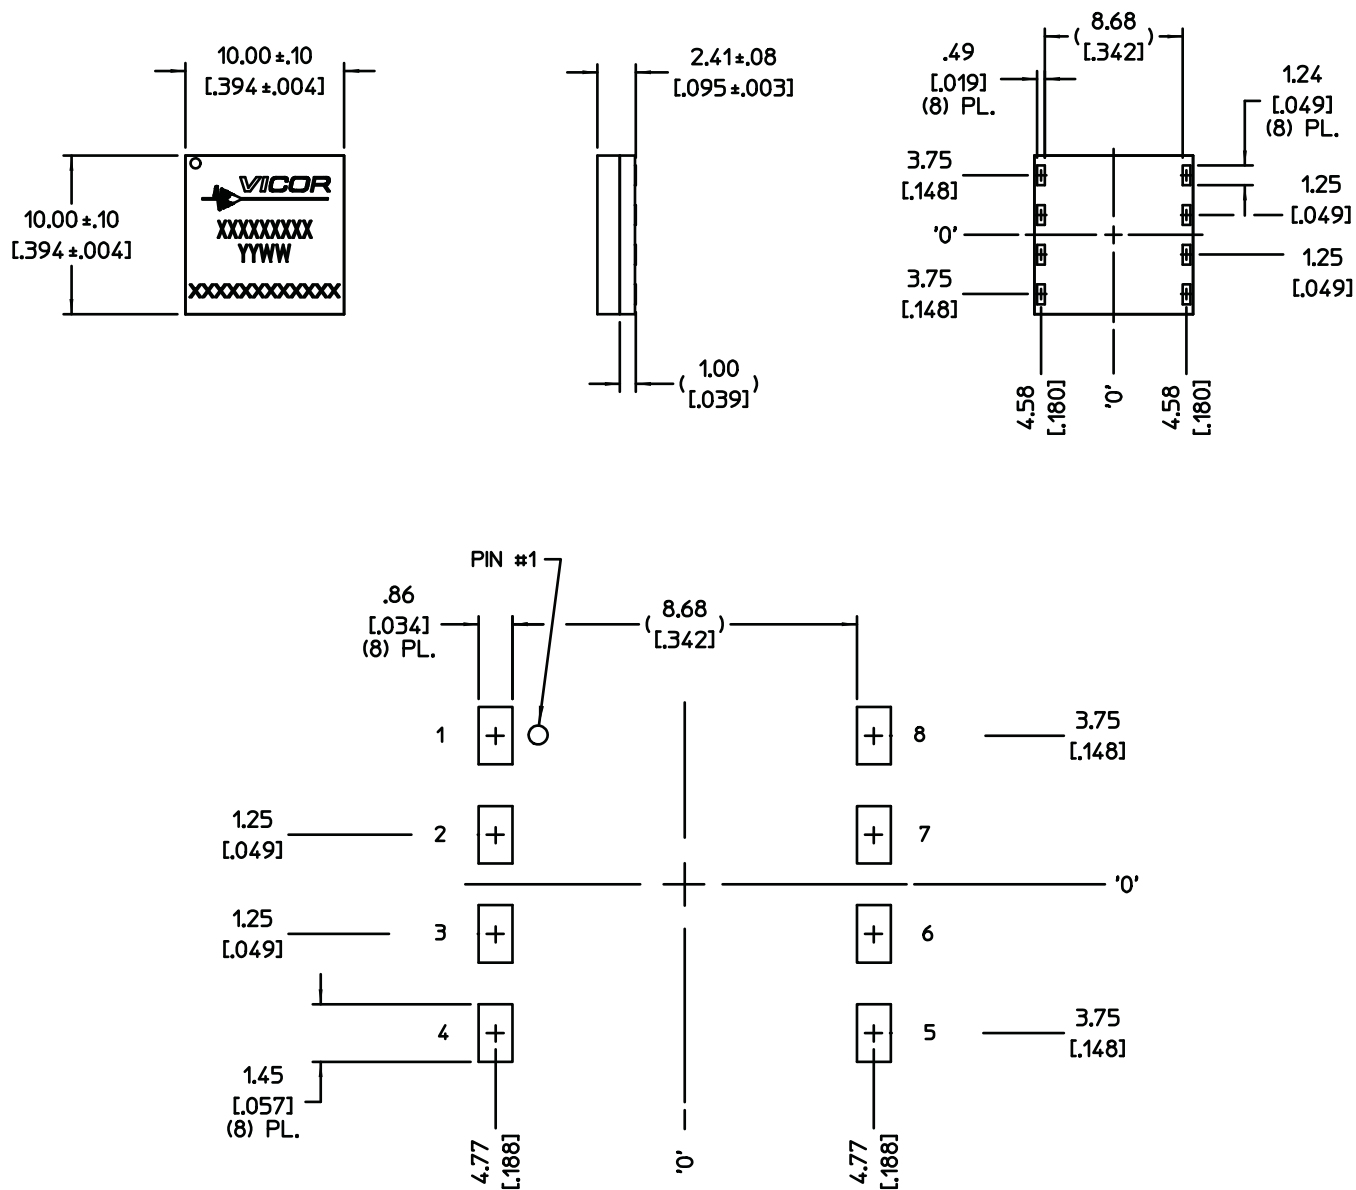

### RECOMMENDED LAND PATTERN

---

**Vicor's comprehensive line of power solutions includes high density AC-DC and DC-DC modules and accessory components, fully configurable AC-DC and DC-DC power supplies, and complete custom power systems.**

Information furnished by Vicor is believed to be accurate and reliable. However, no responsibility is assumed by Vicor for its use. Vicor makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication. Vicor reserves the right to make changes to any products, specifications, and product descriptions at any time without notice. Information published by Vicor has been checked and is believed to be accurate at the time it was printed; however, Vicor assumes no responsibility for inaccuracies. Testing and other quality controls are used to the extent Vicor deems necessary to support Vicor's product warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

**Specifications are subject to change without notice.**

**Vicor's Standard Terms and Conditions**

All sales are subject to Vicor's Standard Terms and Conditions of Sale, which are available on Vicor's webpage or upon request.

**Product Warranty**

In Vicor's standard terms and conditions of sale, Vicor warrants that its products are free from non-conformity to its Standard Specifications (the "Express Limited Warranty"). This warranty is extended only to the original Buyer for the period expiring two (2) years after the date of shipment and is not transferable.

UNLESS OTHERWISE EXPRESSLY STATED IN A WRITTEN SALES AGREEMENT SIGNED BY A DULY AUTHORIZED VICOR SIGNATORY, VICOR DISCLAIMS ALL REPRESENTATIONS, LIABILITIES, AND WARRANTIES OF ANY KIND (WHETHER ARISING BY IMPLICATION OR BY OPERATION OF LAW) WITH RESPECT TO THE PRODUCTS, INCLUDING, WITHOUT LIMITATION, ANY WARRANTIES OR REPRESENTATIONS AS TO MERCHANTABILITY, FITNESS FOR PARTICULAR PURPOSE, INFRINGEMENT OF ANY PATENT, COPYRIGHT, OR OTHER INTELLECTUAL PROPERTY RIGHT, OR ANY OTHER MATTER.

This warranty does not extend to products subjected to misuse, accident, or improper application, maintenance, or storage. Vicor shall not be liable for collateral or consequential damage. Vicor disclaims any and all liability arising out of the application or use of any product or circuit and assumes no liability for applications assistance or buyer product design. Buyers are responsible for their products and applications using Vicor products and components. Prior to using or distributing any products that include Vicor components, buyers should provide adequate design, testing and operating safeguards.

Vicor will repair or replace defective products in accordance with its own best judgment. For service under this warranty, the buyer must contact Vicor to obtain a Return Material Authorization (RMA) number and shipping instructions. Products returned without prior authorization will be returned to the buyer. The buyer will pay all charges incurred in returning the product to the factory. Vicor will pay all reshipment charges if the product was defective within the terms of this warranty.

**Life Support Policy**

VICOR'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF VICOR CORPORATION. As used herein, life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness. Per Vicor Terms and Conditions of Sale, the user of Vicor products and components in life support applications assumes all risks of such use and indemnifies Vicor against all liability and damages.

**Intellectual Property Notice**

Vicor and its subsidiaries own Intellectual Property relating to the products described in this data sheet. No license, whether express, implied, or arising by estoppel or otherwise, to any intellectual property rights is granted by this document. Interested parties should contact Vicor's Intellectual Property Department.

The products described on this data sheet are protected by the following U.S. Patents Numbers: 8,772,290

**Vicor Corporation**

25 Frontage Road  
Andover, MA, USA 01810  
Tel: 800-735-6200  
Fax: 978-475-6715

**email**

Customer Service: [custserv@vicorpower.com](mailto:custserv@vicorpower.com)  
Technical Support: [apps@vicorpower.com](mailto:apps@vicorpower.com)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Vicor:](#)

[I13TL1A0](#)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)