


## Silicon NPN Phototransistor, RoHS Compliant



94 8554

### DESCRIPTION

VENT4700 is a high speed silicon NPN epitaxial planar phototransistor in a miniature PLCC-3 package for surface mounting on printed boards. The device is sensitive to visible and near infrared radiation.

### FEATURES

- Package type: surface mount
- Package form: PLCC-3
- Dimensions (L x W x H in mm): 3.5 x 2.8 x 1.75
- High photo sensitivity
- High radiant sensitivity
- Suitable for visible and near infrared radiation
- Fast response times
- Angle of half sensitivity:  $\varphi = \pm 60^\circ$
- Base terminal connected
- Package notch indicates collector
- Package matched with IR emitter series VSML3710
- Floor life: 4 weeks, MSL 2a, acc. J-STD-020
- Lead (Pb)-free reflow soldering
- Lead (Pb)-free component in accordance with RoHS 2002/95/EC and WEEE 2002/96/EC


**RoHS**  
COMPLIANT

### APPLICATIONS

- Photo interrupters
- Miniature switches
- Counters
- Encoders
- Position sensors
- Light sensors

### PRODUCT SUMMARY

| COMPONENT | $I_{ca}$ (mA) | $\varphi$ (deg) | $\lambda_{0.1}$ (nm) |
|-----------|---------------|-----------------|----------------------|
| VENT4700  | 0.5           | $\pm 60$        | 450 to 1080          |

#### Note

Test conditions see table "Basic Characteristics"

### ORDERING INFORMATION

| ORDERING CODE | PACKAGING     | REMARKS                      | PACKAGE FORM |
|---------------|---------------|------------------------------|--------------|
| VENT4700-GS08 | Tape and reel | MOQ: 7500 pcs, 1500 pcs/reel | PLCC-3       |
| VENT4700-GS18 | Tape and reel | MOQ: 8000 pcs, 8000 pcs/reel | PLCC-3       |

#### Note

MOQ: minimum order quantity

### ABSOLUTE MAXIMUM RATINGS

| PARAMETER                 | TEST CONDITION                      | SYMBOL    | VALUE | UNIT |
|---------------------------|-------------------------------------|-----------|-------|------|
| Collector emitter voltage |                                     | $V_{CEO}$ | 70    | V    |
| Emitter collector voltage |                                     | $V_{ECO}$ | 5     | V    |
| Collector current         |                                     | $I_C$     | 50    | mA   |
| Collector peak current    | $t_p/T \leq 0.1, t_p \leq 10 \mu s$ | $I_{CM}$  | 100   | mA   |
| Power dissipation         |                                     | $P_V$     | 100   | mW   |

| ABSOLUTE MAXIMUM RATINGS            |                                                  |            |               |      |
|-------------------------------------|--------------------------------------------------|------------|---------------|------|
| PARAMETER                           | TEST CONDITION                                   | SYMBOL     | VALUE         | UNIT |
| Junction temperature                |                                                  | $T_j$      | 100           | °C   |
| Operating temperature range         |                                                  | $T_{amb}$  | - 40 to + 100 | °C   |
| Storage temperature range           |                                                  | $T_{stg}$  | - 40 to + 100 | °C   |
| Soldering temperature               | Acc. reflow solder profile fig. 10               | $T_{sd}$   | 260           | °C   |
| Thermal resistance junction/ambient | Soldered on PCB with pad dimensions: 4 mm x 4 mm | $R_{thJA}$ | 400           | K/W  |

## Note

$T_{amb} = 25\text{ °C}$ , unless otherwise specified

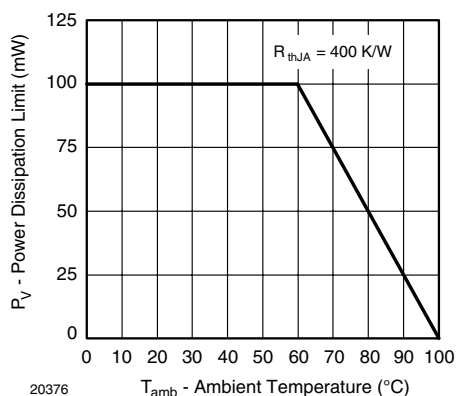


Fig. 1 - Power Dissipation Limit vs. Ambient Temperature

| BASIC CHARACTERISTICS                |                                                                                                  |                 |      |             |      |               |
|--------------------------------------|--------------------------------------------------------------------------------------------------|-----------------|------|-------------|------|---------------|
| PARAMETER                            | TEST CONDITION                                                                                   | SYMBOL          | MIN. | TYP.        | MAX. | UNIT          |
| Collector emitter breakdown voltage  | $I_C = 1\text{ mA}$                                                                              | $V_{(BR)CEO}$   | 70   |             |      | V             |
| Collector emitter dark current       | $V_{CE} = 20\text{ V}$ , $E = 0$                                                                 | $I_{CEO}$       |      | 1           | 200  | nA            |
| Collector emitter capacitance        | $V_{CE} = 5\text{ V}$ , $f = 1\text{ MHz}$ , $E = 0$                                             | $C_{CEO}$       |      | 3           |      | pF            |
| Collector light current              | $E_e = 1\text{ mW/cm}^2$ , $\lambda = 950\text{ nm}$ , $V_{CE} = 5\text{ V}$                     | $I_{ca}$        | 0.25 | 0.5         |      | mA            |
| Angle of half sensitivity            |                                                                                                  | $\phi$          |      | $\pm 60$    |      | deg           |
| Wavelength of peak sensitivity       |                                                                                                  | $\lambda_p$     |      | 850         |      | nm            |
| Range of spectral bandwidth          |                                                                                                  | $\lambda_{0.1}$ |      | 450 to 1080 |      | nm            |
| Collector emitter saturation voltage | $E_e = 1\text{ mW/cm}^2$ , $\lambda = 950\text{ nm}$ , $I_C = 0.1\text{ mA}$                     | $V_{CEsat}$     |      | 0.15        | 0.3  | V             |
| Rise time, fall time                 | $V_S = 5\text{ V}$ , $I_C = 1\text{ mA}$ , $\lambda = 950\text{ nm}$ , $R_L = 1\text{ k}\Omega$  | $t_r/t_f$       |      | 6           |      | $\mu\text{s}$ |
|                                      | $V_S = 5\text{ V}$ , $I_C = 1\text{ mA}$ , $\lambda = 950\text{ nm}$ , $R_L = 100\text{ }\Omega$ | $t_r/t_f$       |      | 2           |      | $\mu\text{s}$ |
| Cut-off frequency                    | $V_S = 5\text{ V}$ , $I_C = 2\text{ mA}$ , $R_L = 100\text{ }\Omega$                             | $f_c$           |      | 180         |      | kHz           |

## Note

$T_{amb} = 25\text{ °C}$ , unless otherwise specified

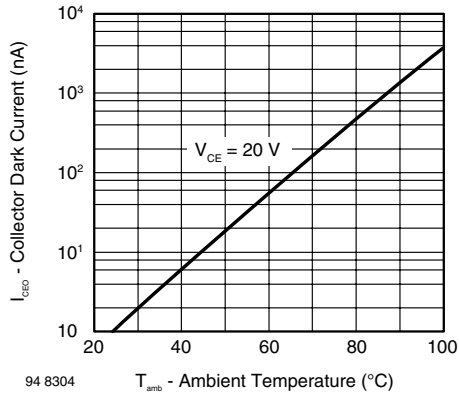
**BASIC CHARACTERISTICS**
 $T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified


Fig. 2 - Collector Dark Current vs. Ambient Temperature

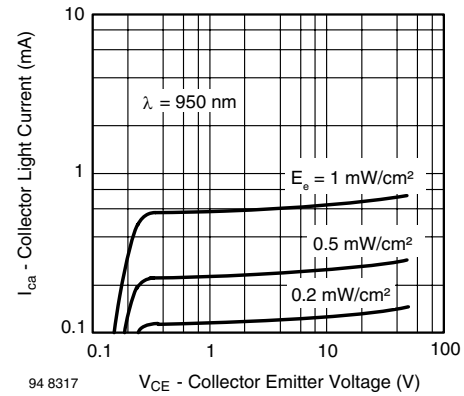


Fig. 5 - Collector Light Current vs. Collector Emitter Voltage

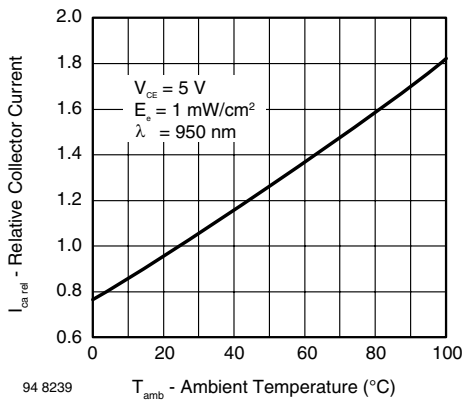


Fig. 3 - Relative Collector Current vs. Ambient Temperature

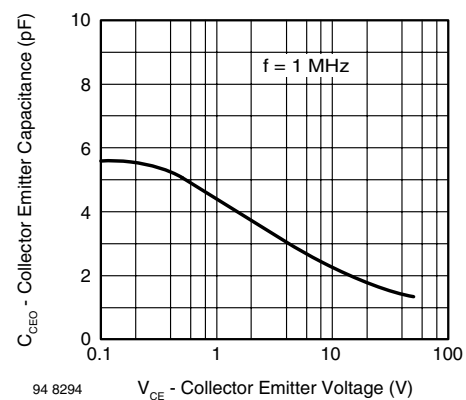


Fig. 6 - Collector Emitter Capacitance vs. Collector Emitter Voltage

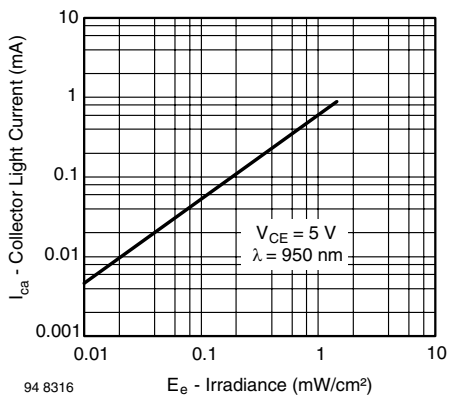


Fig. 4 - Collector Light Current vs. Irradiance

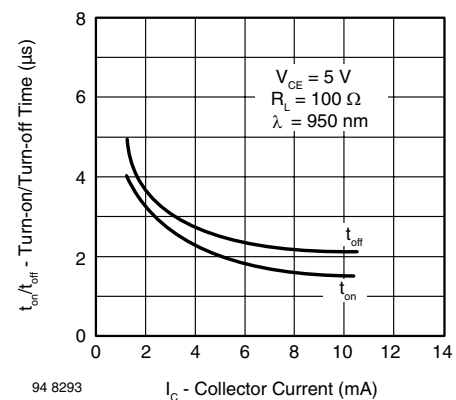


Fig. 7 - Turn-on/Turn-off Time vs. Collector Current

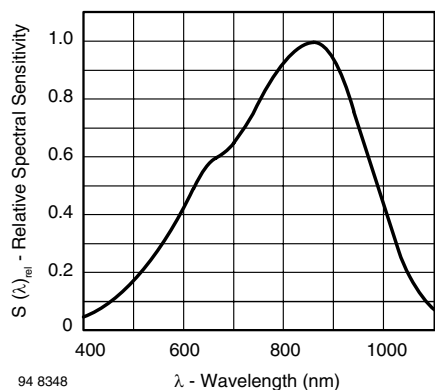


Fig. 8 - Relative Spectral Sensitivity vs. Wavelength





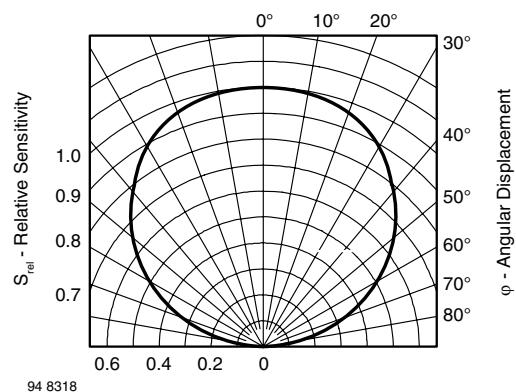


Fig. 9 - Relative Radiant Sensitivity vs. Angular Displacement

## PACKAGE DIMENSIONS in millimeters

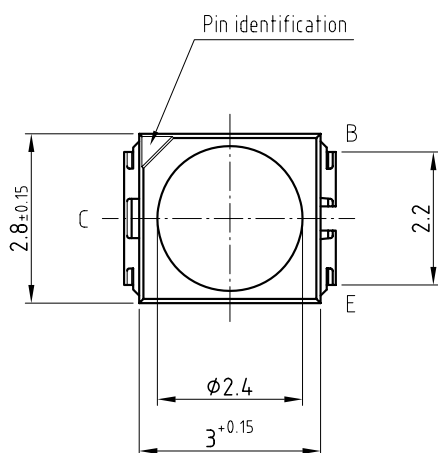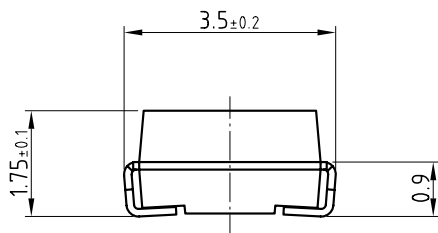

## Mounting Pad Layout

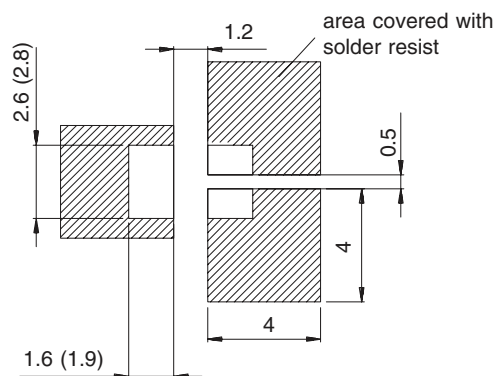

Dimensions: IR and vaporphase  
(wave soldering)

Drawing-No.: 6.541-5070.01-4

Issue: 1; 30.05.07

21439

## SOLDER PROFILE

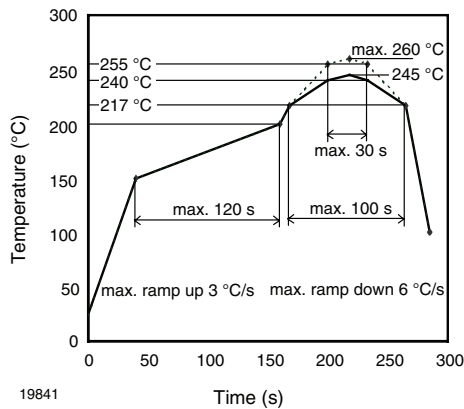


Fig. 10 - Lead (Pb)-free Reflow Solder Profile  
acc. J-STD-020D

## DRYPACK

Devices are packed in moisture barrier bags (MBB) to prevent the products from moisture absorption during transportation and storage. Each bag contains a desiccant.

## FLOOR LIFE

Floor life (time between soldering and removing from MBB) must not exceed the time indicated on MBB label:

Floor life: 4 weeks

Conditions:  $T_{amb} < 30^{\circ}\text{C}$ , RH < 60 %

Moisture sensitivity level 2a, acc. to J-STD-020.

## DRYING

In case of moisture absorption devices should be baked before soldering. Conditions see J-STD-020 or label. Devices taped on reel dry using recommended conditions 192 h at  $40^{\circ}\text{C}$  (+  $5^{\circ}\text{C}$ ), RH < 5 %.

## TAPE AND REEL

PLCC-3 components are packed in antistatic blister tape (DIN IEC (CO) 564) for automatic component insertion. Cavities of blister tape are covered with adhesive tape.

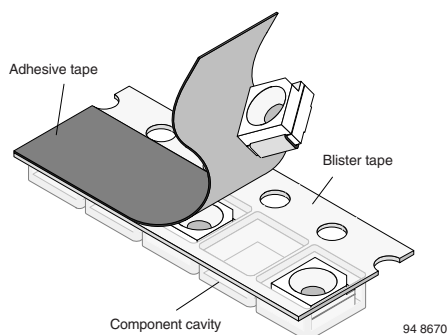


Fig. 11 - Blister Tape

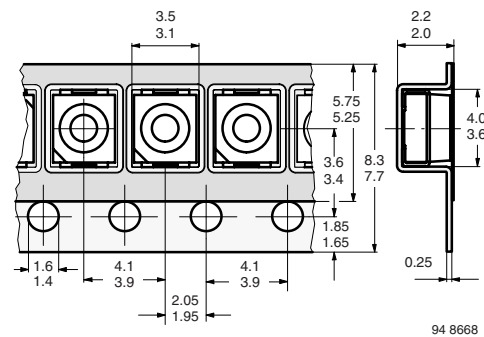


Fig. 12 - Tape Dimensions in mm for PLCC-3

## MISSING DEVICES

A maximum of 0.5 % of the total number of components per reel may be missing, exclusively missing components at the beginning and at the end of the reel. A maximum of three consecutive components may be missing, provided this gap is followed by six consecutive components.

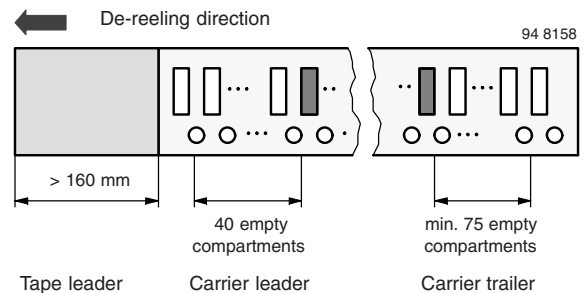


Fig. 13 - Beginning and End of Reel

The tape leader is at least 160 mm and is followed by a carrier tape leader with at least 40 empty compartments. The tape leader may include the carrier tape as long as the cover tape is not connected to the carrier tape. The least component is followed by a carrier tape trailer with at least 75 empty compartments and sealed with cover tape.

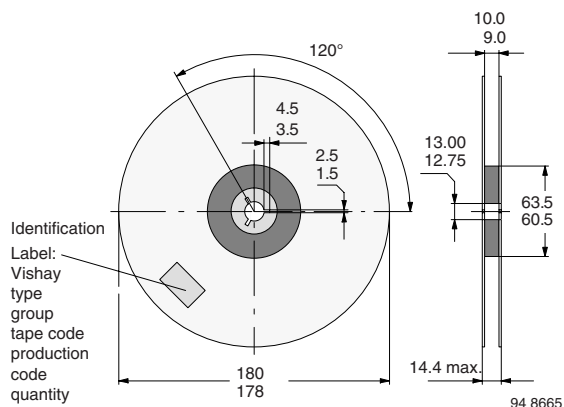


Fig. 14 - Dimensions of Reel-GS08

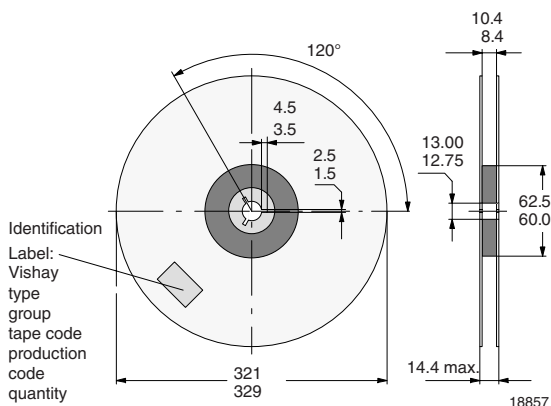


Fig. 15 - Dimensions of Reel-GS18

## COVER TAPE REMOVAL FORCE

The removal force lies between 0.1 N and 1.0 N at a removal speed of 5 mm/s. In order to prevent components from popping out of the blisters, the cover tape must be pulled off at an angle of 180° with regard to the feed direction.



### Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)