

FL SERIES

Floating Hot Deck LVPS With Isolated Digital and Analog I/O




The FL Series of floating-hot-deck, low-voltage power supplies offers an integrated solution for systems requiring LV power & controls with high-voltage isolation. Combining a highly isolated, DC-to-DC, multi-output low-voltage power supply (LVPS) with an advanced isolated digital & analog I/O topology, the FL sub-system provides both power and controls to floating-hot-deck circuitry. This solution, when combined with one or more UV HVPS or other circuitry, can provide high-performance solutions for applications such as:

- | | |
|---------------------------------------|-----------------------------|
| Floating/Stacked Ion or E-Beam Biases | Floating Filament Bias |
| Floating Pulsers & Gated Grids | Floating Capacitance Meters |
| Floating High Side Current Monitors | Floating Leakage Testers |

Please contact UltraVolt's customer service department for an analysis of your requirements.

- Isolated up to 15kV
- DC leakage current of <10nA
- AC leakage capacitance of <40pF
- 3 regulated floating LV power outputs
- Isolated digital I/O to and from floating hot deck
- Isolated analog I/O to and from floating hot deck
- UL/cUL Recognized Component; CE Mark (LVD & RoHS)

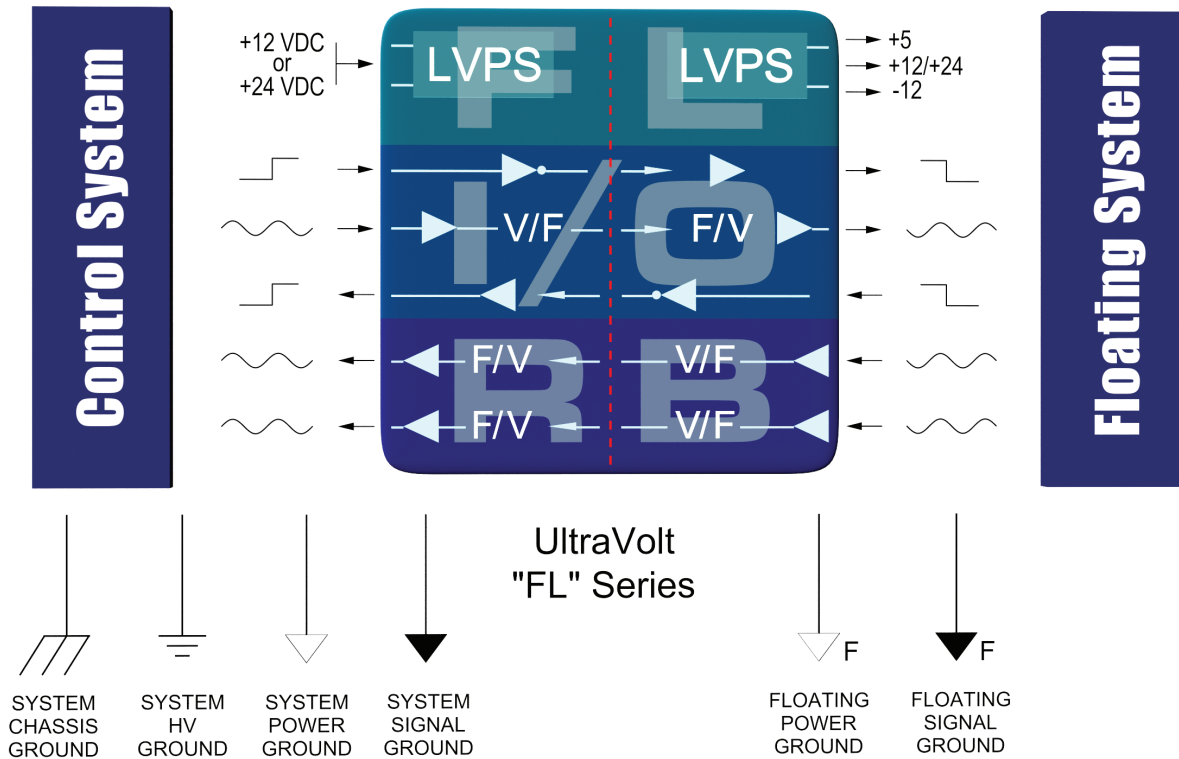

Specifications subject to change without notice.



Making High Voltage Easier!®

Higher Service, Higher Performance, Higher Reliability
©2011, UltraVolt Inc. All rights reserved.

FL SERIES

Floating Hot Deck LVPS With Isolated Digital and Analog I/O

| PARAMETER | CONDITIONS | MODELS | | UNITS |
|--|--------------------------------------|--|----------------------|--------|
| INPUT POWER: | | 12V MODELS | 24V MODELS | |
| Voltage Range | Full Power | +12 ± 5% | +24 ± 5% | VDC |
| Voltage Range | Derated Power Range | +10.8 to +16 | +21.6 to +30 | VDC |
| Current | Standby (Disabled) | < 90 | < 50 | mA |
| Current | No Load | < 0.15 | < 0.15 | A |
| Current | Max Load | < 1.60 | < 1.40 | A |
| AC Ripple Current | Nominal Input, Full Load | < 80 | < 100 | mA p-p |
| LOCAL CONTROLS: REFERENCE | | ALL TYPES | | |
| Output Voltage | T = +25°C, Initial value | +5.1 ± 1% | | VDC |
| Output Impedance | T = +25°C | 464 ± 1% | | Ω |
| Stability | Over full temperature range | 0.2 | | mV/°C |
| LOCAL CONTROLS: LVPS ENABLE / DISABLE | | ALL TYPES | | |
| Power supply on | Open, or a voltage above TTL high | +2.4 to 32 | | VDC |
| Power supply off | Grounded, or a voltage below TTL low | 0 to + 0.7 ± 0.2 (Isink 1mA minimum) | | VDC |
| INPUT / OUTPUT ISOLATION: | | 12V MODELS | 24V MODELS | |
| Isolation Voltage | Continuous | 15 | 15 | kV |
| Leakage Current | All inputs to all outputs | < 10 std, < 100 "-E" | < 10 std, < 100 "-E" | nA |
| Leakage Capacitance | All inputs to all outputs | < 40 std, < 50 "-E" | < 50 std or "-E" | pF |
| ISOLATED POWER OUTPUTS: | | 15FL12-12W | 15FL24-24W | |
| Output #1 Power | Nominal input, max lout | 12 | 24 | W |
| Output #1 Voltage | Nominal input voltage range | +12 ± 2% | +24 ± 2% | VDC |
| Output #1 Current | Minimum to Maximum | 0 to 1 | 0 to 1 | A |
| Output #1 Line Regulation | Nominal input range, full load | < 0.1% | < 0.1% | VDC |
| Output #1 Load Regulation | No load to full load | < 0.1% | < 0.1% | VDC |
| Output #1 Ripple | Full load | < 2% | < 1% | V p-p |
| Output #2 Voltage | Nominal input voltage range | -15 ± 1 | -15 ± 1 | VDC |
| Output #2 Current | Minimum > Maximum | 0 to 10 | 0 to 10 | mA |
| Output #2 Line Regulation | Nominal input range, full load | < 0.1% | < 0.1% | VDC |
| Output #2 Load Regulation | No load to full load | < 2% | < 2% | VDC |
| Output #2 Ripple | Full load | < 2% | < 2% | V p-p |
| Output #3 Voltage | Nominal input voltage range | +5.6 ± 6% | +5.6 ± 6% | VDC |
| Output #3 Current | Minimum > Maximum | 0 to 10 | 0 to 10 | mA |
| Output #3 Line Regulation | Nominal input range, full load | < 1 % | < 1 % | VDC |
| Output #3 Load Regulation | No load to full load | < 1 % | < 1 % | VDC |
| Output #3 Ripple | Full load | < 1 % | < 1 % | V p-p |
| ISOLATED CONTROLS: TTL CHANNEL "UP" | | ALL TYPES WITH "-I/O" OPTION | | |
| Local input | Source voltage, sink current | 10MΩ internal pull up to +15V <1V low, >2.5V high | | VDC |
| Isolated output | Inverted & buffered TTL | Open collector with internal 1kΩ pull up to +5V Can sink 10mA max | | VDC |
| Baud Rate | Varying duty cycle | DC to >300 | | kHz |
| ISOLATED CONTROLS: ANALOG CHANNEL "UP" | | ALL TYPES WITH "-I/O" OPTION | | |
| Local input voltage | Range | 0 to + 5 | | VDC |
| Local input impedance | | 10 Meg | | Ω |
| Isolated output voltage | Range | 0 to + 5 | | VDC |
| Isolated output impedance | | Buffered low impedance | | - |
| Initial offset error | | < ± 1% | | mV |
| Gain error | Full scale | < ± 2% | | VDC |
| Linearity error | 0 to full scale | < ± 1% | | VDC |
| Stability | 30 min. warm-up, per 8 hrs / per day | < 0.01% / < 0.02% | | VDC |
| Temperature Coefficient | 0 to +55°C | < ± 50 | | ppm/°C |
| Bandwidth | Symmetric or asymmetric signal | DC to 30 (-3dB point is 47 Hz) | | Hz |



Making High Voltage Easier!®

1800 Ocean Avenue, Ronkonkoma, NY 11779
Phone: 1-631-471-4444 Fax: 1-631-471-4696 www.ultravolt.com

FL SERIES

Floating Hot Deck LVPS With Isolated Digital and Analog I/O

| ‘-RB’ ISOLATED CONTROLS: TTL CHANNEL “DOWN” | | | | |
|---|--|--|--------------|-----|
| PARAMETER | CONDITIONS | ALL TYPES WITH “-I/O-R/B” OPTION | UNITS | |
| Isolated ‘Hot Deck’ Input | Source voltage, sink current | 10M Ω internal pull up to +15V <1V low, >2.5V high | VDC | |
| Local output | Inverted & Buffered TTL | Open collector with internal 1k Ω pull up to +5V Can sink 10mA max | VDC | |
| Bandwidth | Varying duty cycle | DC to >300 | kHz | |
| ISOLATED CONTROLS: ANALOG CHANNELS #1 & #2 “DOWN” | | | | |
| PARAMETER | CONDITIONS | ALL TYPES WITH “-I/O-R/B” OPTION | UNITS | |
| Isolated ‘Hot Deck’ +Input | Range | 0 to +5, 0 to +10 with >+15VDC input power | VDC | |
| Isolated ‘Hot Deck’ -Input | Range | 0 to -5, 0 to -10 with >+15VDC input power | VDC | |
| Isolated ‘Hot Deck’ + or - Input impedance | Signal source | > 10 Meg | Ω | |
| Local output +voltage | Range | 0 to +5, 0 to +10 with >+15VDC input power | VDC | |
| Local output -voltage | Range | 0 to -5, 0 to -10 with >+15VDC input power | VDC | |
| Local output impedance | Signal source | Buffered low impedance | Ω | |
| Initial offset error | Signal source | < \pm 5 | mVDC | |
| Gain error | Full scale | < \pm 1% | VDC | |
| Linearity error | 0 to full scale | < \pm 1% | VDC | |
| Stability | 30 min. warm-up, per 8 hrs / per day | < 0.01% / < 0.02% | VDC | |
| Temperature Coefficient | -20 °C to +55 °C | < \pm 50 | ppm/°C | |
| Bandwidth | Symmetric or asymmetric signal | DC to 30 (-3dB point is 47Hz) | Hz | |
| TEMPERATURE: | CONDITIONS | ALL TYPES | | |
| Operating | Full load, case measurement | -20 to +55 | °C | |
| Storage | Non-operating, case measurement | -55 to +85 | °C | |
| Thermal shock | Mil-Std-810, Method 503-4, Proc. II | -20 to +55 | °C | |
| ALTITUDE: | | ALL TYPES | | |
| Operating | All operating conditions | Sea level to Vacuum | | |
| Storage | Non-operating | Sea level to Vacuum | | |
| SHOCK & VIBRATION: | | STANDARD | - R/B OPTION | |
| Shock | Mil-Std-810, Method 516.5, Proc IV | 20 | 20 | G's |
| Vibration | Mil-Std-810, Method 514.5, Fig. 514.5C-3 | 10 | 10 | G's |




Making High Voltage Easier!®

1800 Ocean Avenue, Ronkonkoma, NY 11779
Phone: 1-631-471-4444 Fax: 1-631-471-4696 www.ultravolt.com

FL SERIES

Floating Hot Deck LVPS With Isolated Digital and Analog I/O

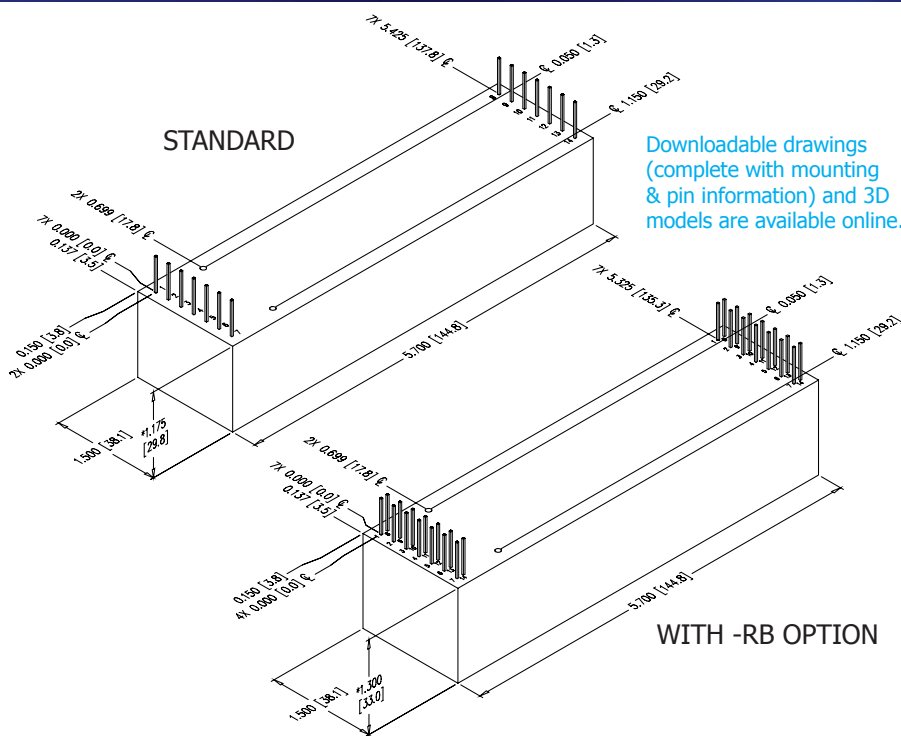

CONSTRUCTION

Epoxy-filled DAP box certified to ASTM-D-5948

SIZE

Volume: Standard: 10 in³ (163.9cc)
 -R/B Option: 11.1 in³ (182cc)
 Weight: Standard: 12.0 oz (340.2g)
 -R/B Option: 13.3 oz (377.1g)

TOLERANCE

Overall $\pm 0.050''$ (1.27)
 Pin to Pin $\pm 0.015''$ (0.38)
 Mounting hole locations $\pm 0.025''$ (0.64)

NOTES

24-watt versions are an additional 0.062'' (1.57) in height.
 -M equipped units are an additional 0.030'' (0.76) in height.
 Contact UV Customer Service for drawings of models equipped with -E options.



Non-RoHS compliant units are available. Please contact the factory for more information.

| LOCAL CONNECTIONS | |
|-------------------|--|
| PIN | FUNCTION |
| 1 | Input Power Ground Return |
| 2 | Positive Power Input |
| 3 | LVPS Enable/Disable Input |
| 4 | TTL Up/HVPS Enable/Disable (-I/O Only) |
| 5 | Signal Ground Return |
| 6 | Analog Up/ HVPS Remote Programming Input (-I/O Only) |
| 7 | +5V Reference Output |

| ADDITIONAL LOCAL CONNECTIONS (-R/B OPTION) | |
|--|--|
| PIN | FUNCTION |
| 8 | +Iout monitor output (Analog Down Channel 1) |
| 9 | -Iout monitor output (Analog Down Channel 1) |
| 10 | +Eout monitor output (Analog Down Channel 2) |
| 11 | -Eout monitor output (Analog Down Channel 2) |
| 12 & 13 | N/C (reserved for future use) |
| 14 | TTL output (Digital Down Channel 1) |

| ISOLATED/FLOATING CONNECTIONS | |
|-------------------------------|--|
| PIN | FUNCTION |
| 8 | Floating PWR Ground Return |
| 9 | Floating +12VDC or +24VDC Output |
| 10 | Floating -15VDC Output |
| 11 | Floating TTL Up/HVPS Enable/Disable (-I/O Only) |
| 12 | Floating Signal Ground Return |
| 13 | Floating Analog Up/HVPS Remote Programming Input (-I/O Only) |
| 14 | Floating +5.6V Reference Output |

| ADDITIONAL ISOLATED CONNECTIONS (-R/B ONLY) | |
|---|--|
| PIN | FUNCTION |
| 1 | Floating +Iout monitor input (Analog Down Channel 1) |
| 2 | Floating -Iout monitor input (Analog Down Channel 1) |
| 3 | Floating +Eout monitor input (Analog Down Channel 2) |
| 4 | Floating -Eout monitor input (Analog Down Channel 2) |
| 5 & 6 | N/C (reserved for future use) |
| 7 | Floating TTL input (Digital Down Channel 1) |

| ORDERING INFORMATION | | |
|----------------------|---|----------|
| Type | 15kV Isolation | 15FL |
| Input Voltage | 12VDC Nominal | 12 |
| | 24VDC Nominal | 24 |
| Power | Watts Output (12 V Only) | -12W |
| | Watts Output (24 V Only) | -24W |
| Options | (1) Digital Up Channel & (1) Analog Up Channel | -I/O |
| | (1) Digital Down Channel & (2) Analog Down Channels | -RB |
| | Partial Mu-Metal Shield | -M |
| Case | Plastic Case - Diallyl Phthalate | Standard |
| | 'Eared' Chassis Mounting Plate | -E |

Manufactured in USA



Rev. Q 10/14



Making High Voltage Easier!®

1800 Ocean Avenue, Ronkonkoma, NY 11779
 Phone: 1-631-471-4444 Fax: 1-631-471-4696 www.ultravolt.com

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru