

# NL7SZ58

## Configurable Multifunction Gate

The NL7SZ58 is an advanced high-speed CMOS multifunction gate. The device allows the user to choose logic functions AND, OR, NAND, NOR, XOR, INVERT and BUFFER. The device has Schmitt-trigger inputs, thereby enhancing noise immunity.

The NL7SZ58 input and output structures provide protection when voltages up to 7.0 V are applied, regardless of the supply voltage.

### Features

- High Speed:  $t_{PD} = 3.4 \text{ ns (Typ) @ } V_{CC} = 5.0 \text{ V}$
- Low Power Dissipation:  $I_{CC} = 1 \mu\text{A (Maximum) at } T_A = 25^\circ\text{C}$
- Power Down Protection Provided on inputs
- Balanced Propagation Delays
- Overvoltage Tolerant (OVT) Input and Output Pins
- Ultra-Small Package
- NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- This is a Pb-Free Device



**ON Semiconductor®**


<http://onsemi.com>



1

**SC-88 (SOT-363)  
CASE 419B**


### MARKING DIAGRAM



MM = Specific Device Code  
M = Date Code  
▪ = Pb-Free Package

(Note: Microdot may be in either location)

### PIN ASSIGNMENTS

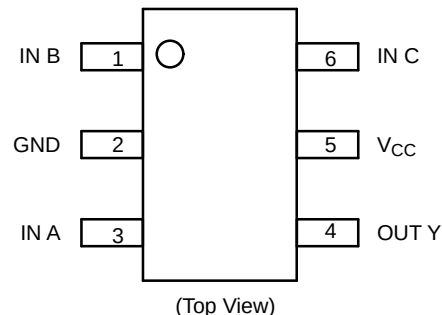

### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 7 of this data sheet.

NL7SZ58

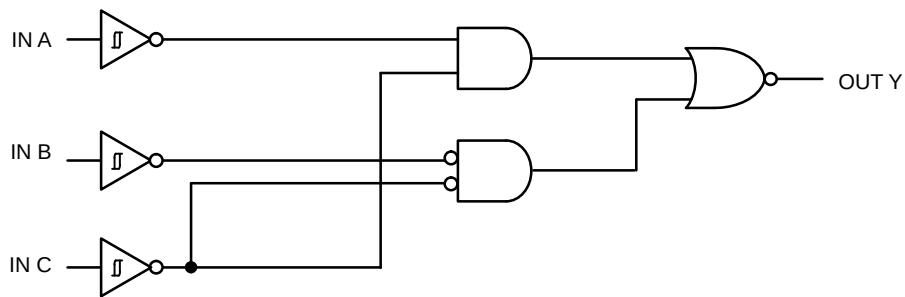


Figure 1. Function Diagram

PIN ASSIGNMENT

|   |                 |
|---|-----------------|
| 1 | IN B            |
| 2 | GND             |
| 3 | IN A            |
| 4 | OUT Y           |
| 5 | V <sub>CC</sub> |
| 6 | IN C            |

FUNCTION TABLE\*

| Input |   |   | Output |
|-------|---|---|--------|
| A     | B | C | Y      |
| L     | L | L | L      |
| L     | L | H | H      |
| L     | H | L | L      |
| L     | H | H | L      |
| H     | L | L | H      |
| H     | L | H | H      |
| H     | H | L | H      |
| H     | H | H | L      |

\*To select a logic function, please refer to “Logic Configurations section”.

LOGIC CONFIGURATIONS

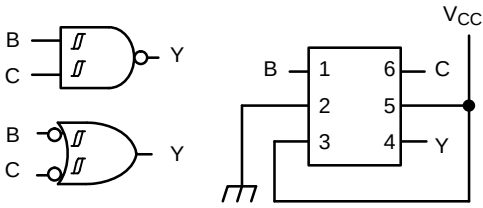


Figure 2. 2-Input NAND (When A = "H")

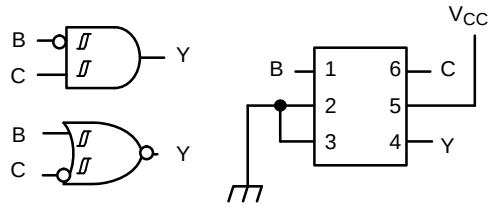


Figure 3. 2-Input AND with Input B Inverted (When A = "L")

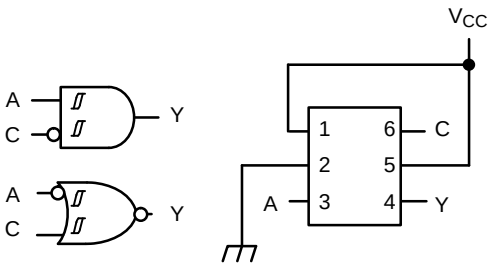


Figure 4. 2-Input AND with Input C Inverted (When B = "H")

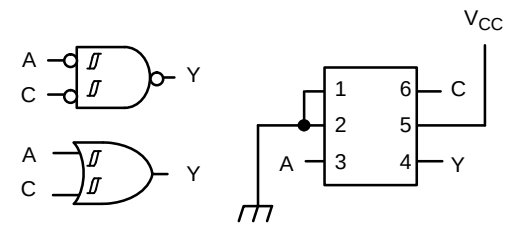


Figure 5. 2-Input OR (When B = "L")

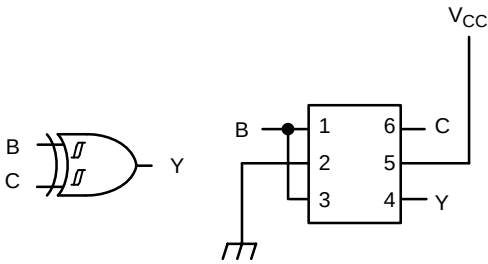


Figure 6. 2-Input XOR (When A = B)

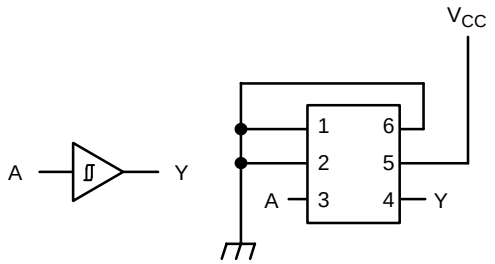


Figure 7. Buffer (When B = C = "L")

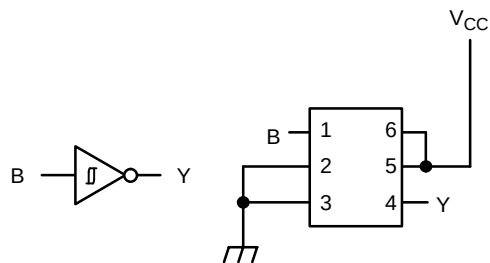


Figure 8. Inverter (When A = "L" and C = "H")

# MAXIMUM RATINGS

| Symbol               | Parameter                                                                                                    | Value                | Unit |
|----------------------|--------------------------------------------------------------------------------------------------------------|----------------------|------|
| V <sub>CC</sub>      | DC Supply Voltage                                                                                            | −0.5 to +7.0         | V    |
| V <sub>IN</sub>      | DC Input Voltage                                                                                             | −0.5 to +7.0         | V    |
| V <sub>OUT</sub>     | DC Output Voltage                                                                                            | −0.5 to +7.0         | V    |
| I <sub>IK</sub>      | DC Input Diode Current<br>V <sub>IN</sub> < GND                                                              | −50                  | mA   |
| I <sub>OK</sub>      | DC Output Diode Current<br>V <sub>OUT</sub> < GND                                                            | −50                  | mA   |
| I <sub>O</sub>       | DC Output Source/Sink Current                                                                                | ± 50                 | mA   |
| I <sub>CC</sub>      | DC Supply Current Per Supply Pin                                                                             | ± 100                | mA   |
| I <sub>GND</sub>     | DC Ground Current per Ground Pin                                                                             | ± 100                | mA   |
| T <sub>STG</sub>     | Storage Temperature Range                                                                                    | −65 to +150          | °C   |
| T <sub>L</sub>       | Lead Temperature, 1 mm from Case for 10 Seconds                                                              | 260                  | °C   |
| T <sub>J</sub>       | Junction Temperature Under Bias                                                                              | +150                 | °C   |
| θ <sub>JA</sub>      | Thermal Resistance (Note 1)<br>SC−88                                                                         | 350                  | °C/W |
| P <sub>D</sub>       | Power Dissipation in Still Air at 85°C<br>SC−88                                                              | 200                  | mW   |
| MSL                  | Moisture Sensitivity                                                                                         | Level 1              |      |
| F <sub>R</sub>       | Flammability Rating Oxygen<br>Index: 28 to 34                                                                | UL 94 V−0 @ 0.125 in |      |
| V <sub>ESD</sub>     | ESD Withstand Voltage<br>Human Body Mode (Note 2)<br>Machine Model (Note 3)<br>Charged Device Model (Note 4) | >2000<br>>200<br>N/A | V    |
| I <sub>LATCHUP</sub> | Latchup Performance Above V <sub>CC</sub> and Below GND at 125°C (Note 5)                                    | ± 500                | mA   |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Measured with minimum pad spacing on an FR4 board, using 10 mm by 1 inch, 2 ounce copper trace no air flow.
2. Tested to EIA/JESD22−A114−A.
3. Tested to EIA/JESD22−A115−A.
4. Tested to JESD22−C101−A.
5. Tested to EIA/JESD78.

# RECOMMENDED OPERATING CONDITIONS

| Symbol           | Parameter                                                                                                                                   | Min         | Max                              | Unit |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------|-------------|----------------------------------|------|
| V <sub>CC</sub>  | Positive DC Supply Voltage                                                                                                                  | 1.65        | 5.5                              | V    |
| V <sub>IN</sub>  | Digital Input Voltage                                                                                                                       | 0           | 5.5                              | V    |
| V <sub>OUT</sub> | Output Voltage                                                                                                                              | 0           | 5.5                              | V    |
| T <sub>A</sub>   | Operating Free−Air Temperature                                                                                                              | −55         | +125                             | °C   |
| Δt/ΔV            | Input Transition Rise or Fall Rate<br>V <sub>CC</sub> = 2.5 V ± 0.2 V<br>V <sub>CC</sub> = 3.3 V ± 0.3 V<br>V <sub>CC</sub> = 5.0 V ± 0.5 V | 0<br>0<br>0 | No Limit<br>No Limit<br>No Limit | nS/V |

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

# NL7SZ58

## DC ELECTRICAL CHARACTERISTICS

| Symbol          | Parameter                         | Conditions                                                       | V <sub>CC</sub><br>(V) | T <sub>A</sub> = 25°C |     |      | T <sub>A</sub> ≤ +85°C |      | T <sub>A</sub> = -55°C to +125°C |      | Unit |
|-----------------|-----------------------------------|------------------------------------------------------------------|------------------------|-----------------------|-----|------|------------------------|------|----------------------------------|------|------|
|                 |                                   |                                                                  |                        | Min                   | Typ | Max  | Min                    | Max  | Min                              | Max  |      |
| V <sub>T+</sub> | Positive Threshold Voltage        |                                                                  | 1.65                   | 0.79                  |     | 1.16 |                        | 1.16 |                                  | 1.16 | V    |
|                 |                                   |                                                                  | 2.3                    | 1.11                  |     | 1.56 |                        | 1.56 |                                  | 1.56 |      |
|                 |                                   |                                                                  | 3.0                    | 1.5                   |     | 1.87 |                        | 1.87 |                                  | 1.87 |      |
|                 |                                   |                                                                  | 4.5                    | 2.16                  |     | 2.74 |                        | 2.74 |                                  | 2.74 |      |
|                 |                                   |                                                                  | 5.5                    | 2.61                  |     | 3.33 |                        | 3.33 |                                  | 3.33 |      |
| V <sub>T-</sub> | Negative Threshold Voltage        |                                                                  | 1.65                   | 0.35                  |     | 0.62 | 0.35                   |      | 0.35                             |      | V    |
|                 |                                   |                                                                  | 2.3                    | 0.58                  |     | 0.87 | 0.58                   |      | 0.58                             |      |      |
|                 |                                   |                                                                  | 3.0                    | 0.84                  |     | 1.19 | 0.84                   |      | 0.84                             |      |      |
|                 |                                   |                                                                  | 4.5                    | 1.41                  |     | 1.9  | 1.41                   |      | 1.41                             |      |      |
|                 |                                   |                                                                  | 5.5                    | 1.78                  |     | 2.29 | 1.78                   |      | 1.78                             |      |      |
| V <sub>H</sub>  | Hysteresis Voltage                |                                                                  | 1.65                   | 0.30                  |     | 0.62 | 0.30                   | 0.62 | 0.30                             | 0.62 | V    |
|                 |                                   |                                                                  | 2.3                    | 0.40                  |     | 0.8  | 0.40                   | 0.8  | 0.40                             | 0.8  |      |
|                 |                                   |                                                                  | 3.0                    | 0.53                  |     | 0.87 | 0.53                   | 0.87 | 0.53                             | 0.87 |      |
|                 |                                   |                                                                  | 4.5                    | 0.71                  |     | 1.04 | 0.71                   | 1.04 | 0.71                             | 1.04 |      |
|                 |                                   |                                                                  | 5.5                    | 0.8                   |     | 1.2  | 0.8                    | 1.2  | 0.8                              | 1.2  |      |
| V <sub>OH</sub> | Minimum High-Level Output Voltage | V <sub>IN</sub> ≤ V <sub>T-MIN</sub><br>I <sub>OH</sub> = -50 μA | 1.65 – 5.5             | V <sub>CC</sub> – 0.1 |     |      | V <sub>CC</sub> – 0.1  |      | V <sub>CC</sub> – 0.1            |      | V    |
|                 |                                   | V <sub>IN</sub> ≤ V <sub>T-MIN</sub>                             |                        |                       |     |      |                        |      |                                  |      |      |
|                 |                                   | I <sub>OH</sub> = -4 mA                                          | 1.65                   | 1.2                   |     |      | 1.2                    |      | 1.2                              |      |      |
|                 |                                   | I <sub>OH</sub> = -8 mA                                          | 2.3                    | 1.9                   |     |      | 1.9                    |      | 1.9                              |      |      |
|                 |                                   | I <sub>OH</sub> = -16 mA                                         | 3.0                    | 2.4                   |     |      | 2.4                    |      | 2.4                              |      |      |
|                 |                                   | I <sub>OH</sub> = -24 mA                                         | 3.0                    | 2.3                   |     |      | 2.3                    |      | 2.3                              |      |      |
|                 |                                   | I <sub>OH</sub> = -32 mA                                         | 4.5                    | 3.8                   |     |      | 3.8                    |      | 3.8                              |      |      |
| V <sub>OL</sub> | Maximum Low-Level Output Voltage  | V <sub>IN</sub> ≥ V <sub>T+MAX</sub><br>I <sub>OL</sub> = 50 μA  | 1.65 – 5.5             |                       |     | 0.1  |                        | 0.1  |                                  | 0.1  | V    |
|                 |                                   | V <sub>IN</sub> ≥ V <sub>T+MAX</sub>                             |                        |                       |     |      |                        |      |                                  |      |      |
|                 |                                   | I <sub>OL</sub> = 4 mA                                           | 1.65                   |                       |     | 0.45 |                        | 0.45 |                                  | 0.45 |      |
|                 |                                   | I <sub>OL</sub> = 8 mA                                           | 2.3                    |                       |     | 0.3  |                        | 0.3  |                                  | 0.3  |      |
|                 |                                   | I <sub>OL</sub> = 16 mA                                          | 3.0                    |                       |     | 0.4  |                        | 0.4  |                                  | 0.4  |      |
|                 |                                   | I <sub>OL</sub> = 24 mA                                          | 3.0                    |                       |     | 0.55 |                        | 0.55 |                                  | 0.55 |      |
|                 |                                   | I <sub>OL</sub> = 32 mA                                          | 4.5                    |                       |     | 0.55 |                        | 0.55 |                                  | 0.55 |      |
| I <sub>IN</sub> | Input Leakage Current             | 0 ≤ V <sub>IN</sub> ≤ 5.5 V                                      | 0 to 5.5               |                       |     | ±0.1 |                        | ±1.0 |                                  | ±1.0 | μA   |
| I <sub>CC</sub> | Quiescent Supply Current          | 0 ≤ V <sub>IN</sub> ≤ V <sub>CC</sub>                            | 5.5                    |                       |     | 1.0  |                        | 10   |                                  | 10   | μA   |


Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

**AC ELECTRICAL CHARACTERISTICS** (Input  $t_r = t_f = 3.0$  ns)

| Symbol                   | Parameter                                                         | $V_{CC}$ (V) | Test Condition | $T_A = 25^\circ\text{C}$ |     |      | $T_A \leq +85^\circ\text{C}$ |      | $T_A = -55^\circ\text{C}$<br>to $+125^\circ\text{C}$ |      | Unit |
|--------------------------|-------------------------------------------------------------------|--------------|----------------|--------------------------|-----|------|------------------------------|------|------------------------------------------------------|------|------|
|                          |                                                                   |              |                | Min                      | Typ | Max  | Min                          | Max  | Min                                                  | Max  |      |
| $t_{PLH}$ ,<br>$t_{PHL}$ | Propagation Delay,<br>Any Input to Output<br>Y (See Test Circuit) | 1.65 – 1.95  |                | 3.2                      | 9.0 | 14.4 | 3.2                          | 14.4 | 3.2                                                  | 14.4 | ns   |
|                          |                                                                   | 2.3 – 2.7    |                | 2.0                      | 5.3 | 8.3  | 2.0                          | 8.3  | 2.0                                                  | 8.3  |      |
|                          |                                                                   | 3.0 – 3.6    |                | 1.5                      | 4.0 | 6.3  | 1.5                          | 6.3  | 1.5                                                  | 6.3  |      |
|                          |                                                                   | 4.5 – 5.5    |                | 1.1                      | 3.4 | 5.1  | 1.1                          | 5.1  | 1.1                                                  | 5.1  |      |
| $C_{IN}$                 | Input Capacitance                                                 |              |                |                          | 3.5 |      |                              |      |                                                      |      | pF   |
| $C_{PD}$                 | Power Dissipation<br>Capacitance<br>(Note 6)                      | 5.0          | $f = 10$ MHz   |                          | 22  |      |                              |      |                                                      |      | pF   |

6.  $C_{PD}$  is defined as the value of the internal equivalent capacitance which is calculated from the dynamic operating current consumption without load. Average operating current can be obtained by the equation  $I_{CC(OPR)} = C_{PD} \cdot V_{CC} \cdot f_{in} + I_{CC}$ .  $C_{PD}$  is used to determine the no-load dynamic power consumption:  $P_D = C_{PD} \cdot V_{CC}^2 \cdot f_{in} + I_{CC} \cdot V_{CC}$ .

**TEST CIRCUIT AND VOLTAGE WAVEFORMS**

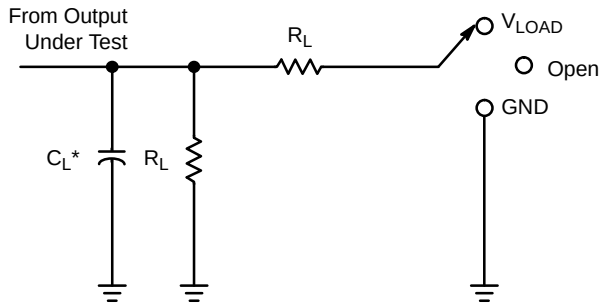

| Test              | S1         |
|-------------------|------------|
| $t_{PLH}/t_{PHL}$ | Open       |
| $t_{PLZ}/t_{PZL}$ | $V_{LOAD}$ |
| $t_{PHZ}/t_{PZH}$ | GND        |

\* $C_L$  includes probes and jig capacitance.

**Figure 9. Load Circuit**

| $V_{CC}$                         | Inputs   |                      | $V_M$      | $V_{LOAD}$        | $C_L$ | $R_L$        | $V_A$  |
|----------------------------------|----------|----------------------|------------|-------------------|-------|--------------|--------|
|                                  | $V_I$    | $t_r/t_f$            |            |                   |       |              |        |
| $1.8\text{ V} \pm 0.15\text{ V}$ | $V_{CC}$ | $\leq 2\text{ ns}$   | $V_{CC}/2$ | $2 \times V_{CC}$ | 30 pF | 1 k $\Omega$ | 0.15 V |
| $2.5\text{ V} \pm 0.2\text{ V}$  | $V_{CC}$ | $\leq 2\text{ ns}$   | $V_{CC}/2$ | $2 \times V_{CC}$ | 30 pF | 500 $\Omega$ | 0.15 V |
| $3.3\text{ V} \pm 0.3\text{ V}$  | 3 V      | $\leq 2.5\text{ ns}$ | 1.5 V      | 6 V               | 50 pF | 500 $\Omega$ | 0.3 V  |
| $5.5\text{ V} \pm 0.5\text{ V}$  | $V_{CC}$ | $\leq 2.5\text{ ns}$ | $V_{CC}/2$ | $2 \times V_{CC}$ | 50 pF | 500 $\Omega$ | 0.3 V  |




Figure 10. Voltage Waveforms Pulse Duration

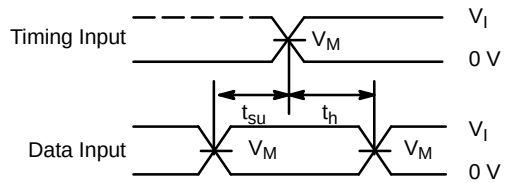


Figure 11. Voltage Waveforms Setup and Hold Times

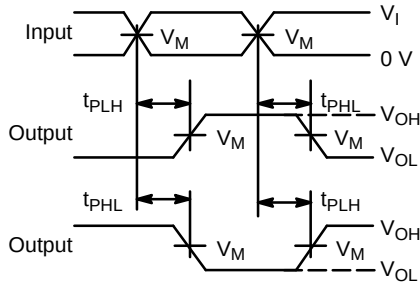


Figure 12. Voltage Waveforms Propagation Delay Times Inverting and Noninverting Outputs

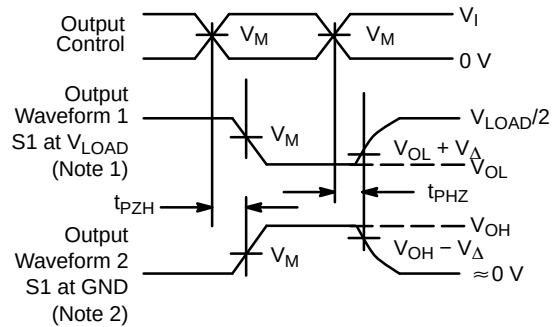


Figure 13. Voltage Waveforms Enable and Disable Times Low- and High-Level Enabling

1. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control.
2. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
3. All input pulses are supplied by generators having the following characteristics:  $PRR \leq 10 \text{ MHz}$ ,  $Z_O = 50 \Omega$ .
4. The outputs are measured one at a time, with one transition per measurement.
5. All parameters are waveforms are not applicable to all devices.

## ORDERING INFORMATION

| Device         | Package            | Shipping <sup>†</sup> |
|----------------|--------------------|-----------------------|
| NL7SZ58DFT2G   | SC-88<br>(Pb-Free) | 3000 / Tape & Reel    |
| NLV7SZ58DFT2G* | SC-88<br>(Pb-Free) | 3000 / Tape & Reel    |


<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable.

# NL7SZ58

## PACKAGE DIMENSIONS


SC-88/SC70-6/SOT-363  
CASE 419B-02  
ISSUE Y

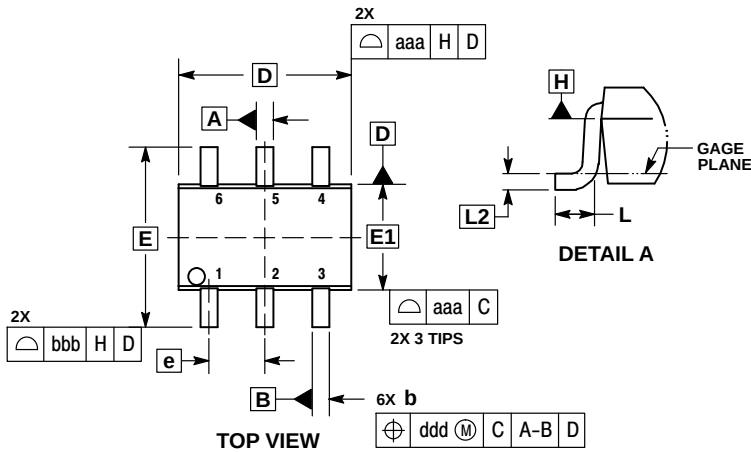


### NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSIONS D AND E1 DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.20 PER END.
4. DIMENSIONS D AND E1 AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY AND DATUM H.
5. DATUMS A AND B ARE DETERMINED AT DATUM H.
6. DIMENSIONS b AND c APPLY TO THE FLAT SECTION OF THE LEAD BETWEEN 0.08 AND 0.15 FROM THE TIP.
7. DIMENSION b DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 TOTAL IN EXCESS OF DIMENSION b AT MAXIMUM MATERIAL CONDITION. THE DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OF THE FOOT.

| DIM | MILLIMETERS |      |      | INCHES    |       |       |
|-----|-------------|------|------|-----------|-------|-------|
|     | MIN         | NOM  | MAX  | MIN       | NOM   | MAX   |
| A   | ---         | ---  | 1.10 | ---       | ---   | 0.043 |
| A1  | 0.00        | ---  | 0.10 | 0.000     | ---   | 0.004 |
| A2  | 0.70        | 0.90 | 1.00 | 0.027     | 0.035 | 0.039 |
| b   | 0.15        | 0.20 | 0.25 | 0.006     | 0.008 | 0.010 |
| C   | 0.08        | 0.15 | 0.22 | 0.003     | 0.006 | 0.009 |
| D   | 1.80        | 2.00 | 2.20 | 0.070     | 0.078 | 0.086 |
| E   | 2.00        | 2.10 | 2.20 | 0.078     | 0.082 | 0.086 |
| E1  | 1.15        | 1.25 | 1.35 | 0.045     | 0.049 | 0.053 |
| e   | 0.65 BSC    |      |      | 0.026 BSC |       |       |
| L   | 0.26        | 0.36 | 0.46 | 0.010     | 0.014 | 0.018 |
| L2  | 0.15 BSC    |      |      | 0.006 BSC |       |       |
| aaa | 0.15        |      |      | 0.006     |       |       |
| bbb | 0.30        |      |      | 0.012     |       |       |
| ccc | 0.10        |      |      | 0.004     |       |       |
| ddd | 0.10        |      |      | 0.004     |       |       |

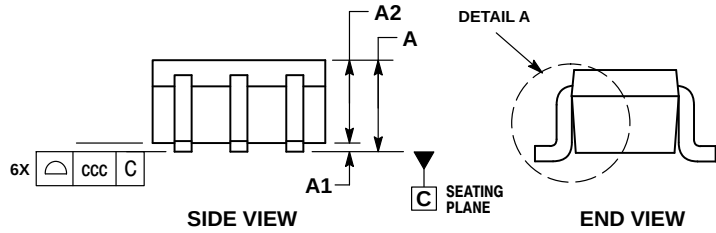

### RECOMMENDED SOLDERING FOOTPRINT\*



\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marketing.pdf](http://www.onsemi.com/site/pdf/Patent-Marketing.pdf). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### PUBLICATION ORDERING INFORMATION

**LITERATURE FULFILLMENT:**  
Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5817-1050

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)  
**Order Literature:** <http://www.onsemi.com/orderlit>  
For additional information, please contact your local Sales Representative

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)