

DS450HE-3/ DS550HE-3

450 W - 550 W

Distributed Power System

Distributed Power Bulk Front-End
Total Output Power: 450 - 550 Watts
+12 Vdc Main Output
+3.3 Vdc Stand-by Output
Wide Range Input Voltage: 90 - 264 Vac



Special Features

- Active Power Factor Correction
- EN61000-3-2 Harmonic Compliance
- Active AC Inrush Control
- 1U X 2U Form Factor
- 10.3 W / in³ (DS550HE)
8.4 W / in³ (DS450HE)
- +12 Vdc Output
- +3.3 Vdc Stand-By
- No Minimum Load Required
- Hot Plug Operation
- N + 1 Redundant
- Internal OR'ing Fets
- Active Current Sharing
- Built-in Cooling Fans (40 mm x 28 mm)
- I²C Communication Interface Bus
- EERPOM for FRU Data
- Amber LED Status, Fan_Fail
- Green LED Status, Power Good / AC_OK Status
- Internal Fan Speed Control
- Fan Fail Tach Output Signal
- Two Year Warranty

Safety

- UL/cUL 60950 (UL Recognized)
- NEMKO+ CB Report EN60950
- EN60950
- CE Mark
- China CCC

Electrical Specifications

Input	
Input range:	90 - 264 Vac (wide range)
Frequency:	47 - 63 Hz, single phase AC
Inrush current:	15 A maximum
Efficiency:	See curve
Conducted EMI:	FCC Subpart J EN55022 Class A
Radiated EMI:	FCC Subpart J EN55022 Class A
Power factor:	0.99 typical
Leakage current:	1.30 mA @ 240 Vac
Hold up time:	20 ms minimum
Output	
Main DC voltage:	+12 V
Stand-By:	+3.3 Vsb
Adjustment range:	Factory Set, no pot adjustments
Regulation:	+12 Vdc; +5%/-3% +3.3 Vsb; +5%/-4%
Overcurrent:	See Table 1 next page
Overvoltage:	+12 Vdc; 13.5 - 15 Vdc +3.3 Vsb; 3.76 - 4.30 Vdc
Undervoltage:	+12 Vdc; 11.0 - 11.5 Vdc +3.3 Vsb; 2.77 - 3.00 Vdc
Turn-on delay:	1 Second max
+12 V Output Rise Time:	2 - 20 mS, Monotonic

Logic Control

PS Inhibit:	When supply is inserted into the system the pin is pulled LOW and power supply is ON after all other pins are seated
PS_Status:	I ² C port P6. When the power supply is on and running normal P6 is low. When the power supply is off, either due to -PS_ON, PS_KILL, or a fault, then P6 is high.
AC_Pfail:	I ² C port P7. P7 is high except when the power supply turns the main outputs, not +3.3 Vsb, off due to an AC failure (AC missing or too low for power supply operation). If the supply is turned off due to -PS_ON, PS_KILL, or a fault, then P7 remains high.
Fan_Fault:	The PSU will provide an open collector Tach 1 output.
Tach_1:	This signal is generated from the fan. The signal should generate 2 pulses per revolution. The logic in the system will be operating at 3.3 V.

Environmental Specifications


Operating temperature:	-10 °C to 50 °C
Storage temperature:	-40 °C to +70 °C
Altitude, operating:	10,000 ft.
Electromagnetic susceptibility / Input transients:	-EN61000-3-2, -3-3 -EN61000-4-2, 4.3, 4-4, -4-5, 4-11 Level -EN55024:1998
RoHS & lead-free compliant (no tantalum caps)	
Humidity:	20 to 90% RH, non-condensing
Shock and vibration specifications	complies with Emerson Network Power Std. Specification, Q3205
MTBF (Demonstrated):	400K Hrs at full load, 40 °C

Ordering Information


Output	Nominal Output Voltage Set Point	Set Point Tolerance	Total Regulation	Minimum Current	Maximum Current	Output Ripple P/P	Overcurrent
DS450HE-3	12.0 Vdc	± 0.2%	+5 / -3%	0 A	37.0 A	120 mV	39.5 A - 44.4 A
	3.3 Vsb	± 1%	+5 / -4%	0 A	3.0 A	60 mV	4.9 A Avg, 7 A max
DS550HE-3	12.0 Vdc	± 0.2%	+5 / -3%	0 A	45.0 A	120 mV	48.0 A - 54.0 A
	3.3 Vsb	± 1%	+5 / -4%	0A	3.0 A	60 mV	4.9 A Avg, 7 A max

*Overcurrent latches off if overcurrent lasts over 1 second, otherwise it is auto recovery.

*For 5 Vsb, consult marketing.

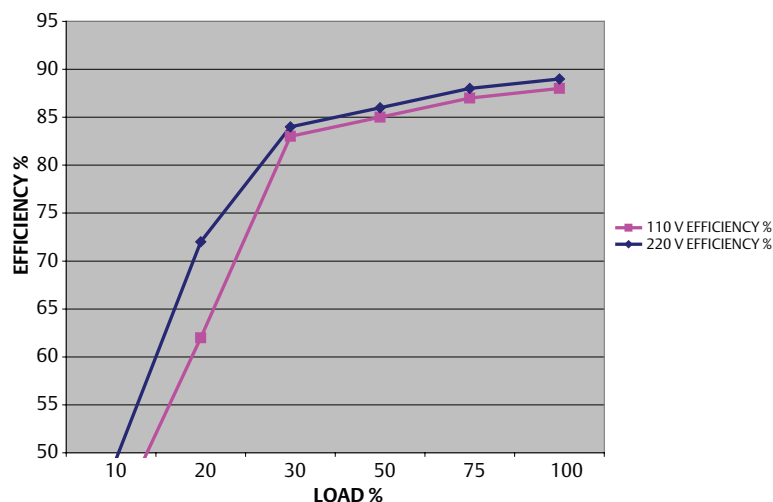

Mechanical Drawing

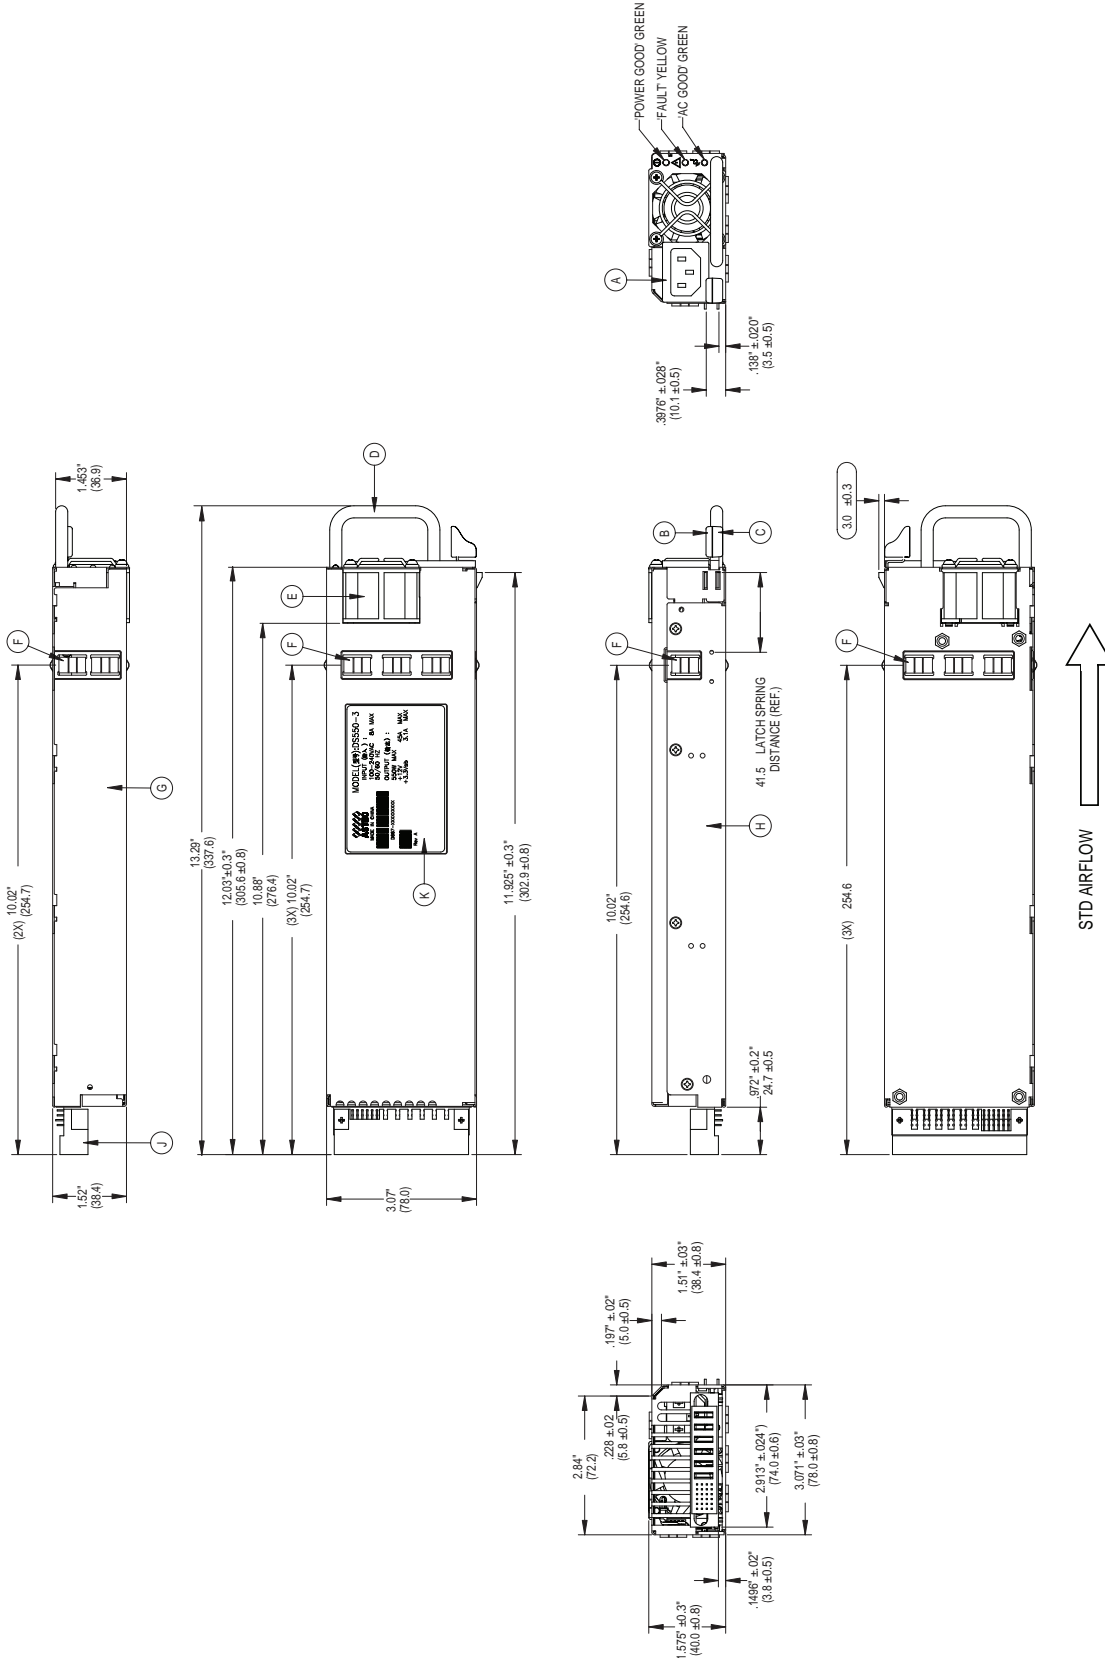

DC Output Connector Pinout Assignment

Male connector as viewed from the rear of the supply:

D1	D2	D3	D4	D5	D6										
C1	C2	C3	C4	C5	C6	PB1	PB2	PB3	PB4	PB5	PB6				
B1	B2	B3	B4	B5	B6										
A1	A2	A3	A4	A5	A6										

P1 - Power Supply Side

1. FCI Power Blade 51721 series
51721-10002406AA
2. Molex Power Connector
SD-87667 series
87667-7002

Mating Connector (System Side)

1. FCI Power Blade
51741-10002406CC
Strait Pins
2. FCI Power Blade
51761-10002406AA
Right Angle

Pin	Signal Name
PB 1	+12 V Return
PB 2	+12 V Return
PB 3	+12 V Return
PB 4	+12 V
PB 5	+12 V
PB 6	+12 V
A1	PS_KILL
A2	+12 V_Current Share
A3	Logic Return
A4	Write Protect
A5	A0 (I ² C Address BIT 0 Signal)
A6	+3.3V Stand-By
B1	Logic Return
B2	12V Sense Return
B3	Logic Return
B4	+3.3 V Stand-By
B5	SDA (I ² C Data Signal)
B6	PSON (Power Enable Signal)
C1	Logic Return
C2	Tach_1 (Fan Fail Signal)
C3	Logic Return
C4	+3.3 V Stand-By
C5	SCL (I ² C Clock Signal)
C6	VIN_GOOD (AC Input present)
D1	-PS_Present (Power Supply Seated)
D2	+12 V Sense
D3	Logic Return
D4	+3.3 V Stand-By
D5	S_INT (Alert)
D6	POK (Output Power Ok)

Americas

5810 Van Allen Way
Carlsbad, CA 92008
USA
Telephone: +1 760 930 4600
Facsimile: +1 760 930 0698

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
Telephone: +44 (0) 1384 842 211
Facsimile: +44 (0) 1384 843 355

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
Telephone: +852 2176 3333
Facsimile: +852 2176 3888

For global contact, visit:

www.Emerson.com/EmbeddedPower
techsupport.embeddedpower@emerson.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

Emerson Network Power.

The global leader in enabling business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Computing
- **Embedded Power**
- Monitoring
- Outside Plant
- Power Switching & Controls
- Precision Cooling
- Racks & Integrated Cabinets
- Services
- Surge Protection

EmersonNetworkPower.com

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co.
©2010 Emerson Electric Co.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru