

F

F

E

E

D

D

C

C

B

B

A

A

10

9

8

7

6

5



4

3

2

1

FINISHED LENGTH (SEE TABLE)

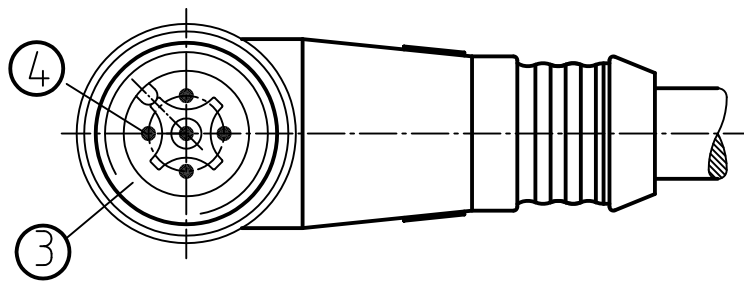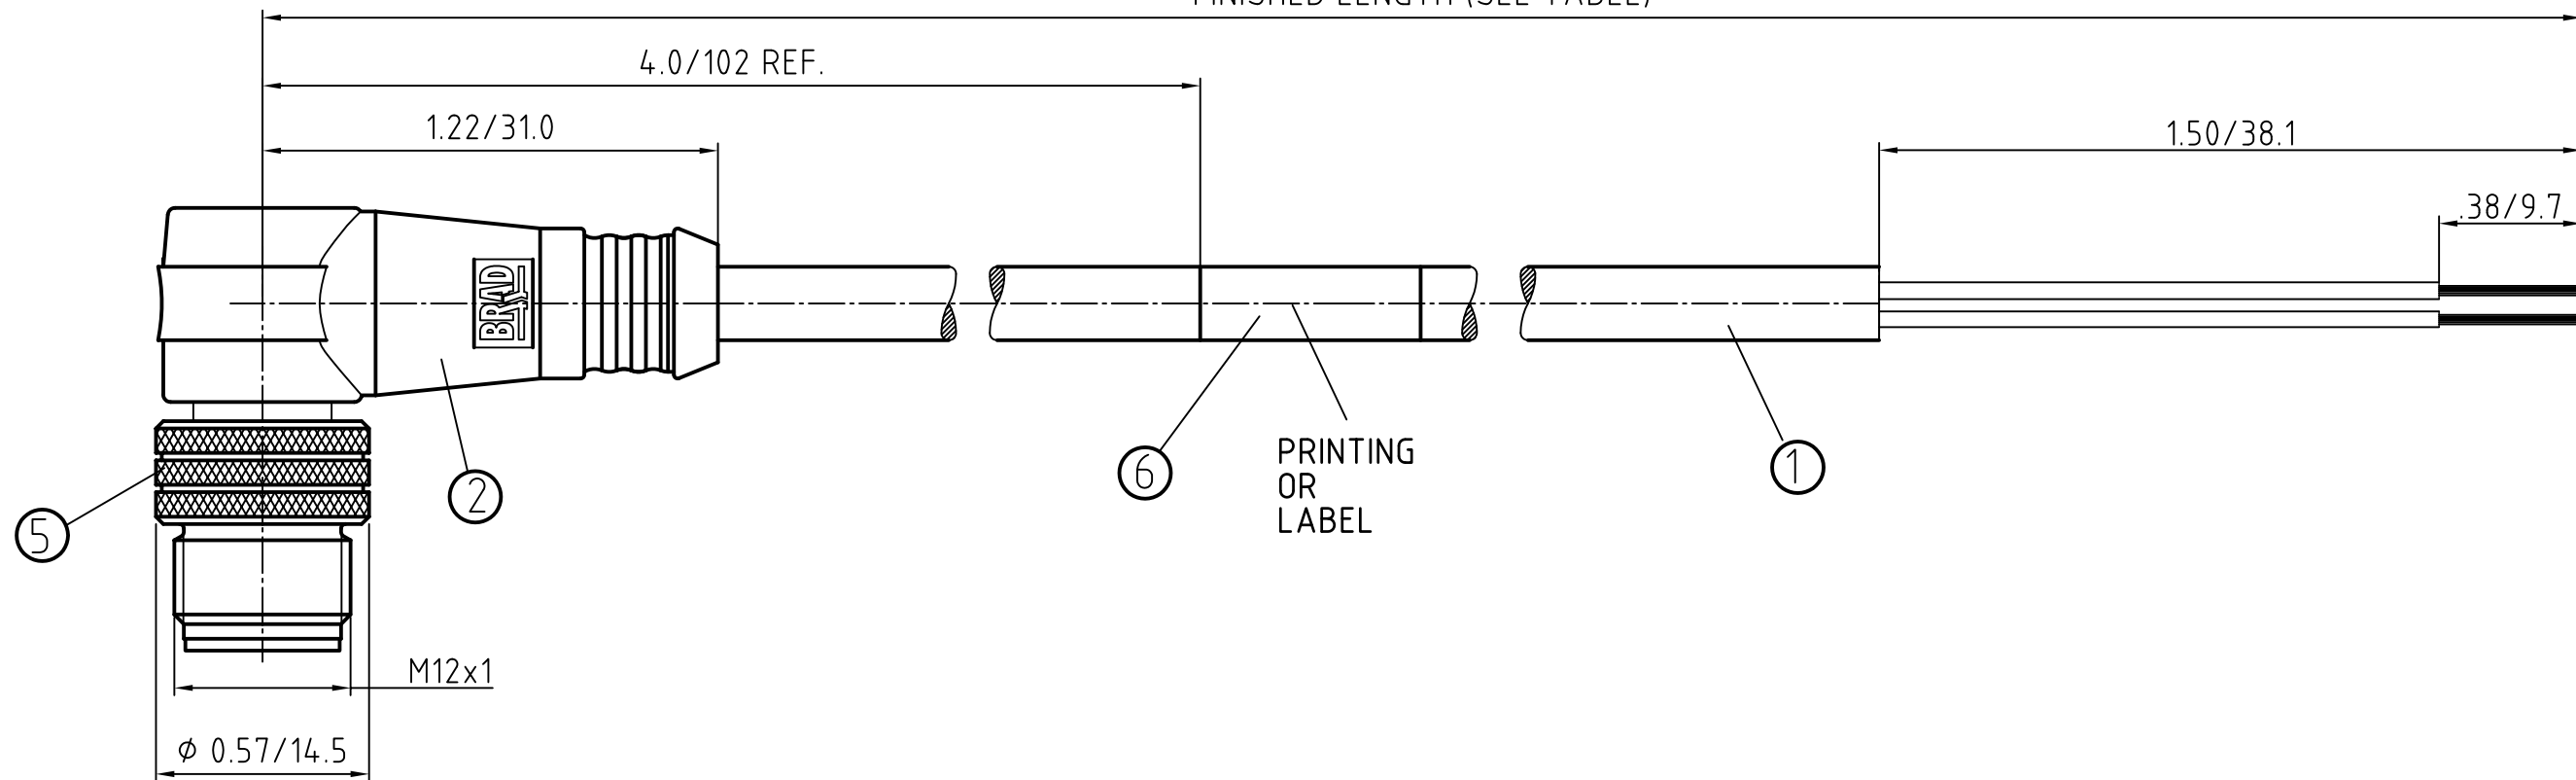


CONNECTOR SPECIFICATION:

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 105°C
UL CERTIFICATIONS	UL RECOGNIZED, FILE NO. E152210
CSA CERTIFICATIONS	CSA CERTIFIED, FILE NO. LR6837

ITEM	COMPONENT	MATERIAL	FINISH
6	LABLE	MYLAR	BLACK/YELLOW
5	COUPLER	BRASS	NICKEL PLATED
4	PIN CONTACT	COPPER ALLOY	GOLD OVER NICKEL
3	INSERT	NYLON	BLACK
2	OVERMOLD	TPE	YELLOW
1	CABLE- 22/3-5 (COPPER STRANDING) 3/4/5 CONDUCT. 300V	INSUL: PVC JACKET: TPE	YELLOW

MALE FACE VIEW

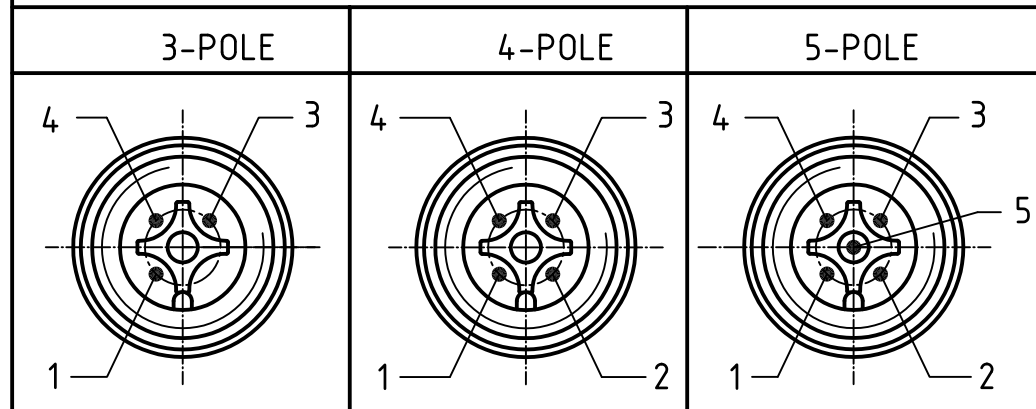

WIRING DIAGRAM

1 BROWN
3 BLUE
4 BLACK

1 BROWN
2 WHITE
3 BLUE
4 BLACK

1 BROWN
2 WHITE
3 BLUE
4 BLACK
5 GREY

DESCRIPTION EC NO: WEU2010-0278 DRWN: LSTEMMLE 2010/01/18 CHKD: NS APPR: NSTAUDIG 2010/01/26		QUALITY SYMBOLS	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
				▽ = 0 ◻ = 0		mm	INCH	DRAWN BY DATE		MICRO-CHANGE CORDSET 3/4/5-POL. MALE 90 SE 22/3-5 TPE YELLOW CABLE				
					4 PLACES	±---	±---	CHECKED BY DATE						
					3 PLACES	±---	±---	RE 2010/01/21						
					2 PLACES	±---	±.01	APPROVED BY DATE						
1		REV		1 PLACE	±0.3	±---	NSTAUDIG 2010/01/25		molex		MOLEX INCORPORATED			
				ANGULAR ± --- °			MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE TABLE SHEET 2		SD-120065-037				1 OF 1	
							SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

	10	9	8	7	6	5	4	3	2	1																																																													
F	<table><tr><th>POL</th><th>MATERIAL NUMBER</th><th>ENGINEERING NUMBER</th><th>FINISHED LENGTH</th></tr><tr><td>3</td><td>1200651501</td><td>803007K05M020</td><td>6.56' +3.5" -0 [2.0M +89 -0]</td></tr></table> <table><tr><th>POL</th><th>MATERIAL NUMBER</th><th>ENGINEERING NUMBER</th><th>FINISHED LENGTH</th></tr><tr><td>4</td><td>1200651691</td><td>804007K05M020</td><td>6.56' +3.5" -0 [2.0M +89 -0]</td></tr><tr><td>4</td><td>1200651692</td><td>804007K05M040</td><td>13.12' +6.5" -0 [4.0M +165 -0]</td></tr><tr><td>4</td><td>1200651693</td><td>804007K05M050</td><td>16.40' +6.5" -0 [5.0M +165 -0]</td></tr><tr><td>4</td><td>1200651694</td><td>804007K05M060</td><td>19.69' +6.5" -0 [6.0M +165 -0]</td></tr><tr><td>4</td><td>1200651695</td><td>804007K05M100</td><td>32.81' +12.5" -0 [10.0M +318 -0]</td></tr></table>										POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH	3	1200651501	803007K05M020	6.56' +3.5" -0 [2.0M +89 -0]	POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH	4	1200651691	804007K05M020	6.56' +3.5" -0 [2.0M +89 -0]	4	1200651692	804007K05M040	13.12' +6.5" -0 [4.0M +165 -0]	4	1200651693	804007K05M050	16.40' +6.5" -0 [5.0M +165 -0]	4	1200651694	804007K05M060	19.69' +6.5" -0 [6.0M +165 -0]	4	1200651695	804007K05M100	32.81' +12.5" -0 [10.0M +318 -0]	F																												
POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH																																																																				
3	1200651501	803007K05M020	6.56' +3.5" -0 [2.0M +89 -0]																																																																				
POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH																																																																				
4	1200651691	804007K05M020	6.56' +3.5" -0 [2.0M +89 -0]																																																																				
4	1200651692	804007K05M040	13.12' +6.5" -0 [4.0M +165 -0]																																																																				
4	1200651693	804007K05M050	16.40' +6.5" -0 [5.0M +165 -0]																																																																				
4	1200651694	804007K05M060	19.69' +6.5" -0 [6.0M +165 -0]																																																																				
4	1200651695	804007K05M100	32.81' +12.5" -0 [10.0M +318 -0]																																																																				
E											E																																																												
D											D																																																												
C											C																																																												
B											B																																																												
A	<table><tr><td rowspan="5">DESCRIPTION EC NO.: WEU2010-0278 DRWN: LSTEMMLE 2010/01/18 CHKD: NS APPR: NSTAUDIG 2010/01/26</td><td>QUALITY SYMBOLS</td><td colspan="2">GENERAL TOLERANCES (UNLESS SPECIFIED)</td><td colspan="2">DIMENSION STYLE IN/MM</td><td>SCALE 2:1</td><td>DESIGN UNITS METRIC</td><td colspan="2">THIRD ANGLE PROJECTION</td></tr><tr><td rowspan="4"> = 0  = 0</td><td>4 PLACES</td><td>±---</td><td>±---</td><td>DRAWN BY</td><td>DATE</td><td colspan="4" rowspan="2">MICRO-CHANGE CORDSET 3/4/5-POL. MALE 90 SE 22/3-5 TPE YELLOW CABLE</td></tr><tr><td>3 PLACES</td><td>±---</td><td>±---</td><td>CHECKED BY</td><td>DATE</td></tr><tr><td>2 PLACES</td><td>±---</td><td>±.01</td><td>RE</td><td>2010/01/21</td><td colspan="4" rowspan="2">MOLEX INCORPORATED</td></tr><tr><td>1 PLACE</td><td>±0.3</td><td>±---</td><td>APPROVED BY</td><td>DATE</td></tr><tr><td colspan="2">ANGULAR ± --- °</td><td colspan="2">DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</td><td colspan="2">MATERIAL NO. SEE TABLE</td><td colspan="2">DOCUMENT NO. SD-120065-037</td><td colspan="2">SHEET NO. 1 OF 1</td></tr><tr><td>1</td><td>REV</td><td colspan="2"></td><td>SIZE A3</td><td colspan="6">THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</td></tr></table>										DESCRIPTION EC NO.: WEU2010-0278 DRWN: LSTEMMLE 2010/01/18 CHKD: NS APPR: NSTAUDIG 2010/01/26	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		 = 0  = 0	4 PLACES	±---	±---	DRAWN BY	DATE	MICRO-CHANGE CORDSET 3/4/5-POL. MALE 90 SE 22/3-5 TPE YELLOW CABLE				3 PLACES	±---	±---	CHECKED BY	DATE	2 PLACES	±---	±.01	RE	2010/01/21	MOLEX INCORPORATED				1 PLACE	±0.3	±---	APPROVED BY	DATE	ANGULAR ± --- °		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-120065-037		SHEET NO. 1 OF 1		1	REV			SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						A
DESCRIPTION EC NO.: WEU2010-0278 DRWN: LSTEMMLE 2010/01/18 CHKD: NS APPR: NSTAUDIG 2010/01/26	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION																																																															
	 = 0  = 0	4 PLACES	±---	±---	DRAWN BY	DATE	MICRO-CHANGE CORDSET 3/4/5-POL. MALE 90 SE 22/3-5 TPE YELLOW CABLE																																																																
		3 PLACES	±---	±---	CHECKED BY	DATE																																																																	
		2 PLACES	±---	±.01	RE	2010/01/21	MOLEX INCORPORATED																																																																
		1 PLACE	±0.3	±---	APPROVED BY	DATE																																																																	
ANGULAR ± --- °		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-120065-037		SHEET NO. 1 OF 1																																																															
1	REV			SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																																																		
	10	9	8	7	6	5	4	3	2	1																																																													

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru