

10135262 - 10X LF

LEAD-FREE DESIGNATION
ONLY WITH APPLICABLE
PLATING CODES

SEE NOTE 2

MODULE
DESCRIPTION

LETTER DESIGNATION REPRESENTED IN DASH NUMBER

BASE
MODULE

RIGHT
POLARIZING
GUIDANCE
MODULE
(SEE SHEET 3)

N

J
(NO KEY)

A

B

C

D











E

F

G

H

NO KEY
NO GUIDE PIN

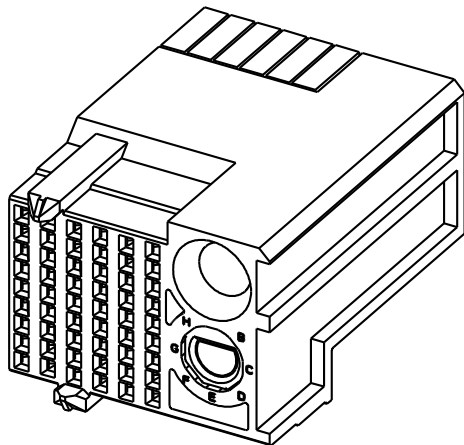

LEFT
POLARIZING
GUIDANCE
MODULE
(SEE SHEET 2)

Z

Y
(NO KEY)

P

Q

R

S











T

U

V

W

NO KEY
NO GUIDE PIN

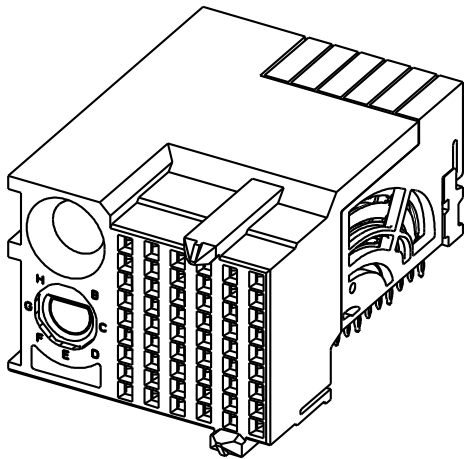





spec ref ---				dr Jerry Ren		2015/05/20		projection		MM		size A2		scale 8:1	
tolerance std				eng Terry Luo		2019/01/31						ecn no -		rel level Released	
ASME Y14.5M				chr Stone Li		2019/01/31									
				appr Heaven Cen		2019/01/31		product family		AirMax VS2					
surface - 		linear		Amphenol FCI		title AIRMAX VSE R.A. RECEPTACLE		ASS'Y, 3 PAIR, 54 POS, 6 IMLA, 20MM, W/GUIDE/KEY		dwg no 10135262		rev A			
														0.X ±.3	
														0.XX ±.15	
		0.XXX ±.050													
		angular 0° ±°		cat. no. -		Product - Customer Drw		sheet 1 of 4							


PDS: Rev :A


STATUS:Released

Printed: Jan 31, 2019

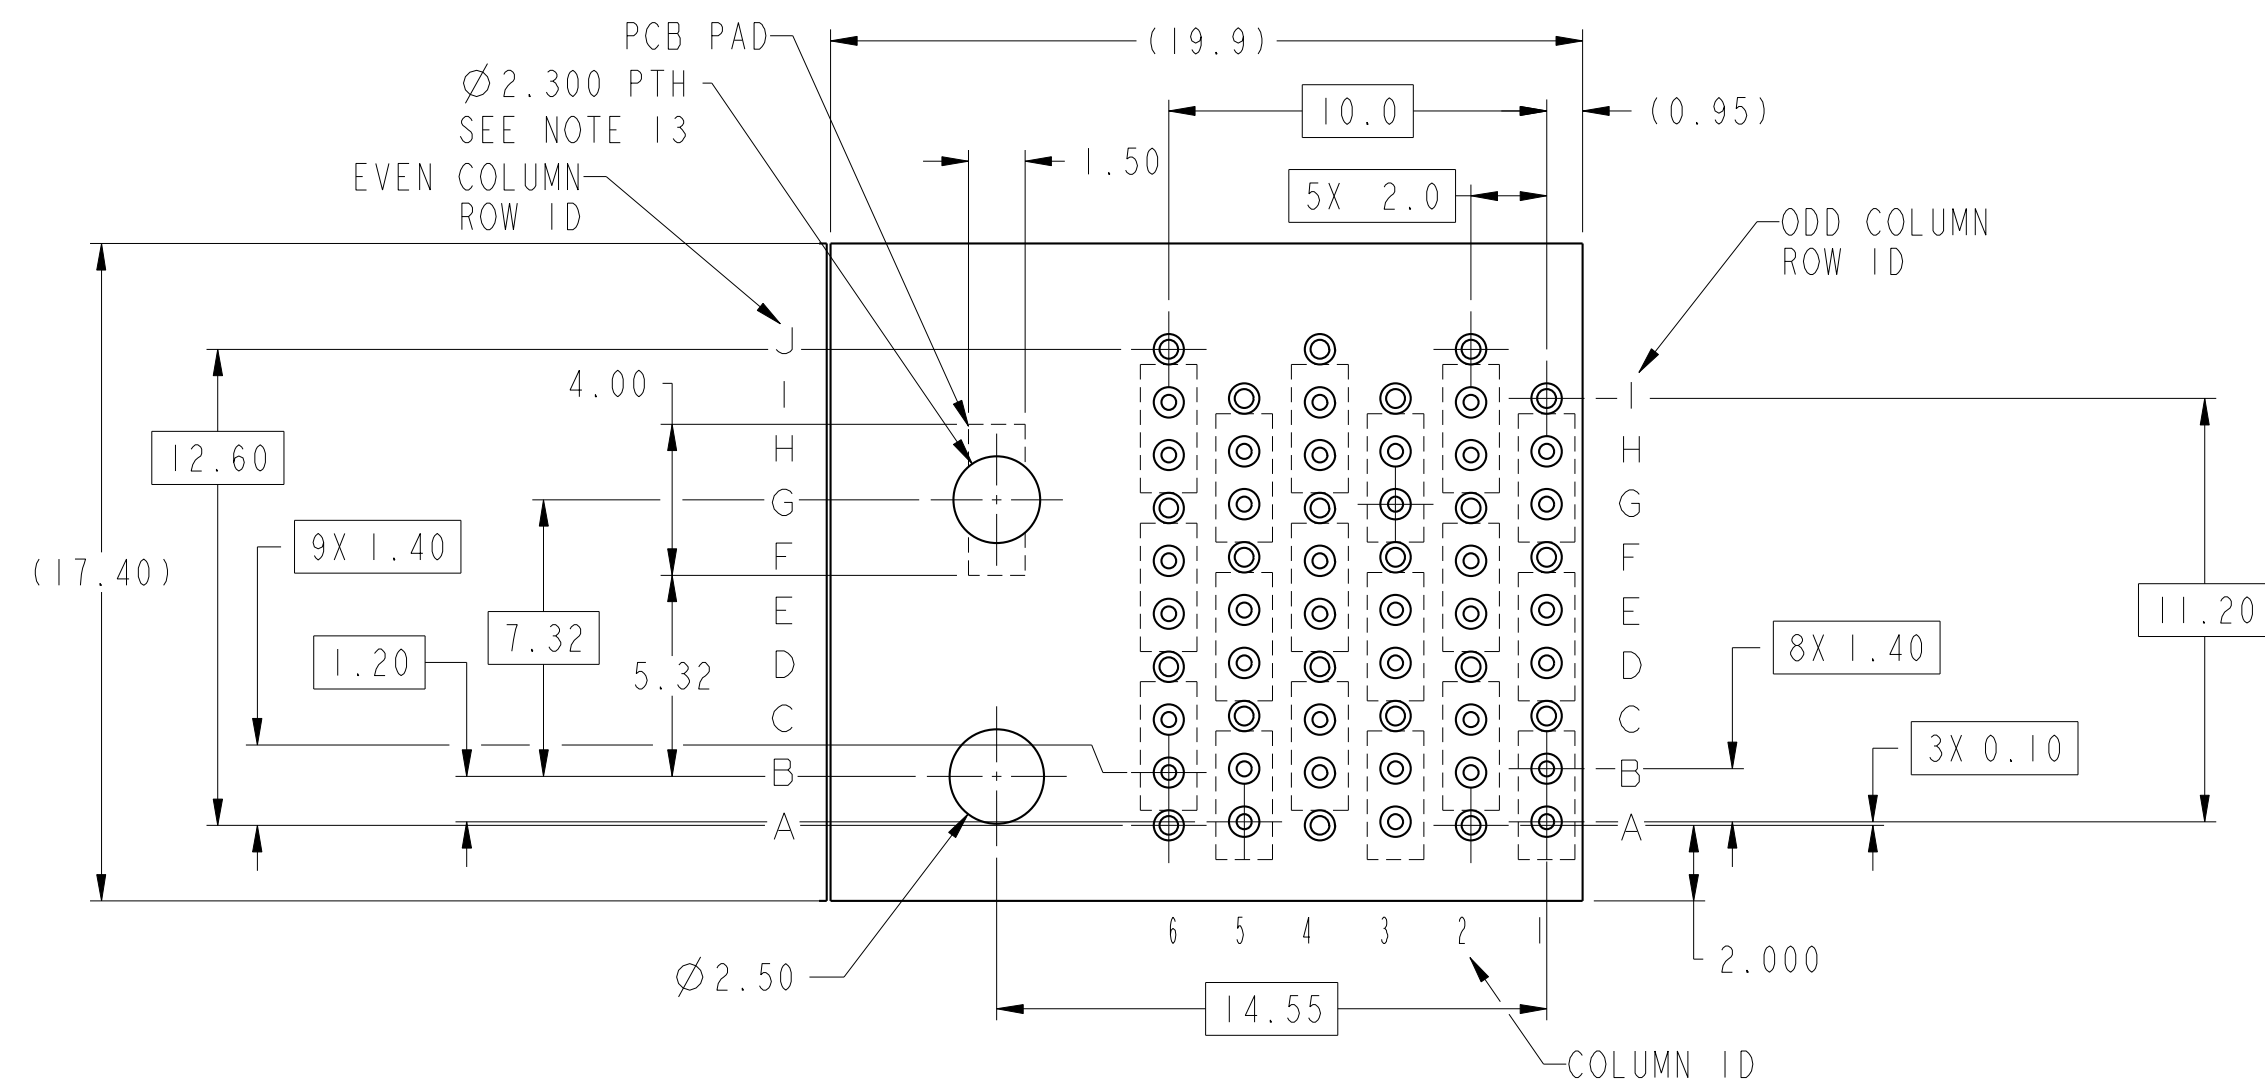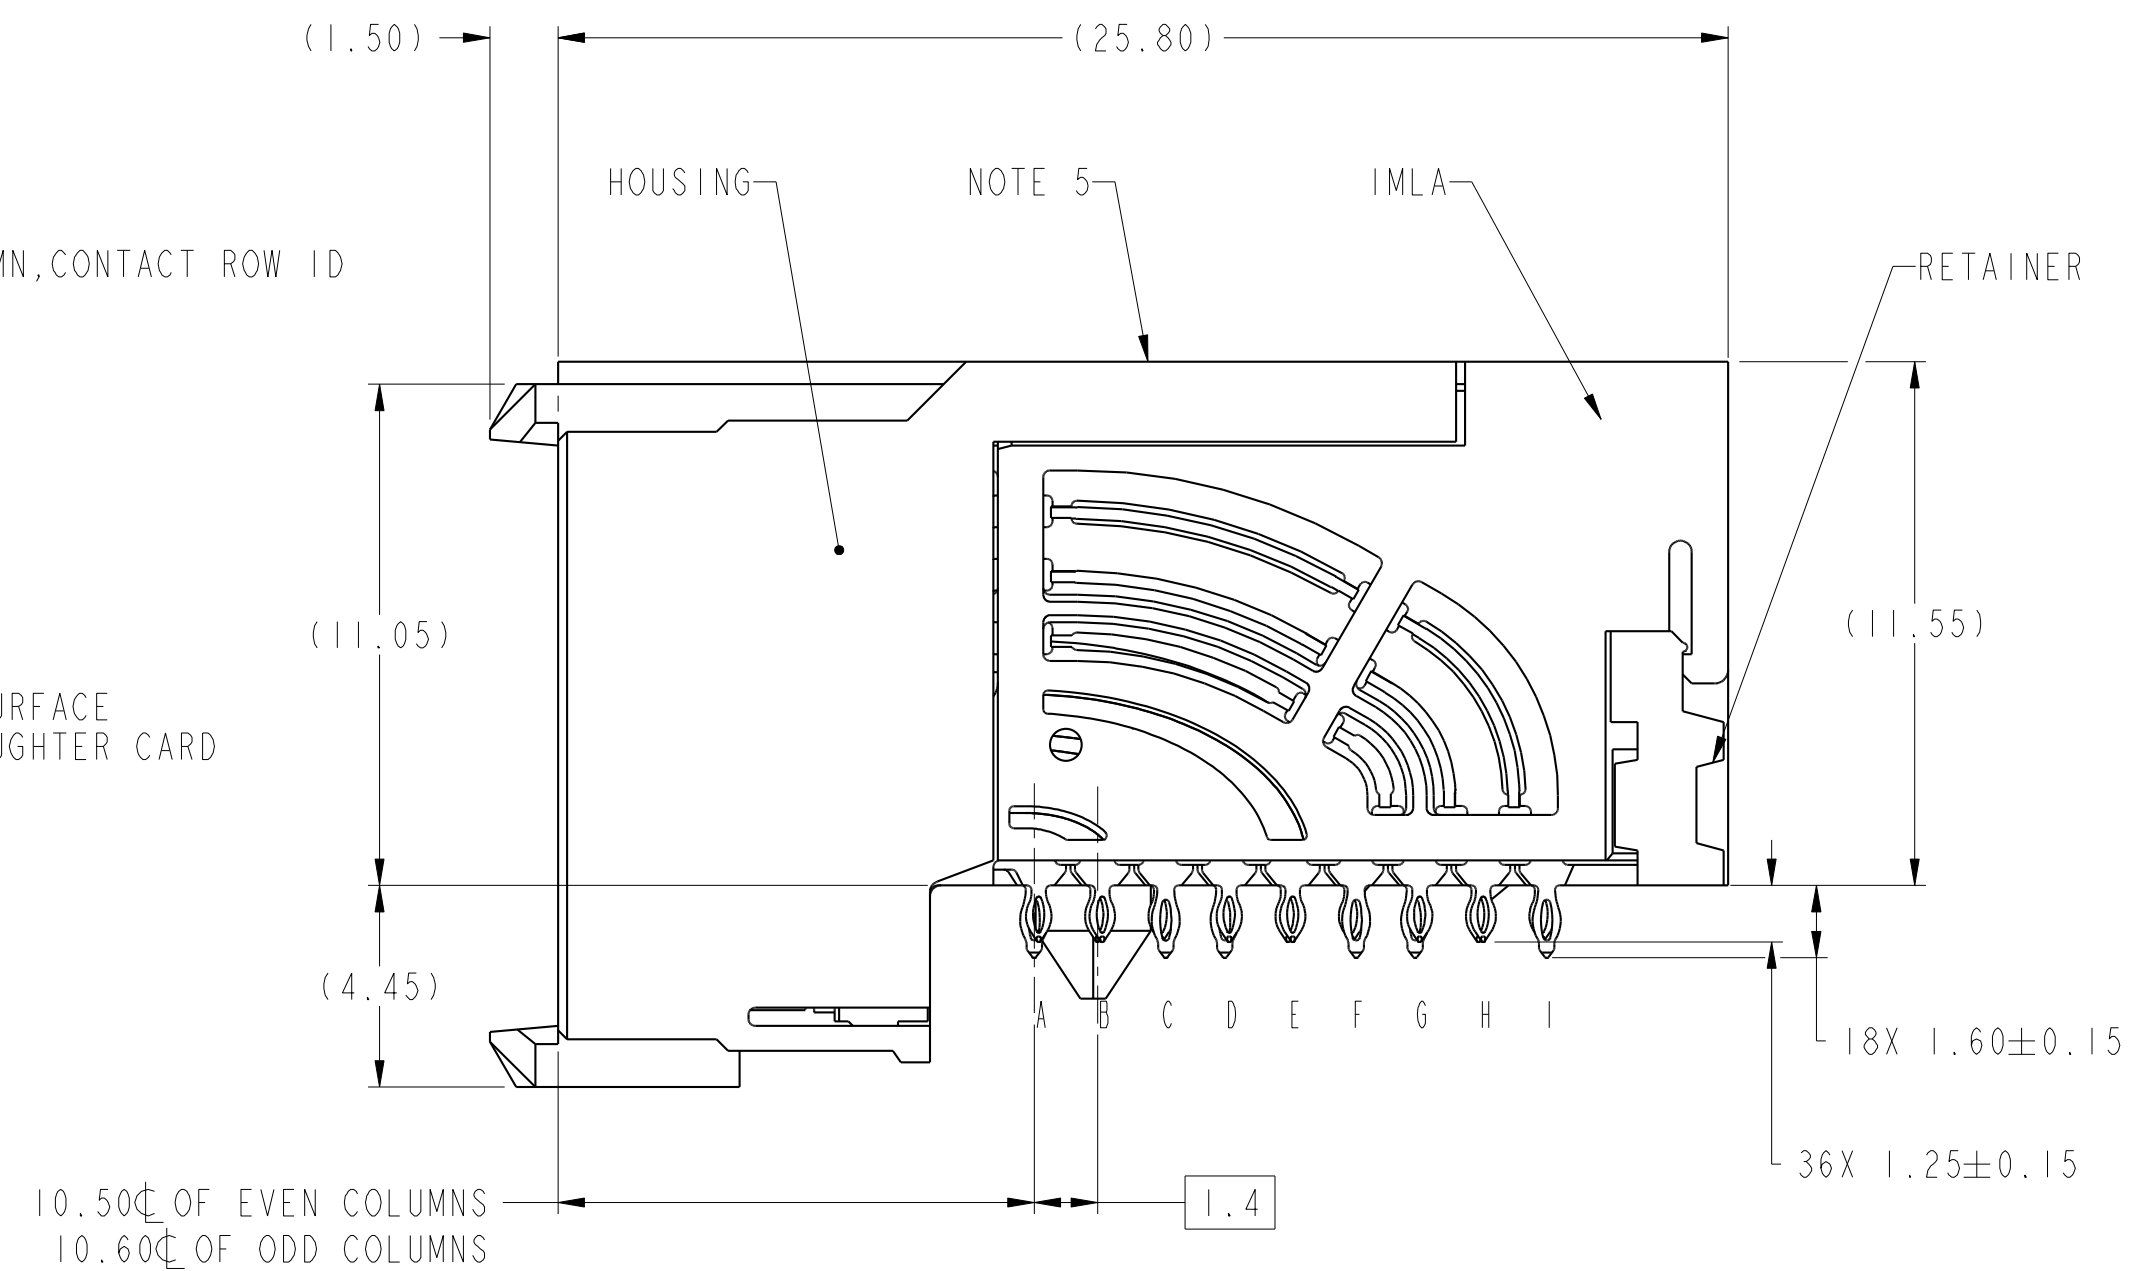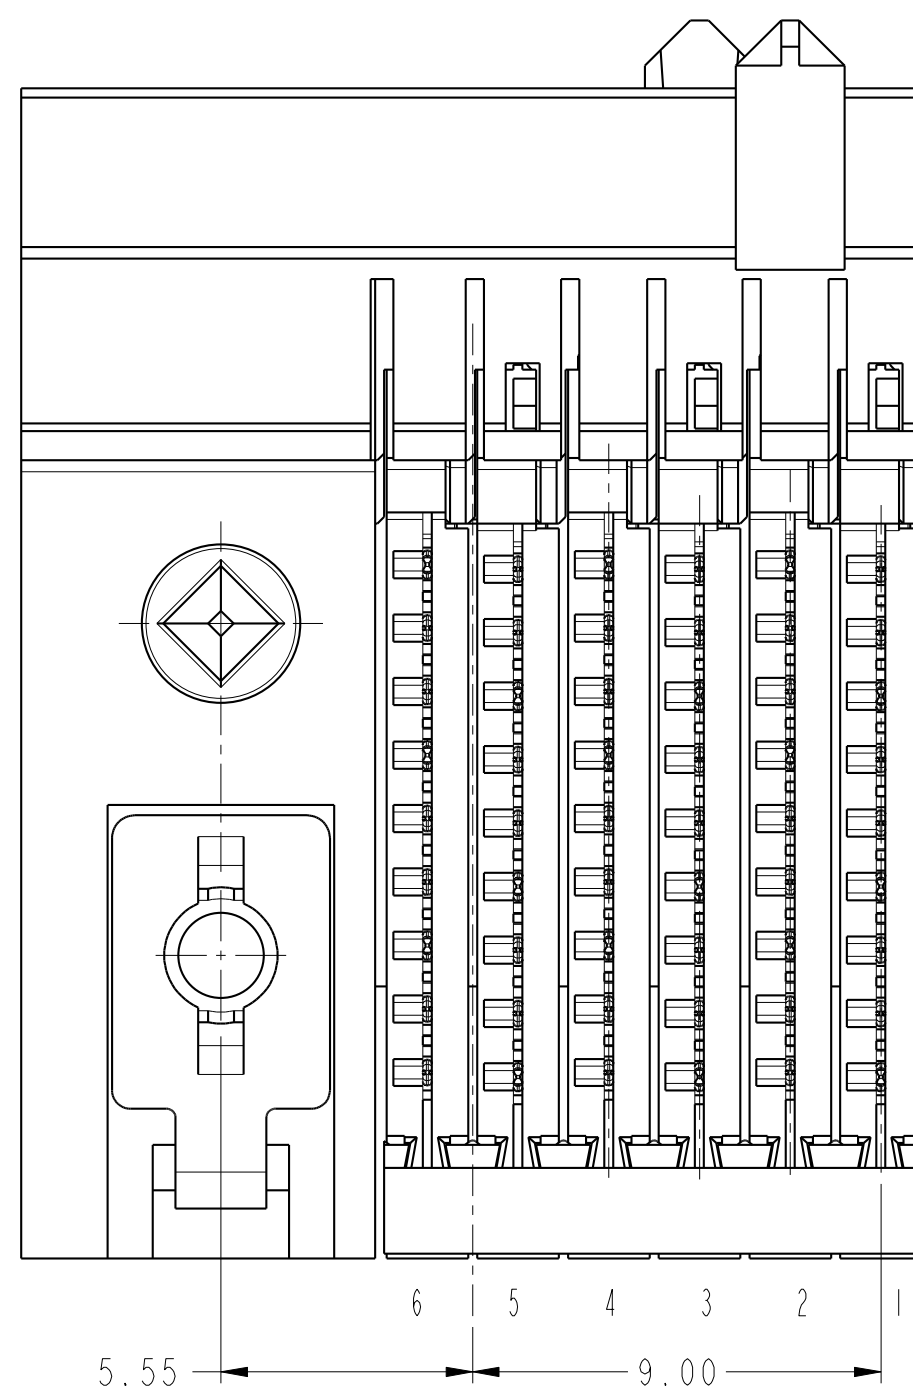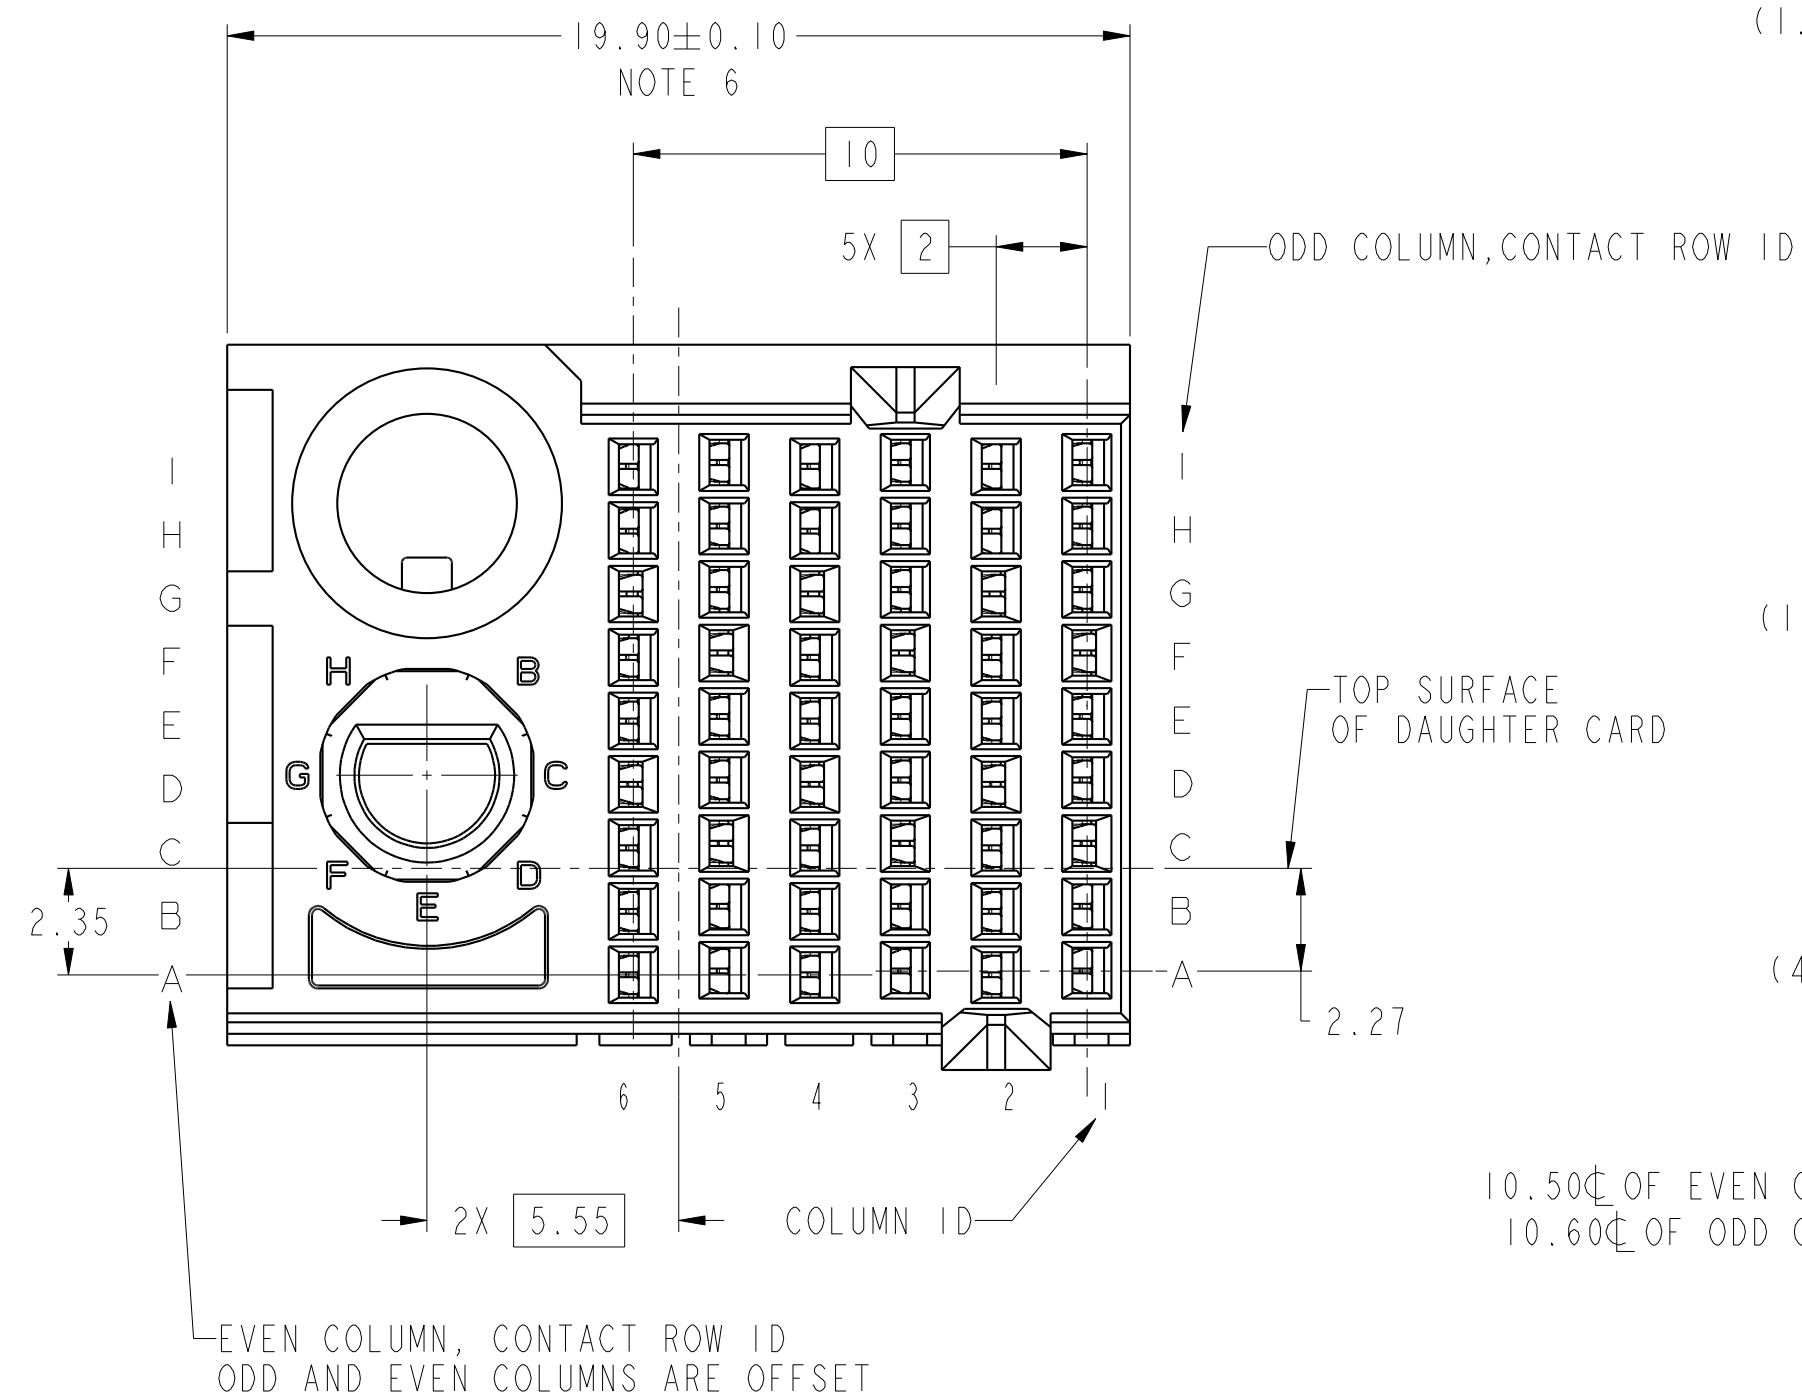

RECOMMENDED PCB LAYOUT

spec ref		---		dr		Jeny Ren		2015/05/20		projection		MM		size		scale					
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		Terry Luo		2015/01/31						A2		6:1			
ASME Y14.5M						chr		Stone Li		2015/01/31						ecn no		-			
						appr		Heaven Cen		2015/01/31						product family		AirMax VS2		rel level	
surface		✓		linear				AIRMAX VSE R.A. RECEPTACLE		ASS'Y, 3 PAIR, 54 POS, 6 IMLA, 20MM, W/GUIDE/KEY		dwg no		10135262		rev		A			
				0.X																±.3	
				0.XX																±.15	
				0.XXX		±.050															
				angular		0°		±°													
				cat. no.						Product - Customer Drw				sheet 2 of 4							

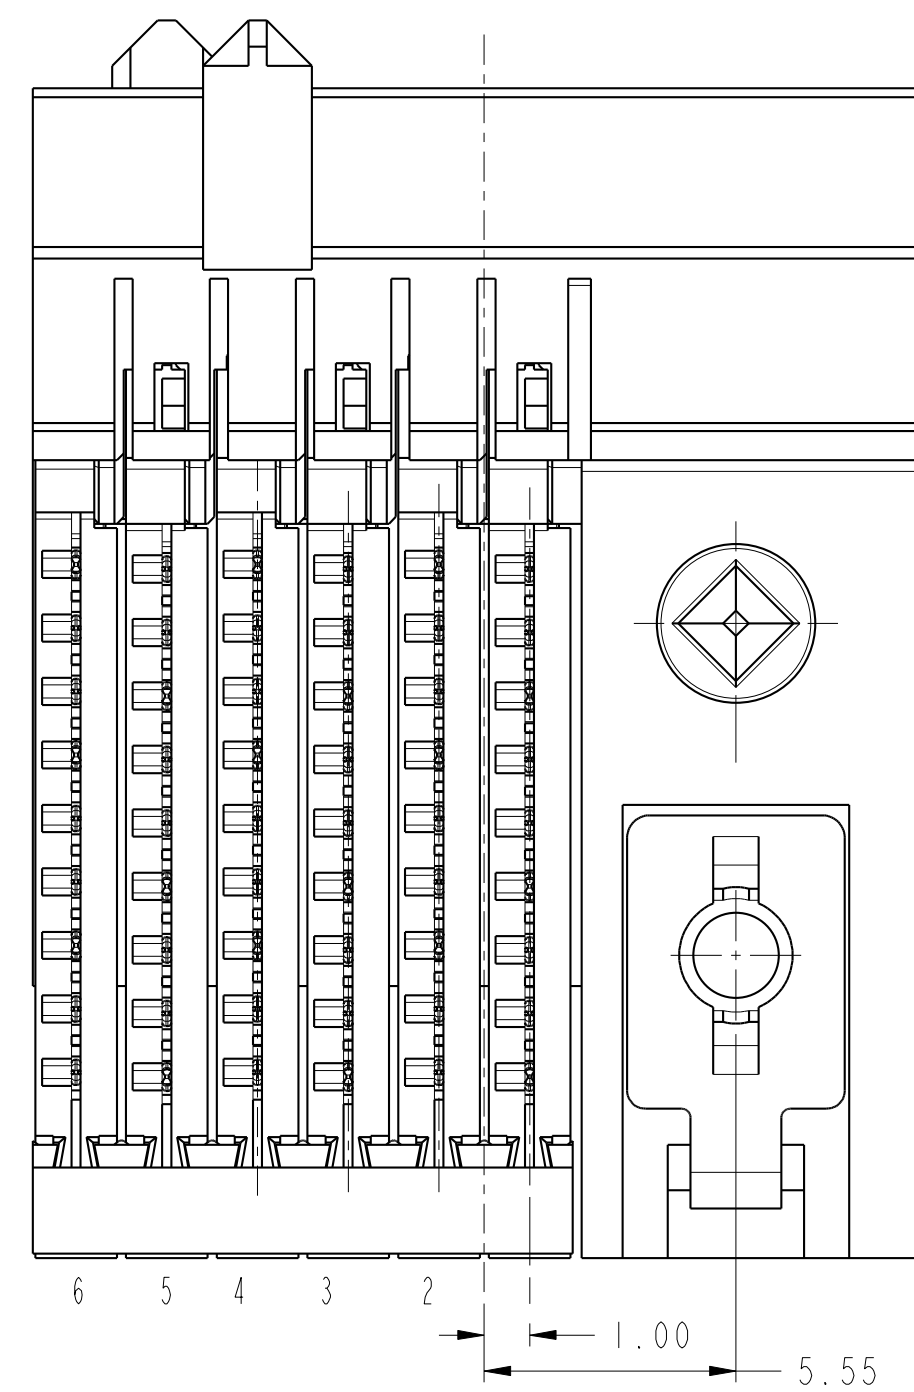

Printed: Jan 31, 2019


spec ref		---		dr		Jeny Ren		2015/05/20		projection		MM		size		scale							
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		Terry Luo		2019/01/31				A2		8:1							
ASME Y14.5M						chr		Stone Li		2019/01/31		ecn no		-									
				appr		Heaven Cen		2019/01/31		product family		AIRMAX VS2		rel level		Released							
surface - 		linear		0.X ±.3 0.XX ±.15 0.XXX ±.050		Amphenol FCI		title		AIRMAX VSE R.A. RECEPTACLE		dwg no		10135262		rev							
																		cat. no.		Product - Customer Drw		sheet 3 of 4	
																		angular		0° ±0°		ASS'Y, 3 PAIR, 54 POS, 6 IMLA, 20MM, W/GUIDE/KEY	

PRODUCT NUMBER	PRESS-FIT TAIL PLATING TYPE
10135262-10*LF	TIN OVER NICKEL (LEAD FREE)


- 1 - CONNECTOR MATERIALS:
HOUSING: HIGH TEMP THERMOPLASTIC, NATURAL, UL94-V0
IMLA PLASTIC: HIGH TEMP THERMOPLASTIC, BLACK, UL94-V0
CONTACT: COPPER ALLOY
ORGANIZER: HIGH TEMP THERMOPLASTIC, WHITE, UL94-V0
- 2 - CONTACT PLATING:
SEPARABLE INTERFACE:
PERFORMANCE-BASED PLATING, QUALIFIED TO MEET THE
REQUIREMENTS OF FCI PRODUCT SPECIFICATION GS-12-0956
INCLUDING TELCORDIA GR-1217-CORE (NOVEMBER 1995)
CENTRAL OFFICE TEST SEQUENCE

PRESS-FIT TAILS: SEE TABLE


- 3 - PRODUCT SPECIFICATION: GS-12-0956
- 4 - APPLICATION SPECIFICATION: GS-20-0305.
- 5 - PRODUCT MARKING, (PART NUMBER & LOT CODE), ON THIS SURFACE.
- 6 - THE MINIMUM CENTERLINE SPACING BETWEEN ADJACENT
MODULES IS 20.0 MM.
- 7 - CONNECTOR OUTLINE MAY BE SCREEN PRINTED ONTO CUSTOMER PCB TO
BE USED AS A GUIDE FOR MANUAL CONNECTOR PLACEMENT.
- 8 - REFER TO CUSTOMER DRAWING 10104444 FOR INFORMATION
ON PCB HOLE DIAMETERS AND PLATING OPTIONS
- 9 - LEAD FREE PRODUCT MEETS THE EUROPEAN UNION DIRECTIVES &
OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- 10 - PACKAGING MEETS GS-14-920 LEAD FREE LABELING
SPECIFICATION.
- 11 - GROUND CONTACTS (C,F, AND I IN ODD COLUMNS AND A, D, AND G,
EVEN COLUMNS) REQUIRE (Ø0.500) FINISHED HOLES. SIGNAL LOCATIONS
REQUIRE (Ø0.400) FINISHED HOLES.
- 12 - THESE OUTER VIAS (J) ARE OPTIONAL. WHILE NO CONNECTOR EONS ARE
PRESSED INTO THESE HOLES WE RECCOMEND (Ø0.500) FINISHED HOLES
AT THESE LOCATIONS TO PROVIDE GROUND SYMMETRY THROUGH THE PCB.
- 13 - CUSTOMER CAN FIX THE CONNECTOR WITH THREAD FORMING SCREW THROUGH
THIS PTH. THE SCREW IS #2-32, THE VALID LENGTH OF SCREW IS 4.5MM PLUS THE
THICKNESS OF PCB.

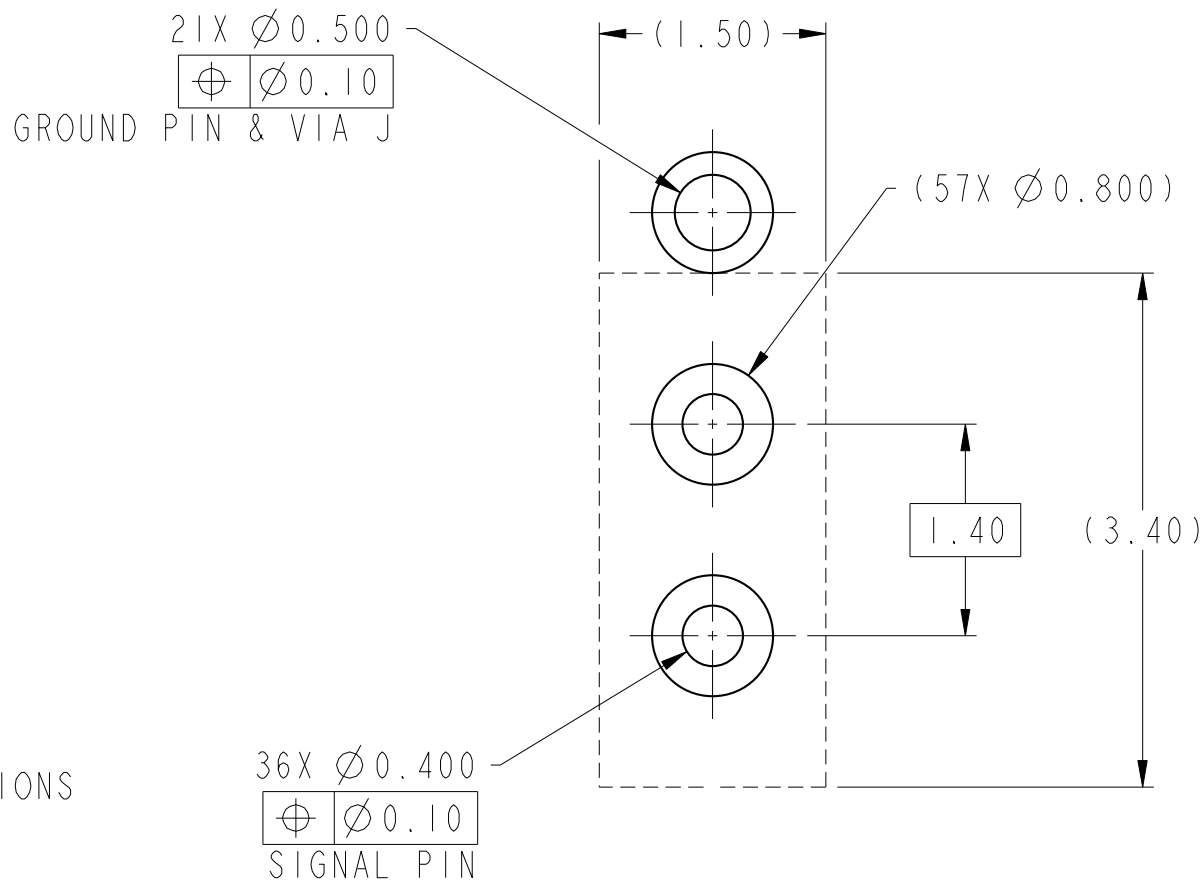

DETAIL A
SCALE 20:1

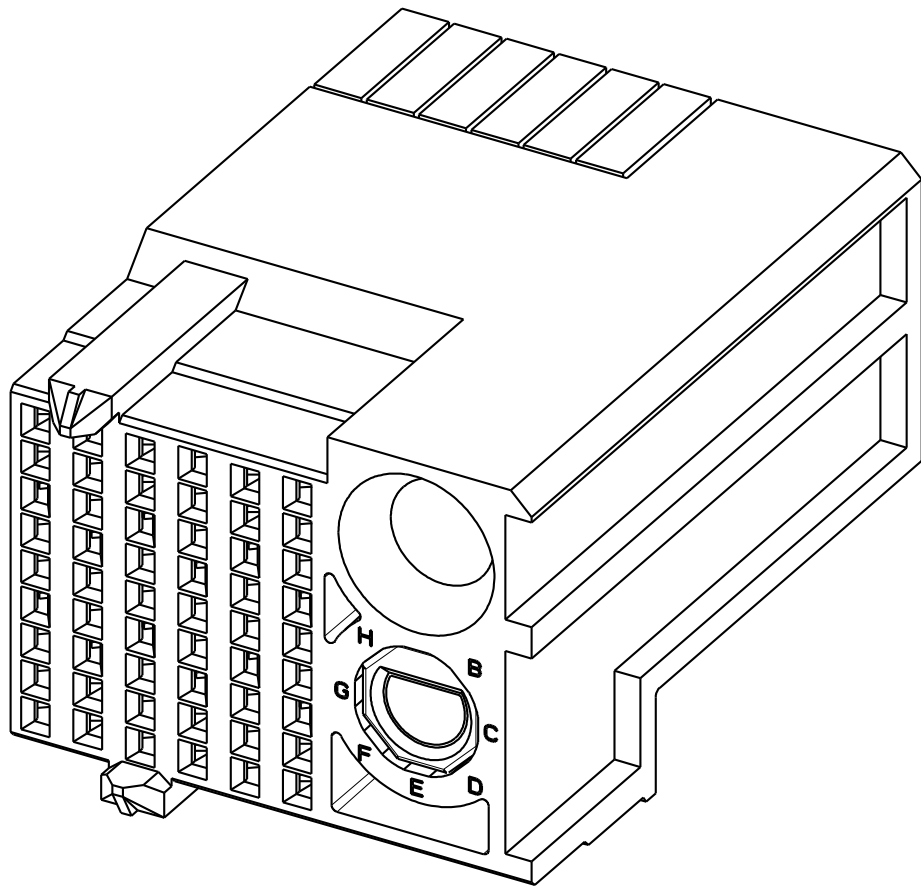

10135262-10ALF

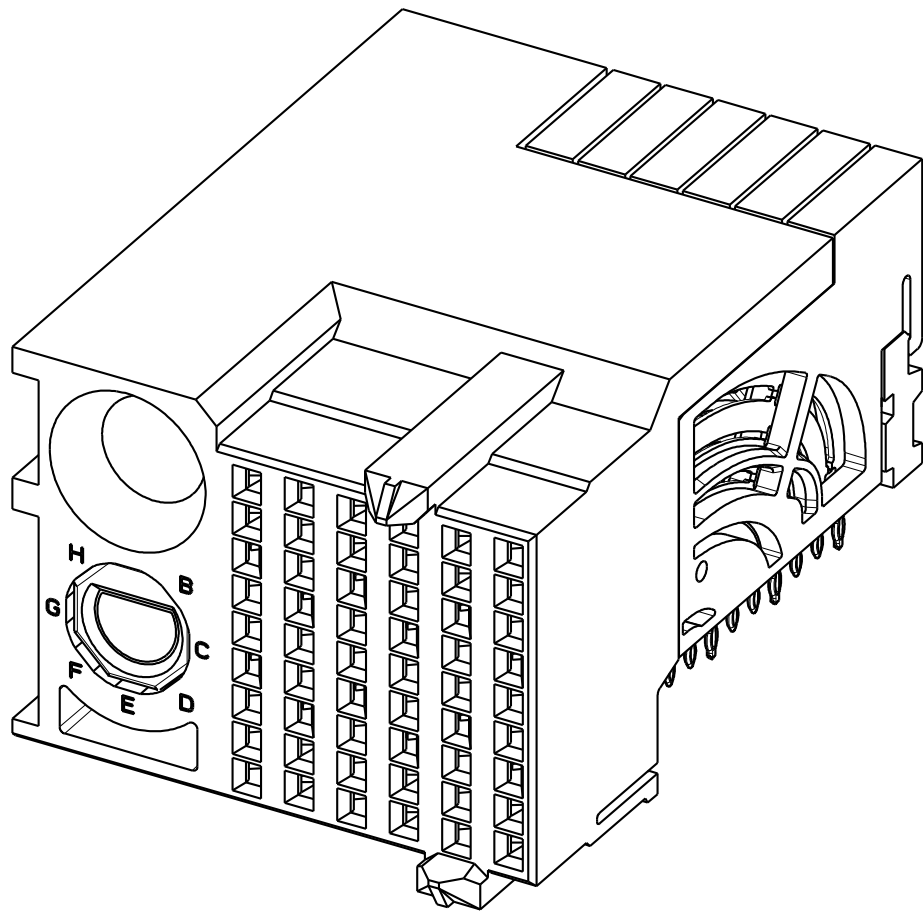

10135262-10PLF

spec ref	---	dr	Jerry Ren	2015/05/20	projection	MM	size	A2	scale	6:1
tolerance std	ASME Y14.5M	eng	Terry Luo	2019/01/31	chr	Stone Li	ecn no	-		
	TOLERANCES UNLESS OTHERWISE SPECIFIED	appr	Heaven Cen	2019/01/31	product family	AirMax VS2	rel level	Released		
surface	linear	0.X	±.3	Amphenol FCI	title	AIRMAX VSE R.A. RECEPTACLE	dwg no	10135262	rev	A
	0.XX	±.15				ASS'Y, 3 PAIR, 54 POS, 6 IMLA, 20MM, W/GUIDE/KEY				
	0.XXX	±.050								
	angular	0°	±°		cat. no.	-	Product - Customer Drw	sheet 4 of 4		

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru