

### Features

- 0.3" (7.62mm) Matrix Height
- Single Digit Display
- Black/Grey Face , White Segment
- IC compatible, Easy assembly
- Dynamic drive connect
- RoHS Compliant, Pb Free

### Applications

- Consumer Electronics
- Industrial Equipment

### Description

The INND-TS30 series is a 0.3" single digit display. It is a through hole type LED display which can be used in various applications.

### Internal Circuit Diagram

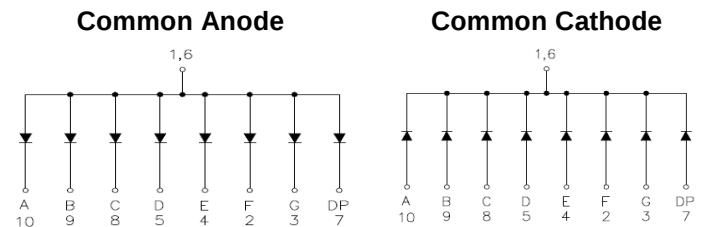


Figure 1. INND-TS30 series Internal Circuit Diagram

### Package Dimensions

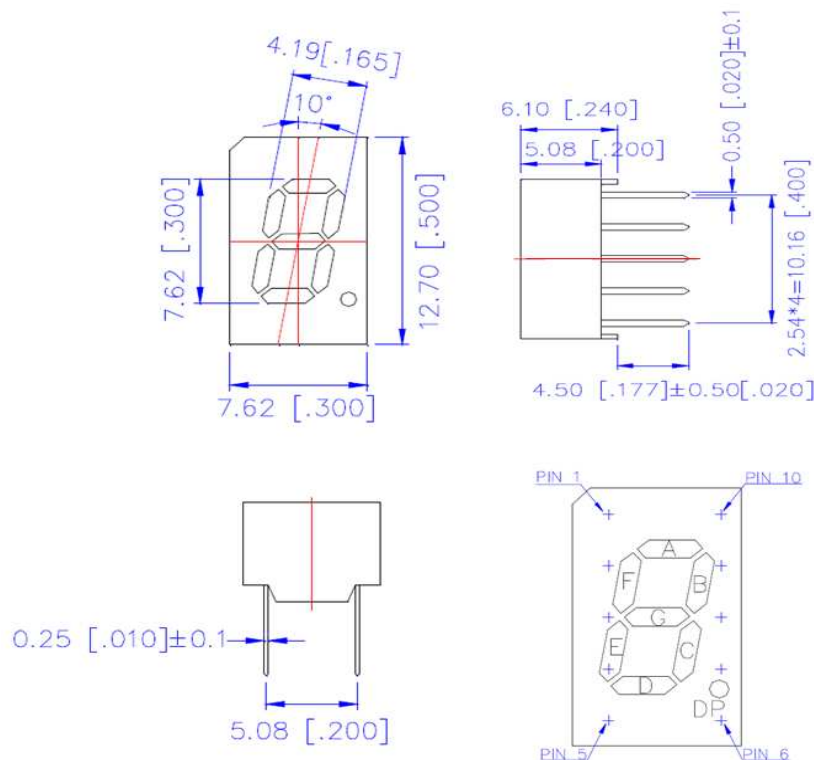


Figure 2. INND-TS30 series Package Dimensions

**Absolute Maximum Rating at 25°C** (Note 1)

| Product<br>(Per Segment) | Emission<br>Color | Technology | Pd (mW) | IF (mA) | IFP*<br>(mA) | VR (V) | Derate From<br>25°C (mA/°C) | T <sub>OP</sub> (°C) | T <sub>ST</sub> (°C) |
|--------------------------|-------------------|------------|---------|---------|--------------|--------|-----------------------------|----------------------|----------------------|
| INND-TS30YGXX            | Yellow<br>Green   | AlGaInP    | 70      | 25      | 90           | 5      | 0.33                        | -35°C~+85°C          | -35°C~+85°C          |
| INND-TS30YXX             | Yellow            | AlGaInP    | 70      | 25      | 90           | 5      | 0.33                        | -35°C~+85°C          | -35°C~+85°C          |
| INND-TS30AXX             | Amber             | AlGaInP    | 70      | 25      | 90           | 5      | 0.33                        | -35°C~+85°C          | -35°C~+85°C          |
| INND-TS30RXX             | Red               | AlGaInP    | 70      | 25      | 90           | 5      | 0.33                        | -35°C~+85°C          | -35°C~+85°C          |
| INND-TS30DRXX            | Deep Red          | AlGaInP    | 70      | 25      | 90           | 5      | 0.33                        | -35°C~+85°C          | -35°C~+85°C          |
| INND-TS30GXX             | Green             | InGaP      | 114     | 30      | 100          | 5      | 0.4                         | -35°C~+85°C          | -35°C~+85°C          |
| INND-TS30BXX             | Blue              | InGaP      | 114     | 30      | 100          | 5      | 0.4                         | -35°C~+85°C          | -35°C~+85°C          |
| INND-TS30WXX             | White             | InGaP      | 114     | 30      | 100          | 5      | 0.4                         | -35°C~+85°C          | -35°C~+85°C          |

**Notes**

1. Condition for IFP is pulse of 1/10 duty and 0.1msec width

### Electrical Characteristics $T_A = 25^\circ\text{C}$ (Note 1)

| Product<br>(Per Segment) | Emission<br>Color | $V_F(\text{V})@20\text{mA}$ |      |     | $\lambda(\text{nm})@20\text{mA}$ |             | $I_V(\text{mcd})@10\text{mA}$ |      |     | $I_R(\mu\text{A})@V_R=5\text{V}$ | $I_{V-M}@I_F=10\text{mA}$ |
|--------------------------|-------------------|-----------------------------|------|-----|----------------------------------|-------------|-------------------------------|------|-----|----------------------------------|---------------------------|
|                          |                   | min                         | typ. | max | $\lambda_D$                      | $\lambda_P$ | min                           | typ. | max | max                              | max                       |
| INND-TS30YGXX            | Yellow<br>Green   | -                           | 2.0  | 2.8 | 570                              | 572         | -                             | 12   | -   | 100                              | 2:1                       |
| INND-TS30YXX             | Yellow            | -                           | 2.0  | 2.8 | 590                              | 592         | -                             | 30   | -   | 100                              | 2:1                       |
| INND-TS30AXX             | Amber             | -                           | 2.0  | 2.8 | 605                              | 612         | -                             | 40   | -   | 100                              | 2:1                       |
| INND-TS30RXX             | Red               | -                           | 2.0  | 2.8 | 630                              | 644         | -                             | 18   | -   | 100                              | 2:1                       |
| INND-TS30DRXX            | Deep Red          | -                           | 2.0  | 2.8 | 645                              | 660         | -                             | 12   | -   | 100                              | 2:1                       |
| INND-TS30GXX             | Green             | -                           | 3.2  | 3.8 | 525                              | -           | -                             | 120  | -   | 100                              | 2:1                       |
| INND-TS30BXX             | Blue              | -                           | 3.2  | 3.8 | 465                              | -           | -                             | 17   | -   | 50                               | 2:1                       |
| INND-TS30WXX             | White             | -                           | 3.2  | 3.8 | X: 0.27<br>Y: 0.25               | -           | -                             | 42.3 | -   | 50                               | 2:1                       |

### Notes

1. Performance guaranteed only under conditions listed in above tables.

### ESD Precaution

ATTENTION: Electrostatic Discharge (ESD) protection



The symbol above denotes that ESD precaution is needed. ESD protection for GaP and AlGaAs based chips is necessary even though they are relatively safe in the presence of low static-electric discharge. Parts built with AlInGaP, GaN, or/and InGaN based chips are STATIC SENSITIVE devices. ESD precaution must be taken during design and assembly. If manual work or processing is needed, please ensure the device is adequately protected from ESD during the process.

Please be advised that normal static precautions should be taken in the handling and assembly of this device to prevent damage or degradation which may be induced by electrostatic discharge (ESD).

## Characteristic Curves for YG, Y, A, R, DR, G

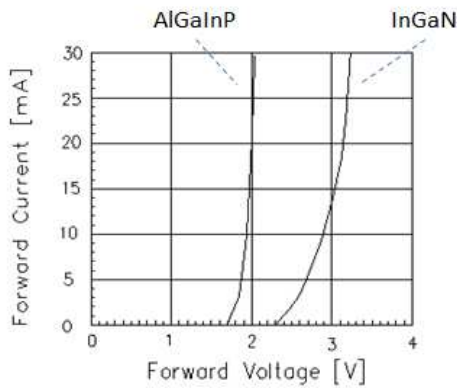


Fig 1. Forward Current vs. Forward Voltage

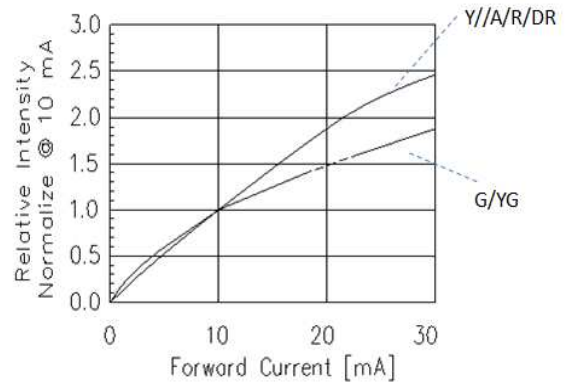


Fig 2. Relative Intensity vs. Forward Current

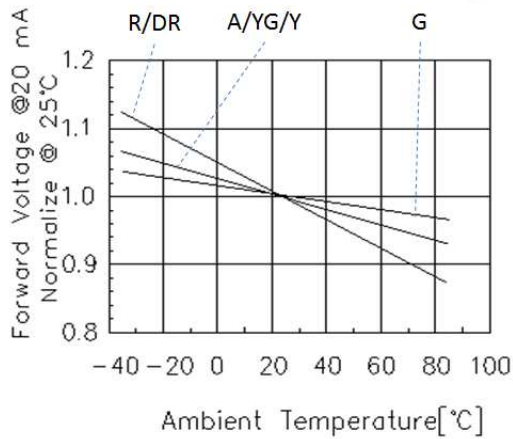


Fig 3. Forward Voltage vs. Temperature

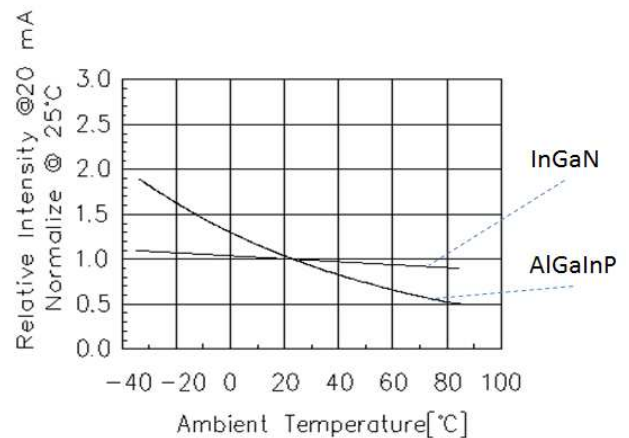


Fig 4. Relative Intensity vs. Temperature

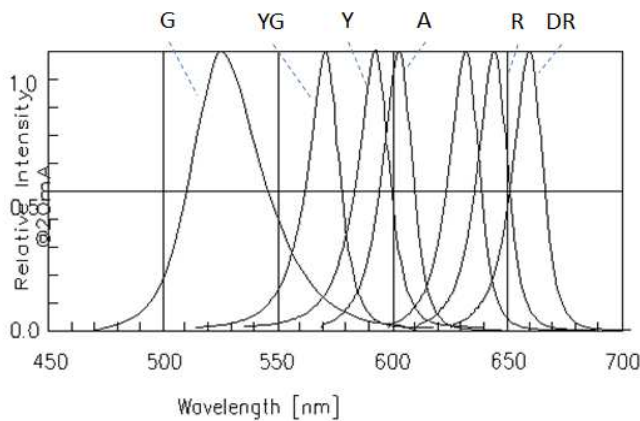


Fig 5. Relative Intensity vs. Wavelength

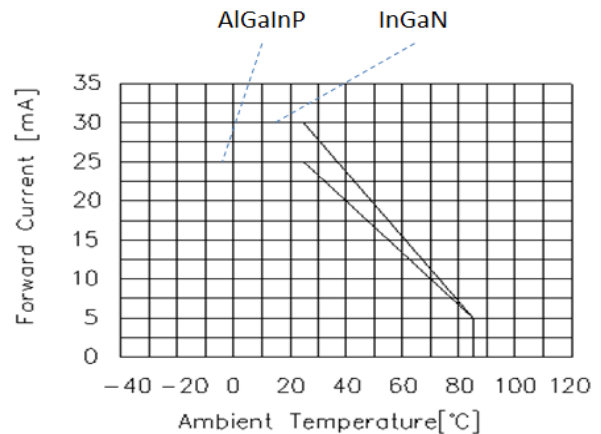


Fig 6. Forward current vs. Temperature

## Characteristic Curves for B

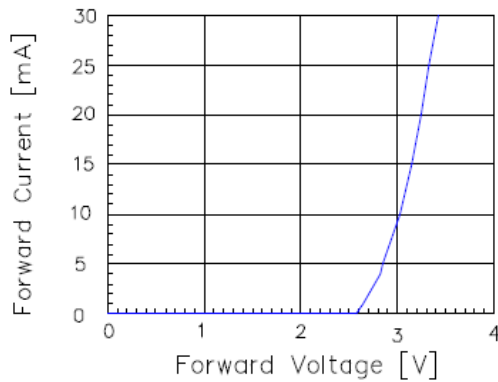


Fig 1. Forward Current vs. Forward Voltage

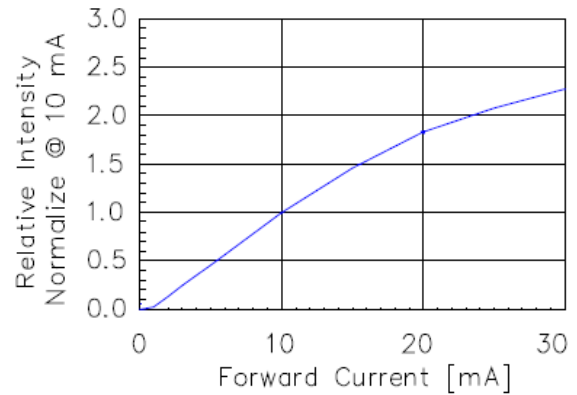


Fig 2. Relative Intensity vs. Forward Current

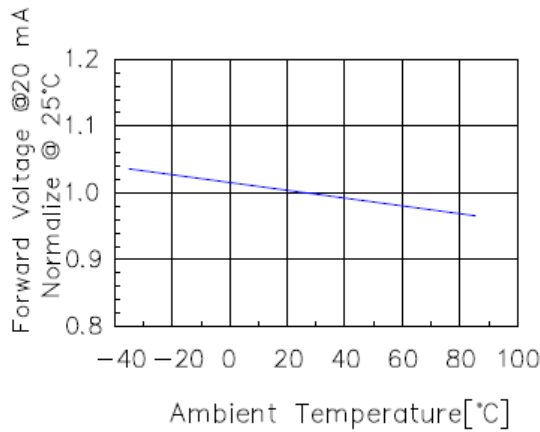


Fig 3. Forward Voltage vs. Temperature

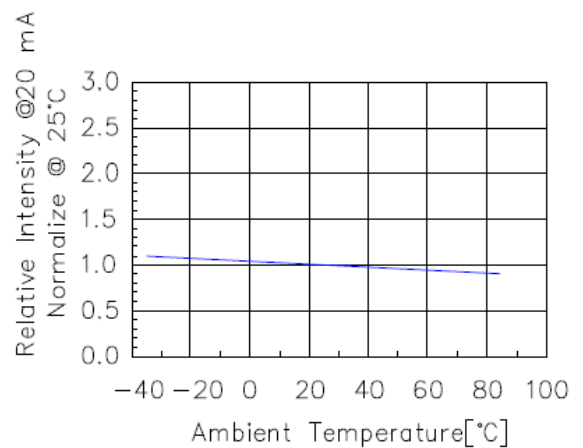


Fig 4. Relative Intensity vs. Temperature

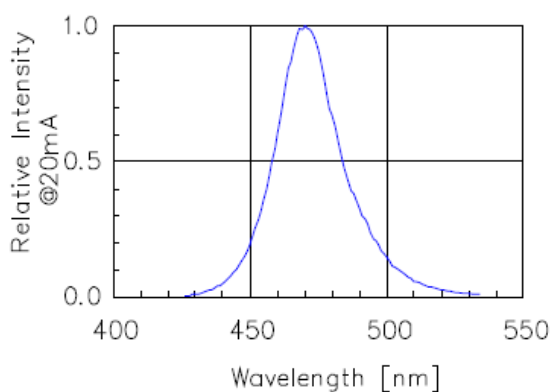


Fig 5. Relative Intensity vs. Wavelength

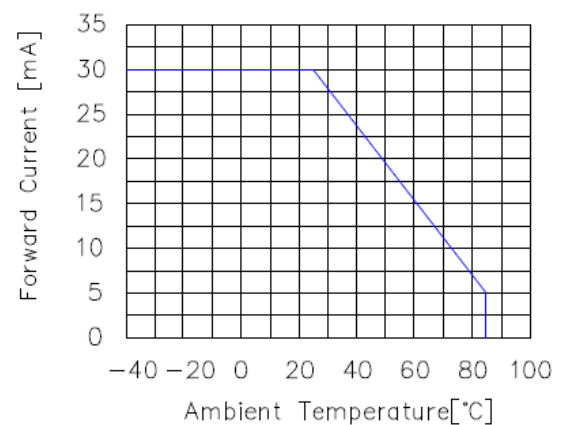


Fig 6. Forward current vs. Temperature

## Characteristic Curves for W



Fig 1. Forward Current vs. Forward Voltage

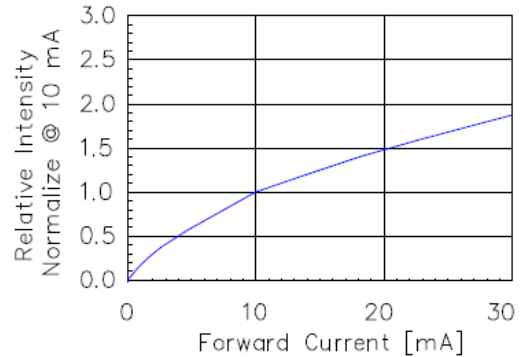


Fig 2. Relative Intensity vs. Forward Current

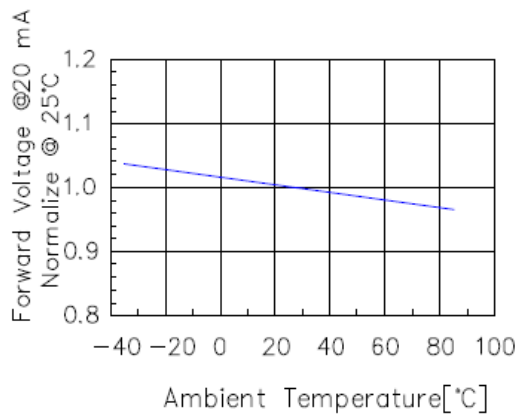


Fig 3. Forward Voltage vs. Temperature

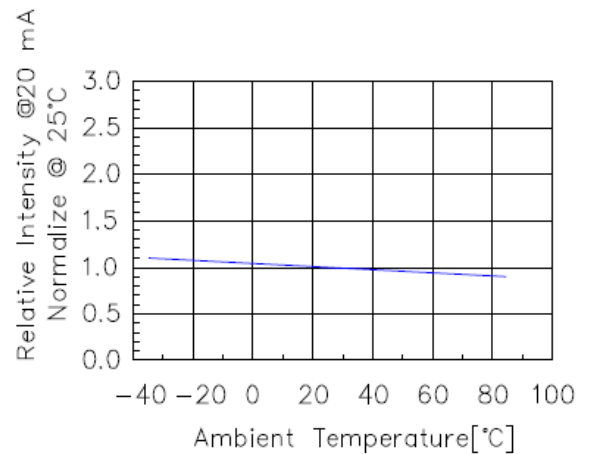


Fig 4. Relative Intensity vs. Temperature

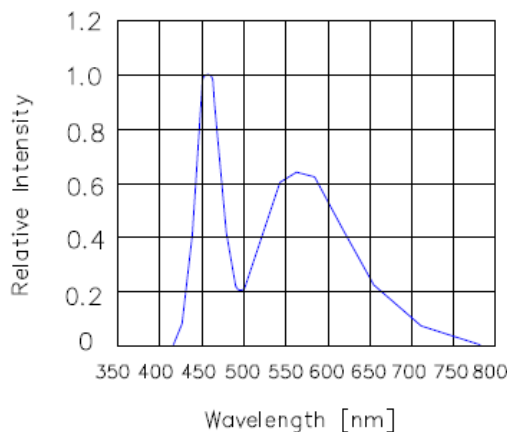


Fig 5. Relative Intensity vs. Wavelength

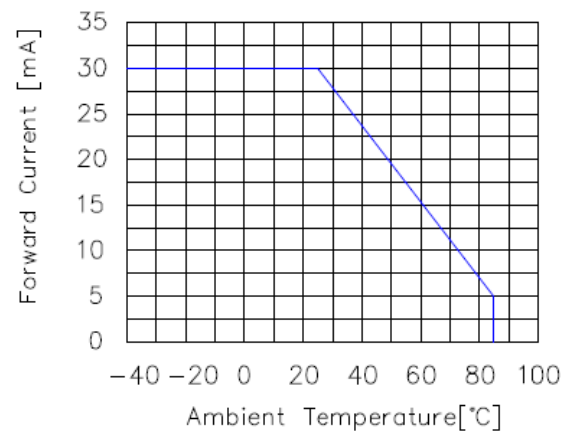
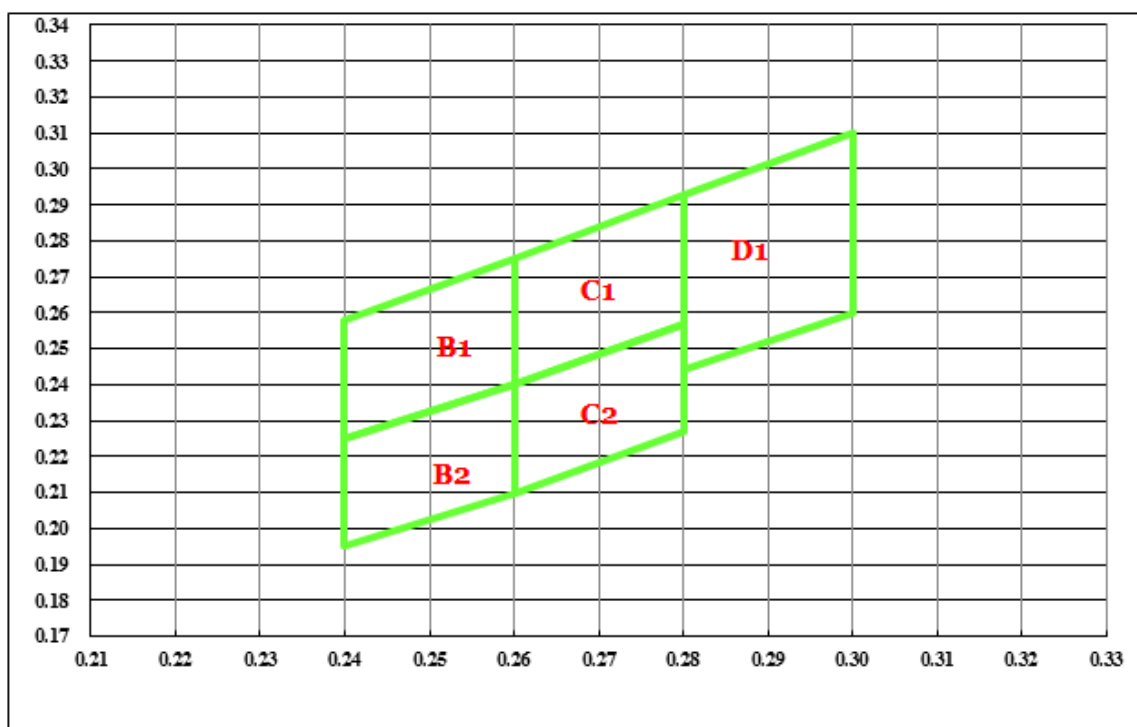


Fig 6. Forward current vs. Temperature

**Chromaticity Bin (for White only)**


| B1 |       |       |       |       |
|----|-------|-------|-------|-------|
| X  | 0.240 | 0.240 | 0.260 | 0.260 |
| Y  | 0.225 | 0.258 | 0.275 | 0.240 |

| B2 |       |       |       |       |
|----|-------|-------|-------|-------|
| X  | 0.240 | 0.240 | 0.260 | 0.260 |
| Y  | 0.195 | 0.225 | 0.240 | 0.210 |

| C1 |       |       |       |       |
|----|-------|-------|-------|-------|
| X  | 0.260 | 0.260 | 0.280 | 0.280 |
| Y  | 0.240 | 0.275 | 0.293 | 0.257 |

| C2 |       |       |       |       |
|----|-------|-------|-------|-------|
| X  | 0.260 | 0.260 | 0.280 | 0.280 |
| Y  | 0.210 | 0.240 | 0.257 | 0.227 |


| D1 |       |       |       |       |
|----|-------|-------|-------|-------|
| X  | 0.280 | 0.280 | 0.300 | 0.300 |
| Y  | 0.244 | 0.293 | 0.310 | 0.260 |

## Ordering Information

| Product       | Emission Color | Technology | I*V(mcd)<br>@10mA | VF(V)<br>@20mA | Polarity       | Face Color | Orderable Part Number |
|---------------|----------------|------------|-------------------|----------------|----------------|------------|-----------------------|
| INND-TS30YGXX | Yellow Green   | AlGaInP    | 12                | 2.0            | Common Anode   | Black      | INND-TS30YGAB         |
|               |                |            |                   |                | Common Cathode | Black      | INND-TS30YGCB         |
|               |                |            |                   |                | Common Anode   | Grey       | INND-TS30YGAG         |
|               |                |            |                   |                | Common Cathode | Grey       | INND-TS30YGCG         |
| INND-TS30YXX  | Yellow         | AlGaInP    | 30                | 2.0            | Common Anode   | Black      | INND-TS30YAB          |
|               |                |            |                   |                | Common Cathode | Black      | INND-TS30YCB          |
|               |                |            |                   |                | Common Anode   | Grey       | INND-TS30YAG          |
|               |                |            |                   |                | Common Cathode | Grey       | INND-TS30YCG          |
| INND-TS30AXX  | Amber          | AlGaInP    | 40                | 2.0            | Common Anode   | Black      | INND-TS30AAB          |
|               |                |            |                   |                | Common Cathode | Black      | INND-TS30ACB          |
|               |                |            |                   |                | Common Anode   | Grey       | INND-TS30AAG          |
|               |                |            |                   |                | Common Cathode | Grey       | INND-TS30ACG          |
| INND-TS30RXX  | Red            | AlGaInP    | 18                | 2.0            | Common Anode   | Black      | INND-TS30RAB          |
|               |                |            |                   |                | Common Cathode | Black      | INND-TS30RCB          |
|               |                |            |                   |                | Common Anode   | Grey       | INND-TS30RAG          |
|               |                |            |                   |                | Common Cathode | Grey       | INND-TS30RCG          |

| Product       | Emission Color | Technology | I*V(mcd)<br>@10mA | VF(V)<br>@20mA | Polarity       | Face Color | Orderable Part Number |
|---------------|----------------|------------|-------------------|----------------|----------------|------------|-----------------------|
| INND-TS30DRXX | Deep Red       | AlGaInP    | 12                | 2.0            | Common Anode   | Black      | INND-TS30DRAB         |
|               |                |            |                   |                | Common Cathode | Black      | INND-TS30DRCB         |
|               |                |            |                   |                | Common Anode   | Grey       | INND-TS30DRAG         |
|               |                |            |                   |                | Common Cathode | Grey       | INND-TS30DRCG         |
| INND-TS30GXX  | Green          | InGaN      | 120               | 3.2            | Common Anode   | Black      | INND-TS30GAB          |
|               |                |            |                   |                | Common Cathode | Black      | INND-TS30GCB          |
|               |                |            |                   |                | Common Anode   | Grey       | INND-TS30GAG          |
|               |                |            |                   |                | Common Cathode | Grey       | INND-TS30GCG          |
| INND-TS30BXX  | Blue           | InGaN      | 17                | 3.2            | Common Anode   | Black      | INND-TS30BAB          |
|               |                |            |                   |                | Common Cathode | Black      | INND-TS30BCB          |
|               |                |            |                   |                | Common Anode   | Grey       | INND-TS30BAG          |
|               |                |            |                   |                | Common Cathode | Grey       | INND-TS30BCG          |
| INND-TS30WXX  | White          | InGaN      | 42.3              | 3.2            | Common Anode   | Black      | INND-TS30WAB          |
|               |                |            |                   |                | Common Cathode | Black      | INND-TS30WCB          |
|               |                |            |                   |                | Common Anode   | Grey       | INND-TS30WAG          |
|               |                |            |                   |                | Common Cathode | Grey       | INND-TS30WCG          |

## Label Specifications

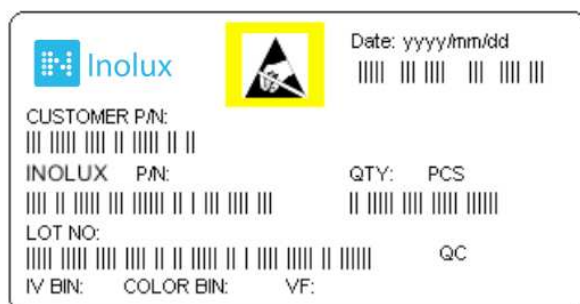

## Inolux P/N:

| I      | N                    | N | D | - | T                            | S | 3                            | 0 | X                                                                                                                     | X                                        | X                     | - | X                    | X | X | X |
|--------|----------------------|---|---|---|------------------------------|---|------------------------------|---|-----------------------------------------------------------------------------------------------------------------------|------------------------------------------|-----------------------|---|----------------------|---|---|---|
| Inolux | Display Type         |   |   |   | Display Type                 |   | Dimension                    |   | Color                                                                                                                 | Polarity                                 | Face Color            |   | Customized Stamp-off |   |   |   |
|        | ND = Numeric Display |   |   |   | T: Through hole<br>S: Single |   | 30 = 0.30"<br>Display Height |   | YG: 570 nm<br>Y: 590 nm<br>A: 605 nm<br>R: 630 nm<br>DR: 660 nm<br>G: 525 nm<br>B: 465 nm<br>W:<br>X: 0.27<br>Y: 0.25 | A = Common Anode<br><br>C=Common Cathode | B = Black<br>G = Grey |   |                      |   |   |   |

## Lot No.:

|                  |                          |   |   |   |       |      |        |
|------------------|--------------------------|---|---|---|-------|------|--------|
| Z                | 2                        | 0 | 1 | 7 | 01    | 24   | 001    |
| Internal Tracker | Year (2017, 2018, .....) |   |   |   | Month | Date | Serial |

## Reflow Soldering



## Soldering Iron

Basic Spec is  $\leq 4$  sec. when 260°C (+10°C → -1 second). Power dissipation of Iron should be less than 15W. Surface temperature should be under 230°C

## Rework

Rework should be completed within 4 second under 245°C

## Revision History

| Changes since last revision | Page | Version No. | Revision Date |
|-----------------------------|------|-------------|---------------|
| Initial Release             |      | 1.0         | 07-12-2017    |
|                             |      |             |               |
|                             |      |             |               |
|                             |      |             |               |
|                             |      |             |               |
|                             |      |             |               |
|                             |      |             |               |
|                             |      |             |               |
|                             |      |             |               |

## DISCLAIMER

INOLUX reserves the right to make changes without further notice to any products herein to improve reliability, function or design. INOLUX does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

## LIFE SUPPORT POLICY

INOLUX's products are not authorized for use as critical components in life support devices or systems without the express written approval of the President of INOLUX or INOLUX CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)