


## FEATURES

- Automatically restarts microprocessor after power failure
- Maintains reset for 350 ms after  $V_{CC}$  returns to an in-tolerance condition
- Accurate 5%, 10% or 15% microprocessor 5V power supply monitoring
- Reduces need for discrete components
- Precision temperature-compensated voltage reference and voltage sensor
- Low-cost TO-92 package or surface mount SOT-223 package
- Internal 5 k $\Omega$  pull-up resistor
- Compatible with Motorola 68XXX series and HC16 Microprocessors
- Operating temperature of -40°C to +85°C

## PIN ASSIGNMENT



BOTTOM VIEW  
TO-92 PACKAGE  
See Mech.  
Drawings Section  
On Website



TOP VIEW  
SOT-23 PACKAGE  
See Mech.  
Drawings Section  
On Website

## PIN DESCRIPTION

|       |                       |
|-------|-----------------------|
| PIN 1 | GROUND                |
| PIN 2 | RESET                 |
| PIN 3 | $V_{CC}$              |
| PIN 4 | GROUND (SOT-223 ONLY) |

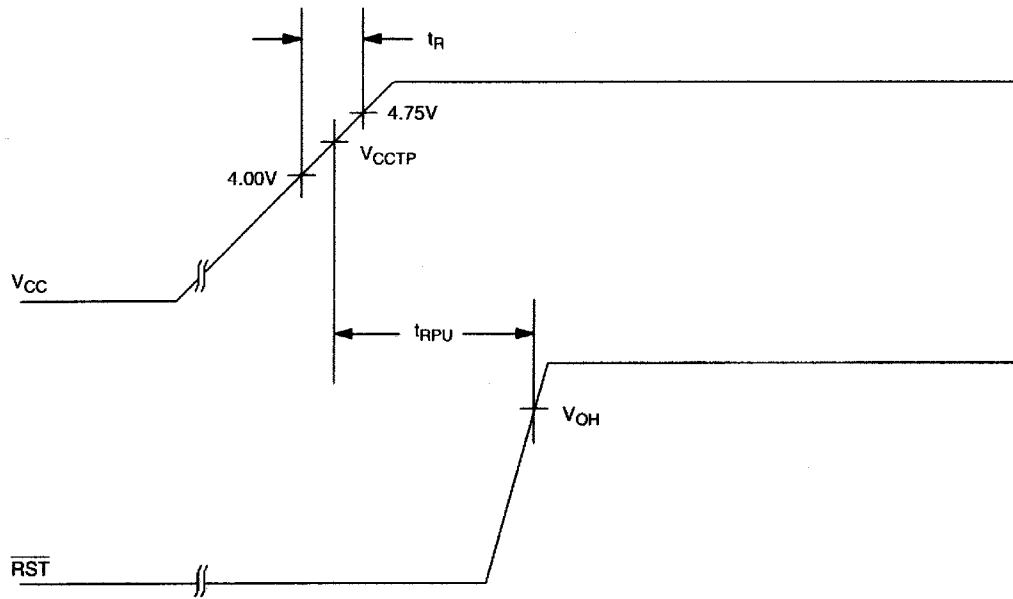
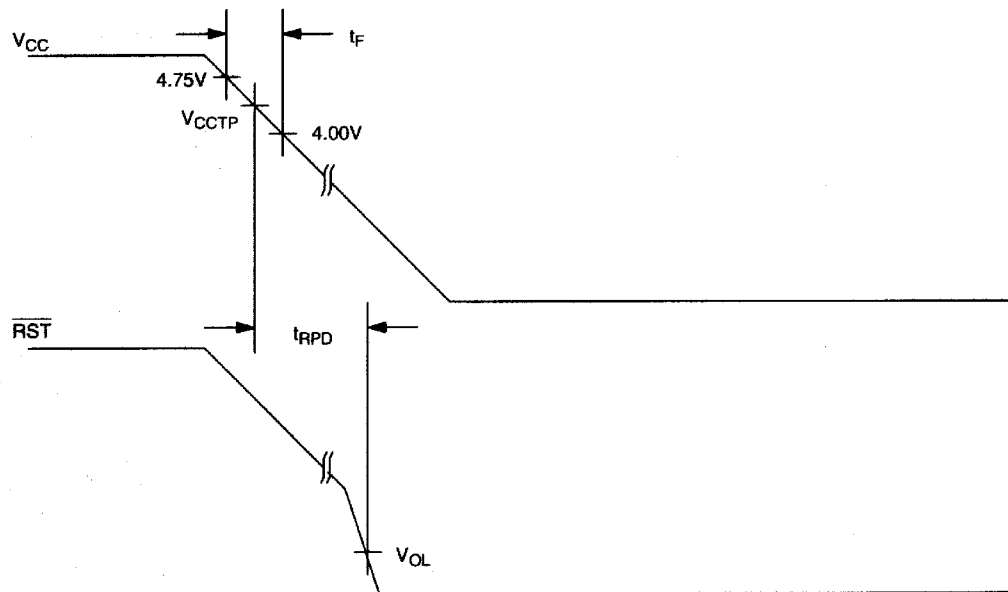
## DESCRIPTION

The DS1233D EconoReset uses a precision temperature-compensated reference and comparator circuit to monitor the status of the power supply ( $V_{CC}$ ). When an out-of-tolerance condition is detected, an internal power-fail signal is generated which forces reset to the active state. When  $V_{CC}$  returns to an in-tolerance condition, the reset signal is kept in the active state for approximately 350 ms to allow the power supply and processor to stabilize.

## OPERATION - POWER MONITOR

The DS1233D provides the functions of detecting out-of-tolerance power supply conditions and warning a processor-based system of impending power failure. When  $V_{CC}$  is detected as out of tolerance as defined by the tolerance of the part selected, the  $\overline{RST}$  signal is asserted. On power-up,  $\overline{RST}$  is kept active for approximately 350 ms after the power supply has reached the selected tolerance. This allows the power supply and microprocessor to stabilize before  $\overline{RST}$  is released.

**BLOCK DIAGRAM Figure 1****APPLICATION EXAMPLE Figure 2**

**POWER UP Figure 3****POWER DOWN Figure 4**

**ABSOLUTE MAXIMUM RATINGS\***

|                                            |                          |
|--------------------------------------------|--------------------------|
| Voltage on $V_{CC}$ Pin Relative to Ground | -0.5V to +7.0V           |
| Voltage on I/O Relative to Ground          | -0.5V to $V_{CC} + 0.5V$ |
| Operating Temperature                      | -40°C to +85°C           |
| Storage Temperature                        | -55°C to +125°C          |
| Soldering Temperature                      | 260°C for 10 seconds     |

- \* This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operation sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect reliability.

**RECOMMENDED DC OPERATING CONDITIONS** (-40°C to +85°C)

| PARAMETER      | SYMBOL   | MIN | TYP | MAX | UNITS | NOTES |
|----------------|----------|-----|-----|-----|-------|-------|
| Supply Voltage | $V_{CC}$ | 1.2 | 5.0 | 5.5 | V     | 1     |

**DC ELECTRICAL CHARACTERISTICS** (-40°C to +85°C;  $V_{DD} = 5V \pm 10\%$ )

| PARAMETER                    | SYMBOL      | MIN  | TYP   | MAX  | UNITS      | NOTES |
|------------------------------|-------------|------|-------|------|------------|-------|
| Low Level @ $\overline{RST}$ | $V_{OL}$    |      |       | 0.4  | V          | 1     |
| Output Current @ 0.4V        | $I_{OL}$    | +8   |       |      | mA         | 2     |
| Operating Current            | $I_{CC}$    |      |       | 50   | $\mu A$    |       |
| $V_{CC}$ Trip Point 5%       | $V_{CCTP1}$ | 4.5  | 4.625 | 4.74 | V          | 1     |
| $V_{CC}$ Trip Point 10%      | $V_{CCTP2}$ | 4.25 | 4.375 | 4.49 | V          | 1     |
| $V_{CC}$ Trip Point 15%      | $V_{CCTP3}$ | 4.0  | 4.125 | 4.24 | V          | 1     |
| Output Capacitance           | $C_{OUT}$   |      |       | 10   | pF         |       |
| Internal Pull-Up Resistor    | $R_P$       | 3.75 | 5     | 6.25 | k $\Omega$ |       |

**AC ELECTRICAL CHARACTERISTICS** (-40°C to +85°C;  $V_{CC} = 5V \pm 10\%$ )

| PARAMETER                           | SYMBOL    | MIN | TYP | MAX | UNITS   | NOTES |
|-------------------------------------|-----------|-----|-----|-----|---------|-------|
| Reset Active Time                   | $t_{RST}$ | 250 | 350 | 450 | ms      |       |
| $V_{CC}$ Detect to $\overline{RST}$ | $t_{RPD}$ |     |     | 100 | ns      |       |
| $V_{CC}$ Slew Rate (4.75V - 4.00V)  | $t_F$     | 300 |     |     | $\mu s$ |       |
| $V_{CC}$ Slew Rate (4.00V - 4.75V)  | $t_R$     | 0   |     |     | ns      |       |
| $V_{CC}$ Detect to RST              | $t_{RPU}$ | 250 | 350 | 450 | ms      |       |

**NOTES:**

1. All voltages are referenced to ground.
2. A 1 k $\Omega$  external resistor may be required for proper operation of the microprocessor reset control circuit.

**ECONORESET SELECTION GUIDE**

|             |            | VCC TRIP POINT |       |      | PUSHBUTTON DETECT |     |     |
|-------------|------------|----------------|-------|------|-------------------|-----|-----|
|             |            | MIN            | TYP   | MAX  | MIN               | TYP | MAX |
| <b>5V</b>   | DS1233-15  | 4.0            | 4.125 | 4.24 | 2.4               | -   | 3.3 |
|             | DS1233-10  | 4.25           | 4.375 | 4.49 | 2.4               | -   | 3.3 |
|             | DS1233-5   | 4.5            | 4.625 | 4.75 | 2.4               | -   | 3.3 |
|             | DS1233D-15 | 4.0            | 4.125 | 4.24 | N/A               |     | N/A |
|             | DS1233D-10 | 4.25           | 4.375 | 4.49 | N/A               |     | N/A |
|             | DS1233D-5  | 4.5            | 4.625 | 4.75 | N/A               |     | N/A |
|             | DS1833-15  | 4.0            | 4.125 | 4.24 | N/A               |     | N/A |
|             | DS1833-10  | 4.25           | 4.375 | 4.49 | N/A               |     | N/A |
|             | DS1833-5   | 4.5            | 4.625 | 4.75 | N/A               |     | N/A |
| <b>3.3V</b> | DS1233A-15 | 2.64           | 2.72  | 2.80 | 1.8               | -   | 3.0 |
|             | DS1233A-10 | 2.8            | 2.88  | 2.97 | 1.8               | -   | 3.0 |

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)