



Adjustable 0.6V Open Collector Shunt Voltage Reference

- Internal 0.6V $\pm 0.5\%$ precision
- Low output saturation voltage
75mV max. between SINK and GND
- Low current consumption: 150 μ A
- Low supply voltage 1.7V
- Industrial temperature range: -40 to +85°C
- 150ppm/°C temperature coefficient
- Lead free available

Description

The TS4436 is a four-terminal device dedicated to low voltage Switch Mode Power Supplies (SMPS).


It integrates a 0.6V voltage reference, an amplifier, and an open collector output transistor in a single package. The TS4436's operating mode is similar to the well-known standard voltage reference, the TL431. It maintains the desired feedback voltage at the REF pin in a closed loop configuration by sinking a current proportional to the error voltage at the REF pin.

TS4436 features an open collector transistor with an ultra-low saturation voltage. This feature allows it to be used in series with the optocoupler in an SMPS for regulation up to a 1.8V output voltage.



SC70
(Plastic Micropackage)

Pin connections (top view)



Applications

- Low voltage switch mode power supplies
- Isolated DC/DC converter
- Computers
- Low voltage discrete regulators

Order Codes

Part Number	Accuracy	Temperature Range	Package	Packing	Marking
TS4436AICT	0.5%	-40, +85°C	SC70	Tape & Reel	L22
TS4436ICT	1%				L21

1 Absolute Maximum Ratings and Operating Conditions

Table 1. Key parameters and their absolute maximum ratings

Symbol	Parameter	Value	Unit
I_{SINK}	Output sink current	30	mA
V_{CC}	Supply voltage	12	V
V_{SINK}	Output voltage	12	V
P_{diss}	Power Dissipation ⁽¹⁾ SOT23-5		mW
P_{diss}	Power Dissipation ⁽²⁾ SC70	310	mW
T_{STD}	Storage Temperature	-65 to +150	°C
ESD	Human Body Model (HBM)	2	kV
	Machine Model (MM)	200	V
T_{LEAD}	Lead Temperature (soldering, 10 seconds)	250	°C


- P_{diss} has been calculated with $T_{AMB} = 25^{\circ}\text{C}$, $T_{Junction} = 150^{\circ}\text{C}$ and
 $R_{thJA} = 250^{\circ}\text{C/W}$ for the SOT23-5 package
 $R_{thJC} = 81^{\circ}\text{C/W}$ for the SOT23-5 package
- P_{diss} has been calculated with $T_{AMB} = 25^{\circ}\text{C}$, $T_{Junction} = 150^{\circ}\text{C}$ and
 $R_{thJA} = 250^{\circ}\text{C/W}$ for the SOT23-5 package
 $R_{thJC} = 81^{\circ}\text{C/W}$ for the SOT23-5 package

Table 2. Operating conditions

Symbol	Parameter	Value	Unit
T_{OPER}	Operating temperature range	-40 to +85	°C
V_{CC}	Supply voltage	1.7 to 10	V
I_{SINK}	Output sink current	up to 20	mA

2 Typical Application Schematic

Figure 1. SMPS power supply: secondary side

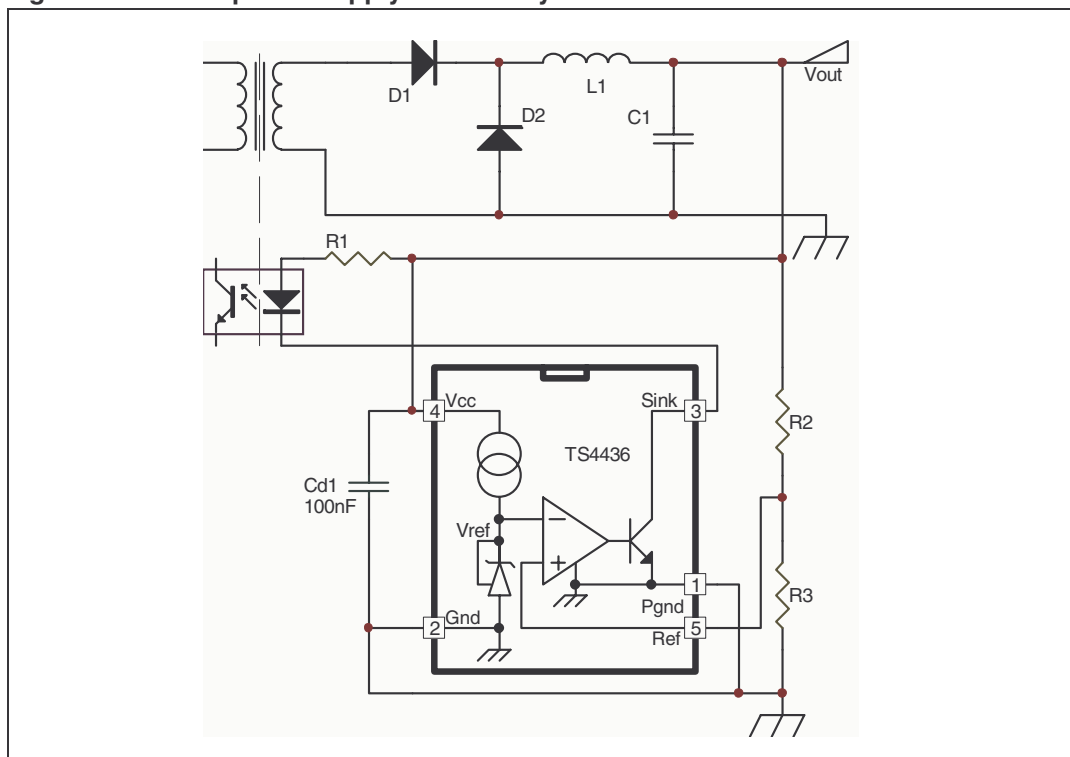

3 Electrical Characteristics

Table 3. Electrical characteristics for $T_{amb} = 25^{\circ}\text{C}$, $V_{CC} = 1.8\text{V}$, $I_{SINK} = 2\text{mA}$ unless otherwise specified

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_{ref}	Reference voltage TS4436A 0.5%		0.597	0.6	0.603	V
		$-40^{\circ}\text{C} < T < +85^{\circ}\text{C}$	0.589		0.611	
V_{ref}	Reference voltage TS4436 1%		0.594	0.6	0.606	V
		$-40^{\circ}\text{C} < T < +85^{\circ}\text{C}$	0.589	0.6	0.611	
T_C	Temperature coefficient				150	ppm/ $^{\circ}\text{C}$
RegLine	Change in V_{ref} due to change in V_{CC}	$V_{CC}=1.7$ to 10V		1	2.5	mV
		$-40^{\circ}\text{C} < T < +85^{\circ}\text{C}$		2	3	
RegLoad	Change in V_{ref} due to change in I_{SINK}	$I_{SINK}=0.1$ to 20mA		3.5	7	mV
		$-40^{\circ}\text{C} < T < +85^{\circ}\text{C}$			10	
I_{CC}	Supply current	$I_{SINK}=2\text{mA}$		150	200	μA
		$-40^{\circ}\text{C} < T < +85^{\circ}\text{C}$			250	
I_{REF}	Change in I_{ref} Reference input current due to change in I_{SINK}	$0.1 < I_{SINK} < 10\text{mA}$		20	50	nA
		$-40^{\circ}\text{C} < T < +85^{\circ}\text{C}$			65	
V_{SAT}	Output transistor saturation voltage	$I_{SINK}=5\text{mA}$		30	50	mV
		$-40^{\circ}\text{C} < T < +85^{\circ}\text{C}$			60	
		$I_{SINK}=20\text{mA}$		90	120	
		$-40^{\circ}\text{C} < T < +85^{\circ}\text{C}$			140	
I_{OH}	Output leakage current	$V_{SINK}=V_{CC}$			0.05	μA
		$-40^{\circ}\text{C} < T < +85^{\circ}\text{C}$			0.1	

Note: Limits are 100% production tested at 25°C . Limits over temperature are guaranteed through correlation and by design.

Figure 2. V_{ref} vs. temperature

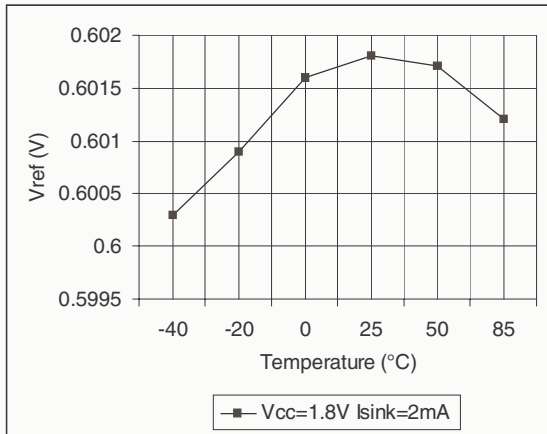


Figure 3. V_{ref} vs. temperature

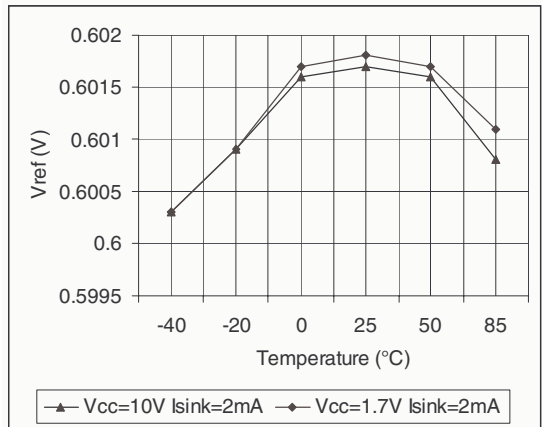


Figure 4. I_{CC} vs. temperature

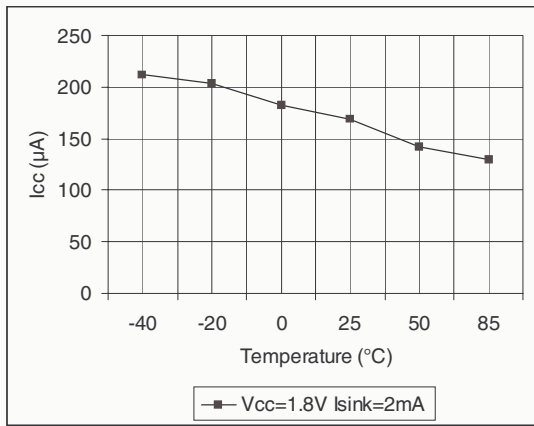


Figure 5. I_{CC} at 25 $^{\circ}C$

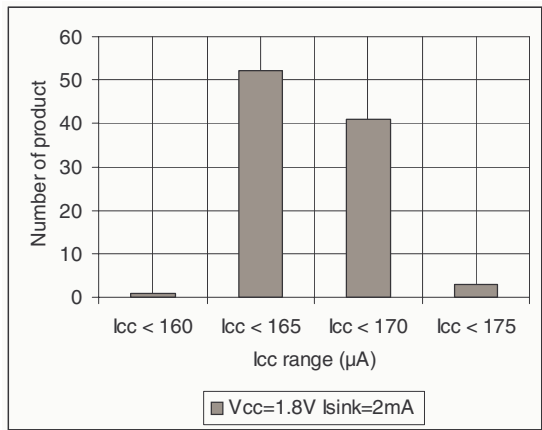


Figure 6. V_{SAT} vs. temperature


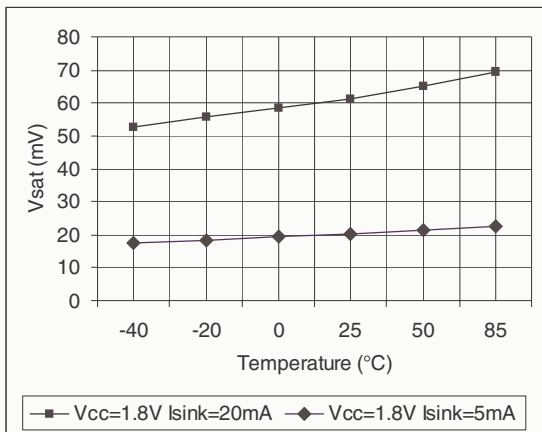


Figure 7. V_{ref} vs. temperature

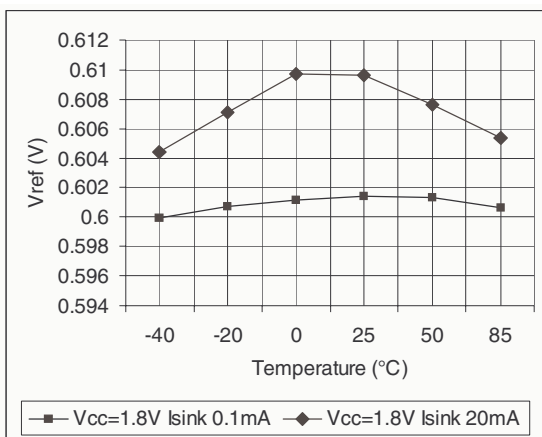

4 Package Mechanical Data

In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a Lead-free second level interconnect. The category of second level interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at: www.st.com.

SC70 Package

SOT323-5L MECHANICAL DATA						
DIM.	mm.			mils		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	0.80		1.10	31.5		43.3
A1	0.00		0.10	0.0		3.9
A2	0.80		1.00	31.5		39.4
b	0.15		0.30	5.9		11.8
C	0.10		0.18	3.9		7.1
D	1.80		2.20	70.9		86.6
E	1.80		2.40	70.9		94.5
E1	1.15		1.35	45.3		53.1
e		0.65			25.6	
e1		1.3			51.2	
L	0.10		0.30	3.9		11.8

The diagram illustrates the mechanical dimensions of the SC70 package. The left view is a side profile showing dimensions A (total width), A1 (lead thickness), A2 (lead width), b (lead thickness), C (lead angle), and L (lead length). The right view is a top-down perspective showing dimensions D (package width), E (package height), E1 (package height to lead), e (pitch), e1 (pitch to lead), and b (lead thickness).

5 Revision History

Table 4. Document revision history

Date	Revision	Changes
Feb. 2006	1	First release of datasheet.

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED REPRESENTATIVE OF ST, ST PRODUCTS ARE NOT DESIGNED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS, WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2006 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru