



## MEAS HD DO-35 SERIES THERMISTOR 10K BETA <sup>25/85</sup> 3450

- High Stability DO-35 Thermistor
- Highly Density (HD) electroceramic thermistor
- Hermetically sealed elements, glass encapsulation
- Axial Leads for PCB mounting
- High temperature devices for applications up to +300°C
- RoHS Compliant
- Copper clad steel (CCS Wire)

### Features


- Hermetically sealed glass package
- Proven Stability at elevated temperatures
- High temperature capability to +300°C
- 24 AWG Nickel Plated CCS Wire
- Cost effective for high volume applications
- Temp range (Nickel plated) -40°C to +300 °C
- Temp range (Tinned) -40 °C to +200 °C

### Applications

- HVAC and refrigeration probe assemblies
- High humidity due to glass protection
- Consumer electronics
- PCB temperature sensing
- Air conditioning

TE has recently developed new advanced ceramic processing techniques and proprietary formulations for the manufacture of high-stability electroceramic thermistor materials. These materials are now used in a select range of DO-35 thermistor sensor components. The newly developed high-density thermistor chip is hermetically sealed in a glass (DO-35 diode style) package to provide protection where high humidity is present and long-term performance is required.

## Dimensions

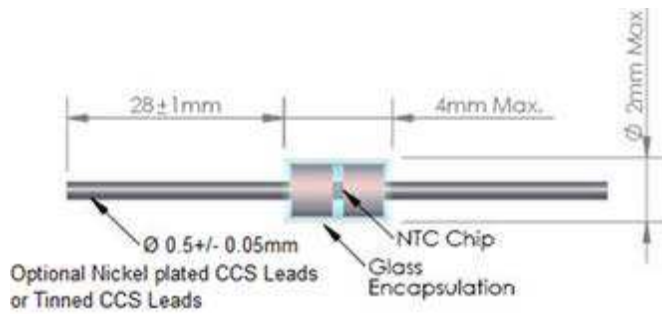

## Electrical Specifications

| PARAMETERS                                      | UNITS   | VALUE       |
|-------------------------------------------------|---------|-------------|
| Resistance @ +25°C                              | Ohms    | 10,000      |
| Resistance tolerance @ +25°C                    | %       | ± 1         |
| Beta Value 25/85                                | K       | 3450        |
| Tolerance on Beta Value 25/85                   | %       | ± 1         |
| Time response in liquid                         | Seconds | Approx.2    |
| Dissipation Constant in still air               | mW/°C   | 1.9         |
| Operating Temperature (Nickel plated CCS Leads) | °C      | -40 to +300 |
| Operating Temperature (Tinned CCS Leads)        | °C      | -40 to +200 |
| Max' Permissible Current (25°C, Still Air)      | A max   | 0.25mA      |
| Max' Power Rating (25°C, Still Air)             | P max   | 110 mW      |

## General Test

| TEST ITEM                           | PERFORMANCE REQUIREMENTS | TEST CONDITION                                           |
|-------------------------------------|--------------------------|----------------------------------------------------------|
| A. Appearance                       | No Cracking              | Visual examination                                       |
| B. Dimension                        | Dimension tolerances     | Caliper, Micrometer                                      |
| C. Resistance (R25)                 | 10K±1%                   | At zero power, 25°C                                      |
| D. Beta Value                       | B25/85=3450K±1%          | B= $\frac{\ln R_{25} - \ln R_{85}}{1/298.15 - 1/358.15}$ |
|                                     |                          | R25=Resistance at 25.0±0.1°C                             |
|                                     |                          | R85=Resistance at 85.0±0.1°C                             |
|                                     |                          |                                                          |
| E. Thermal time constant (τ)        | Approx.2 sec             | Measured in stirred water                                |
| F. Thermal Dissipation Constant (δ) | Approx.1.9m W/°C         | Measured in still air, normal temp                       |

## Reliability

| TEST ITEM                                                                                                                                                                                                                                                                                                                                       | TEST METHODS                                                                                                                                                             | CRITERIA                                    |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|
| <b>A. Low temperature storage</b>                                                                                                                                                                                                                                                                                                               | After placing a thermistor in $-40^{\circ}\text{C}\pm 3^{\circ}\text{C}$ for 1000 hours, keep it in normal temperature and humidity for one hour.                        | $\Delta R/R \leq 2\%$ $\Delta B/B \leq 1\%$ |
| <b>B. High temperature storage</b>                                                                                                                                                                                                                                                                                                              | Tinned Version: After placing a thermistor in $200^{\circ}\text{C}\pm 3^{\circ}\text{C}$ for 1000 hours, keep it in normal temperature and humidity for one hour.        | $\Delta R/R \leq 2\%$ $\Delta B/B \leq 1\%$ |
|                                                                                                                                                                                                                                                                                                                                                 | Nickel Plated Version: After placing a thermistor in $300^{\circ}\text{C}\pm 3^{\circ}\text{C}$ for 1000 hours, keep it in normal temperature and humidity for one hour. | $\Delta R/R \leq 3\%$ $\Delta B/B \leq 2\%$ |
| <b>C. Thermal cycle test</b>                                                                                                                                                                                                                                                                                                                    | After 100 cycles test under the conditions as shown below, keep the thermistor in normal temperature and humidity for one hour.                                          | $\Delta R/R \leq 2\%$ $\Delta B/B \leq 1\%$ |
| <div style="display: flex; align-items: center;"> <div style="margin-right: 20px;"> <math>80^{\circ}\text{C}\pm 3^{\circ}\text{C}</math><br/>(in air)<br/>Normal temp<br/>(in air)<br/><math>-20^{\circ}\text{C}\pm 3^{\circ}\text{C}</math><br/>(in air) </div> </div> <p style="text-align: center;">1 Cycle                      2 Cycle</p> |                                                                                                                                                                          |                                             |
| <b>D. Humidity test</b>                                                                                                                                                                                                                                                                                                                         | After placing a thermistor in $40^{\circ}\text{C}\pm 2^{\circ}\text{C}$ , 90~95%RH, for 1000 hours, keep it in normal temperature and humidity for one hour.             | $\Delta R/R \leq 2\%$ $\Delta B/B \leq 1\%$ |

## Resistance vs. Temperature Table

R25=10KΩ±1% B25/85=3450K±1%

| TEMP. (°C) | MINIMUM (KΩ) | NOMINAL (KΩ) | MAXIMUM (KΩ) | ALPHA(%/°C) |
|------------|--------------|--------------|--------------|-------------|
| -40.0      | 194.700      | 204.224      | 214.193      | -5.82       |
| -39.0      | 183.872      | 192.727      | 201.988      | -5.77       |
| -38.0      | 173.724      | 181.959      | 190.565      | -5.73       |
| -37.0      | 164.208      | 171.869      | 179.870      | -5.68       |
| -36.0      | 155.281      | 162.411      | 169.852      | -5.64       |
| -35.0      | 146.902      | 153.540      | 160.461      | -5.60       |
| -34.0      | 139.035      | 145.216      | 151.657      | -5.55       |
| -33.0      | 131.645      | 137.402      | 143.397      | -5.51       |
| -32.0      | 124.698      | 130.063      | 135.644      | -5.47       |
| -31.0      | 118.167      | 123.167      | 128.365      | -5.43       |
| -30.0      | 112.023      | 116.684      | 121.526      | -5.39       |
| -29.0      | 106.242      | 110.587      | 115.100      | -5.35       |
| -28.0      | 100.798      | 104.851      | 109.057      | -5.31       |
| -27.0      | 95.671       | 99.452       | 103.373      | -5.27       |
| -26.0      | 90.839       | 94.368       | 98.024       | -5.23       |
| -25.0      | 86.285       | 89.578       | 92.988       | -5.19       |
| -24.0      | 81.990       | 85.064       | 88.245       | -5.15       |
| -23.0      | 77.937       | 80.808       | 83.776       | -5.12       |
| -22.0      | 74.113       | 76.793       | 79.563       | -5.08       |
| -21.0      | 70.501       | 73.005       | 75.590       | -5.04       |
| -20.0      | 67.090       | 69.429       | 71.843       | -5.01       |
| -19.0      | 63.866       | 66.052       | 68.305       | -4.97       |
| -18.0      | 60.819       | 62.862       | 64.966       | -4.93       |
| -17.0      | 57.937       | 59.846       | 61.812       | -4.90       |
| -16.0      | 55.211       | 56.996       | 58.832       | -4.87       |
| -15.0      | 52.631       | 54.299       | 56.014       | -4.83       |
| -14.0      | 50.189       | 51.748       | 53.351       | -4.80       |
| -13.0      | 47.875       | 49.334       | 50.831       | -4.76       |
| -12.0      | 45.684       | 47.047       | 48.446       | -4.73       |
| -11.0      | 43.607       | 44.882       | 46.189       | -4.70       |
| -10.0      | 41.637       | 42.830       | 44.052       | -4.67       |
| -9.0       | 39.770       | 40.885       | 42.027       | -4.63       |

## Resistance vs. Temperature Table

R25=10KΩ±1% B25/85=3450K±1%

| TEMP. (°C) | MINIMUM (KΩ) | NOMINAL (KΩ) | MAXIMUM (KΩ) | ALPHA(%/°C) |
|------------|--------------|--------------|--------------|-------------|
| -8.0       | 37.998       | 39.041       | 40.108       | -4.60       |
| -7.0       | 36.316       | 37.291       | 38.289       | -4.57       |
| -6.0       | 34.719       | 35.632       | 36.564       | -4.54       |
| -5.0       | 33.203       | 34.056       | 34.928       | -4.51       |
| -4.0       | 31.763       | 32.560       | 33.375       | -4.48       |
| -3.0       | 30.394       | 31.140       | 31.901       | -4.45       |
| -2.0       | 29.092       | 29.790       | 30.501       | -4.42       |
| -1.0       | 27.855       | 28.507       | 29.171       | -4.39       |
| 0.0        | 26.677       | 27.287       | 27.908       | -4.35       |
| 1.0        | 25.560       | 26.130       | 26.710       | -4.32       |
| 2.0        | 24.496       | 25.029       | 25.571       | -4.29       |
| 3.0        | 23.483       | 23.981       | 24.487       | -4.26       |
| 4.0        | 22.518       | 22.984       | 23.456       | -4.24       |
| 5.0        | 21.599       | 22.034       | 22.475       | -4.21       |
| 6.0        | 20.723       | 21.129       | 21.541       | -4.18       |
| 7.0        | 19.888       | 20.267       | 20.651       | -4.15       |
| 8.0        | 19.091       | 19.445       | 19.804       | -4.13       |
| 9.0        | 18.332       | 18.662       | 18.996       | -4.10       |
| 10.0       | 17.607       | 17.915       | 18.226       | -4.07       |
| 11.0       | 16.915       | 17.202       | 17.492       | -4.05       |
| 12.0       | 16.254       | 16.522       | 16.792       | -4.02       |
| 13.0       | 15.623       | 15.872       | 16.124       | -4.00       |
| 14.0       | 15.021       | 15.253       | 15.487       | -3.97       |
| 15.0       | 14.445       | 14.661       | 14.878       | -3.95       |
| 16.0       | 13.895       | 14.095       | 14.297       | -3.92       |
| 17.0       | 13.368       | 13.555       | 13.743       | -3.90       |
| 18.0       | 12.865       | 13.038       | 13.213       | -3.87       |
| 19.0       | 12.384       | 12.545       | 12.706       | -3.85       |
| 20.0       | 11.924       | 12.072       | 12.222       | -3.83       |
| 21.0       | 11.483       | 11.621       | 11.759       | -3.80       |
| 22.0       | 11.061       | 11.189       | 11.316       | -3.78       |
| 23.0       | 10.657       | 10.775       | 10.893       | -3.76       |
| 24.0       | 10.271       | 10.379       | 10.488       | -3.73       |
| 25.0       | 9.900        | 10.000       | 10.100       | -3.71       |
| 26.0       | 9.536        | 9.637        | 9.738        | -3.69       |

## Resistance vs. Temperature Table

R25=10KΩ±1% B25/85=3450K±1%

| TEMP. (°C) | MINIMUM (KΩ) | NOMINAL (KΩ) | MAXIMUM (KΩ) | ALPHA(%/°C) |
|------------|--------------|--------------|--------------|-------------|
| 27.0       | 9.188        | 9.289        | 9.391        | -3.67       |
| 28.0       | 8.854        | 8.956        | 9.058        | -3.64       |
| 29.0       | 8.534        | 8.636        | 8.739        | -3.62       |
| 30.0       | 8.228        | 8.330        | 8.433        | -3.60       |
| 31.0       | 7.934        | 8.036        | 8.139        | -3.58       |
| 32.0       | 7.653        | 7.755        | 7.857        | -3.56       |
| 33.0       | 7.383        | 7.484        | 7.587        | -3.54       |
| 34.0       | 7.124        | 7.225        | 7.327        | -3.52       |
| 35.0       | 6.875        | 6.976        | 7.078        | -3.50       |
| 36.0       | 6.637        | 6.737        | 6.838        | -3.48       |
| 37.0       | 6.408        | 6.508        | 6.608        | -3.46       |
| 38.0       | 6.188        | 6.287        | 6.387        | -3.44       |
| 39.0       | 5.977        | 6.076        | 6.175        | -3.42       |
| 40.0       | 5.775        | 5.872        | 5.970        | -3.40       |
| 41.0       | 5.580        | 5.677        | 5.774        | -3.38       |
| 42.0       | 5.393        | 5.489        | 5.585        | -3.36       |
| 43.0       | 5.214        | 5.308        | 5.404        | -3.34       |
| 44.0       | 5.041        | 5.134        | 5.229        | -3.32       |
| 45.0       | 4.875        | 4.967        | 5.061        | -3.30       |
| 46.0       | 4.715        | 4.806        | 4.899        | -3.28       |
| 47.0       | 4.561        | 4.652        | 4.743        | -3.26       |
| 48.0       | 4.413        | 4.503        | 4.593        | -3.25       |
| 49.0       | 4.271        | 4.359        | 4.449        | -3.23       |
| 50.0       | 4.134        | 4.221        | 4.310        | -3.28       |
| 51.0       | 3.999        | 4.085        | 4.172        | -3.27       |
| 52.0       | 3.869        | 3.954        | 4.040        | -3.26       |
| 53.0       | 3.744        | 3.828        | 3.913        | -3.25       |
| 54.0       | 3.624        | 3.706        | 3.790        | -3.23       |
| 55.0       | 3.507        | 3.588        | 3.671        | -3.22       |
| 56.0       | 3.395        | 3.475        | 3.556        | -3.21       |
| 57.0       | 3.287        | 3.365        | 3.446        | -3.20       |
| 58.0       | 3.182        | 3.260        | 3.339        | -3.18       |
| 59.0       | 3.082        | 3.158        | 3.236        | -3.17       |
| 60.0       | 2.985        | 3.060        | 3.136        | -3.16       |
| 61.0       | 2.891        | 2.965        | 3.040        | -3.15       |

## Resistance vs. Temperature Table

R25=10KΩ±1% B25/85=3450K±1%

| TEMP. (°C) | MINIMUM (KΩ) | NOMINAL (KΩ) | MAXIMUM (KΩ) | ALPHA(%/°C) |
|------------|--------------|--------------|--------------|-------------|
| 62.0       | 2.800        | 2.873        | 2.947        | -3.14       |
| 63.0       | 2.713        | 2.785        | 2.858        | -3.13       |
| 64.0       | 2.629        | 2.699        | 2.771        | -3.11       |
| 65.0       | 2.548        | 2.617        | 2.688        | -3.10       |
| 66.0       | 2.469        | 2.537        | 2.607        | -3.09       |
| 67.0       | 2.393        | 2.460        | 2.529        | -3.08       |
| 68.0       | 2.320        | 2.386        | 2.453        | -3.07       |
| 69.0       | 2.249        | 2.314        | 2.380        | -3.06       |
| 70.0       | 2.181        | 2.244        | 2.310        | -3.05       |
| 71.0       | 2.115        | 2.177        | 2.241        | -3.03       |
| 72.0       | 2.051        | 2.112        | 2.175        | -3.02       |
| 73.0       | 1.989        | 2.050        | 2.111        | -3.01       |
| 74.0       | 1.930        | 1.989        | 2.050        | -3.00       |
| 75.0       | 1.872        | 1.930        | 1.990        | -2.99       |
| 76.0       | 1.816        | 1.874        | 1.932        | -2.98       |
| 77.0       | 1.763        | 1.819        | 1.876        | -2.97       |
| 78.0       | 1.710        | 1.766        | 1.822        | -2.96       |
| 79.0       | 1.660        | 1.714        | 1.770        | -2.95       |
| 80.0       | 1.611        | 1.665        | 1.719        | -2.94       |
| 81.0       | 1.564        | 1.617        | 1.670        | -2.93       |
| 82.0       | 1.519        | 1.570        | 1.623        | -2.92       |
| 83.0       | 1.475        | 1.525        | 1.577        | -2.91       |
| 84.0       | 1.432        | 1.481        | 1.532        | -2.90       |
| 85.0       | 1.391        | 1.439        | 1.489        | -2.89       |
| 86.0       | 1.351        | 1.398        | 1.447        | -2.88       |
| 87.0       | 1.312        | 1.359        | 1.407        | -2.87       |
| 88.0       | 1.275        | 1.320        | 1.368        | -2.86       |
| 89.0       | 1.238        | 1.283        | 1.330        | -2.85       |
| 90.0       | 1.203        | 1.247        | 1.293        | -2.84       |
| 91.0       | 1.169        | 1.213        | 1.257        | -2.83       |
| 92.0       | 1.136        | 1.179        | 1.223        | -2.82       |
| 93.0       | 1.104        | 1.146        | 1.189        | -2.81       |
| 94.0       | 1.073        | 1.114        | 1.157        | -2.80       |
| 95.0       | 1.044        | 1.084        | 1.125        | -2.79       |
| 96.0       | 1.015        | 1.054        | 1.095        | -2.78       |

## Resistance vs. Temperature Table

R25=10K $\Omega$ ±1% B25/85=3450K±1%

| TEMP. (°C) | MINIMUM (K $\Omega$ ) | NOMINAL (K $\Omega$ ) | MAXIMUM (K $\Omega$ ) | ALPHA(%/°C) |
|------------|-----------------------|-----------------------|-----------------------|-------------|
| 97.0       | 0.986                 | 1.025                 | 1.065                 | -2.77       |
| 98.0       | 0.959                 | 0.997                 | 1.037                 | -2.76       |
| 99.0       | 0.933                 | 0.970                 | 1.009                 | -2.75       |
| 100.0      | 0.907                 | 0.944                 | 0.982                 | -2.66       |
| 101.0      | 0.883                 | 0.919                 | 0.956                 | -2.65       |
| 102.0      | 0.860                 | 0.895                 | 0.932                 | -2.64       |
| 103.0      | 0.837                 | 0.872                 | 0.908                 | -2.63       |
| 104.0      | 0.815                 | 0.849                 | 0.885                 | -2.62       |
| 105.0      | 0.794                 | 0.827                 | 0.862                 | -2.61       |
| 106.0      | 0.773                 | 0.806                 | 0.840                 | -2.60       |
| 107.0      | 0.753                 | 0.785                 | 0.819                 | -2.60       |
| 108.0      | 0.734                 | 0.765                 | 0.798                 | -2.59       |
| 109.0      | 0.715                 | 0.746                 | 0.778                 | -2.58       |
| 110.0      | 0.696                 | 0.727                 | 0.759                 | -2.57       |
| 111.0      | 0.679                 | 0.708                 | 0.740                 | -2.56       |
| 112.0      | 0.661                 | 0.691                 | 0.721                 | -2.55       |
| 113.0      | 0.644                 | 0.673                 | 0.703                 | -2.54       |
| 114.0      | 0.628                 | 0.656                 | 0.686                 | -2.53       |
| 115.0      | 0.612                 | 0.640                 | 0.669                 | -2.52       |
| 116.0      | 0.597                 | 0.624                 | 0.653                 | -2.51       |
| 117.0      | 0.582                 | 0.609                 | 0.637                 | -2.50       |
| 118.0      | 0.567                 | 0.594                 | 0.621                 | -2.50       |
| 119.0      | 0.553                 | 0.579                 | 0.606                 | -2.49       |
| 120.0      | 0.540                 | 0.565                 | 0.591                 | -2.48       |
| 121.0      | 0.526                 | 0.551                 | 0.577                 | -2.47       |
| 122.0      | 0.513                 | 0.538                 | 0.563                 | -2.46       |
| 123.0      | 0.501                 | 0.525                 | 0.550                 | -2.45       |
| 124.0      | 0.488                 | 0.512                 | 0.537                 | -2.44       |
| 125.0      | 0.477                 | 0.500                 | 0.524                 | -2.44       |
| 126.0      | 0.465                 | 0.488                 | 0.512                 | -2.43       |
| 127.0      | 0.454                 | 0.476                 | 0.499                 | -2.42       |
| 128.0      | 0.443                 | 0.465                 | 0.488                 | -2.41       |
| 129.0      | 0.432                 | 0.454                 | 0.476                 | -2.40       |
| 130.0      | 0.422                 | 0.443                 | 0.465                 | -2.39       |
| 131.0      | 0.412                 | 0.432                 | 0.454                 | -2.39       |



## Resistance vs. Temperature Table

R25=10KΩ±1% B25/85=3450K±1%

| TEMP. (°C) | MINIMUM (KΩ) | NOMINAL (KΩ) | MAXIMUM (KΩ) | ALPHA(%/°C) |
|------------|--------------|--------------|--------------|-------------|
| 132.0      | 0.402        | 0.422        | 0.444        | -2.38       |
| 133.0      | 0.392        | 0.412        | 0.433        | -2.37       |
| 134.0      | 0.383        | 0.403        | 0.423        | -2.36       |
| 135.0      | 0.374        | 0.393        | 0.414        | -2.35       |
| 136.0      | 0.365        | 0.384        | 0.404        | -2.35       |
| 137.0      | 0.357        | 0.375        | 0.395        | -2.34       |
| 138.0      | 0.348        | 0.367        | 0.386        | -2.33       |
| 139.0      | 0.340        | 0.358        | 0.377        | -2.32       |
| 140.0      | 0.332        | 0.350        | 0.369        | -2.31       |
| 141.0      | 0.325        | 0.342        | 0.360        | -2.31       |
| 142.0      | 0.317        | 0.334        | 0.352        | -2.30       |
| 143.0      | 0.310        | 0.327        | 0.344        | -2.29       |
| 144.0      | 0.303        | 0.319        | 0.337        | -2.28       |
| 145.0      | 0.296        | 0.312        | 0.329        | -2.28       |
| 146.0      | 0.289        | 0.305        | 0.322        | -2.27       |
| 147.0      | 0.283        | 0.298        | 0.315        | -2.26       |
| 148.0      | 0.276        | 0.292        | 0.308        | -2.26       |
| 149.0      | 0.270        | 0.285        | 0.301        | -2.25       |
| 150.0      | 0.264        | 0.279        | 0.294        | -2.20       |
| 151.0      | 0.258        | 0.273        | 0.288        | -2.19       |
| 152.0      | 0.252        | 0.267        | 0.282        | -2.18       |
| 153.0      | 0.247        | 0.261        | 0.276        | -2.17       |
| 154.0      | 0.242        | 0.255        | 0.270        | -2.16       |
| 155.0      | 0.236        | 0.250        | 0.264        | -2.15       |
| 156.0      | 0.231        | 0.245        | 0.259        | -2.14       |
| 157.0      | 0.226        | 0.240        | 0.253        | -2.14       |
| 158.0      | 0.222        | 0.234        | 0.248        | -2.13       |
| 159.0      | 0.217        | 0.230        | 0.243        | -2.12       |
| 160.0      | 0.212        | 0.225        | 0.238        | -2.11       |
| 161.0      | 0.208        | 0.220        | 0.233        | -2.10       |
| 162.0      | 0.203        | 0.216        | 0.228        | -2.09       |
| 163.0      | 0.199        | 0.211        | 0.224        | -2.08       |
| 164.0      | 0.195        | 0.207        | 0.219        | -2.07       |
| 165.0      | 0.191        | 0.203        | 0.215        | -2.06       |
| 166.0      | 0.187        | 0.198        | 0.210        | -2.05       |

## Resistance vs. Temperature Table

R25=10KΩ±1% B25/85=3450K±1%

| TEMP. (°C) | MINIMUM (KΩ) | NOMINAL (KΩ) | MAXIMUM (KΩ) | ALPHA(%/°C) |
|------------|--------------|--------------|--------------|-------------|
| 167.0      | 0.183        | 0.194        | 0.206        | -2.04       |
| 168.0      | 0.179        | 0.190        | 0.202        | -2.03       |
| 169.0      | 0.176        | 0.187        | 0.198        | -2.03       |
| 170.0      | 0.172        | 0.183        | 0.194        | -2.02       |
| 171.0      | 0.169        | 0.179        | 0.190        | -2.01       |
| 172.0      | 0.165        | 0.176        | 0.187        | -2.00       |
| 173.0      | 0.162        | 0.172        | 0.183        | -1.99       |
| 174.0      | 0.159        | 0.169        | 0.179        | -1.98       |
| 175.0      | 0.156        | 0.166        | 0.176        | -1.97       |
| 176.0      | 0.153        | 0.162        | 0.173        | -1.97       |
| 177.0      | 0.150        | 0.159        | 0.169        | -1.96       |
| 178.0      | 0.147        | 0.156        | 0.166        | -1.95       |
| 179.0      | 0.144        | 0.153        | 0.163        | -1.94       |
| 180.0      | 0.141        | 0.150        | 0.160        | -1.93       |
| 181.0      | 0.138        | 0.147        | 0.157        | -1.92       |
| 182.0      | 0.136        | 0.144        | 0.154        | -1.92       |
| 183.0      | 0.133        | 0.142        | 0.151        | -1.91       |
| 184.0      | 0.131        | 0.139        | 0.148        | -1.90       |
| 185.0      | 0.128        | 0.136        | 0.145        | -1.89       |
| 186.0      | 0.126        | 0.134        | 0.143        | -1.88       |
| 187.0      | 0.123        | 0.131        | 0.140        | -1.88       |
| 188.0      | 0.121        | 0.129        | 0.138        | -1.87       |
| 189.0      | 0.119        | 0.127        | 0.135        | -1.86       |
| 190.0      | 0.116        | 0.124        | 0.133        | -1.85       |
| 191.0      | 0.114        | 0.122        | 0.130        | -1.85       |
| 192.0      | 0.112        | 0.120        | 0.128        | -1.84       |
| 193.0      | 0.110        | 0.118        | 0.126        | -1.83       |
| 194.0      | 0.108        | 0.115        | 0.123        | -1.82       |
| 195.0      | 0.106        | 0.113        | 0.121        | -1.82       |
| 196.0      | 0.104        | 0.111        | 0.119        | -1.81       |
| 197.0      | 0.102        | 0.109        | 0.117        | -1.80       |
| 198.0      | 0.100        | 0.107        | 0.115        | -1.79       |
| 199.0      | 0.099        | 0.105        | 0.113        | -1.79       |
| 200.0      | 0.097        | 0.104        | 0.111        | -1.78       |
| 201.0      | 0.095        | 0.102        | 0.109        | -1.77       |

## Resistance vs. Temperature Table

R25=10KΩ±1% B25/85=3450K±1%

| TEMP. (°C) | MINIMUM (KΩ) | NOMINAL (KΩ) | MAXIMUM (KΩ) | ALPHA(%/°C) |
|------------|--------------|--------------|--------------|-------------|
| 202.0      | 0.093        | 0.100        | 0.107        | -1.76       |
| 203.0      | 0.092        | 0.098        | 0.105        | -1.76       |
| 204.0      | 0.090        | 0.097        | 0.103        | -1.75       |
| 205.0      | 0.089        | 0.095        | 0.102        | -1.74       |
| 206.0      | 0.087        | 0.093        | 0.100        | -1.74       |
| 207.0      | 0.086        | 0.092        | 0.098        | -1.73       |
| 208.0      | 0.084        | 0.090        | 0.096        | -1.72       |
| 209.0      | 0.083        | 0.089        | 0.095        | -1.72       |
| 210.0      | 0.081        | 0.087        | 0.093        | -1.71       |
| 211.0      | 0.080        | 0.086        | 0.092        | -1.70       |
| 212.0      | 0.078        | 0.084        | 0.090        | -1.69       |
| 213.0      | 0.077        | 0.083        | 0.089        | -1.69       |
| 214.0      | 0.076        | 0.081        | 0.087        | -1.68       |
| 215.0      | 0.075        | 0.080        | 0.086        | -1.67       |
| 216.0      | 0.073        | 0.079        | 0.084        | -1.67       |
| 217.0      | 0.072        | 0.077        | 0.083        | -1.66       |
| 218.0      | 0.071        | 0.076        | 0.082        | -1.65       |
| 219.0      | 0.070        | 0.075        | 0.080        | -1.65       |
| 220.0      | 0.069        | 0.074        | 0.079        | -1.64       |
| 221.0      | 0.067        | 0.072        | 0.078        | -1.64       |
| 222.0      | 0.066        | 0.071        | 0.077        | -1.63       |
| 223.0      | 0.065        | 0.070        | 0.075        | -1.62       |
| 224.0      | 0.064        | 0.069        | 0.074        | -1.62       |
| 225.0      | 0.063        | 0.068        | 0.073        | -1.61       |
| 226.0      | 0.062        | 0.067        | 0.072        | -1.60       |
| 227.0      | 0.061        | 0.066        | 0.071        | -1.60       |
| 228.0      | 0.060        | 0.065        | 0.070        | -1.59       |
| 229.0      | 0.059        | 0.064        | 0.069        | -1.59       |
| 230.0      | 0.058        | 0.063        | 0.067        | -1.58       |
| 231.0      | 0.057        | 0.062        | 0.066        | -1.57       |
| 232.0      | 0.056        | 0.061        | 0.065        | -1.57       |
| 233.0      | 0.056        | 0.060        | 0.064        | -1.56       |
| 234.0      | 0.055        | 0.059        | 0.063        | -1.56       |
| 235.0      | 0.054        | 0.058        | 0.062        | -1.55       |
| 236.0      | 0.053        | 0.057        | 0.061        | -1.54       |

## Resistance vs. Temperature Table

R25=10KΩ±1% B25/85=3450K±1%

| TEMP. (°C) | MINIMUM (KΩ) | NOMINAL (KΩ) | MAXIMUM (KΩ) | ALPHA(%/°C) |
|------------|--------------|--------------|--------------|-------------|
| 237.0      | 0.052        | 0.056        | 0.061        | -1.54       |
| 238.0      | 0.051        | 0.055        | 0.060        | -1.53       |
| 239.0      | 0.051        | 0.054        | 0.059        | -1.53       |
| 240.0      | 0.050        | 0.054        | 0.058        | -1.52       |
| 241.0      | 0.049        | 0.053        | 0.057        | -1.51       |
| 242.0      | 0.048        | 0.052        | 0.056        | -1.51       |
| 243.0      | 0.048        | 0.051        | 0.055        | -1.50       |
| 244.0      | 0.047        | 0.051        | 0.055        | -1.50       |
| 245.0      | 0.046        | 0.050        | 0.054        | -1.49       |
| 246.0      | 0.045        | 0.049        | 0.053        | -1.49       |
| 247.0      | 0.045        | 0.048        | 0.052        | -1.48       |
| 248.0      | 0.044        | 0.048        | 0.051        | -1.48       |
| 249.0      | 0.043        | 0.047        | 0.051        | -1.47       |
| 250.0      | 0.043        | 0.046        | 0.050        | -1.46       |
| 251.0      | 0.042        | 0.046        | 0.049        | -1.46       |
| 252.0      | 0.042        | 0.045        | 0.049        | -1.45       |
| 253.0      | 0.041        | 0.044        | 0.048        | -1.45       |
| 254.0      | 0.040        | 0.044        | 0.047        | -1.44       |
| 255.0      | 0.040        | 0.043        | 0.046        | -1.44       |
| 256.0      | 0.039        | 0.042        | 0.046        | -1.43       |
| 257.0      | 0.039        | 0.042        | 0.045        | -1.43       |
| 258.0      | 0.038        | 0.041        | 0.045        | -1.42       |
| 259.0      | 0.038        | 0.041        | 0.044        | -1.42       |
| 260.0      | 0.037        | 0.040        | 0.043        | -1.41       |
| 261.0      | 0.036        | 0.039        | 0.043        | -1.41       |
| 262.0      | 0.036        | 0.039        | 0.042        | -1.40       |
| 263.0      | 0.035        | 0.038        | 0.042        | -1.40       |
| 264.0      | 0.035        | 0.038        | 0.041        | -1.39       |
| 265.0      | 0.034        | 0.037        | 0.040        | -1.39       |
| 266.0      | 0.034        | 0.037        | 0.040        | -1.38       |
| 267.0      | 0.034        | 0.036        | 0.039        | -1.38       |
| 268.0      | 0.033        | 0.036        | 0.039        | -1.37       |
| 269.0      | 0.033        | 0.035        | 0.038        | -1.37       |
| 270.0      | 0.032        | 0.035        | 0.038        | -1.36       |
| 271.0      | 0.032        | 0.034        | 0.037        | -1.36       |


## Resistance vs. Temperature Table

R25=10KΩ±1% B25/85=3450K±1%

| TEMP. (°C) | MINIMUM (KΩ) | NOMINAL (KΩ) | MAXIMUM (KΩ) | ALPHA(%/°C) |
|------------|--------------|--------------|--------------|-------------|
| 272.0      | 0.031        | 0.034        | 0.037        | -1.35       |
| 273.0      | 0.031        | 0.033        | 0.036        | -1.35       |
| 274.0      | 0.030        | 0.033        | 0.036        | -1.34       |
| 275.0      | 0.030        | 0.033        | 0.035        | -1.34       |
| 276.0      | 0.030        | 0.032        | 0.035        | -1.33       |
| 277.0      | 0.029        | 0.032        | 0.034        | -1.33       |
| 278.0      | 0.029        | 0.031        | 0.034        | -1.32       |
| 279.0      | 0.028        | 0.031        | 0.034        | -1.32       |
| 280.0      | 0.028        | 0.030        | 0.033        | -1.31       |
| 281.0      | 0.028        | 0.030        | 0.033        | -1.31       |
| 282.0      | 0.027        | 0.030        | 0.032        | -1.30       |
| 283.0      | 0.027        | 0.029        | 0.032        | -1.30       |
| 284.0      | 0.027        | 0.029        | 0.031        | -1.30       |
| 285.0      | 0.026        | 0.029        | 0.031        | -1.29       |
| 286.0      | 0.026        | 0.028        | 0.031        | -1.29       |
| 287.0      | 0.026        | 0.028        | 0.030        | -1.28       |
| 288.0      | 0.025        | 0.027        | 0.030        | -1.28       |
| 289.0      | 0.025        | 0.027        | 0.030        | -1.27       |
| 290.0      | 0.025        | 0.027        | 0.029        | -1.27       |
| 291.0      | 0.024        | 0.026        | 0.029        | -1.26       |
| 292.0      | 0.024        | 0.026        | 0.028        | -1.26       |
| 293.0      | 0.024        | 0.026        | 0.028        | -1.26       |
| 294.0      | 0.023        | 0.025        | 0.028        | -1.25       |
| 295.0      | 0.023        | 0.025        | 0.027        | -1.25       |
| 296.0      | 0.023        | 0.025        | 0.027        | -1.24       |
| 297.0      | 0.023        | 0.025        | 0.027        | -1.24       |
| 298.0      | 0.022        | 0.024        | 0.026        | -1.23       |
| 299.0      | 0.022        | 0.024        | 0.026        | -1.23       |
| 300.0      | 0.022        | 0.024        | 0.026        | -1.23       |


Resistance vs. Temperature Table

R<sub>25</sub>=10KΩ±1% B<sub>25/85</sub>=3450K±1%

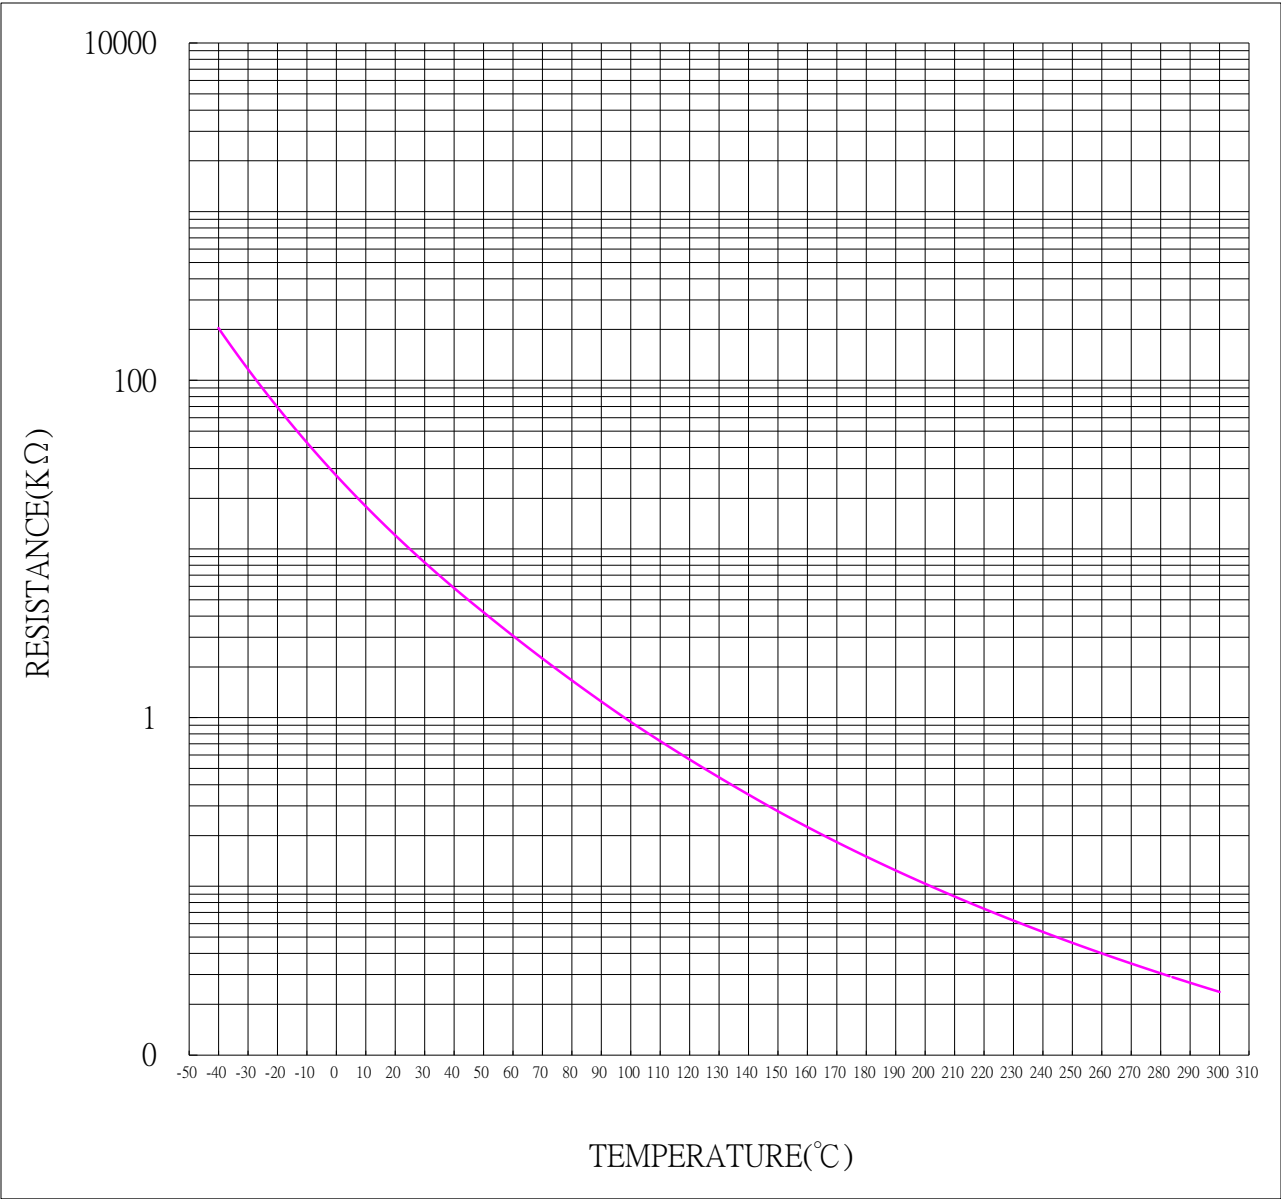

## Ordering Information

| PART NUMBER   | DESCRIPTION                                          | NOM. $\Omega$<br>@25°C | RES.<br>TOLERANCE | PACKAGING |
|---------------|------------------------------------------------------|------------------------|-------------------|-----------|
| 10KF3450DPHFN | DO-35 Series Thermistor (+300°C)™ for Nickel version | 10,000                 | ± 1%              | Bulk      |
| 10KF3450DPHFS | DO-35 Series Thermistor (+200°C)™ for Tinned version | 10,000                 | ± 1%              | Bulk      |

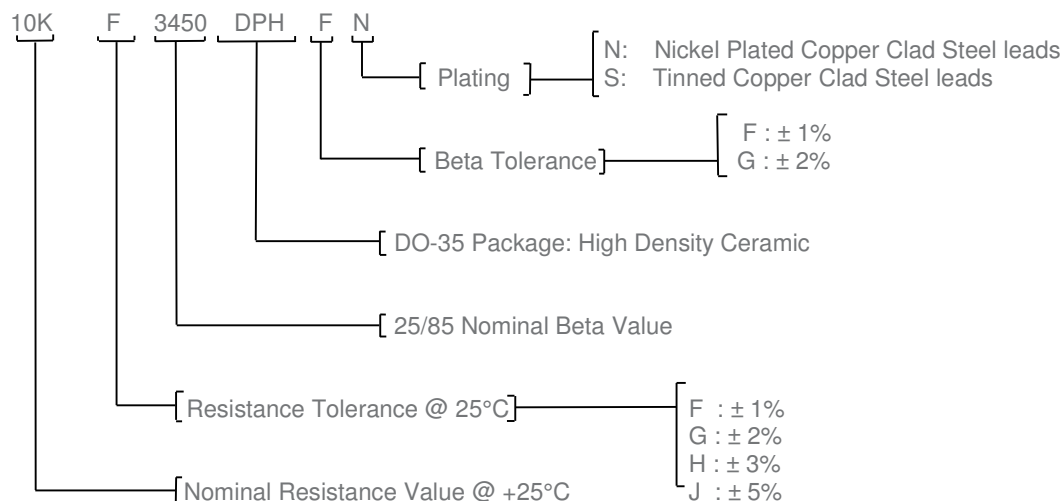

| MEAS PART<br>NUMBER | RESISTANCE<br>[ $\Omega$ ] @ +25°C | TOLERANCE @<br>+25°C | BETA VALUE<br>25/85 | BETA<br>TOLERANCE | OPERATING<br>TEMPERATURE |
|---------------------|------------------------------------|----------------------|---------------------|-------------------|--------------------------|
| 5KF3950DPHFN        | 5000                               | ± 1%                 | 3950                | ± 1%              | -40° to +300°C           |
| 5KF3950DPHFS        | 5000                               | ± 1%                 | 3950                | ± 1%              | -40° to +200°C           |
| 10KF3977DPHFN       | 10000                              | ± 1%                 | 3977                | ± 1%              | -40° to +300°C           |
| 10KF3977DPHFS       | 10000                              | ± 1%                 | 3977                | ± 1%              | -40° to +200°C           |
| 50KF4050DPHFN       | 50000                              | ± 1%                 | 4050                | ± 1%              | -40° to +300°C           |
| 50KF4050DPHFS       | 50000                              | ± 1%                 | 4050                | ± 1%              | -40° to +200°C           |

### NORTH AMERICA

Measurement Specialties, Inc.,  
a TE Connectivity Company  
910 Turnpike Road  
Shrewsbury, MA 01545  
Tel : 1-508-842-0516  
Fax : 1-508-842-0342  
Email: customercare.ando@te.com

### EUROPE

Measurement Specialties (Europe), Ltd.,  
a TE Connectivity Company  
Ballybrit Business Park  
Galway Ireland  
Tel : +353-91-753238  
Fax : +353-91-770789  
Email: customercare.glwy@te.com

### ASIA

Measurement Specialties (China), Ltd.,  
a TE Connectivity Company  
No. 368 Wulian 1st Road  
Gongxing Town  
Shuangliu, Chengdu  
Sichuan, 610200  
China  
Tel: +86 (0) 28 8573 9088  
Fax: +86 (0) 28 8573 9070  
Email: customercare.chdu@te.com

### te.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, MEAS, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2016 TE Connectivity Ltd. family of companies All Rights Reserved.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)