




# ABC75 Series

## Low Profile Open Frame Power Supplies

The ABC75 Series of open frame power supplies feature a wide universal AC input range of 85 V – 264 VAC, offering 75 W of output power in a compact 3 x 2 x 1 inch footprint, with a variety of isolated single output voltages.

The high efficiency and high power density of the ABC family ensures minimal power loss in end-use equipment, thereby facilitating higher reliability, easier thermal management and meets regulatory approvals for environmentally-friendly end products.

ABC Series power supplies are ideal for telecom, datacom, industrial equipment and other applications.

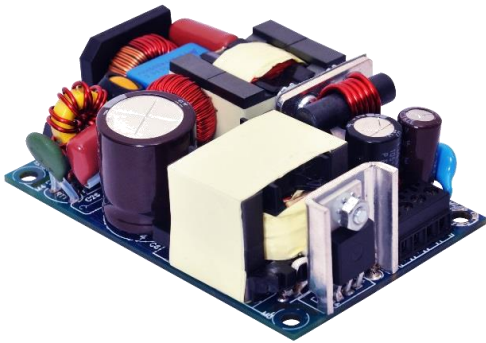

### Key Features & Benefits

- 3 x 2 x 1 Inch Form Factor
- 75 Watts with Convection Cooling
- Efficiency up to 93%
- -40 to 70°C Operating Temperature
- Thermal Shut-Down Feature
- 2 Million Hours, Telcordia -SR332-Issue 3
- Standby Power < 0.3 W
- RoHS Compliant
- CE Marked

### Applications

- Instrumentation
- Lighting
- Industrial Applications
- Applied Computing
- Renewable Energy
- Test and Measurement
- Robotics
- Wireless Communication

## 1. MODEL SELECTION

| MODEL NUMBER               | DESCRIPTION                    | VOLTAGE | MAX. LOAD<br>(CONVECTION) | MIN. LOAD | RIPPLE & NOISE <sup>1</sup> |
|----------------------------|--------------------------------|---------|---------------------------|-----------|-----------------------------|
| ABC75-1T12L<br>ABC75-1012L | Screw Terminal<br>Molex Header | 12 V    | 6.25 A                    | 0.0 A     | 1%                          |
| ABC75-1T15L<br>ABC75-1015L | Screw Terminal<br>Molex Header | 15 V    | 5.00 A                    | 0.0 A     | 1%                          |
| ABC75-1T24L<br>ABC75-1024L | Screw Terminal<br>Molex Header | 24 V    | 3.12 A                    | 0.0 A     | 1%                          |
| ABC75-1T30L<br>ABC75-1030L | Screw Terminal<br>Molex Header | 30 V    | 2.50 A                    | 0.0 A     | 1%                          |
| ABC75-1T48L<br>ABC75-1048L | Screw Terminal<br>Molex Header | 48 V    | 1.56 A                    | 0.0 A     | 1%                          |
| ABC75-1T58L<br>ABC75-1058L | Screw Terminal<br>Molex Header | 58 V    | 1.29 A                    | 0.0 A     | 1%                          |
| COVER-120-XBC <sup>2</sup> | metal cover kit accessory      |         |                           |           |                             |

## 2. INPUT SPECIFICATIONS

Specifications are for nominal input voltage, 25°C unless otherwise stated.

| PARAMETER           | DESCRIPTION / CONDITION                                    | SPECIFICATION                     |
|---------------------|--|-----------------------------------|
| Input Voltage       | Universal<br>(Derate from 75 W @ 100 VAC to 65 W @ 85 VAC) | 85-264 VAC / 390 VDC <sup>3</sup> |
| Input Frequency     |  | 47-63 Hz                          |
| Input Current       | 115 VAC:<br>230 VAC:                                       | 1 A max.<br>0.5 A max.            |
| No Load Power       | Typical  | < 0.3 W                           |
| Inrush Current      | 115 VAC:<br>230 VAC:<br>264 VAC:                           | 25 A<br>45 A<br>75 A              |
| Power Factor        | @ Full Load  | > 0.95                            |
| Switching Frequency | Typical  | 60 kHz                            |

<sup>1</sup> Ripple is peak to peak with 20 MHz bandwidth and 10 µF (Tantalum capacitor) in parallel with a 0.1 µF capacitor at rated line voltage and load ranges.

<sup>2</sup> When used in Cover Kit, de-rate output power to 70 % under all operating conditions

<sup>3</sup> Functional, not approved.

### 3. OUTPUT SPECIFICATIONS

| PARAMETER                | DESCRIPTION / CONDITION   | SPECIFICATION        |
|--------------------------|---|----------------------|
| Output Power             | Convection cooled   | 75 W                 |
| Efficiency               | 48 V, 58 V:<br>24 V, 30 V:<br>12 V, 15 V:                                 | 93%<br>91%<br>90%    |
| Hold-up Time             | Typical   | >16 ms               |
| Line Regulation          |   | +/-0.5%              |
| Load Regulation          |   | +/-1%                |
| Transient Response       | 25% step load change, at 0.1A/uS slew rate,<br>50% duty cycle, 50 Hz = 4% | recovery time < 5 ms |
| Voltage Adjustment       |   | +/-3%                |
| Rise Time                | Typical   | 55 ms                |
| Set Point Tolerance      |   | +/-1%                |
| Over Current Protection  |   | > 110%               |
| Over Voltage Protection  | Latch type (AC recycling required)  | 110 to 140%          |
| Short Circuit Protection | Hiccup mode   |                      |

### 4. EMC SPECIFICATIONS

| PARAMETER                          | DESCRIPTION / CONDITION  | SPECIFICATION        |
|------------------------------------|--|----------------------|
| Conducted Emissions                | EN55032-B, CISPR22-B, FCC PART15-B   | Pass                 |
| Radiated Emissions                 | EN 55032 A;<br>with external core (King core K5B RC 25x12x15-M in input cable) | Pass<br>Level B      |
| Input Current Harmonics            | EN 61000-3-2   | Class D              |
| Voltage Fluctuation and Flicker    | EN 61000-3-3   | Pass                 |
| ESD Immunity                       | EN 61000-4-2   | Level 3, Criterion A |
| Radiated Field Immunity            | EN 61000-4-3   | Level 3, Criterion A |
| Electrical Fast Transient Immunity | EN 61000-4-4   | Level 3, Criterion A |
| Surge Immunity                     | EN 61000-4-5   | Level 3, Criterion A |
| Conducted Immunity                 | EN 61000-4-6   | Level 3, Criterion A |
| Magnetic Field Immunity            | EN 61000-4-8   | Level 3, Criterion A |
| Voltage Dips, Interruptions        | EN 61000-4-11  | Criterion A & B      |

### 5. SAFETY SPECIFICATIONS

| PARAMETER          | DESCRIPTION / CONDITION  | SPECIFICATION        |
|--------------------|--|----------------------|
| Isolation Voltage  | Input to Output: (For ITE application)<br>Input to GND:  | 3000 VAC<br>1500 VAC |
| Safety Standard(s) | Approved to the latest edition of the following standards:<br>CSA/UL60950-1, EN60950-1 and IEC60950-1. |                      |
| Agency Approvals   | Nemko, UL, C-UL, CCC   |                      |
| CE mark            | Complies with LVD Directive  |                      |

## 6. ENVIRONMENTAL SPECIFICATIONS

| PARAMETER                          | DESCRIPTION / CONDITION                            | SPECIFICATION              |
|------------------------------------|--|----------------------------|
| Operating Temperature <sup>4</sup> | Startup guaranteed with spec deviation, see Fig 1. | -40 to +70°C<br>-40 to 0°C |
| Storage Temperature                |  | -40 to +85°C               |
| Cooling                            | With natural convection cooling at 100 to 264 VAC  | 75 W                       |
| Relative Humidity                  | Noncondensing                                      | 5% to 95%                  |
| Altitude                           | Operating:<br>Nonoperating:                        | 16,000 ft<br>40,000 ft.    |
| Reliability                        | MTBF according to Telcordia -SR332-Issue 3         | 2.00 million hours         |



Figure 1. Derating Curve


## 7. CONNECTOR & PIN DESCRIPTIONS

| CONNECTOR           | PIN | DESCRIPTION / CONDITION | MANUFACTURER / PN |                           |  |
|---------------------|-----|-------------------------|-------------------|---------------------------|--|
| AC Input Connector  | J1  | Pin 1                   | AC Line           | Screw Terminal (Option 1) | Molex: 39357-0003  |
|                     |     | Pin 2                   | Not Fitted        |                           | Tyco-2-1776112-3   |
|                     |     | Pin 3                   | AC Neutral        | Molex Header (Option 2)   | Molex: 1722861103<br>(Mating conn: Molex 1722561003)                     |
| DC Output Connector | J2  | Pin 1, 2                | V1 -VE            | Screw Terminal (Option 1) | Molex: 39357-0004  |
|                     |     | Pin 3, 4                | V1 +VE            | Molex Header (Option 2)   | Tyco-2-1776112-4<br>Molex: 1722861104<br>(Mating conn: Molex 1722561004) |

## 8. MECHANICAL SPECIFICATIONS


| PARAMETER  | DESCRIPTION / CONDITION                                |
|------------|--|
| Weight     | 150 g  |
| Dimensions | 76.2 x 50.8 x 25.4 mm (3 x 2 x 1 inch)                 |
| Cooling    | 75 W with natural convection cooling at 100 to 264 VAC |

<sup>4</sup> Output ripple can be more than 10% of the output voltage.

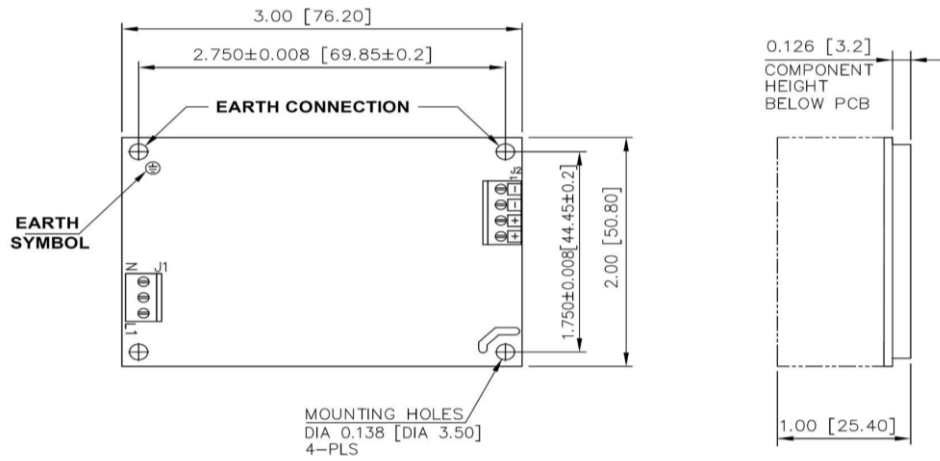

MECHANICAL OUTLINE DIMENSIONS  
ALL DIMENSIONS ARE IN INCHES[MM]  
GEN TOLERANCE: ±0.06

Figure 2. Mechanical Drawing - Screw Terminal (Option 1)

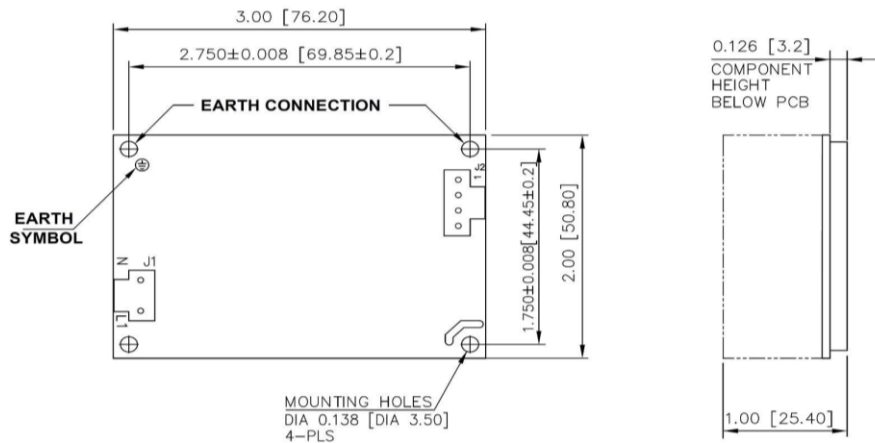

MECHANICAL OUTLINE DIMENSIONS  
ALL DIMENSIONS ARE IN INCHES[MM]  
GEN TOLERANCE: ±0.06

Figure 3 - Mechanical Drawing - Molex Header (Option 2)

**NOTES:** In case the PCB is mounted in a metal enclosure, using metal hardware ensure the following:

- 1 Stand off, used to mount PCB has OD of 5.4 mm max.
- 2 Screws, used to fix PCB on stand off, have head dia of 6.0 mm max.
- 3 Washer, if used, to have dia of 6.5 mm max.

**For more information on these products consult: [tech.support@psbel.com](mailto:tech.support@psbel.com)**

**NUCLEAR AND MEDICAL APPLICATIONS** - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

**TECHNICAL REVISIONS** - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.



Asia-Pacific  
+86 755 298 85888

Europe, Middle East  
+353 61 225 977

North America  
+1 408 785 5200

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)