

### Features

- 3" x 5" x 1.3" Package
- 240 Watts
- EN55015 Class B Conducted EMI
- 50°C Ambient Operation with 300 LFM
- 130 Watts @ 70C (Conduction Cooled)
- 190 Watts @ 60C (200 LFM)
- 160 Watts @ 70C (200 LFM)
- Universal Input 90-264Vac
- Meets IEC61000-3-2 Class C for 0% to 100% LED Dimming Applications(1 Watt input power to full load)
- EN60950 2<sup>nd</sup> Edition



### Description

The LB240 model is the highest density conduction cooled power supply in a compact 3X5 package. Providing 240 Watts of power at 50°C ambient with 300 LFM airflow, the LB240 is designed to meet global lighting requirements and has a built-in EMI filter to meet EN55015 class B.

### Model Chart

Model* Number	Volts	Maximum Output Current (A)	Minimum Load	Ripple & Noise**	Total Regulation	OVP Threshold
LB240S56K	56V	4.29	0A	560mV pk-pk	±3%	66V± 4V
LB240S48K	48V	5	0A	480mV pk-pk	±3%	56V± 3V
LB240S24K	24V	10	0A	240mV pk-pk	±3%	29V±2.5V

\* For Cold Plate cooling, add option H. Consult the factory for model number availability.

\*\*Ripple is 800mV pk-pk @ -10°C

### General Specifications

<b>AC Input</b>	100-240Vac, ±10%, 47-63Hz, 1Ø	<b>Turn On Time</b>	Less than 3 sec. @115Vac, Full Load
<b>Input Current</b>	Max. 115Vac:2.6A, 230Vac: 1.3A	<b>Hold-up Time</b>	12 mSec min, 115Vac/60Hz
<b>Inrush Current</b>	< 55A peak, 264Vac, cold start, turn on at AC zero crossing	<b>Overtemperature Protection</b>	Sensing transformer temperature, 165°C latching type, requires input power recycling to reset.
<b>Input Fuse</b>	5A, 250Vac fuse provided on all models	<b>Overload Protection</b>	Hiccup Mode
<b>Earth Leakage Current</b>	<500µA@264Vac, 60Hz, NC	<b>Short Circuit Protection</b>	Hiccup Mode, auto recovery. A direct hard short may latch off the converter; remove AC input to reset.

<b>Efficiency</b>	VIN 24V 48V 56V (Vac) ----- 115 88% 90% 90% 230 90% 92% 92%	<b>Overvoltage Protection</b>	OVP latch, remove AC input to reset.
<b>Output Power</b>	240 Watts max. with 300 LFM	<b>Switching Frequency</b>	PFC: Fixed, 65kHz Main Converter: Variable 35-200kHz, 65-70kHz at full load
<b>Transient Response</b>	For 5% to 50% or 50% to 5% load change: <20 mSec, return to 1% of nominal, di/dt <0.2A/uS. Max voltage deviation=3%  For 50% to 100% or 100% to 50% load change: <1 mSec, return to 1% of nominal, di/dt <0.2A/uS. Max voltage deviation=3%  For 5% to 100% or 100% to 5% load change: 25 mSec, return to 1% of nominal, di/dt <0.2A/uS. Max voltage deviation=4%	<b>Isolation</b>	Input-Output: 3,000Vac Input-Ground: 1,800Vac Output-Ground: 1,500Vac
<b>Ripple and Noise</b>	0.5%rms, 1% pk-pk, see chart.	<b>Operating Temperature</b>	-10°C to +70°C( See Below Chart) Start Up at -40°C
<b>Output Voltage</b>	See Model Chart	<b>Heat-Sink Temperature</b>	To maintain Safety approval & life expectancy, heat-sink temperature should not exceed 85°C
<b>Voltage Adjustability</b>	Fixed Output	<b>Storage Temperature</b>	-40°C to +85°C
<b>Minimum Load</b>	Not required	<b>Altitude</b>	Operating: -457 to 3000 m Non-operating: -457 to 12,192m.
<b>Total Regulation</b>	+/- 3% combined line, load and initial setting.	<b>Relative Humidity</b>	5% to 95%, non-condensing
<b>Vibration</b>	Operating: 0.003g <sup>2</sup> /Hz, 1.5grms overall, 3 axes, 1 hr/axis Non-Operating: 0.026g <sup>2</sup> /Hz, 5.0grms overall, 3 axes, 10 min/axis	<b>Shock</b>	Operating: Half-sine, 20gpk, 10ms, 3 axes, 6 shocks total Non-Operating: Half-sine, 40 gpk, 10 ms, 3axes, 6 shocks total
<b>Dimensions</b>	W: 3.0" x L: 5.0" x H: 1.3" "H" option: 3.0"x 6.0" x1.5"	<b>Safety Standards</b>	EN/CSA/UL/IEC 60950-1, 2nd Edition
<b>Weight</b>	370g "H" option: TBD	<b>Life</b>	100,000 hours, 50C for 240W 40,000 hours, 70C for 130W
<b>Audible Noise</b>	20 dB A max per ISO7779 with 0% - 100% static load 25 dB A max per ISO7779 with 0% - 100% - 0% transient load	<b>MTBF</b>	438,540 hours. Conditions: Standard: Telcordia SR-332 issue 3 Ambient temp: 25c Voltage: 110v Level: 0/1 Environment: Ground, fixed, controlled


The specification above is based on 25°C ambient and where applicable at nominal input voltage of 100 to 240VAC.

Ambient	Cooling Method	Wattage (watts)
50°C	Forced Air, 300 LFM	240
60°C	Forced Air, 200 LFM	190
70°C	Forced Air, 200 LFM	160
70°C with Max. Temperature of primary heat-sink to be held under 85°C	Conduction	130
50°C	Convection	160
40°C with "H" option, Max. Temp of cold plate to be held under 60°C	Conduction	200

## EMI/EMC Compliance

<b>Conducted Emissions</b>	EN55015 Class B, FCC Part 15, Subpart B, Class B
<b>Radiated Emissions</b>	EN55022 Class A, FCC Part 15, Subpart B, Class A
<b>Static Discharge Immunity</b>	EN61000-4-2, 6kV Contact Discharge, 8kV air discharge
<b>Radiated RF Immunity</b>	EN61000-4-3, 3V/m.
<b>EFT/Burst Immunity</b>	EN61000-4-4, 2kV/5kHz
<b>Line Surge Immunity</b>	EN61000-4-5, 1kV differential, 2kV common-mode
<b>Conducted RF Immunity</b>	EN61000-4-6, 3Vrms
<b>Power Frequency Magnetic Field Immunity</b>	EN61000-4-8, 3A/m
<b>Voltage Dip Immunity</b>	EN61000-4-11, 100%, 10ms; 30%, 500ms; 60%, 100ms; Performance Criteria A, A, & A at 58% load.
<b>Line Harmonic Emissions</b>	EN61000-3-2, Class A, D For Class C from 1W input power to full load
<b>Flicker Test</b>	EN61000-3-3, Complies (dmax<6%)


## Mechanical Drawing

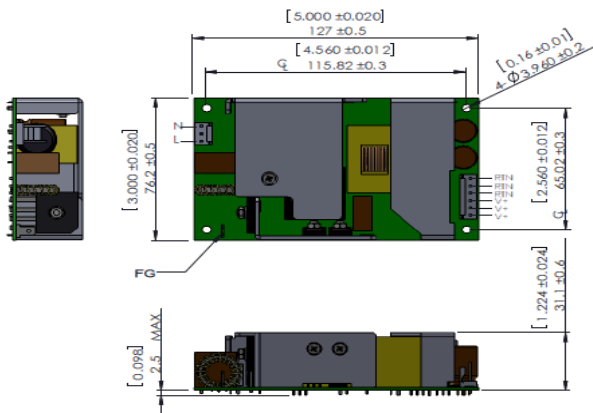

### Notes

1. All dimensions in inches (mm), tolerances are mentioned for each measurement
2. Mounting holes should be grounded for EMI purposes.
3. FG is safety ground connection.
4. The power supply requires mounting on Metal standoffs min. of 0.20" (5mm) in height

## LB240SXXKH

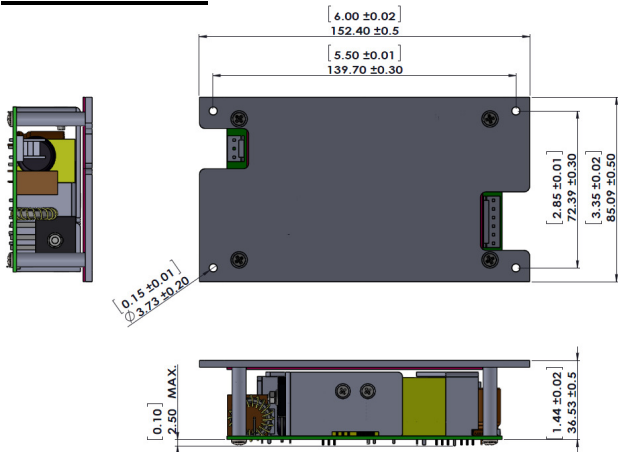

**Connector Information**

Input Connector J100	Ground (FG)	DC Output Connector J300	
PIN 1) AC LINE PIN 2) EMPTY PIN 3) AC NEUTRAL	0.25" FASTON TAB	Term. 1,2,3: RTN Term. 4,5,6: +Vout	
Mating Connector: AMP 640250-3 Pins: 640252-2	Mating Connector: Molex 190020001	Mating Connector: AMP 640250-6 Pins: 640252-2	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)