

4

3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
© COPYRIGHT ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B1	ECR-14-001885	11FEB2014	GK	HMR

REPLACED BY OCEAN STYLE APPLICATOR PART NUMBER 2151362-6

FOR REPLACEMENT PARTS FOR APPLICATOR 1911054 REFER TO ADDITIONAL PAGE(S). SPARE PARTS KIT (IF LISTED) WILL REMAIN AVAILABLE.

THE REPLACEMENT OCEAN STYLE APPLICATOR HAS THE SAME TERMINATOR/PRESS INTERFACE AS APPLICATOR 1911054

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	GOPALAKRISHNA HV														
DIMENSIONS:		CHK	RAGHAVENDRA														
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	RAGHAVENDRA														
<table border="0"> <tr><td>0 PLC</td><td>±</td></tr> <tr><td>1 PLC</td><td>±</td></tr> <tr><td>2 PLC</td><td>±</td></tr> <tr><td>3 PLC</td><td>±</td></tr> <tr><td>4 PLC</td><td>±</td></tr> <tr><td>ANGLES</td><td>±</td></tr> </table>		0 PLC	±	1 PLC	±	2 PLC	±	3 PLC	±	4 PLC	±	ANGLES	±	PRODUCT SPEC	NAME		
0 PLC	±																
1 PLC	±																
2 PLC	±																
3 PLC	±																
4 PLC	±																
ANGLES	±																
MATERIAL		APPLICATION SPEC	SIDE FEED SYSTEM III APPLICATOR														
FINISH		WEIGHT	SIZE	CAGE CODE	DRAWING NO												
			A3		©- 1911054												
		CUSTOMER DRAWING	SCALE	SHEET 1 OF 2	REV B1												




PART NUMBER	REV	DESCRIPTION	PROGRAMMED MEMORY CHIP
1911054-1	B	CUTS CARRIER	8-1911054-1
1911054-6	B	CONTINUOUS CARRIER	8-1911054-6
7-1911054-1	B	-1 AND SPARE PARTS	9-1911054-1
7-1911054-6	B	-6 AND SPARE PARTS	9-1911054-6
7-1911054-7	A	SPARE PARTS KIT	-

APPLICATOR DATA		
CRIMP	SIZE	TYPE
WIRE	.105 [2.67mm]	F
INSUL	.130 [3.30mm]	F

TERMINAL DATA: DELPHI TERMINAL TYCO ELECTRONICS CRIMP SPEC			
TERMINAL NAME: DELPHI FEMALE 56 SERIES TERMINAL			
WIRE STRIP LENGTH		INSULATION DIAMETER RANGE	
.186-.201 [4.7-5.1mm]		.080-.094 [2.04-2.38mm]	
TERMINAL APPL SPEC	NONE		
TERMINALS APPLIED			
TE TERMINAL	DELPHI TERMINAL	TE TERMINAL	DELPHI TERMINAL
1572924-1	12124512	1572924-2	12124513

WIRE SIZE	CRIMP HEIGHT
0.8mm ²	.059±.002 [1.50±.05]
0.5mm ²	.057±.002 [1.45±.05]

FEED FINGER 1901694-1	SET UP GAGE 1901040-1	LOC A	DIST 66	REVISIONS			
				REV	DATE	BY	CHKD
				A	25JUL2007	RD	ND
				B	09APR2009	MY	TE

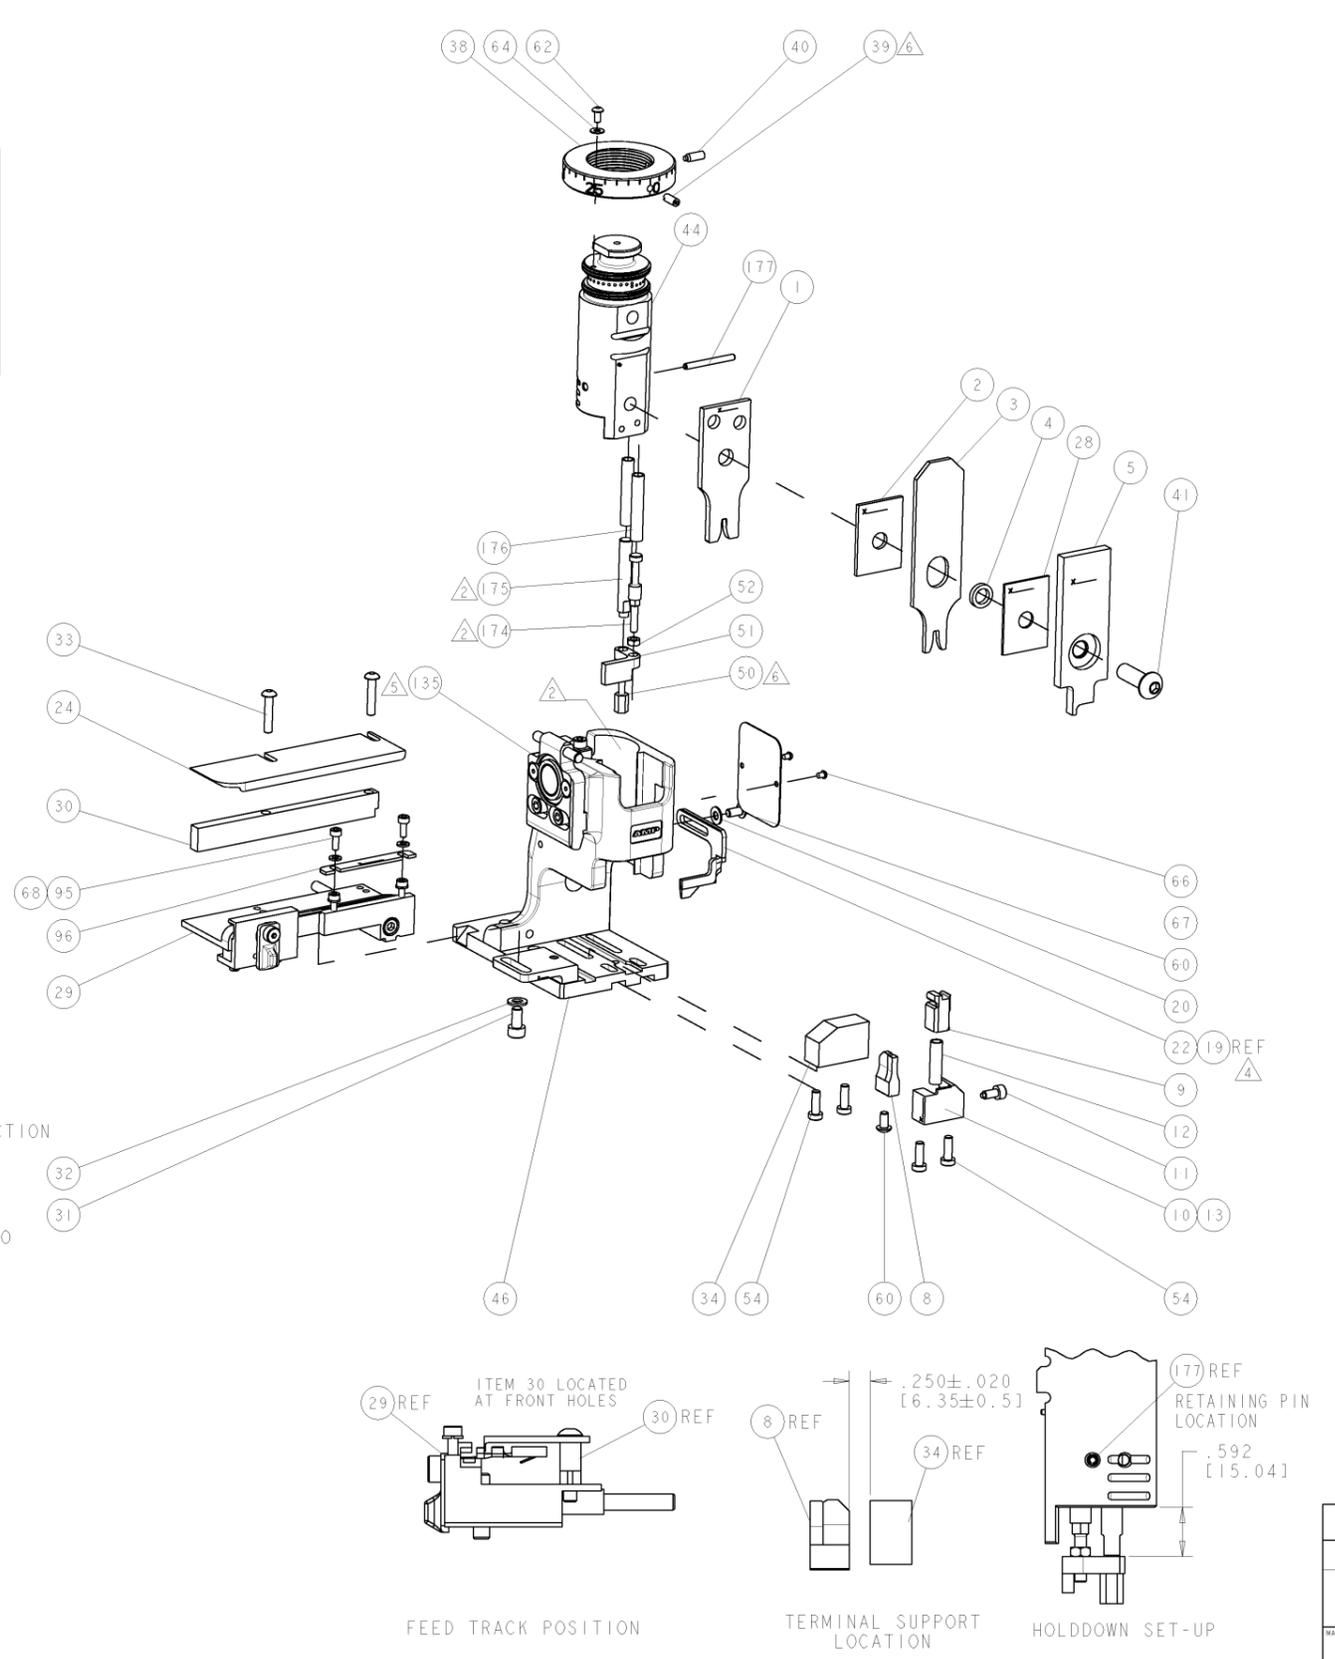

REV	DATE	DESCRIPTION	BY	CHKD			
-	1	1	1	1	1-993111-6	PIN, SLOTTED SPRING 3.0 X 30.0	177
-	2	2	2	2	3-22280-7	SPRING, COMPRESSION	176
-	1	1	1	1	1752353-1	GUIDE PIN, HOLDDOWN	175
-	1	1	1	1	1901680-1	GUIDE PIN, HOLDDOWN	174
-	REF	REF	REF	REF	SEE TABLE	MEMORY CHIP, PROGRAMMED	135
-	1	1	1	1	693855-1	FRONT STRIP GUIDE	96
-	2	2	2	2	4-1655316-4	SCR, SKT HD CAP, M3 X 8.0	95
-	1	1	1	1	1633565-1	DOCUMENTATION PACKAGE S111	71
-	2	2	2	2	18026-1	WASHER, SPRG LOCK, REG M3	68
-	1	1	1	1	1901048-1	TAG, IDENTIFICATION	67
-	2	2	2	2	21017-1	SCREW, DRIVE	66
-	1	1	1	1	18028-1	WASHER, FLAT, REG M3	64
-	1	1	1	1	1655785-9	SCR, BTN SKT HD CAP (M3 X 6)	62
-	2	2	2	2	1655785-1	SCR, BTN SKT HD CAP (M4 X 8)	60
-	4	4	4	4	1655783-3	SCR, CAP, SOC HD, LOW HEAD, M4 X 12	54
-	1	1	1	1	1-18030-0	NUT, HEX, REG M3.5	52
-	1	1	1	1	1901681-1	HOLDDOWN, TERMINAL	51
-	1	1	1	1	2-1752354-1	STANDOFF, HOLD-DOWN	50
-	1	1	1	1	1752300-1	SF SYSTEM III APPLICATOR	46
-	1	1	1	1	1752308-1	RAM	44
-	1	1	1	1	2-1655785-3	SCR, BTN SKT HD CAP (M8 X 25)	41
-	1	1	1	1	993002-4	SCREW, SET, SFT TIP	40
-	1	1	1	1	1962043-1	PLUNGER, BALL, METRIC	39
-	1	1	1	1	1752309-1	RING, INSULATION CRIMP	38
-	1	1	1	1	1752356-5	SUPPORT, TERMINAL	34
-	2	2	2	2	3-1655785-3	SCR, BTN SKT HD CAP (M4 X 20)	33
-	1	1	1	1	18028-3	WASHER, FLAT, REG M5	32
-	1	1	1	1	5-1655316-3	SCR, SKT HD CAP, M5 X 10.0	31
-	1	1	1	1	1320908-1	SPACER, STRIP GUIDE	30
-	1	1	1	1	1-1901087-0	ASSEMBLY, STRIP GUIDE	29
-	1	1	1	1	1-455888-0	SPACER, CRIMPER	28
-	1	1	1	1	1320928-1	PLATE, STRIP GUIDE	24
-	1	1	1	1	1976045-1	STRIPPER	22
-	1	1	1	1	18028-2	WASHER, FLAT, REG M4	20
-	REF	REF	REF	REF	1752311-1	STRIPPER	19
-	1	1	1	1	1338684-1	SHEAR HOLDER, FRONT	13
-	1	1	1	1	3-22280-3	SPRING, COMPRESSION	12
-	1	1	1	1	356885-4	STOP, SHEAR	11
-	1	1	1	1	1320921-1	SHEAR HOLDER, FRONT, CUT	10
-	1	1	1	1	1-454276-9	FLOATING SHEAR, FRONT	9
-	1	2	2	1	4-1633138-5	ANVIL, COMBINATION	8
-	1	1	1	1	1-455889-4	DEPRESSOR, SHEAR	5
-	1	1	1	1	238011-4	BLOCK, CRIMPER SPACER	4
-	1	2	2	1	6-456134-6	CRIMPER, INSULATION F PREMIUM	3
-	1	1	1	1	1-455888-8	SPACER, CRIMPER	2
-	1	2	2	1	4-1633305-0	CRIMPER, WIRE PREMIUM	1

- △ RECOMMENDED SPARE PARTS.
- △ GREASE BEARING SURFACES LIGHTLY.
- 3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
- △ ITEM 19 - OPTIONAL STRIPPER FOR BENCH MACHINE APPLICATIONS.
- △ APPLICATOR SPECIFIC DATA TO BE ENTERED INTO BLANK MEMORY CHIP AT ASSEMBLY.
- △ APPLY P/N 1-23419-5 LOCTITE(R) TO THREADS.

DIMENSIONS (INCHES/mm)		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWG: R. DORSON 09MAY2007		CHK: CN. DEMING 09MAY2007		APVD: W. DEMING 09MAY2007		NAME: Tyco Electronics Tyco Electronics Harrisburg, PA 17105-3608	
0 PLC	±	0.0005	±	0.0005	±	0.0005	±	0.0005	±	0.0005	±
1 PLC	±	0.0010	±	0.0010	±	0.0010	±	0.0010	±	0.0010	±
2 PLC	±	0.0015	±	0.0015	±	0.0015	±	0.0015	±	0.0015	±
3 PLC	±	0.0020	±	0.0020	±	0.0020	±	0.0020	±	0.0020	±
4 PLC	±	0.0025	±	0.0025	±	0.0025	±	0.0025	±	0.0025	±
5 PLC	±	0.0030	±	0.0030	±	0.0030	±	0.0030	±	0.0030	±
6 PLC	±	0.0035	±	0.0035	±	0.0035	±	0.0035	±	0.0035	±
7 PLC	±	0.0040	±	0.0040	±	0.0040	±	0.0040	±	0.0040	±
8 PLC	±	0.0045	±	0.0045	±	0.0045	±	0.0045	±	0.0045	±
9 PLC	±	0.0050	±	0.0050	±	0.0050	±	0.0050	±	0.0050	±
10 PLC	±	0.0055	±	0.0055	±	0.0055	±	0.0055	±	0.0055	±
11 PLC	±	0.0060	±	0.0060	±	0.0060	±	0.0060	±	0.0060	±
12 PLC	±	0.0065	±	0.0065	±	0.0065	±	0.0065	±	0.0065	±
13 PLC	±	0.0070	±	0.0070	±	0.0070	±	0.0070	±	0.0070	±
14 PLC	±	0.0075	±	0.0075	±	0.0075	±	0.0075	±	0.0075	±
15 PLC	±	0.0080	±	0.0080	±	0.0080	±	0.0080	±	0.0080	±
16 PLC	±	0.0085	±	0.0085	±	0.0085	±	0.0085	±	0.0085	±
17 PLC	±	0.0090	±	0.0090	±	0.0090	±	0.0090	±	0.0090	±
18 PLC	±	0.0095	±	0.0095	±	0.0095	±	0.0095	±	0.0095	±
19 PLC	±	0.0100	±	0.0100	±	0.0100	±	0.0100	±	0.0100	±
20 PLC	±	0.0105	±	0.0105	±	0.0105	±	0.0105	±	0.0105	±
21 PLC	±	0.0110	±	0.0110	±	0.0110	±	0.0110	±	0.0110	±
22 PLC	±	0.0115	±	0.0115	±	0.0115	±	0.0115	±	0.0115	±
23 PLC	±	0.0120	±	0.0120	±	0.0120	±	0.0120	±	0.0120	±
24 PLC	±	0.0125	±	0.0125	±	0.0125	±	0.0125	±	0.0125	±
25 PLC	±	0.0130	±	0.0130	±	0.0130	±	0.0130	±	0.0130	±
26 PLC	±	0.0135	±	0.0135	±	0.0135	±	0.0135	±	0.0135	±
27 PLC	±	0.0140	±	0.0140	±	0.0140	±	0.0140	±	0.0140	±
28 PLC	±	0.0145	±	0.0145	±	0.0145	±	0.0145	±	0.0145	±
29 PLC	±	0.0150	±	0.0150	±	0.0150	±	0.0150	±	0.0150	±
30 PLC	±	0.0155	±	0.0155	±	0.0155	±	0.0155	±	0.0155	±
31 PLC	±	0.0160	±	0.0160	±	0.0160	±	0.0160	±	0.0160	±
32 PLC	±	0.0165	±	0.0165	±	0.0165	±	0.0165	±	0.0165	±
33 PLC	±	0.0170	±	0.0170	±	0.0170	±	0.0170	±	0.0170	±
34 PLC	±	0.0175	±	0.0175	±	0.0175	±	0.0175	±	0.0175	±
35 PLC	±	0.0180	±	0.0180	±	0.0180	±	0.0180	±	0.0180	±
36 PLC	±	0.0185	±	0.0185	±	0.0185	±	0.0185	±	0.0185	±
37 PLC	±	0.0190	±	0.0190	±	0.0190	±	0.0190	±	0.0190	±
38 PLC	±	0.0195	±	0.0195	±	0.0195	±	0.0195	±	0.0195	±
39 PLC	±	0.0200	±	0.0200	±	0.0200	±	0.0200	±	0.0200	±
40 PLC	±	0.0205	±	0.0205	±	0.0205	±	0.0205	±	0.0205	±
41 PLC	±	0.0210	±	0.0210	±	0.0210	±	0.0210	±	0.0210	±
42 PLC	±	0.0215	±	0.0215	±	0.0215	±	0.0215	±	0.0215	±
43 PLC	±	0.0220	±	0.0220	±	0.0220	±	0.0220	±	0.0220	±
44 PLC	±	0.0225	±	0.0225	±	0.0225	±	0.0225	±	0.0225	±
45 PLC	±	0.0230	±	0.0230	±	0.0230	±	0.0230	±	0.0230	±
46 PLC	±	0.0235	±	0.0235	±	0.0235	±	0.0235	±	0.0235	±
47 PLC	±	0.0240	±	0.0240	±	0.0240	±	0.0240	±	0.0240	±
48 PLC	±	0.0245	±	0.0245	±	0.0245	±	0.0245	±	0.0245	±
49 PLC	±	0.0250	±	0.0250	±	0.0250	±	0.0250	±	0.0250	±
50 PLC	±	0.0255	±	0.0255	±	0.0255	±	0.0255	±	0.0255	±
51 PLC	±	0.0260	±	0.0260	±	0.0260	±	0.0260	±	0.0260	±
52 PLC	±	0.0265	±	0.0265	±	0.0265	±	0.0265	±	0.0265	±
53 PLC	±	0.0270	±	0.0270	±	0.0270	±	0.0270	±	0.0270	±
54 PLC	±	0.0275	±	0.0275	±	0.0275	±	0.0275	±	0.0275	±
55 PLC	±	0.0280	±	0.0280	±	0.0280	±	0.0280	±	0.0280	±
56 PLC	±	0.0285	±	0.0285	±	0.0285	±	0.0285	±	0.0285	±
57 PLC	±	0.0290	±	0.0290	±	0.0290	±	0.0290	±	0.0290	±
58 PLC	±	0.0295	±	0.0295	±	0.0295	±	0.0295	±	0.0295	±
59 PLC	±	0.0300	±	0.0300	±	0.0300	±	0.0300	±	0.0300	±
60 PLC	±	0.0305	±	0.0305	±	0.0305	±	0.0305	±	0.0305	±
61 PLC	±	0.0310	±	0.0310	±	0					

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru