



## SinglFuse™ SF-0603S Series Features

- Single blow fuse for overcurrent protection
- 1608 (EIA 0603) miniature footprint
- Slow blow fuse
- UL listed
- RoHS compliant\* and halogen free\*\*
- Thin film chip fuse
- Surface mount packaging for automated assembly

## SF-0603S Series - Slow Blow Surface Mount Fuses

### Electrical Characteristics

| Model       | Rated Current (Amps) | Fusing Time                               | Resistance (mΩ) Typ.*** | Rated Voltage | Breaking Capacity | Typical I <sup>2</sup> t (A <sup>2</sup> s) |
|-------------|----------------------|---|-------------------------|---------------|-------------------|---|
| SF-0603S050 | 0.50                 | Open within 5 sec. at 250 % rated current | 175                     | DC 50 V       | DC 50 V<br>50 A   | 0.009                                       |
| SF-0603S063 | 0.63                 |   | 130                     | DC 32 V       | DC 32 V<br>50 A   | 0.017                                       |
| SF-0603S080 | 0.80                 |   | 93                      |               |                   | 0.024                                       |
| SF-0603S100 | 1.00                 |   | 65                      |               |                   | 0.026                                       |
| SF-0603S125 | 1.25                 |   | 47                      |               |                   | 0.057                                       |
| SF-0603S150 | 1.50                 |   | 36                      |               |                   | 0.081                                       |
| SF-0603S160 | 1.60                 |   | 34                      |               |                   | 0.086                                       |
| SF-0603S200 | 2.00                 |   | 26                      |               |                   | 0.115                                       |
| SF-0603S250 | 2.50                 |   | 20                      |               |                   | 0.200                                       |
| SF-0603S300 | 3.00                 |   | 16                      |               |                   | 0.210                                       |
| SF-0603S315 | 3.15                 |   | 15                      |               |                   | 0.279                                       |
| SF-0603S400 | 4.00                 |   | 12                      |               |                   | 0.326                                       |
| SF-0603S500 | 5.00                 |   | 9                       |               |                   | 0.622                                       |

\*\*\*Resistance value was measured with less than 10 % of rated current.

### Reliability Testing

| Parameter                 | Requirement                     | Test Method   |
|---------------------------|---------------------------------|---|
| Carrying Capacity         | No fusing                       | Rated current, 4 hours  |
| Fusing Time               | Within 5 seconds                | 250 % of its rated current  |
| Interrupting Ability      | No mechanical damages           | After the fuse is interrupted, rated voltage applied for 30 seconds again |
| Bending Test              | No mechanical damages           | Distance between holding points: 90 mm, Bending: 3 mm, 1 time, 30 seconds |
| Resistance to Solder Heat | ±20 %                           | 260 °C ±5 °C, 10 seconds ±1 second  |
| Solderability             | 95 % coverage minimum           | 235 °C ±5 °C, 2 ±0.5 second<br>245 °C ±5 °C, 2 ±0.5 second (lead free)    |
| Temperature Rise          | <75 °                           | 100 % of its rated current, measure of surface temperature                |
| Resistance to Dry Heat    | ±20 %                           | 105 °C ±5 °C, 1000 hours  |
| Resistance to Solvent     | No evident damage on protective | 23 °C ±5 °C of isopropyl alcohol, 90 seconds coating and marking          |
| Residual Resistance       | 10k W or more                   | Measure DC resistance after fusing  |
| Thermal Shock             | DR < 10 %                       | -20 °C / +25 °C / +125 °C / +25 °C, 10 cycles                             |

### Typical Part Marking

Represents total content. Layout may vary.



| RATING CURRENT (A) |          |
|--------------------|----------|
| F = 0.50           | S = 2.00 |
| I = 0.63           | T = 2.50 |
| K = 0.80           | 3 = 3.00 |
| L = 1.00           | U = 3.15 |
| M = 1.25           | W = 4.00 |
| P = 1.50           | Y = 5.00 |
| N = 1.60           |          |

### How to Order

**SF - 0603 S 050 - 2**

|                               |                                     |
|-------------------------------|-------------------------------------|
| SinglFuse™ Product Designator | SF                                  |
| SMD Footprint                 | 0603                                |
| 1608 (EIA 0603) size          |                                     |
| Fuse Blow Type                | S                                   |
| F = Fast acting               |                                     |
| S = Slow blow                 |                                     |
| Rated Current                 | 050-500 (500 mA - 5.00 A)           |
| Packaging Type                | - 2 = Tape & Reel (5,000 pcs./reel) |

**BOURNS®**

#### Asia-Pacific:

Tel: +886-2 2562-4117  
Fax: +886-2 2562-4116

#### Europe:

Tel: +41-41 768 5555  
Fax: +41-41 768 5510

#### The Americas:

Tel: +1-951 781-5500  
Fax: +1-951 781-5700

[www.bourns.com](http://www.bourns.com)

\* RoHS Directive 2002/95/EC Jan 27 2003 including Annex.

\*\* Bourns is using the definition that appears to be the prevalent definition used as the industry standard at this time. The Bourns definition of "halogen-free" is: Bromine (Br) content: ≤ 900 ppm; Chlorine (Cl) content: ≤ 900 ppm; Total Br + Cl content: ≤ 1500 ppm.

"SinglFuse" is a trademark of Bourns, Inc.

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

# SinglFuse™ SF-0603S Series Applications

- Portable memory
- LCD monitors
- Disk drives
- PDAs
- Digital cameras
- DVDs
- Cell phones
- Rechargeable battery packs
- Battery chargers
- Set top boxes
- Industrial controllers


## SF-0603S Series - Slow Blow Surface Mount Fuses **BOURNS®**

### Solder Reflow Recommendations



PEAK: 250 +0/-5 °C, 5 seconds  
 PRE-HEATING ZONE: 150 to 180 °C, 90 ± 30 seconds  
 SOLDERING ZONE: 230 °C or higher, 30 ± 10 seconds

### Product Dimensions

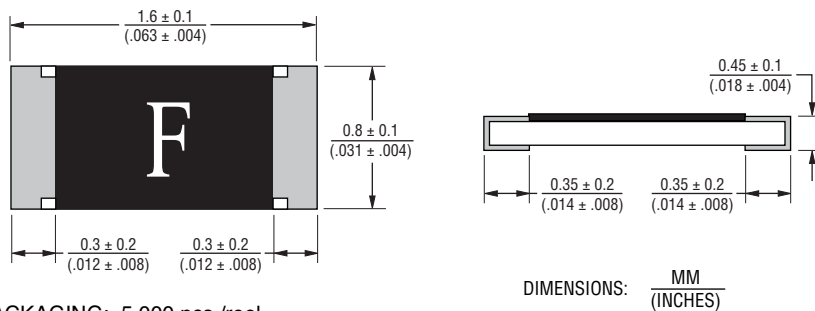

PACKAGING: 5,000 pcs./reel

### Recommended Pad Layout



### Thermal Derating Curve



### Construction & Material Content



Operating Temperature.....-40 °C to +105 °C  
 Storage Conditions  
 Temperature .....+5 °C to +35 °C  
 Humidity.....40 % to 75 %  
 Shelf Life..... 2 years from manufacturing date

Specifications are subject to change without notice. The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

# SF-0603S Series - Slow Blow Surface Mount Fuses

**BOURNS®**

**Average Time Current Curves**



**Minimum I<sup>2</sup>T V Clear Time Curves**




REV. D 03/13

Specifications are subject to change without notice.  
 The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.  
 Users should verify actual device performance in their specific applications.

# SF-0603S Series Tape and Reel Specifications

# BOURNS®

| Tape Dimensions | SF-0603S Series<br>per EIA 481-2        |
|-----------------|---|
| W               | $\frac{8.0 \pm 0.2}{(.315 \pm .008)}$   |
| P <sub>0</sub>  | $\frac{4.0 \pm 0.1}{(.157 \pm .004)}$   |
| P <sub>1</sub>  | $\frac{4.0 \pm 0.1}{(.157 \pm .004)}$   |
| P <sub>2</sub>  | $\frac{2.0 \pm 0.05}{(.079 \pm .002)}$  |
| A               | $\frac{1.1 \pm 0.1}{(.043 \pm .004)}$   |
| B               | $\frac{1.9 \pm 0.1}{(.075 \pm .004)}$   |
| F               | $\frac{3.5 \pm 0.05}{(.138 \pm .002)}$  |
| E               | $\frac{1.75 \pm 0.1}{(.069 \pm .004)}$  |
| D <sub>0</sub>  | $\frac{1.5 + 0.1/-0}{(.059 + .004/-0)}$ |
| T               | $\frac{0.64 \pm 0.1}{(.025 \pm .004)}$  |
| Reel Dimensions |   |
| A               | $\frac{180 +0/-3.0}{(7.087 +0/- .118)}$ |
| B Min.          | $\frac{60.0}{(2.362)}$                  |
| C               | $\frac{13.0 \pm 1.0}{(.512 \pm .039)}$  |
| W               | $\frac{9.0 \pm 1.0}{(.354 \pm .039)}$   |
| T               | $\frac{11.4 \pm 2.0}{(.449 \pm .079)}$  |

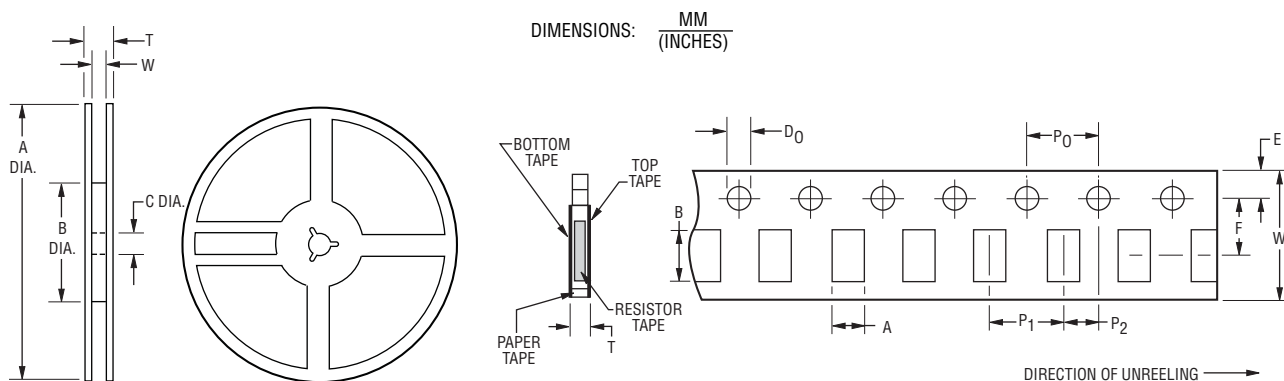

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.  
Users should verify actual device performance in their specific applications.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)