

# XLM Supercapacitor

## 62 V, 130 F Module



### Description

Eaton supercapacitors are high reliability, high power, ultra-high capacitance energy storage devices utilizing electric double layer capacitor (EDLC) construction combined with proprietary materials and processes. This combination of advanced technologies allows Eaton to offer a wide variety of capacitor solutions tailored to applications for backup power, pulse power and hybrid power systems. They can be applied as the sole energy storage or in combination with batteries to optimize cost, life time and run time. System requirements can range from a few microwatts to megawatts. All products feature low ESR for high power density with environmentally friendly materials for a green power solution. Eaton supercapacitors are maintenance-free with design lifetimes up to 20 years\* and operating temperatures down to -40 °C and up to +85 °C.

### Features and benefits

- Long life energy storage, up to 20 years\*
- Very low equivalent series resistance (ESR)
- Wide operating temperature
- Cost effective backup power and large energy recapture
- High efficiency (>98%) under broad operating conditions
- High reliability, green solution
- Low operating costs and maintenance free
- Shunt balancing for reduced leakage current

### Applications

- Datacenter UPS
- Healthcare UPS
- Hybrid power systems
- Grid storage and support
- Peak power shaving

\*Supercapacitor lifetimes vary based on charge voltage and temperature. See Eaton's application guidelines or contact your local Eaton sales representative for more information on lifetime estimates.

## Ratings

Capacitance	130 F
Maximum working voltage	62.1 V
Capacitance tolerance	0% to +20% (+20 °C)
Operating temperature range	-40 °C to +65 °C

## Specifications

Capacitance <sup>1</sup> (F)	Part number	Maximum working voltage (V)	Maximum initial ESR <sup>1</sup> (mΩ)	Nominal leakage current <sup>2</sup> (mA)	Stored energy <sup>3</sup> (Wh)	Peak power <sup>4</sup> (kW)	Pulse current <sup>5</sup> (A)	Typical thermal resistance R <sub>th</sub> (°C/W) <sup>6</sup>
130	XLM-62R1137A-R	62.1	6.7	128	69.6	143.9	2157	0.5
130	XLM-62R1137A-T	62.1	6.7	128	69.6	143.9	2157	0.5
130	XLM-62R1137B-R	62.1	6.7	5.2	69.6	143.9	2157	0.5
130	XLM-62R1137B-T	62.1	6.7	5.2	69.6	143.9	2157	0.5

## Performance

Parameter (F)	Capacitance change (% of initial value)	ESR (% of maximum initial value)
Lifetime (1500 hours @ +65 °C, 62.1 Vdc)	≤ 20%	≤ 200%
Lifetime (10 years @ +25 °C, 62.1 Vdc)	≤ 20%	≤ 200%
Charge/discharge cycles <sup>7</sup> (1,000,000 @ +25 °C)	≤ 20%	≤ 200%
Storage (3 years, uncharged, <+30 °C)	≤ 3%	≤ 10%

1. Capacitance and equivalent series resistance (ESR) measured according to IEC62391-1 at +20 °C, with current in millamps (mA) =  $8*C*V$

2. Leakage current at +20 °C after 72 hour charge and hold

$$3. \text{ Stored energy (Wh)} = \frac{\frac{1}{2} * C * V^2}{3600}$$

$$4. \text{ Peak power (W)} = \frac{V^2}{4 * ESR}$$

$$5. \text{ Pulse Current in Amps (A), 1 second discharge from rated voltage to half rated voltage} = \frac{\frac{1}{2} * C * V}{(1 + ESR * C)}$$

6. Thermal resistance (R<sub>th</sub>) cell body temperature to ambient in open air in degrees C per Watt (°C/W)



7. Cycling between rated voltage and half voltage, 3 seconds rest at +25 °C

## Standards and certifications

Agency information	CE & UL810A file number: MH46887 on XLM-62R1137A-R, other part numbers pending
Shock and vibration	Telcordia GR-63 Zone 4
Environmental	IP30, RoHS
Altitude, Operating	10,000 ft / 3,000 meters
Altitude, Non-operating	40,000 ft / 12,000 meters
Shipping	No restrictions per UN3499 with all cells <0.3 (Wh), ship with shorting wire

## Dimensions (mm) and mass (kg)

Part Number	W	L	H
XLM-62R1137A-R	176	635	173
Tolerance	$\pm 1.0$		

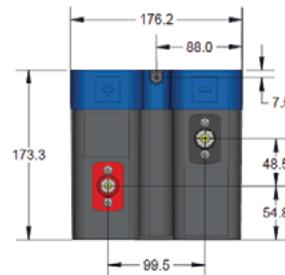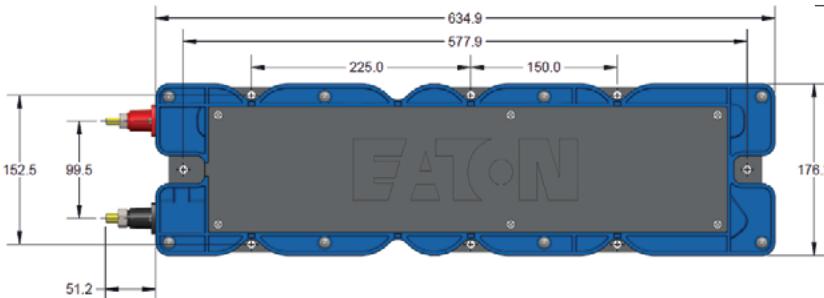

Positive Terminal: 5/16" – 18 threaded stud

Negative Terminal: 3/8" – 16 threaded stud

**Typical mass:** 16 kg

## Part numbering system

XLM	- 62R1	13	7	A	-R
Family code	Voltage (V) R= decimal	Capacitance ( $\mu$ F)		Cell balancing	Option code
XLM = Family code	62R1= 62.1 V	Value	Multiplier	A= Passive B= Shunt	R= Standard product T= Temperature output

Example 130=13 x  $10^7$   $\mu$ F or 130 F

## Packaging information

- Standard packaging: 1 module per box

## Part marking

- Manufacturer
- Capacitance (F)
- Maximum working voltage (V)
- Family code or part number

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

**Eaton**  
**Electronics Division**  
1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
Eaton.com/electronics

© 2019 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. 10754 BU-MC19138  
October 2019

Eaton is a registered trademark.

All other trademarks are property  
of their respective owners.

Follow us on social media to get the  
latest product and support information.



ООО "ЛайфЭлектроникс"

"LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: org@lifeelectronics.ru