



## Conformal, Single In-Line Thin Film Resistor, Through Hole Network (Custom)

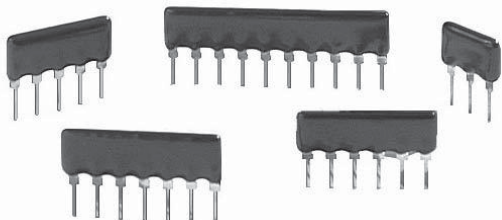

Wirewound or metal film performance in a space saving package.

SIP networks available in 3 pins to 10 pins sizes can obtain important performance parameters in an economical, mass producible style. SIPs take up the least amount of board space and are the easiest possible configuration to hand-insert into printed circuit boards. Standard pin centers are 0.100". Passivation coatings plus a conformal coating of epoxy protect the active element from the outside environment.

### SCHEMATIC

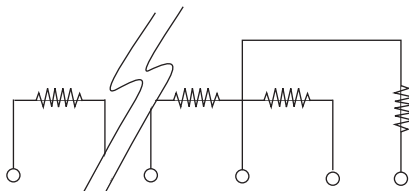

Custom schematics available.  
Please consult factory.

### FEATURES

- Minimal PC board space
- Standard 100 mil centers
- Exceptional ratio stability over time and temperature ( $\Delta R \pm 0.015\%$  at  $+70^\circ\text{C}$  at 2000 h)
- Integrated construction
- Conformal coating flame resistant (UL 94 V-0 rating)
- Compliant to RoHS Directive 2002/95/EC



**RoHS\***  
COMPLIANT

### Note


\* Pb containing terminations are not RoHS compliant, exemptions may apply

### TYPICAL PERFORMANCE

|      | ABSOLUTE | TRACKING |
|------|----------|----------|
| TCR  | 10       | 2        |
|      | ABSOLUTE | RATIO    |
| TOL. | 0.05     | 0.02     |

| STANDARD ELECTRICAL SPECIFICATIONS |  |   |
|------------------------------------|--|---|
| TEST                               | SPECIFICATIONS   | CONDITIONS                                      |
| Material                           | Passivated nichrome  | -   |
| Pin/Lead Number                    | 3 to 10  | -   |
| Resistance Range                   | 100 $\Omega$ to 2 M $\Omega$ total                               | -   |
| TCR: Absolute                      | $\pm 10$ ppm/ $^\circ\text{C}$ to $\pm 25$ ppm/ $^\circ\text{C}$ | - 55 $^\circ\text{C}$ to + 125 $^\circ\text{C}$ |
| TCR: Tracking                      | $\pm 2$ ppm/ $^\circ\text{C}$ to $\pm 5$ ppm/ $^\circ\text{C}$   | - 55 $^\circ\text{C}$ to + 125 $^\circ\text{C}$ |
| Tolerance: Absolute                | $\pm 0.05\%$ to $\pm 1.0\%$                                      | + 25 $^\circ\text{C}$                           |
| Tolerance: Ratio                   | $\pm 0.01\%$ to $\pm 0.5\%$                                      | + 25 $^\circ\text{C}$                           |
| Power Rating: Resistor             | 0.100 W (per element)  | Maximum at + 70 $^\circ\text{C}$                |
| Power Rating: Package              | -  | Maximum at + 70 $^\circ\text{C}$                |
| Stability: Absolute                | $\Delta R \pm 0.05\%$  | 2000 h at + 70 $^\circ\text{C}$                 |
| Stability: Ratio                   | $\Delta R \pm 0.015\%$   | 2000 h at + 70 $^\circ\text{C}$                 |
| Voltage Coefficient                | < 0.1 ppm/V  | -   |
| Working Voltage                    | 100 V  | -   |
| Operating Temperature Range        | - 55 $^\circ\text{C}$ to + 125 $^\circ\text{C}$                  | -   |
| Storage Temperature Range          | - 55 $^\circ\text{C}$ to + 125 $^\circ\text{C}$                  | -   |
| Noise                              | < - 30 dB  | -   |
| Thermal EMF                        | < 0.10 $\mu\text{V}/^\circ\text{C}$                              | -   |
| Shelf Life Stability: Absolute     | $\Delta R \pm 0.01\%$  | 1 year at + 25 $^\circ\text{C}$                 |
| Shelf Life Stability: Ratio        | $\Delta R \pm 0.002\%$   | 1 year at + 25 $^\circ\text{C}$                 |

**DIMENSIONS AND IMPRINTING** in inches and millimeters
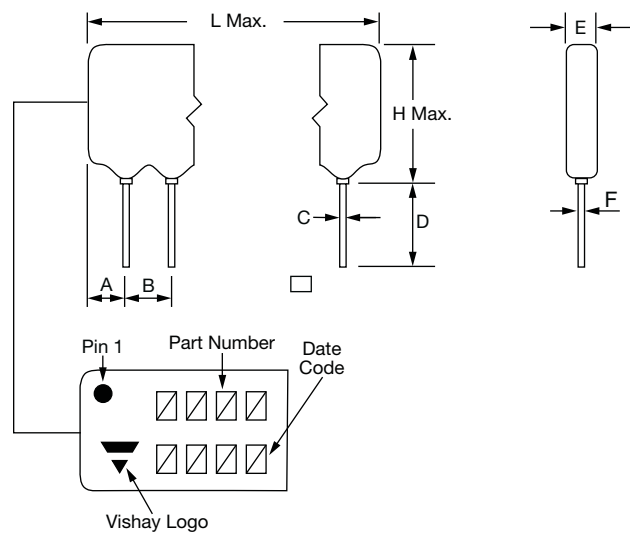
|  | DIMENSION   | INCHES               | MILLIMETERS      |
|---|-------------|----------------------|------------------|
|   | A           | 0.058 typ.           | 1.47 typ.        |
|   | B           | 0.100 typ.           | 2.54 typ.        |
|   | C           | 0.020 ± 0.003        | 0.51 ± 0.08      |
|   | D           | 0.125 min.           | 3.18 min.        |
|   | E           | 0.110 max.           | 2.79 max.        |
|   | F           | 0.010 typ.           | 0.25 typ.        |
|   | L (3 Pins)  | 0.320                | 8.13             |
|   | L (4 Pins)  | 0.420                | 10.67            |
|   | L (5 Pins)  | 0.520                | 13.21            |
|   | L (6 Pins)  | 0.620                | 15.75            |
|   | L (7 Pins)  | 0.720                | 18.29            |
|   | L (8 Pins)  | 0.820                | 20.83            |
|   | L (9 Pins)  | 0.920                | 23.37            |
|   | L (10 Pins) | 1.020                | 25.91            |
|   | H (3 Pins)  | 0.280 <sup>(1)</sup> | 7 <sup>(1)</sup> |
|   | H (4 Pins)  |                      |                  |
|   | H (5 Pins)  |                      |                  |
|   | H (6 Pins)  |                      |                  |
|   | H (7 Pins)  |                      |                  |
|   | H (8 Pins)  |                      |                  |
|   | H (9 Pins)  |                      |                  |
|   | H (10 Pins) |                      |                  |

**Note**
<sup>(1)</sup> H dimension, R-value and schematic dependent

**MECHANICAL SPECIFICATIONS**

|   |                      |
|---|----------------------|
| <b>Resistive Element</b>                  | Passivated nichrome  |
| <b>Substrate Material</b>                 | Alumina              |
| <b>Body</b>                               | Epoxy coated         |
| <b>Terminals</b>                          | Copper alloy         |
| <b>Tin/Lead Option</b>                    | Sn60 - Sn63          |
| <b>Lead (Pb)-free Option</b>              | Sn96.5, Ag3.0, Cu0.5 |
| <b>Tin/Lead and Lead (Pb)-free Finish</b> | Hot solder dip       |

**ORDERING INFORMATION CHECK LIST (Customs)**


Special requirements should be identified in advance, but as a minimum, you should have the following information ready.

| ELECTRICAL  | MECHANICAL   |
|---|--|
| 1. Resistors, by value and tolerance<br>2. Reference resistor(s) and matching of which resistors to which reference resistors<br>3. Resistance by ratio<br>4. Absolute temperature coefficient of resistivity<br>5. Temperature tracking of subordinate resistors to reference resistor(s)<br>6. Maximum operating voltage<br>7. Resistor power ratings<br>8. Operating temperature range | 1. Maximum allowable seated height (from PC board to top of network)<br>2. Special marking concerns<br>3. Schematic pin out of package<br>4. Specify if lead (Pb)-free |
| For additional assistance refer to Vishay Thin Film's guide to understanding Thin Film precision.<br>Resistor networks or application engineering.<br>All standard products may be ordered directly from Vishay Thin Film.  |  |




### GLOBAL PART NUMBER INFORMATION

New Global Part Numbering: VTF211BX

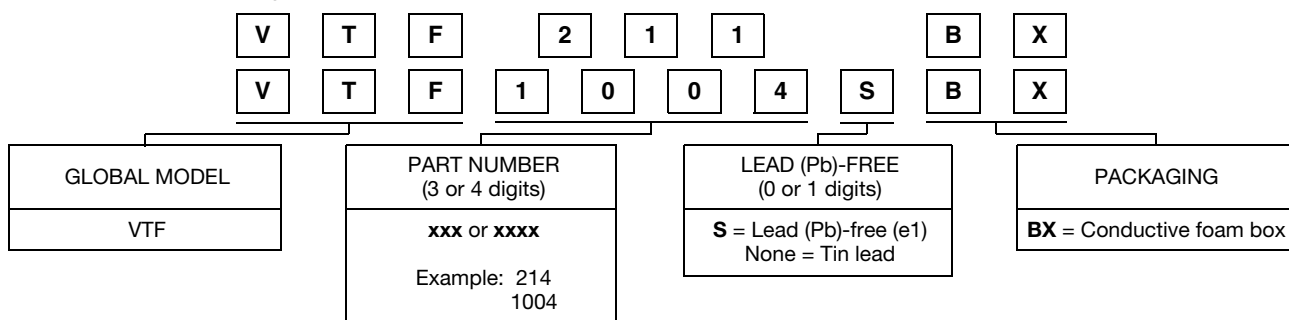

Historical Part Number example: VTF Custom 211 (for reference purposes only)

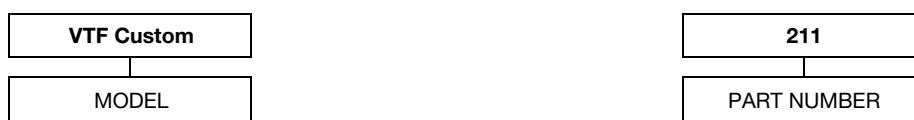



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Material Category Policy

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.**

**Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.**

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.**

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)