

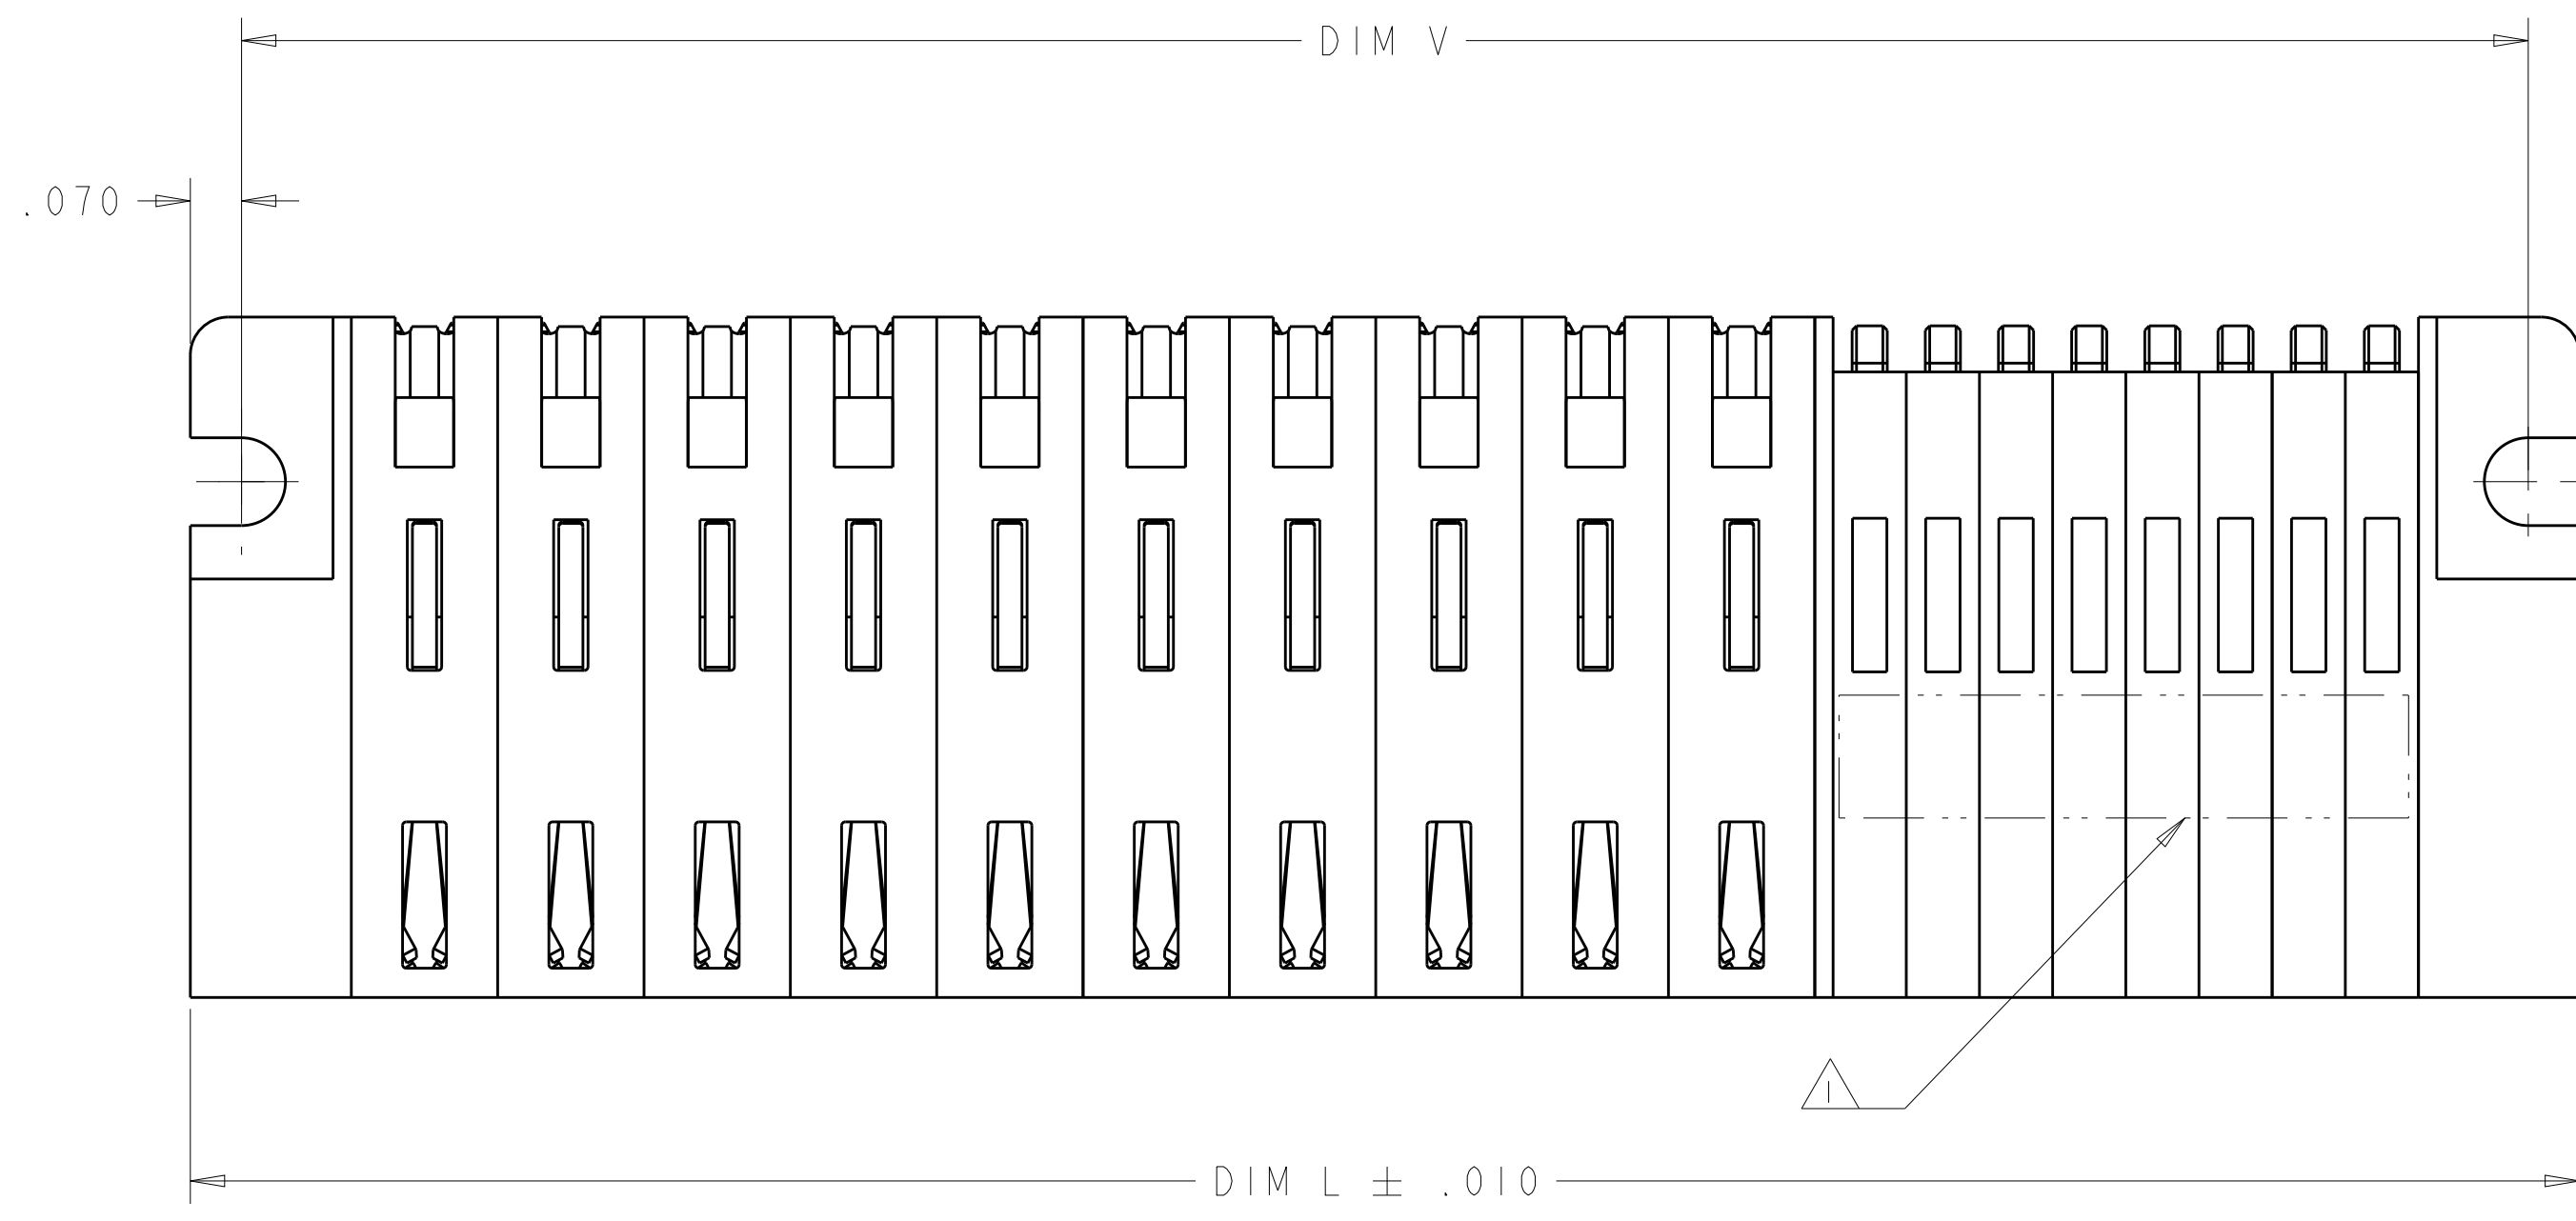
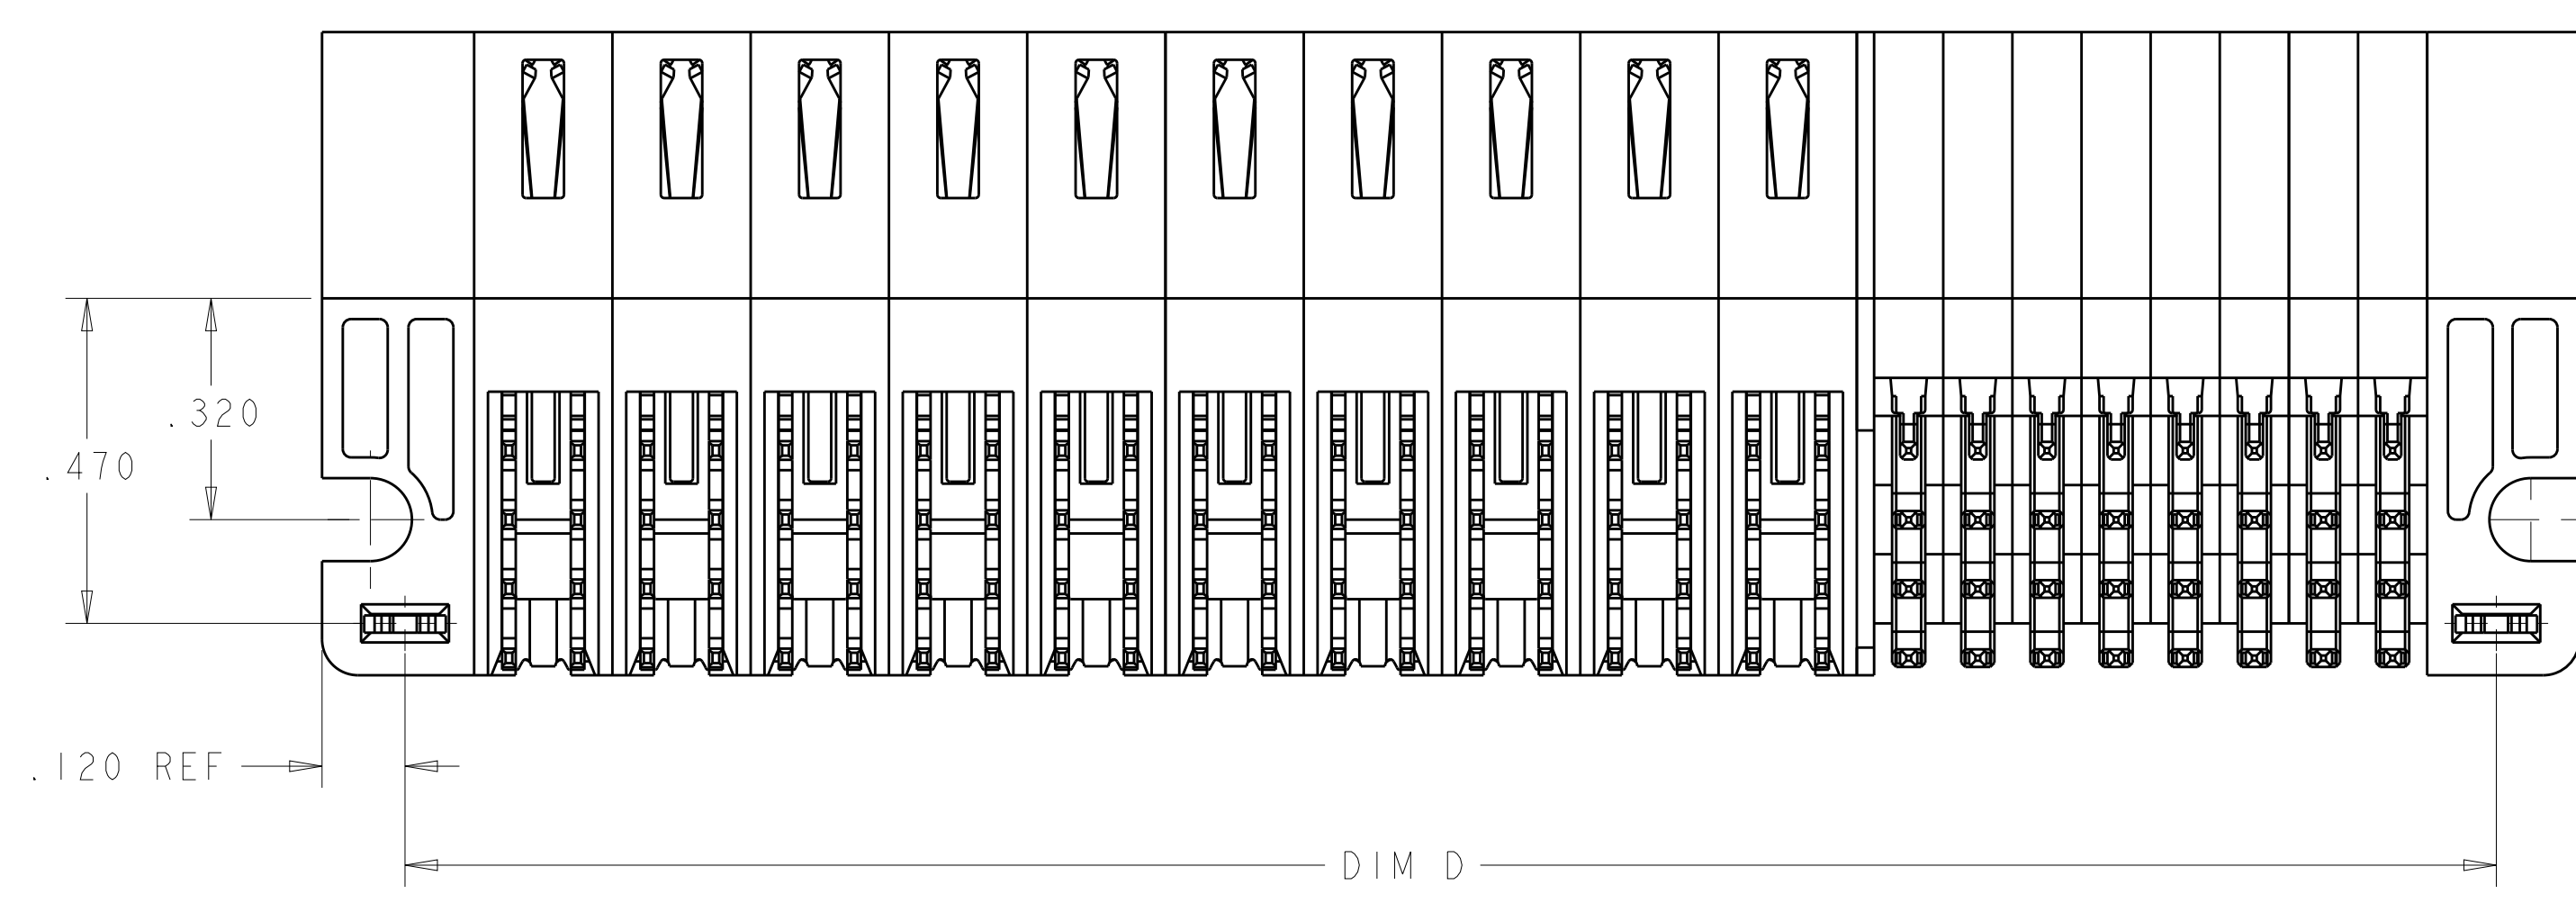


LOC		DIST		REVISIONS			
ES	00	P	LTN	DESCRIPTION	DATE	DWN	APVD
		K4		REVISED 4-7 BY CUSTOMER	18MAY2015	CZ	SZ
		K5		REVISED 4-7 SIGNAL PINS BY CUSTOMER	09JUN2015	CZ	SZ
		K6		REV PER ECO-17-001490	12DEC2016	CZ	SZ

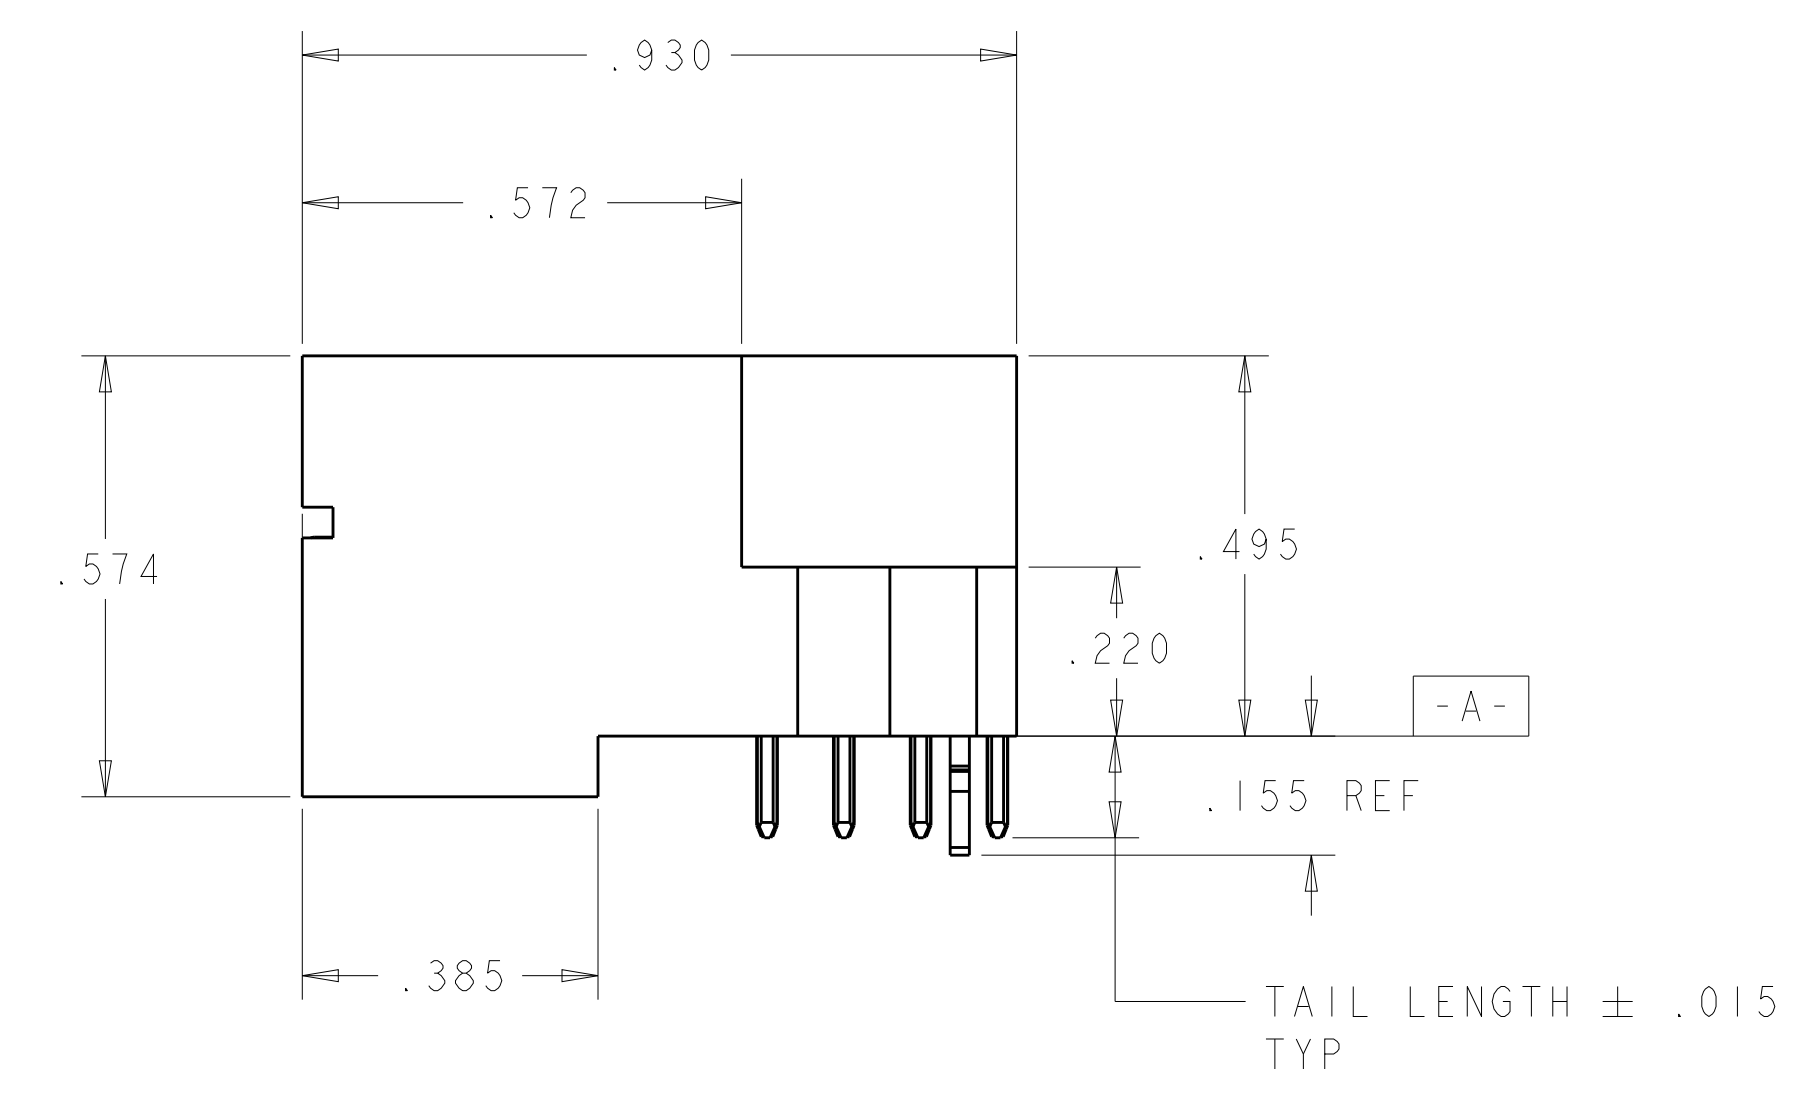

- 1 "AMP", PART NUMBER AND DATE CODE TO BE MARKED IN AREA SHOWN PARTS UNDER 2.00" LONG MAY BE MARKED ON BOTH SIDES
- 2 MATERIAL:
HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, UL94 V-0
SIGNAL CONTACT - COPPER ALLOY
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- 3 CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA OF SIGNAL CONTACTS AND POWER CONTACTS.
- 4 MECHANICAL CONNECTOR KEEP OUT ZONE
- 5 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 6 PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES
- 7 PCB - 0.0453 ± .0010 DRILLED HOLES PLATED WITH .0003 MIN Sn OVER .001 TO .003 Cu PLATING TO ACHIEVE A .040 ± .030 HOLE
- 8 FOR CONFIGURATION "L/P", "P/LP/S", PLEASE REFER TO SHEET 3.
- 9 VARIABLE DIMENSIONS PLEASE SEE PART TABLE.

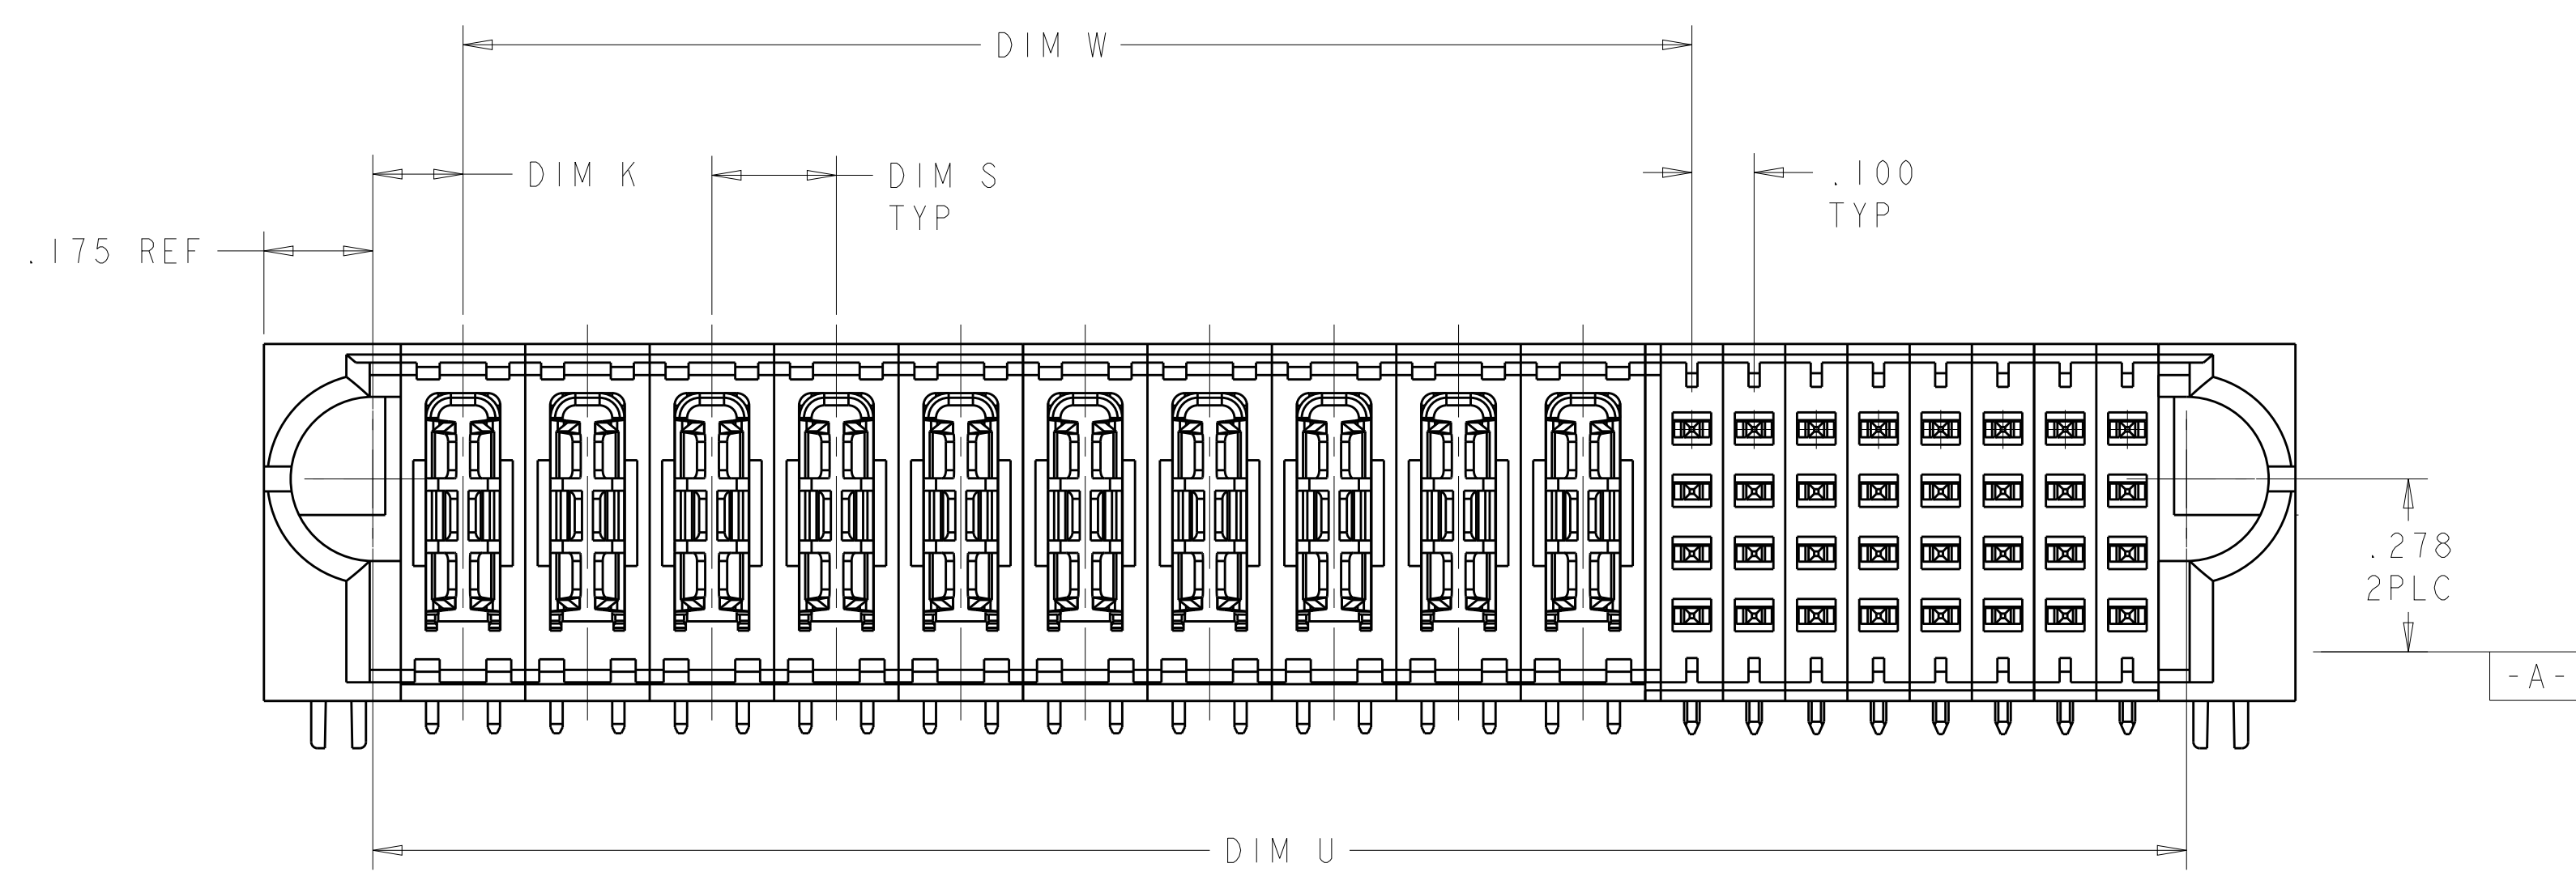

THIS DRAWING IS A CONTROLLED DOCUMENT. DWN H.LIU 27MAY2008
 CHK S.ZHAO 27MAY2008

TE Connectivity

R/A HEADER WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE

108-2292
 APPLICATION SPEC

114-13251
 WEIGHT

A100779C=6450832

CUSTOMER DRAWING SCALE 2:1 SHEET 1 OF 24 REV K6

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY TE CONNECTIVITY ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P.	LTN	DESCRIPTION	DATE	OWN	APVD
		-		SEE SHEET 1			

△9	4.640	4.500	4.290	4.400	2.550	.145	5P + 2HDP + 4P + 64S	5-6450832-9
△9	5.290	5.150	4.940	5.050	4.050	.195	15P + 28S	4-6450832-7
.200	2.965	2.825	2.615	2.725	1.975	.145	10HDP + 20S	4-6450832-6
△9	2.090	1.950	1.740	1.850	1.000	.145	5HDP + 24S	4-6450832-5
.200	1.990	1.850	1.640	1.750	.975	.170	5HDP + 20S	4-6450832-4
△9	3.790	3.650	3.440	3.550	2.625	.170	12P + 24S	4-6450832-3
.250	3.240	3.100	2.890	3.000	1.925	.170	8P + 32S	4-6450832-2
.250	3.240	3.100	2.890	3.000	1.925	.170	8P + 32S	4-6450832-1
.350	1.565	1.325	1.215	1.425	.975	.145	3P + 4S	4-6450832-0
.250	3.040	2.900	2.690	2.800	1.925	.170	8HDP + 24S	3-6450832-9
△9	2.965	2.825	2.615	2.725	1.825	.195	3ACP + 4P + 24S	3-6450832-8
△9	5.290	5.150	4.940	5.050	4.050	.195	15P + 28S	3-6450832-6
.200	1.990	1.850	1.640	1.750	.975	.170	5HDP + 20S	3-6450832-5
.250	3.090	2.950	2.740	2.850	1.950	.170	8P + 24S	3-6450832-4
△9	4.640	4.500	4.290	4.400	2.550	.145	5P + 2HDP + 4P + 64S	3-6450832-3
.200	3.265	3.125	2.915	3.025	2.175	.145	11HDP + 24S	3-6450832-2
.115 △8	.945	.805	.595	.705	.2725 △8	.1025 △8	2LP + 8S	3-6450832-1
.375	2.240	2.100	1.890	2.000	1.500	.170	4ACP + 8S	3-6450832-0
.200	3.265	3.125	2.915	3.025	2.175	.145	11HDP + 24S	2-6450832-8
.200	3.065	2.925	2.715	2.825	1.975	.145	10HDP + 24S	2-6450832-7
.200	2.240	2.100	1.890	2.000	1.150	.145	6HDP + 24S	2-6450832-6
△8	2.420	2.280	2.070	2.180	1.330	.145	5P + 2LP + 24S	2-6450832-5
△8	3.065	2.925	2.715	2.825	1.525	.195	4P + 40S	2-6450832-4
△8	4.015	3.875	3.665	3.775	3.075	.195	3ACP + 9P + 16S	2-6450832-3
.250	2.415	2.275	2.065	2.175	1.425	.145	6P + 20S	2-6450832-2
△8	2.420	2.280	2.070	2.180	1.330	.145	5P + 2LP + 24S	2-6450832-0
.250	3.790	3.650	3.440	3.550	2.675	.170	11P + 24S	1-6450832-9
△8	3.740	3.600	3.390	3.500	2.625	.170	3ACP + 8P + 24S	1-6450832-7
△8	3.790	3.650	3.440	3.550	2.700	.145	13P + 24S	1-6450832-6
.250	1.490	1.350	1.140	1.250	.675	.170	3P + 12S	1-6450832-4
.250	1.565	1.425	1.215	1.325	.425	.170	2P + 24S	1-6450832-2
.250	3.790	3.650	3.440	3.550	2.900	.145	12P + 16S	1-6450832-0
△8	1.590	1.450	1.240	1.350	.650	.170	2P + 8S	6450832-9
.115 △8	.970	.830	.620	.730	.2725 △8	.1275 △8	2LP + 8S	6450832-8
△8	3.740	3.600	3.390	3.500	2.625	.170	3ACP + 8P + 24S	6450832-7
.200	3.065	2.925	2.715	2.825	1.975	.145	10HDP + 24S	6450832-5
.200	3.065	2.925	2.715	2.825	1.975	.145	10HDP + 24S	6450832-4
.250	2.565	2.425	2.215	2.325	1.425	.170	6P + 24S	6450832-3
△8	2.575	2.435	2.225	2.335	1.460 △8	.170 △8	4P + 4LP + 24S	6450832-2
.200	3.265	3.125	2.915	3.025	1.975	.145	10HDP + 32S	6450832-1
DIM S	DIM L	DIM V	DIM U	DIM D	DIM W	DIM K	DESCRIPTION	PART NUMBER

Ⓜ VIEW IN SHEET 6

THIS DRAWING IS A CONTROLLED DOCUMENT. DWN 27MAY2008
 CHK H. LIU
 S. ZHAO 27MAY2008

TE Connectivity


NAME R/A HEADER WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY
 PRODUCT SPEC 108-2292
 APPLICATION SPEC MULTI-BEAM XLE

SIZE 114-13251
 CAGE CODE 6450832
 DRAWING NO. 100779


RESTRICTED TO

CUSTOMER DRAWING SCALE 4:1 SHEET 2 OF 24 REV K6

LOC		DIST		REVISIONS			
P	LTN	DESCRIPTION	DATE	DMN	APVD		
-		SEE SHEET 1	-	-	-		

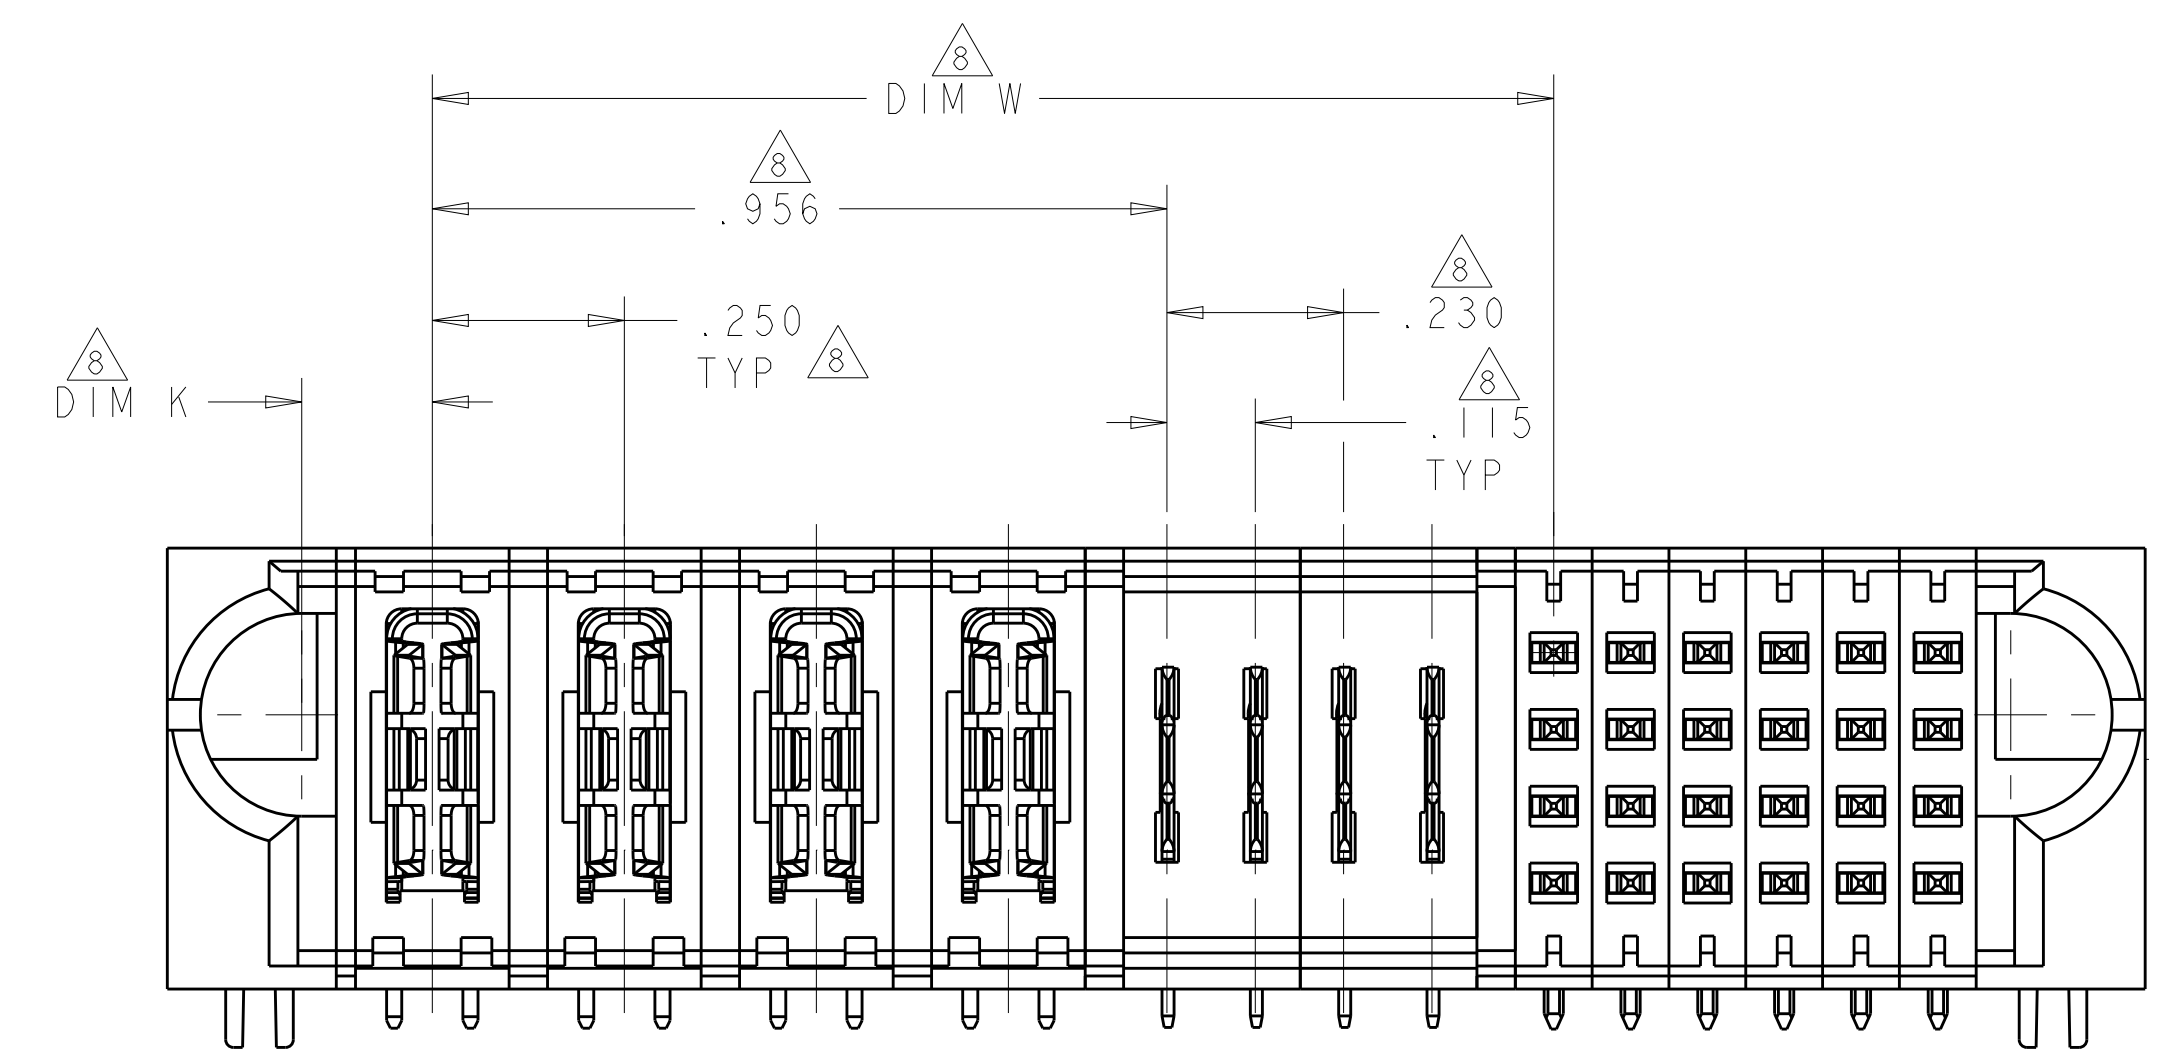

FOR P/N:6450832-2, OTHER DIMENSIONS PLEASE SEE TABLE

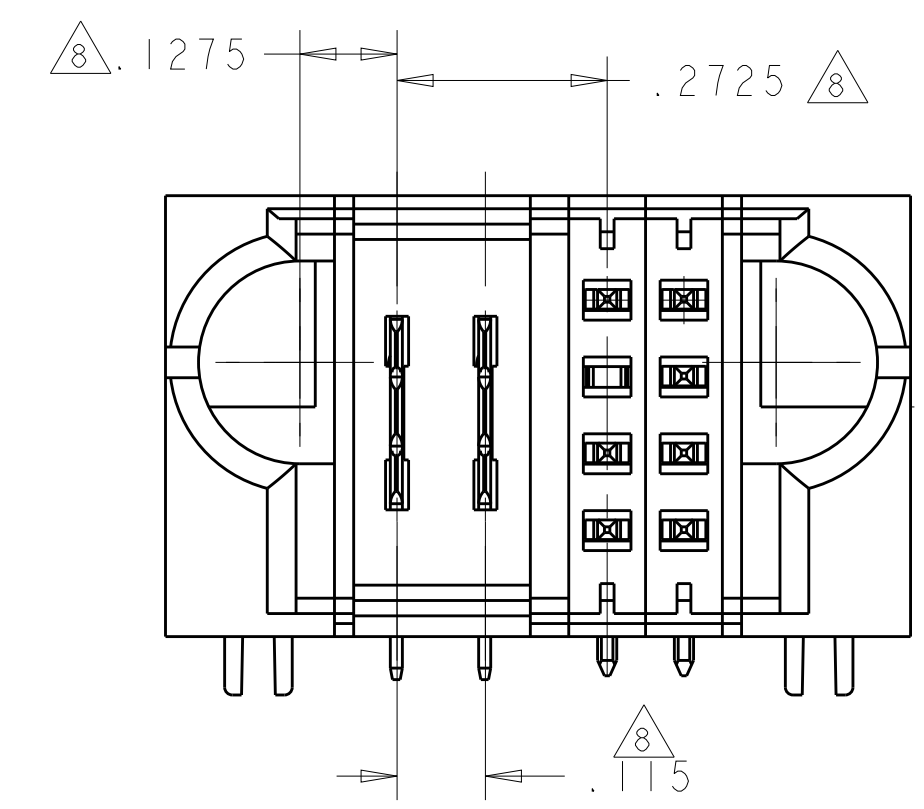


FOR P/N:6450832-8 AND 3-6450832-1, OTHER DIMENSIONS PLEASE SEE SHEET 1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DMN H. LIU 27MAY2008	
		CHK S. ZHAO 27MAY2008	
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD S. ZHAO	NAME R/A HEADER WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE
INCHES	0 PLC ±. 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020	PRODUCT SPEC 108-2292	SIZE A100779
	ANGLES M7°	APPLICATION SPEC 114-13251	DRAWING NO C=6450832
MATERIAL	FINISH	WEIGHT	RESTRICTED TO
		CUSTOMER DRAWING	SCALE 4:1 SHEET 3 OF 24 REV K6

LOC		DIST		REVISIONS			
P	LTN	DESCRIPTION	DATE	DMN	APVD		
-	-	SEE SHEET 1	-	-	-	-	-

PART NUMBER	ROWS	POWER										SIGNAL							
		P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	1	2	3	4	5	6	7	8
6450832-1	D C B A	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	J	J	J	J	J	J	J	J
		TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	K	K	K	K	K	K	K	K
		TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	N	N	N	N	N	G	N	N
		TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	S	S	S	S	S	S	S	S
10HDP + 32S		HD		HD		HD		HD		HD		HD		HD		HD		HD	

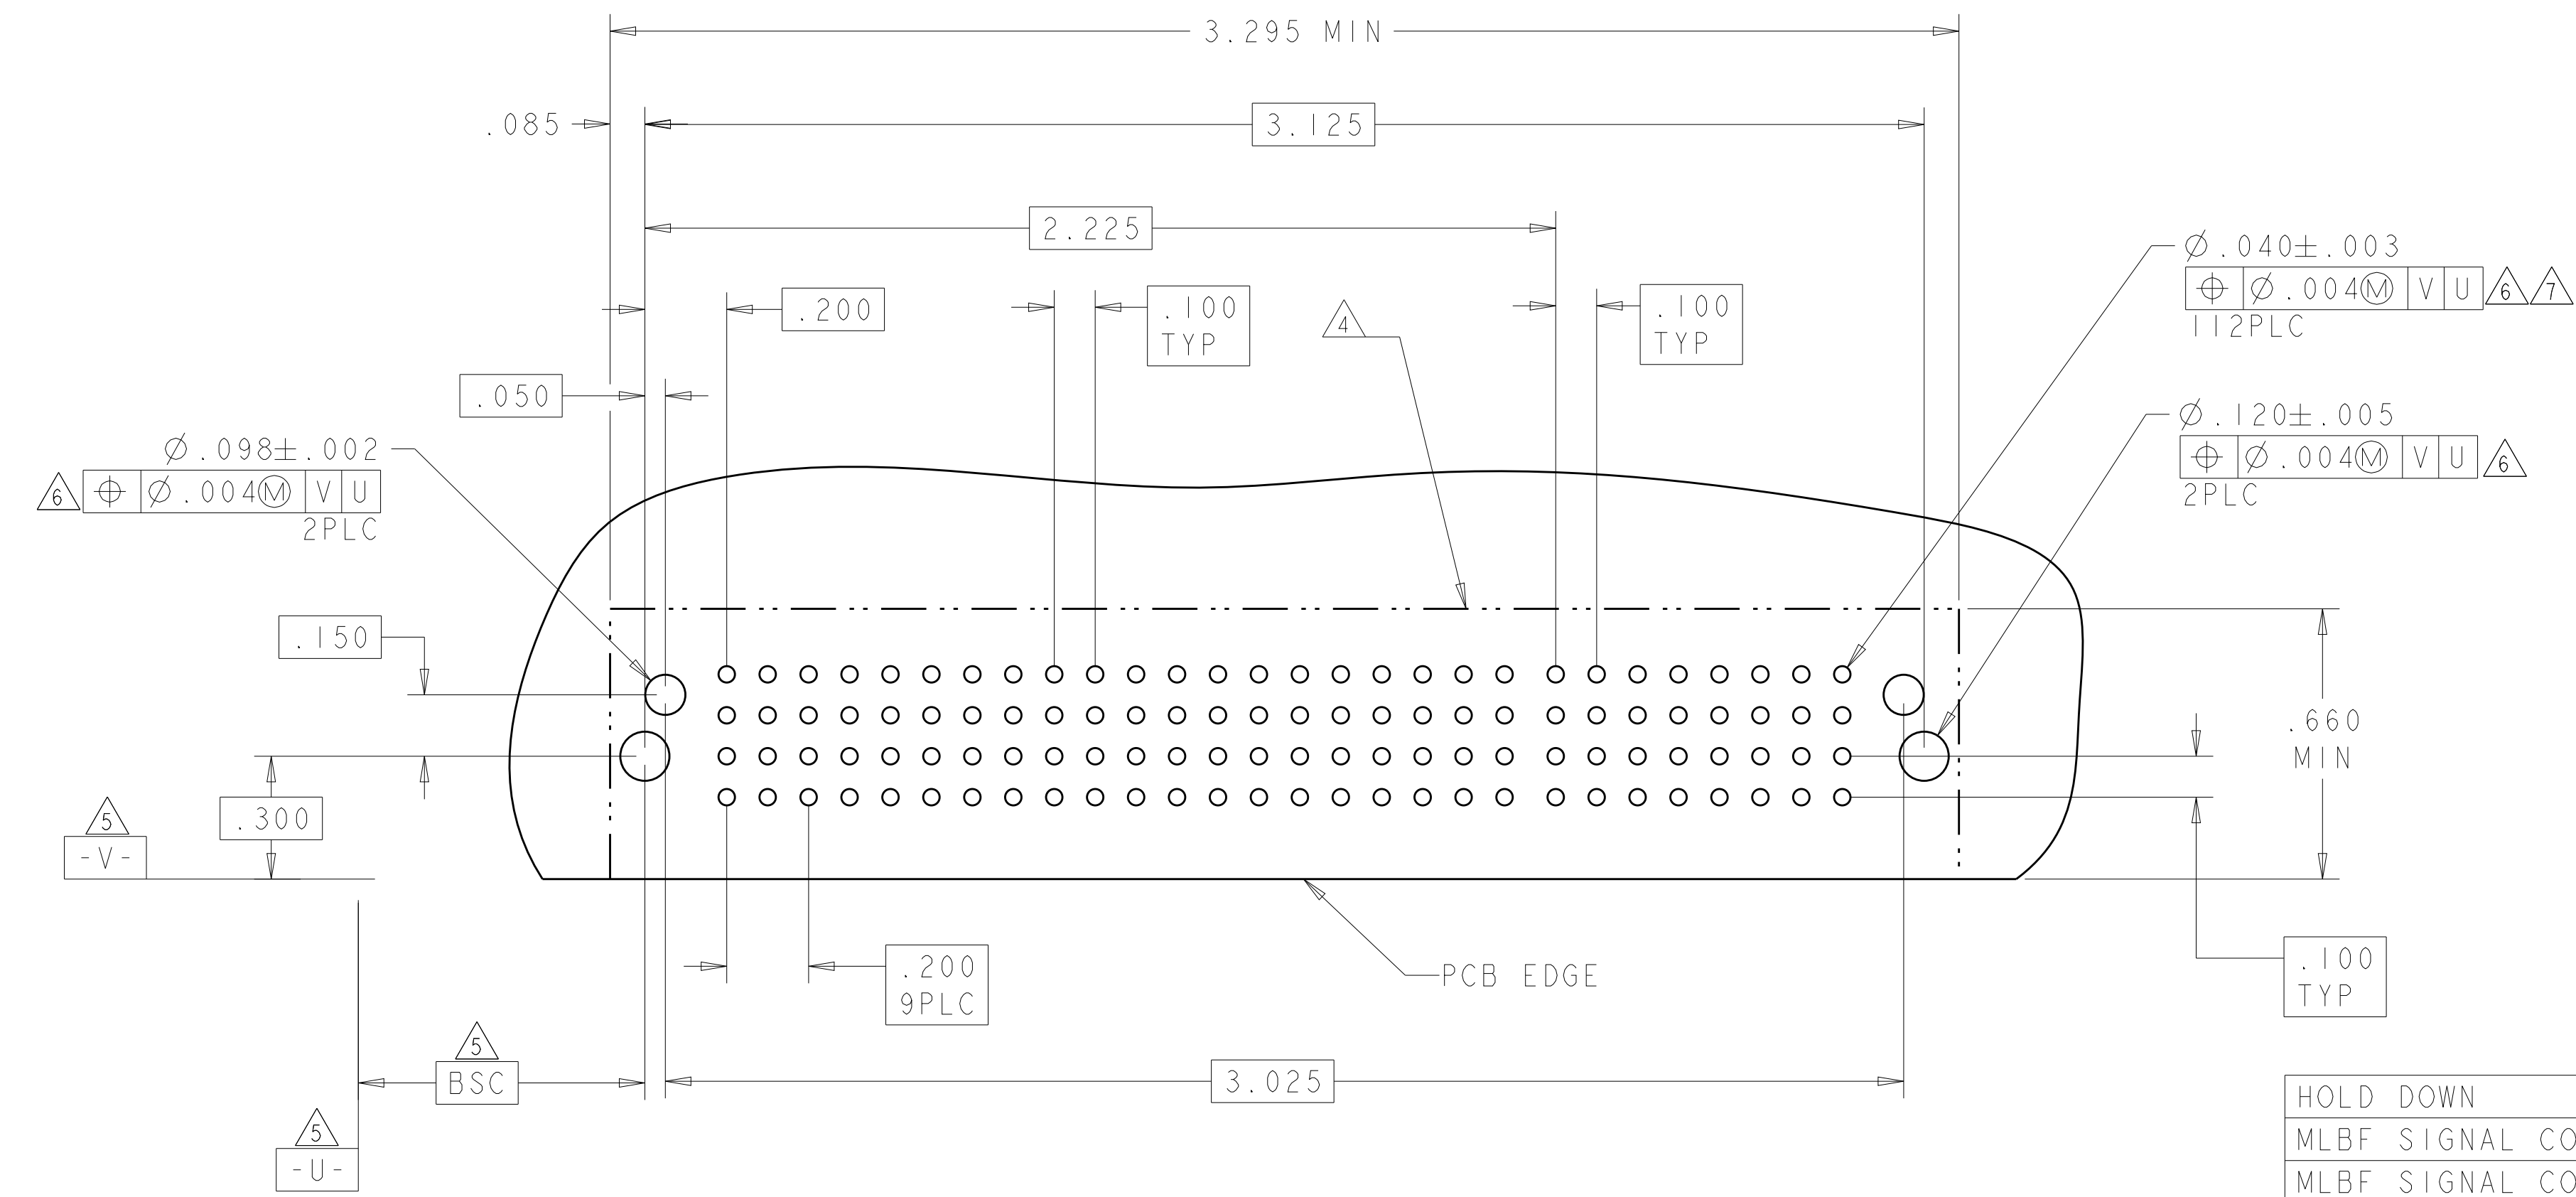



DESCRIPTION	IDENTIFIER
HOLD DOWN	HD
MLBF SIGNAL CONTACT, .135 TAIL LENGTH, ROW D	E
MLBF SIGNAL CONTACT, .135 TAIL LENGTH, ROW C	F
MLBF SIGNAL CONTACT, .135 TAIL LENGTH, ROW B	G
MLBF SIGNAL CONTACT, .135 TAIL LENGTH, ROW A	H
MFBL SIGNAL CONTACT, .135 TAIL LENGTH, ROW D	FJ
MFBL SIGNAL CONTACT, .135 TAIL LENGTH, ROW C	FK
MFBL SIGNAL CONTACT, .135 TAIL LENGTH, ROW B	FN
MFBL SIGNAL CONTACT, .135 TAIL LENGTH, ROW A	FS
STANDARD SIGNAL CONTACT, .135 TAIL LENGTH, ROW D	J
STANDARD SIGNAL CONTACT, .135 TAIL LENGTH, ROW C	K
STANDARD SIGNAL CONTACT, .135 TAIL LENGTH, ROW B	N
STANDARD SIGNAL CONTACT, .135 TAIL LENGTH, ROW A	S
MFBL LOWER POWER CONTACT, .135 TAIL LENGTH.	LMF
STD LOWER POWER CONTACT, .135 TAIL LENGTH	LM
3-BEAM POWER CONTACT, .135 TAIL LENGTH	TM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DMN	H.LIU	27MAY2008
DIMENSIONS:		CHK	S.ZHAO	27MAY2008
INCHES		APVD	S.ZHAO	-
TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	R/A HEADER WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE	
0 PLC	±	PRODUCT SPEC	108-2292	
1 PLC	±.01	APPLICATION SPEC	114-13251	
2 PLC	±.005	SIZE	A100779	
3 PLC	±.0020	CAGE CODE	C=6450832	
4 PLC	±.0020	DRAWING NO	114-13251	
ANGLES	±.0020	WEIGHT	-	
FINISH	±.0020	CUSTOMER DRAWING	SCALE 4:1 SHEET 4 OF 24 REV K6	

LOC	DIST	REVISIONS			
P	LTM	DESCRIPTION	DATE	DMN	APVD
-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS	POWER								SIGNAL							
		P1	P2	P3	P4	P5	P6	P7	P8	1	2	3	4	5	6		
6450832-2	D	TM	TM	TM	TM	LM	LM	LM	LM	J	J	J	J	J	J		
	C	TM	TM	TM	TM	LM	LM	LM	LM	K	K	K	K	K	K		
	B	TM	TM	TM	TM	LM	LM	LM	LM	N	N	N	N	N	N		
	A	TM	TM	TM	TM	LM	LM	LM	LM	S	S	S	S	S	S		
		HD									HD						
		4P + 4LP + 24S															

PART NUMBER	ROWS	POWER						SIGNAL							
		P1	P2	P3	P4	P5	P6	1	2	3	4	5	6		
6450832-3	D	TM	TM	TM	TM	TM	TM	J	J	J	J	J	J		
	C	TM	TM	TM	TM	TM	TM	K	K	K	K	K	K		
	B	TM	TM	TM	TM	TM	TM	N	N	N	N	N	N		
	A	TM	TM	TM	TM	TM	TM	S	S	S	S	S	S		
		HD							HD						
		6P + 24S													

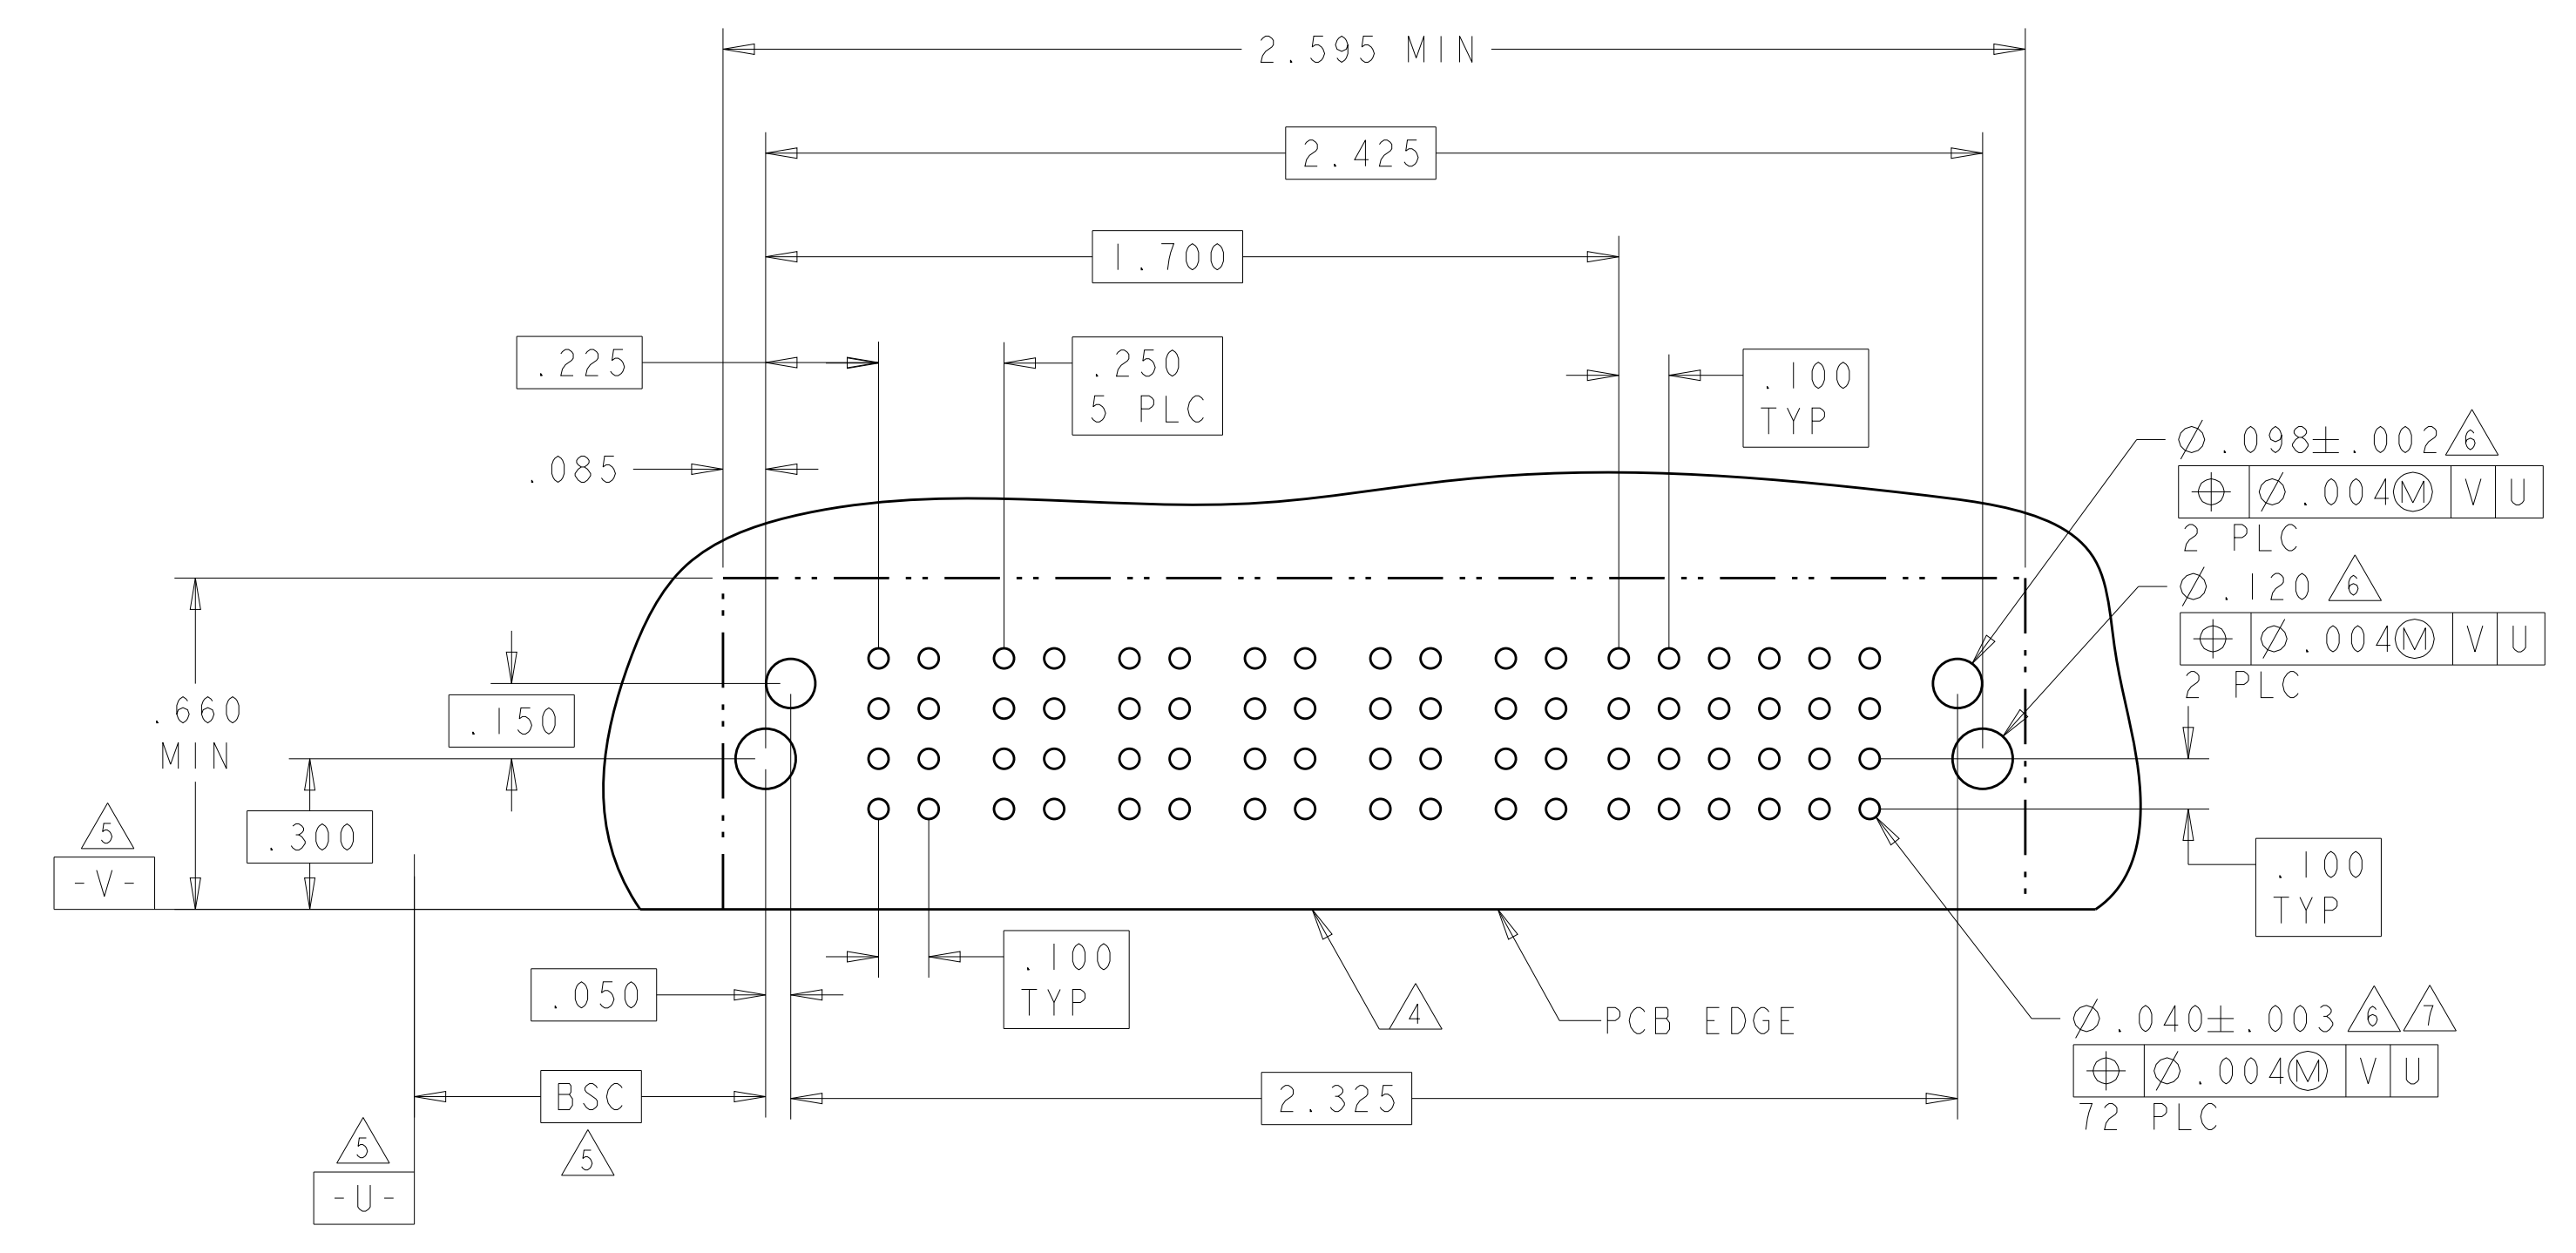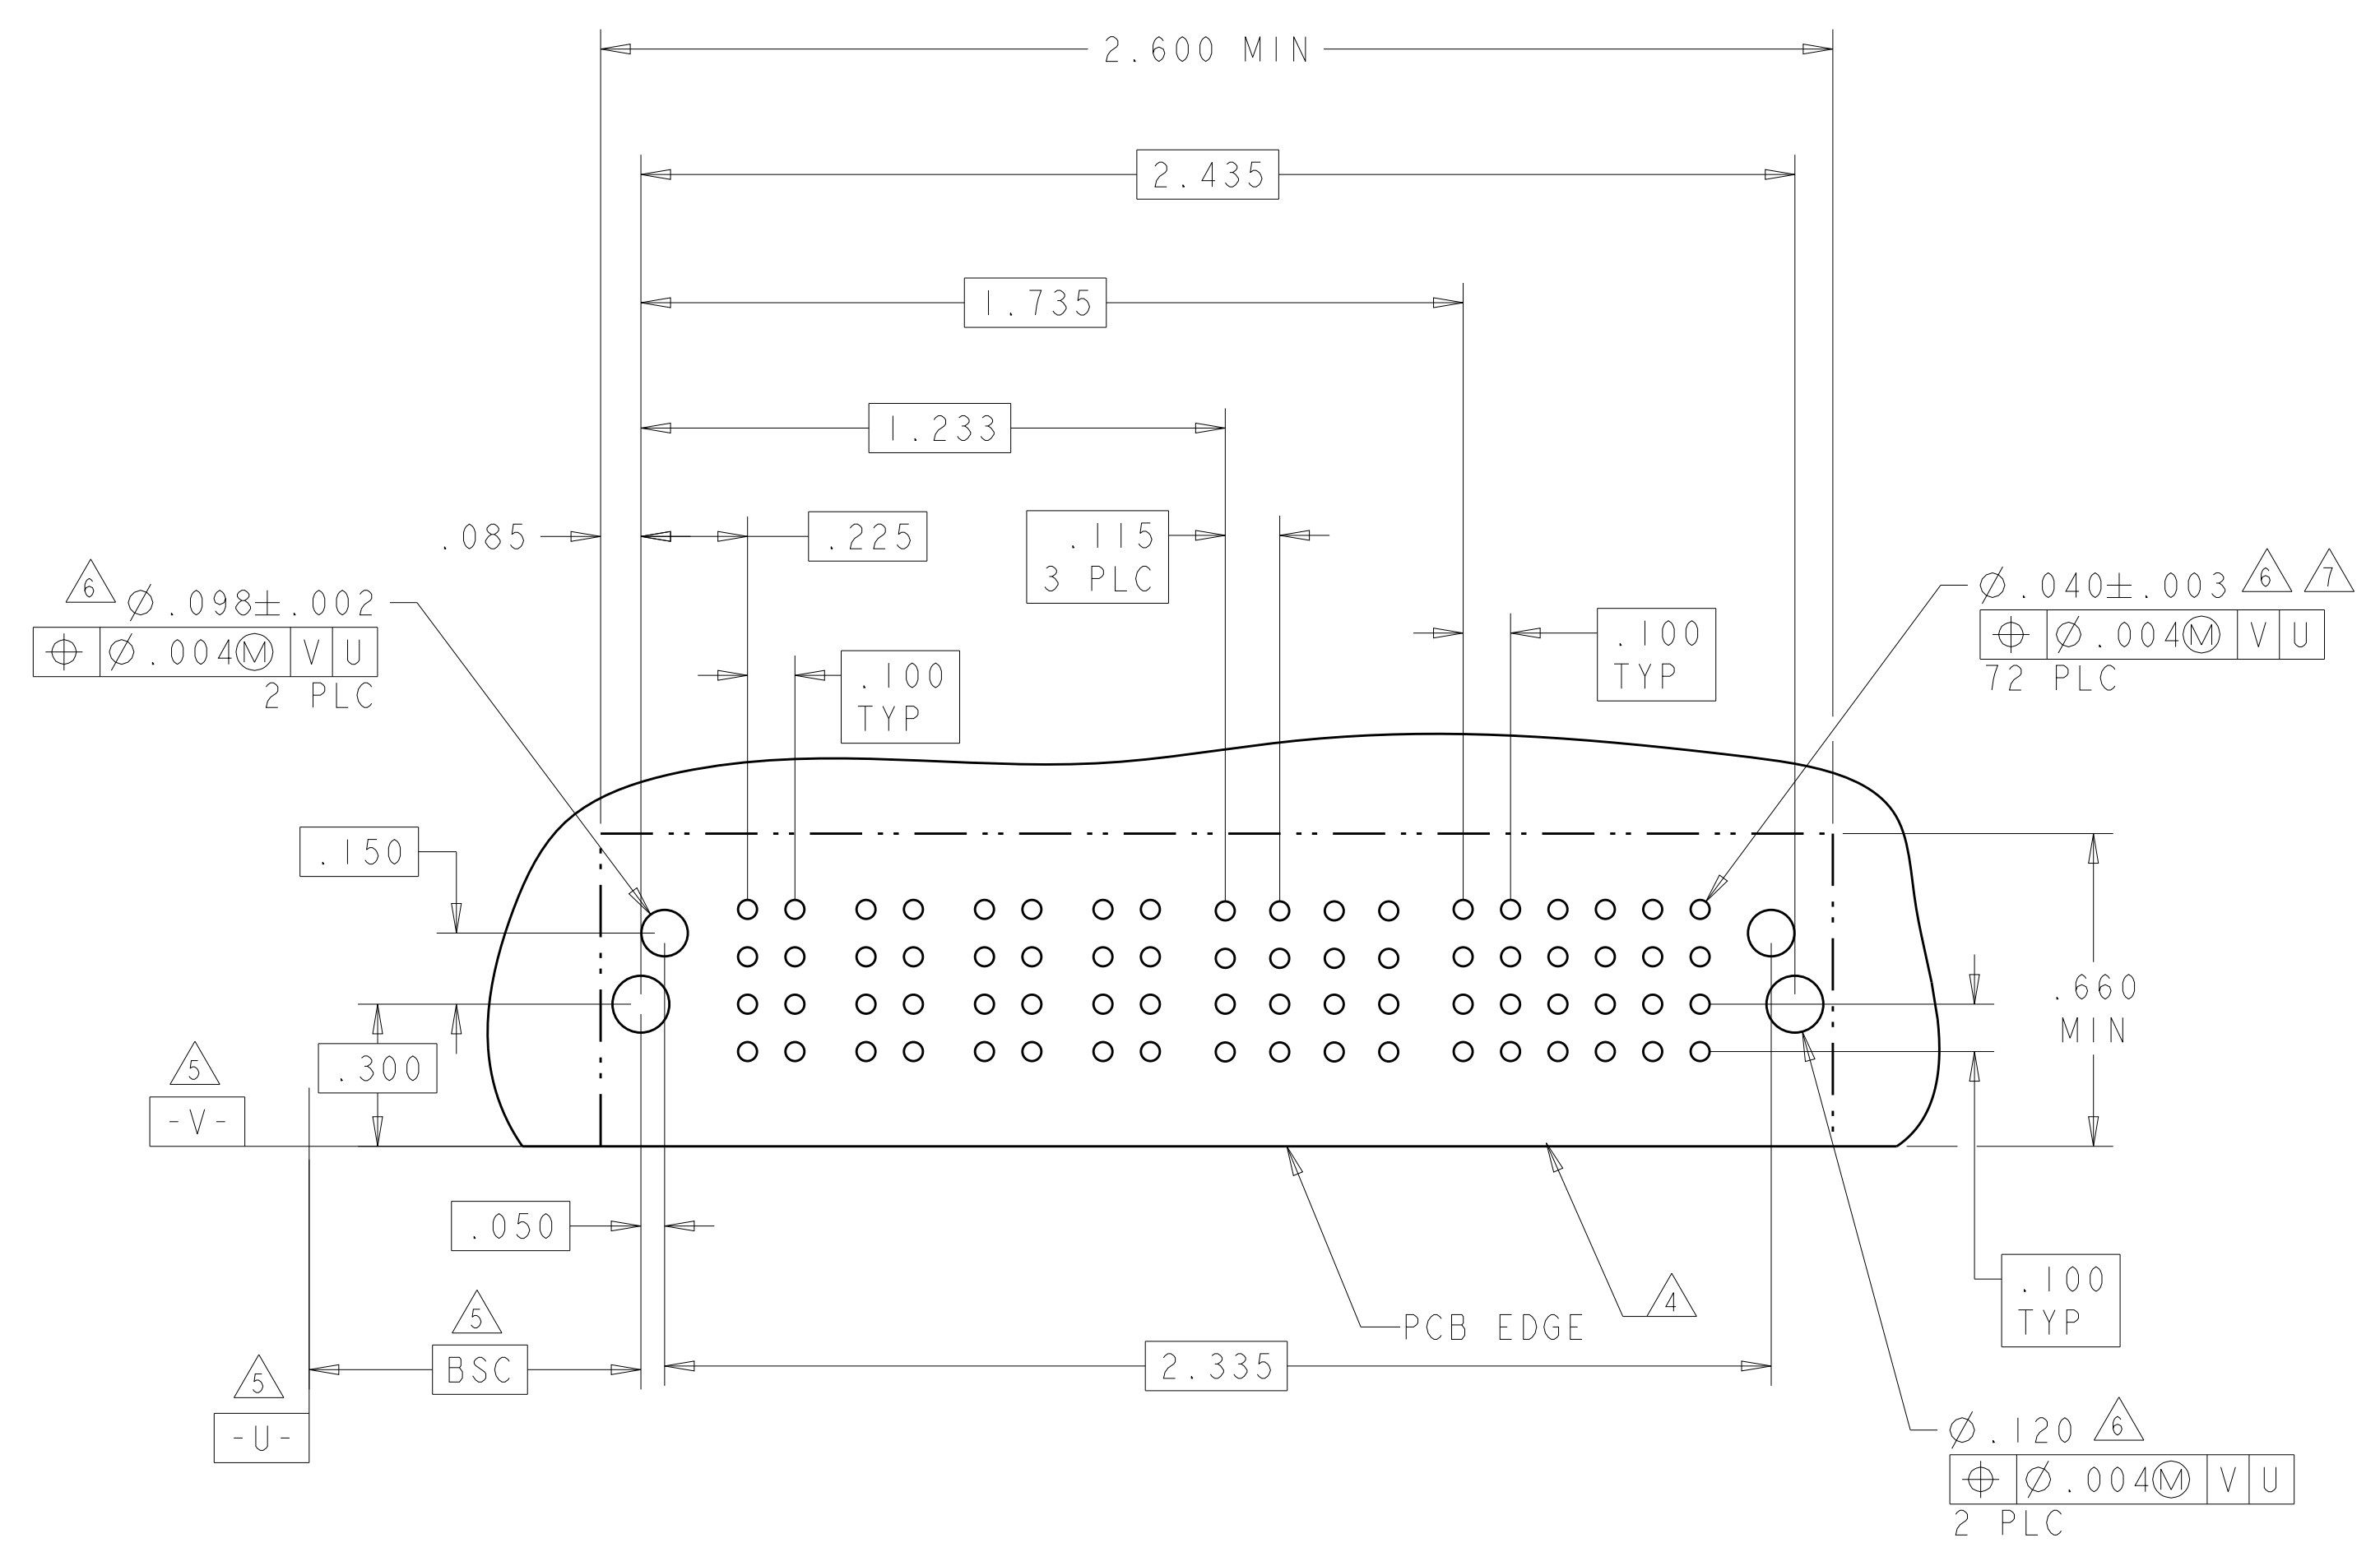



THIS DRAWING IS A CONTROLLED DOCUMENT.		DMN: H.LIU 27MAY2008	STE TE Connectivity
DIMENSIONS: INCHES		CHK: S.ZHAO 27MAY2008	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: S.ZHAO	NAME: R/A HEADER WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE
0 PLC ±.01		PRODUCT SPEC: 108-2292	SIZE: A1
1 PLC ±.01		APPLICATION SPEC: 114-13251	CAGE CODE: C=6450832
2 PLC ±.01		WEIGHT: -	RESTRICTED TO: -
3 PLC ±.01		CUSTOMER DRAWING	SCALE: 4:1
4 PLC ±.005			SHEET: 5 OF 24
5 PLC ±.002			REV: K6
ANGLES: ±0.2°			
FINISH: #2			

LOC	DIST	REVISIONS			
P	LTM	DESCRIPTION	DATE	OWN	APVD
-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS	POWER										SIGNAL					
		P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	1	2	3	4	5	6
6450832-4	D C B A	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	J	J	J	J	J	J
		TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	K	K	K	K	K	K
		TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	N	N	N	N	N	N
10HDP + 24S											H	S	S	S	S	S	

PART NUMBER	ROWS	POWER										SIGNAL					
		P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	1	2	3	4	5	6
6450832-5	D C B A	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	J	J	J	J	J	J
		TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	K	K	K	K	K	K
		TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	N	N	N	N	N	N
10HDP + 24S											H	S	S	S	S	S	

PART NUMBER	ROWS	POWER										SIGNAL					
		P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	1	2	3	4	5	6
2-6450832-7	D C B A	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	J	J	J	J	J	J
		TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	K	K	K	K	K	K
		TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	N	N	N	N	N	N
10HDP + 24S											H	S	S	S	S	S	

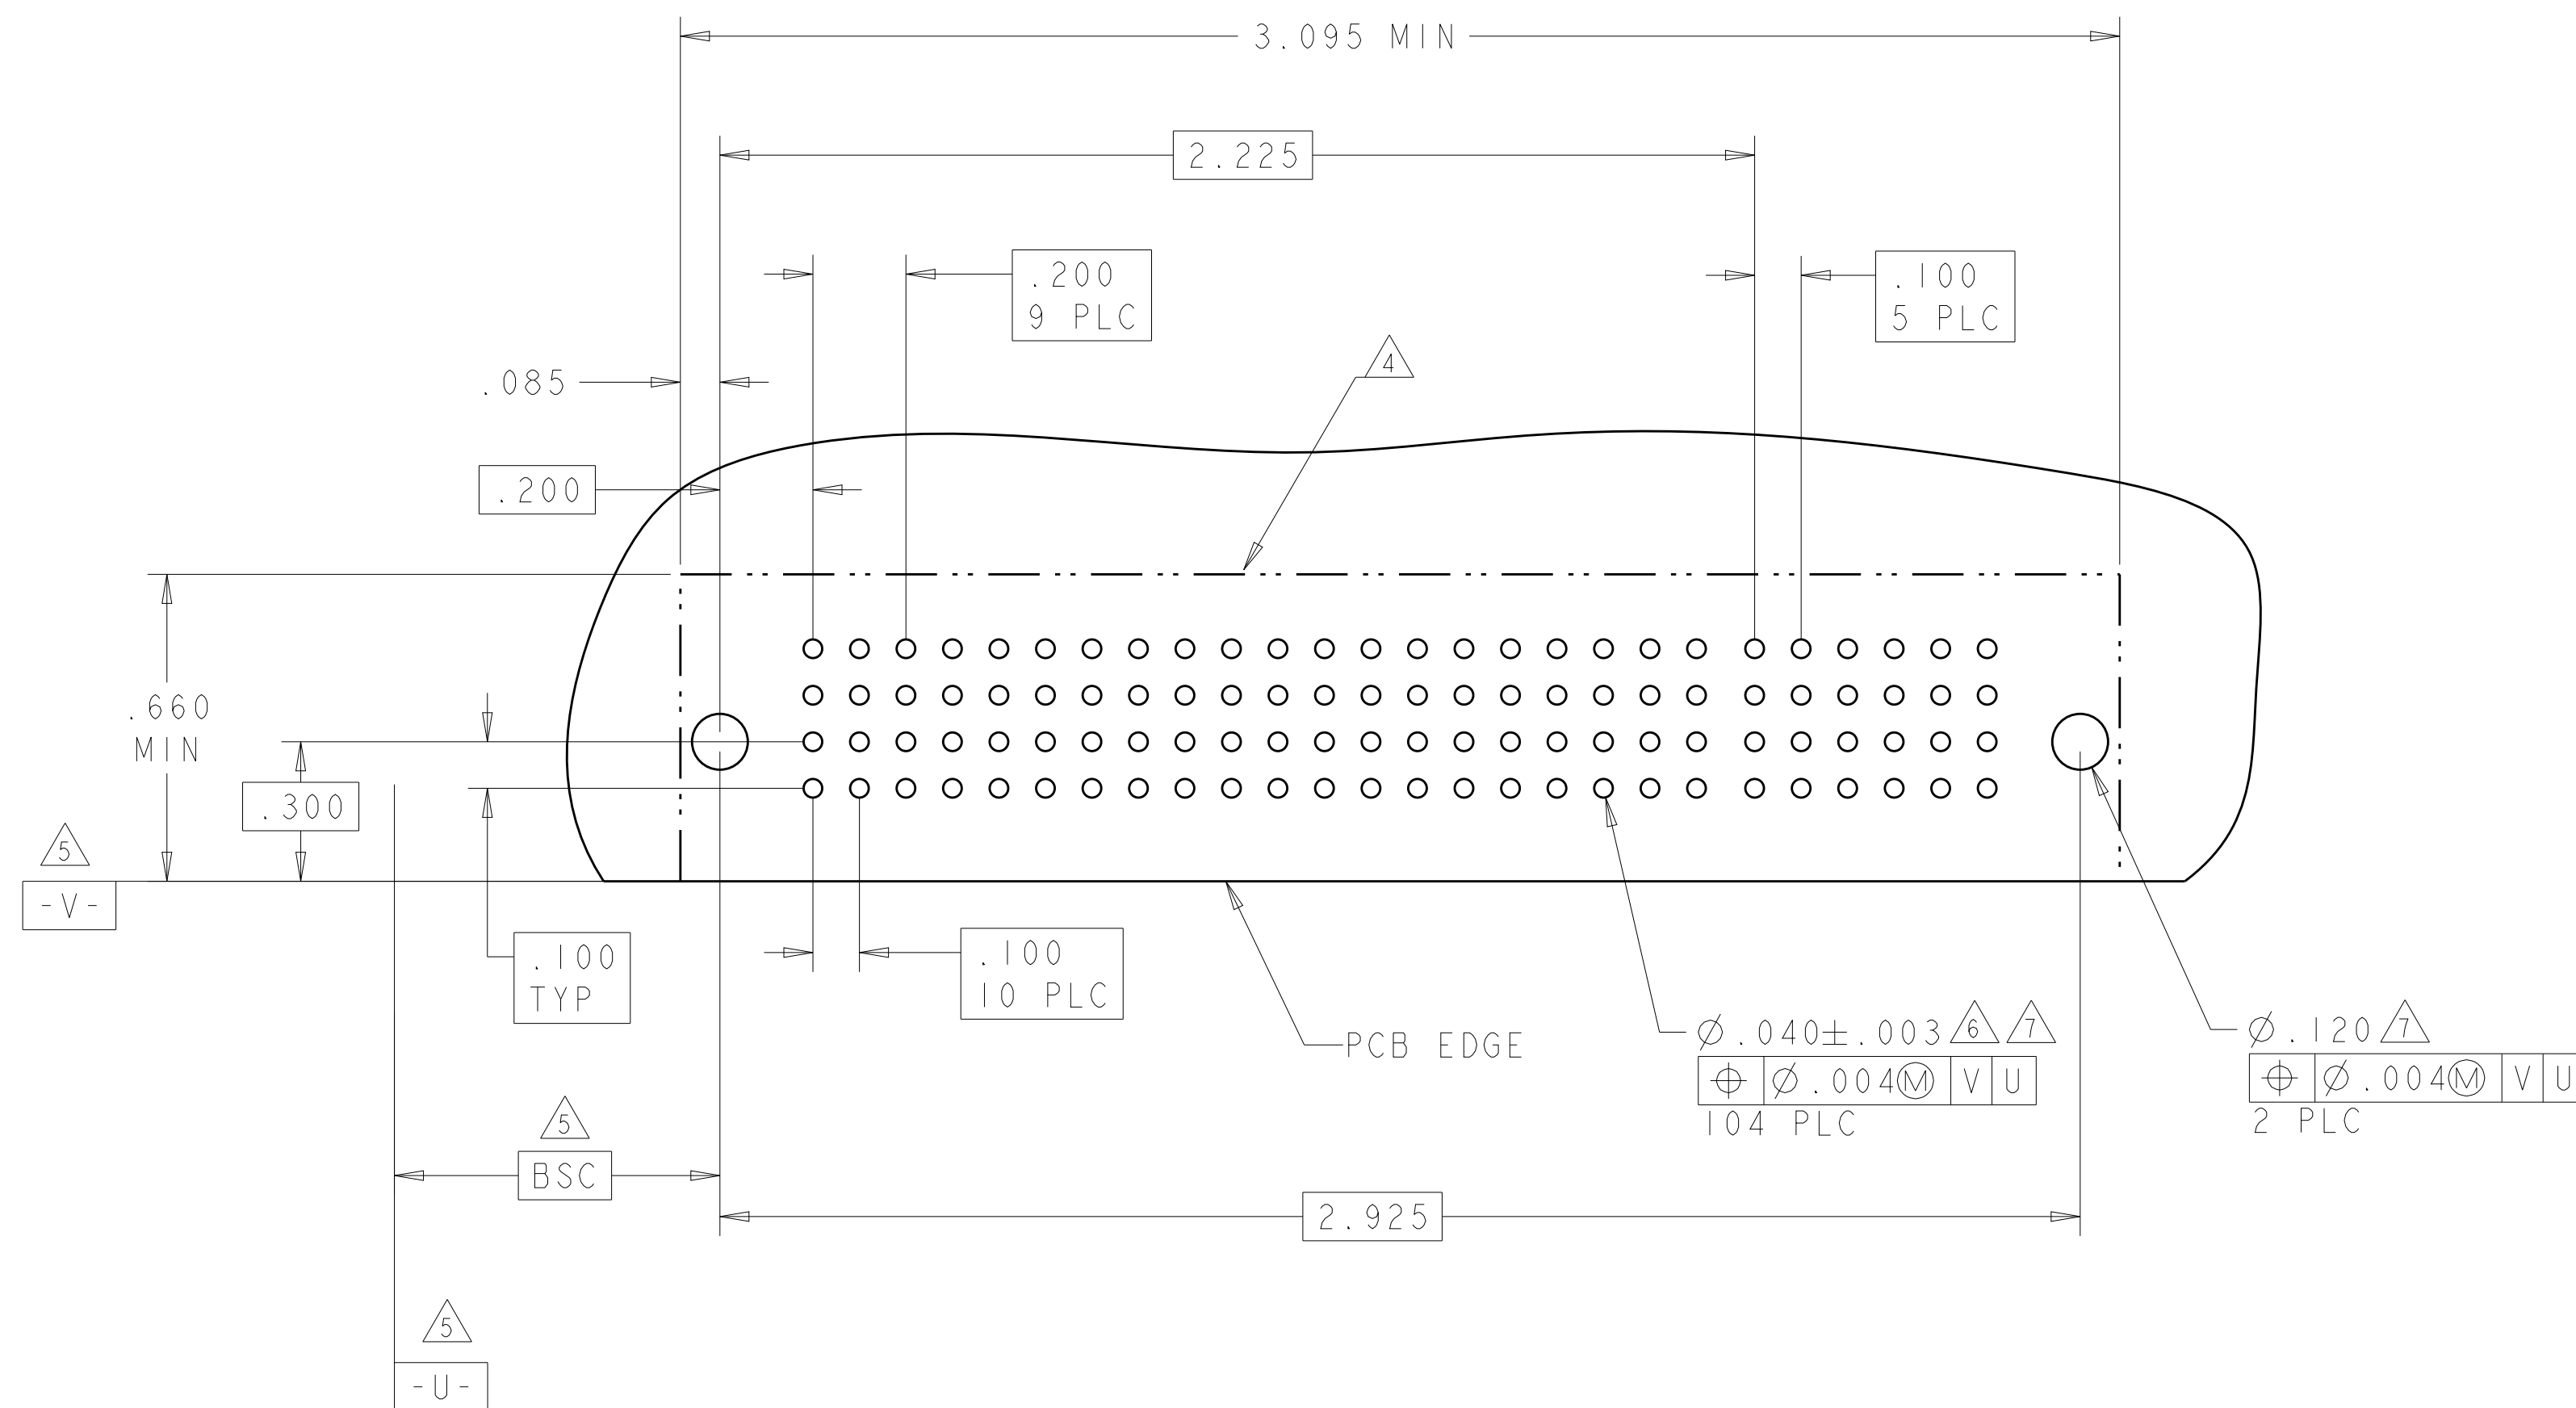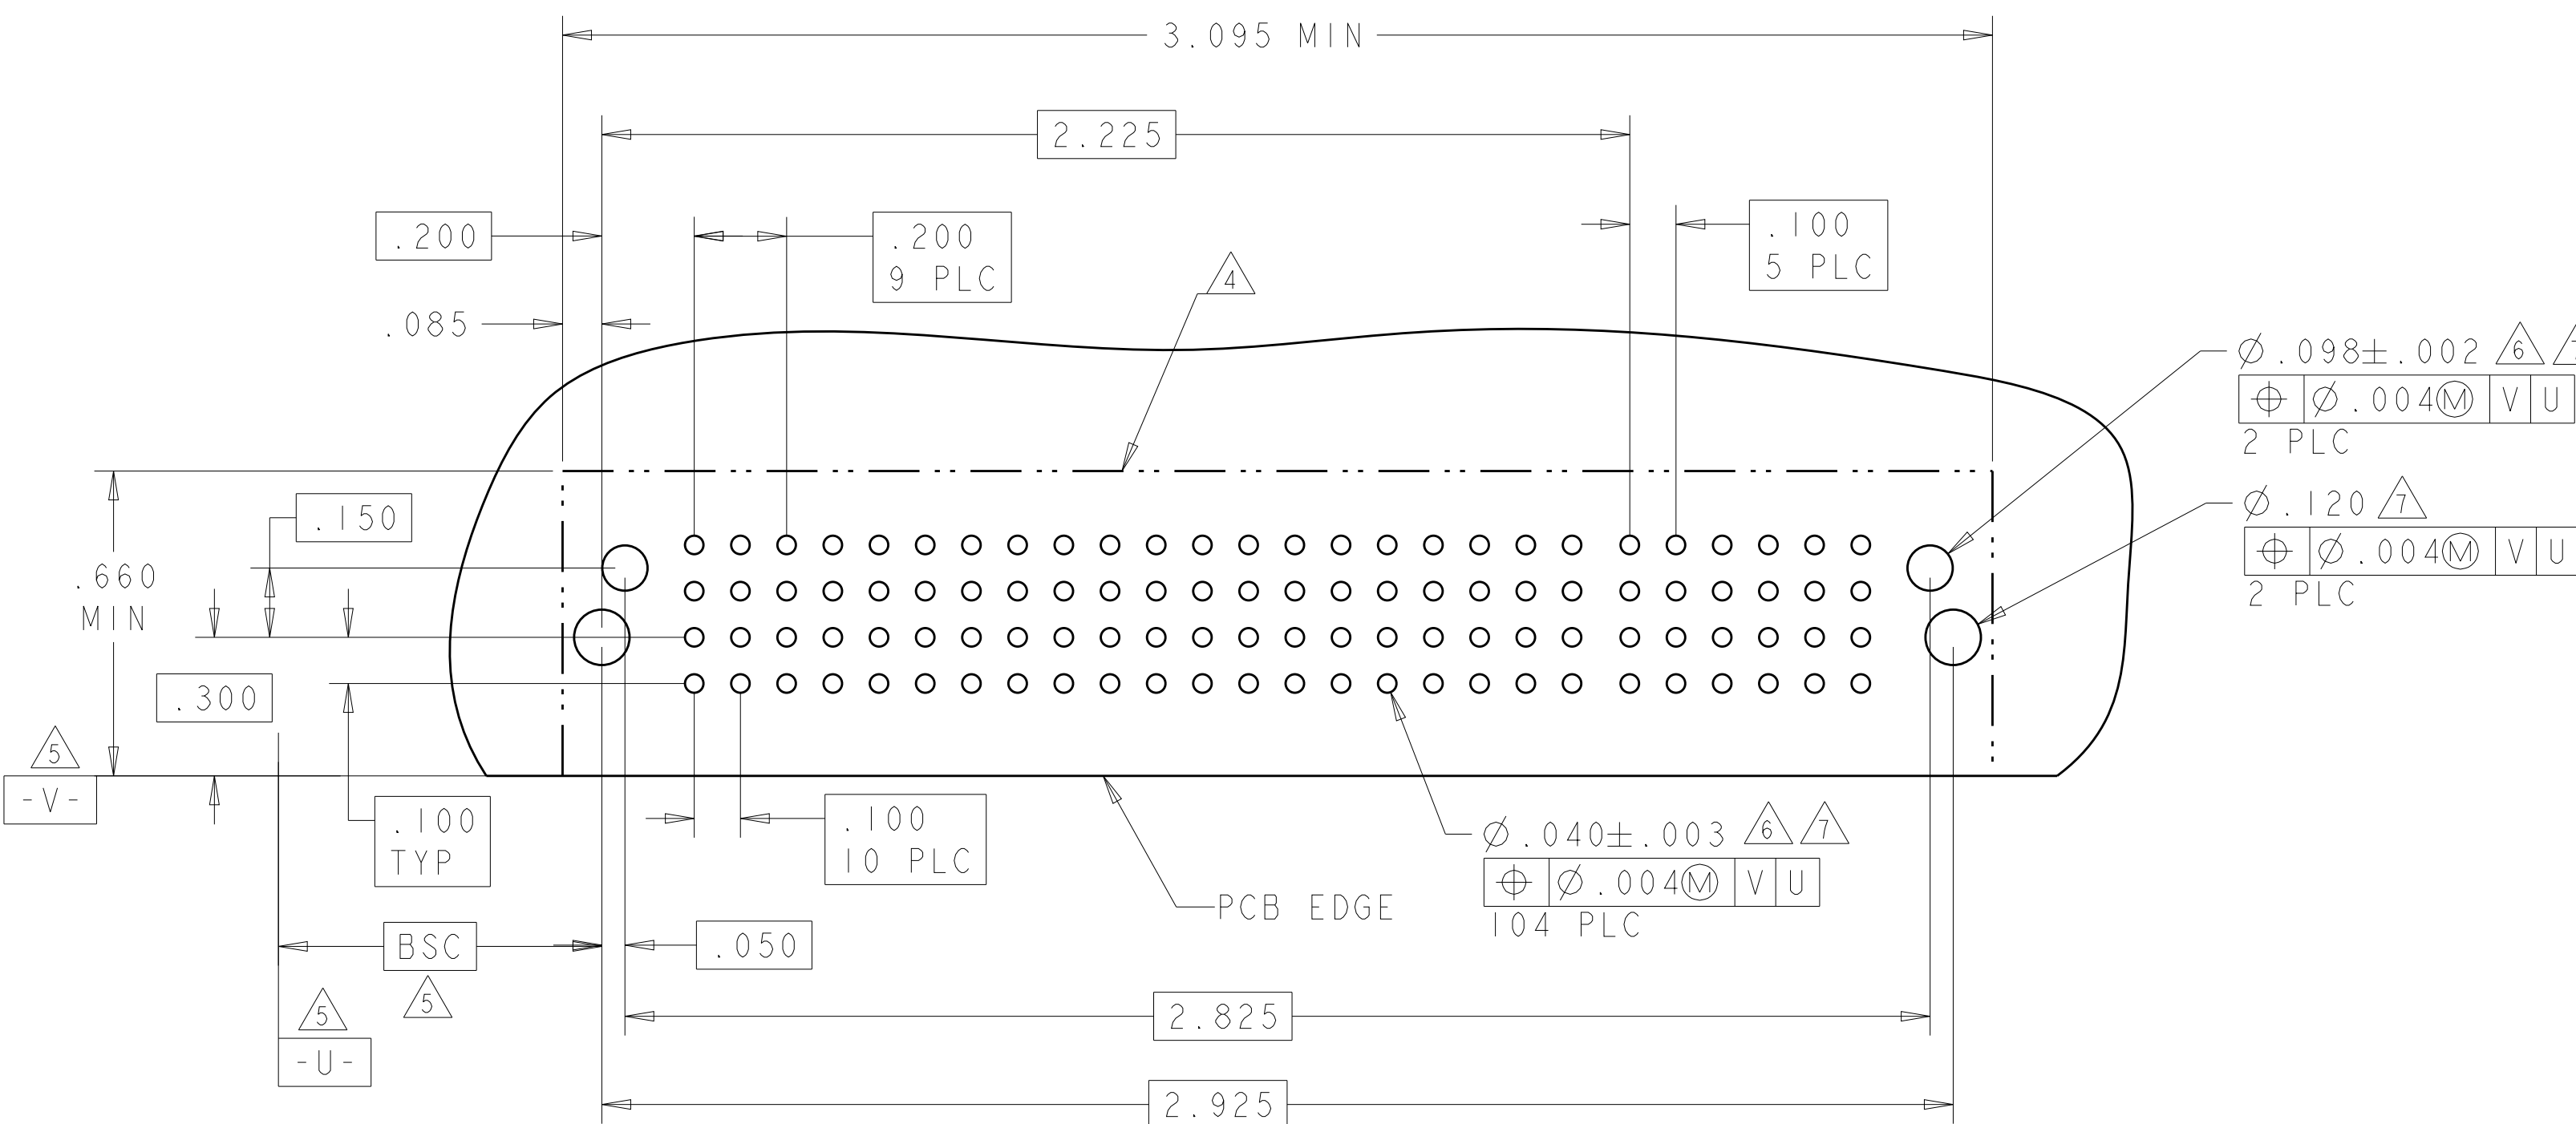

PCB LAYOUT FOR P/N: 6450832-5 AND 2-6450832-7



THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: H. LIU 27MAY2008	TE Connectivity
DIMENSIONS: INCHES		CHK: S. ZHAO 27MAY2008	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: S. ZHAO	NAME: R/A HEADER WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY
0 PLC ±.01		PRODUCT SPEC: 108-2292	MULTI-BEAM XLE
1 PLC ±.01		APPLICATION SPEC: 114-13251	SIZE: CAGE CODE DRAWING NO: A100779C=6450832
2 PLC ±.01		WEIGHT: -	RESTRICTED TO: -
3 PLC ±.005		CUSTOMER DRAWING	SCALE: 4:1 SHEET 6 OF 24 REV: K6
4 PLC ±.002			
ANGLES ±.002			
FINISH: -			

LOC		DIST		REVISIONS			
P	LTN	DESCRIPTION	DATE	OWN	APVD		
-	-	SEE SHEET 1	-	-	-	-	-

PART NUMBER	ROWS	POWER											SIGNAL					
		P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	1	2	3	4	5	6
6450832-7	D C B A	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	E	E	J	J	E	E
		K	F	K	K	K	K	K	K	K	K	K	N	G	G	G	G	G
		S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S

PART NUMBER	ROWS	POWER		SIGNAL	
		P1	P2	1	2
6450832-8	D C B A	LMF	LM	E	E
				F	F
				G	G
				H	H

2LP + 8S

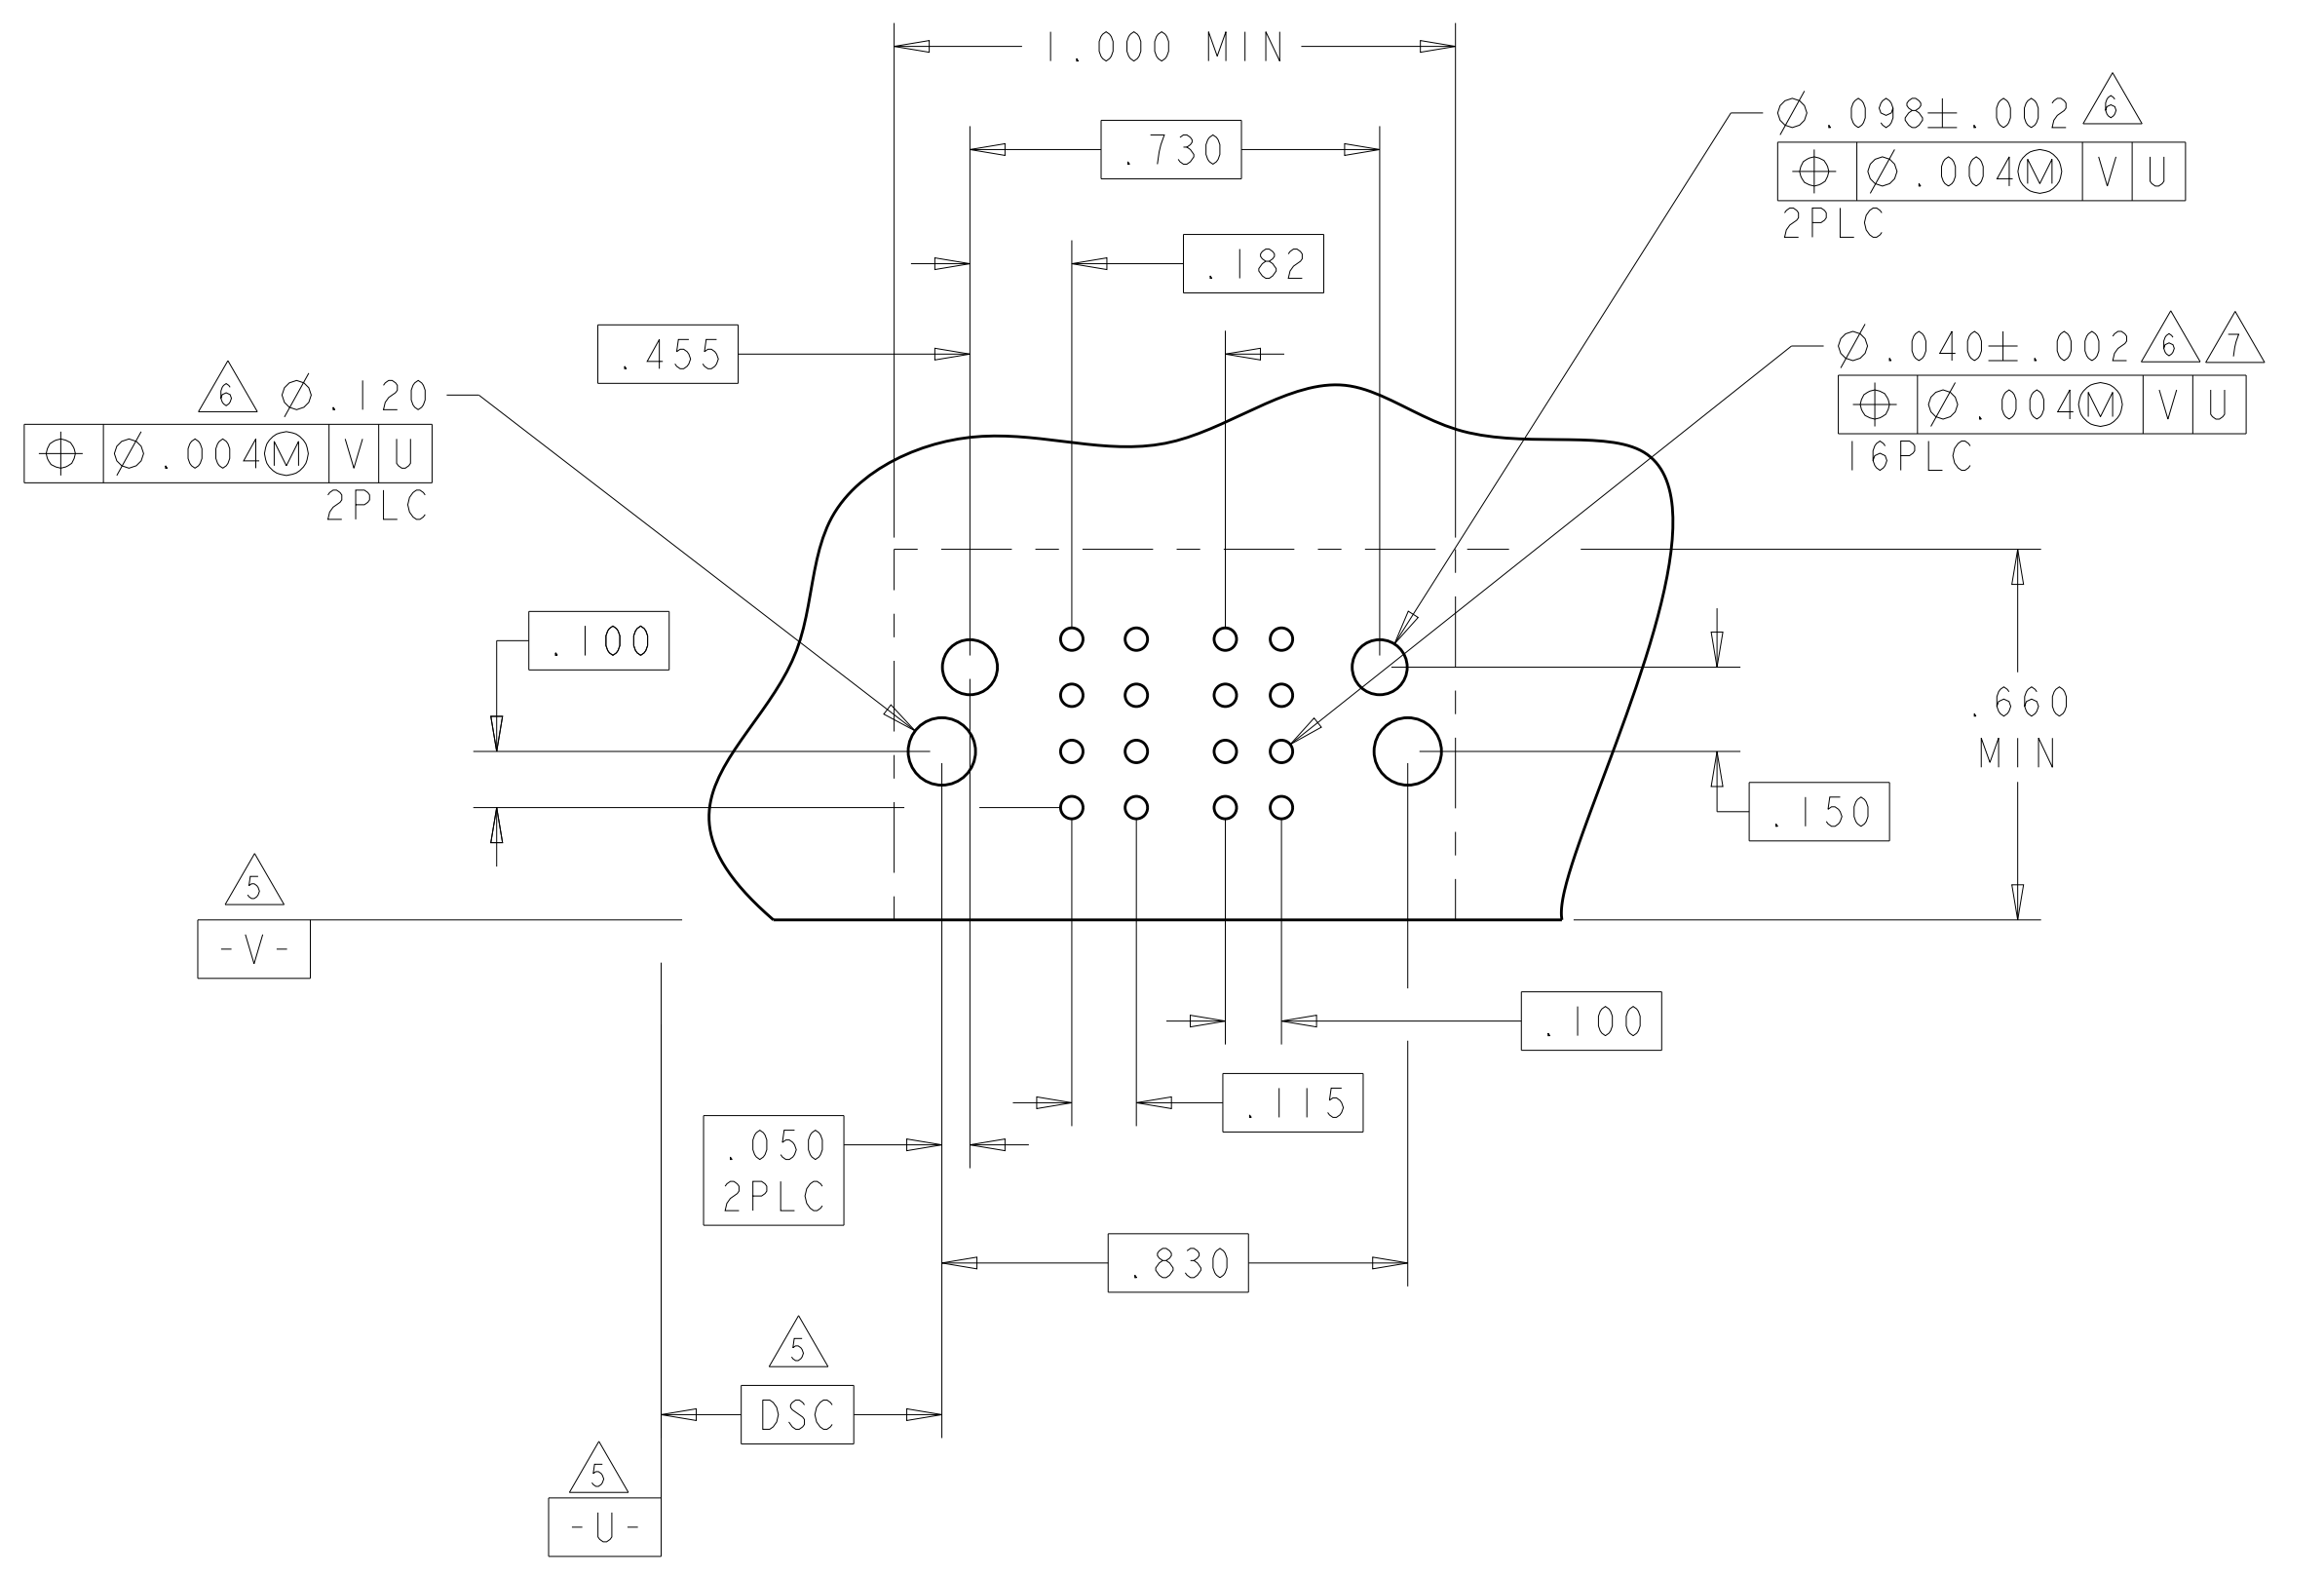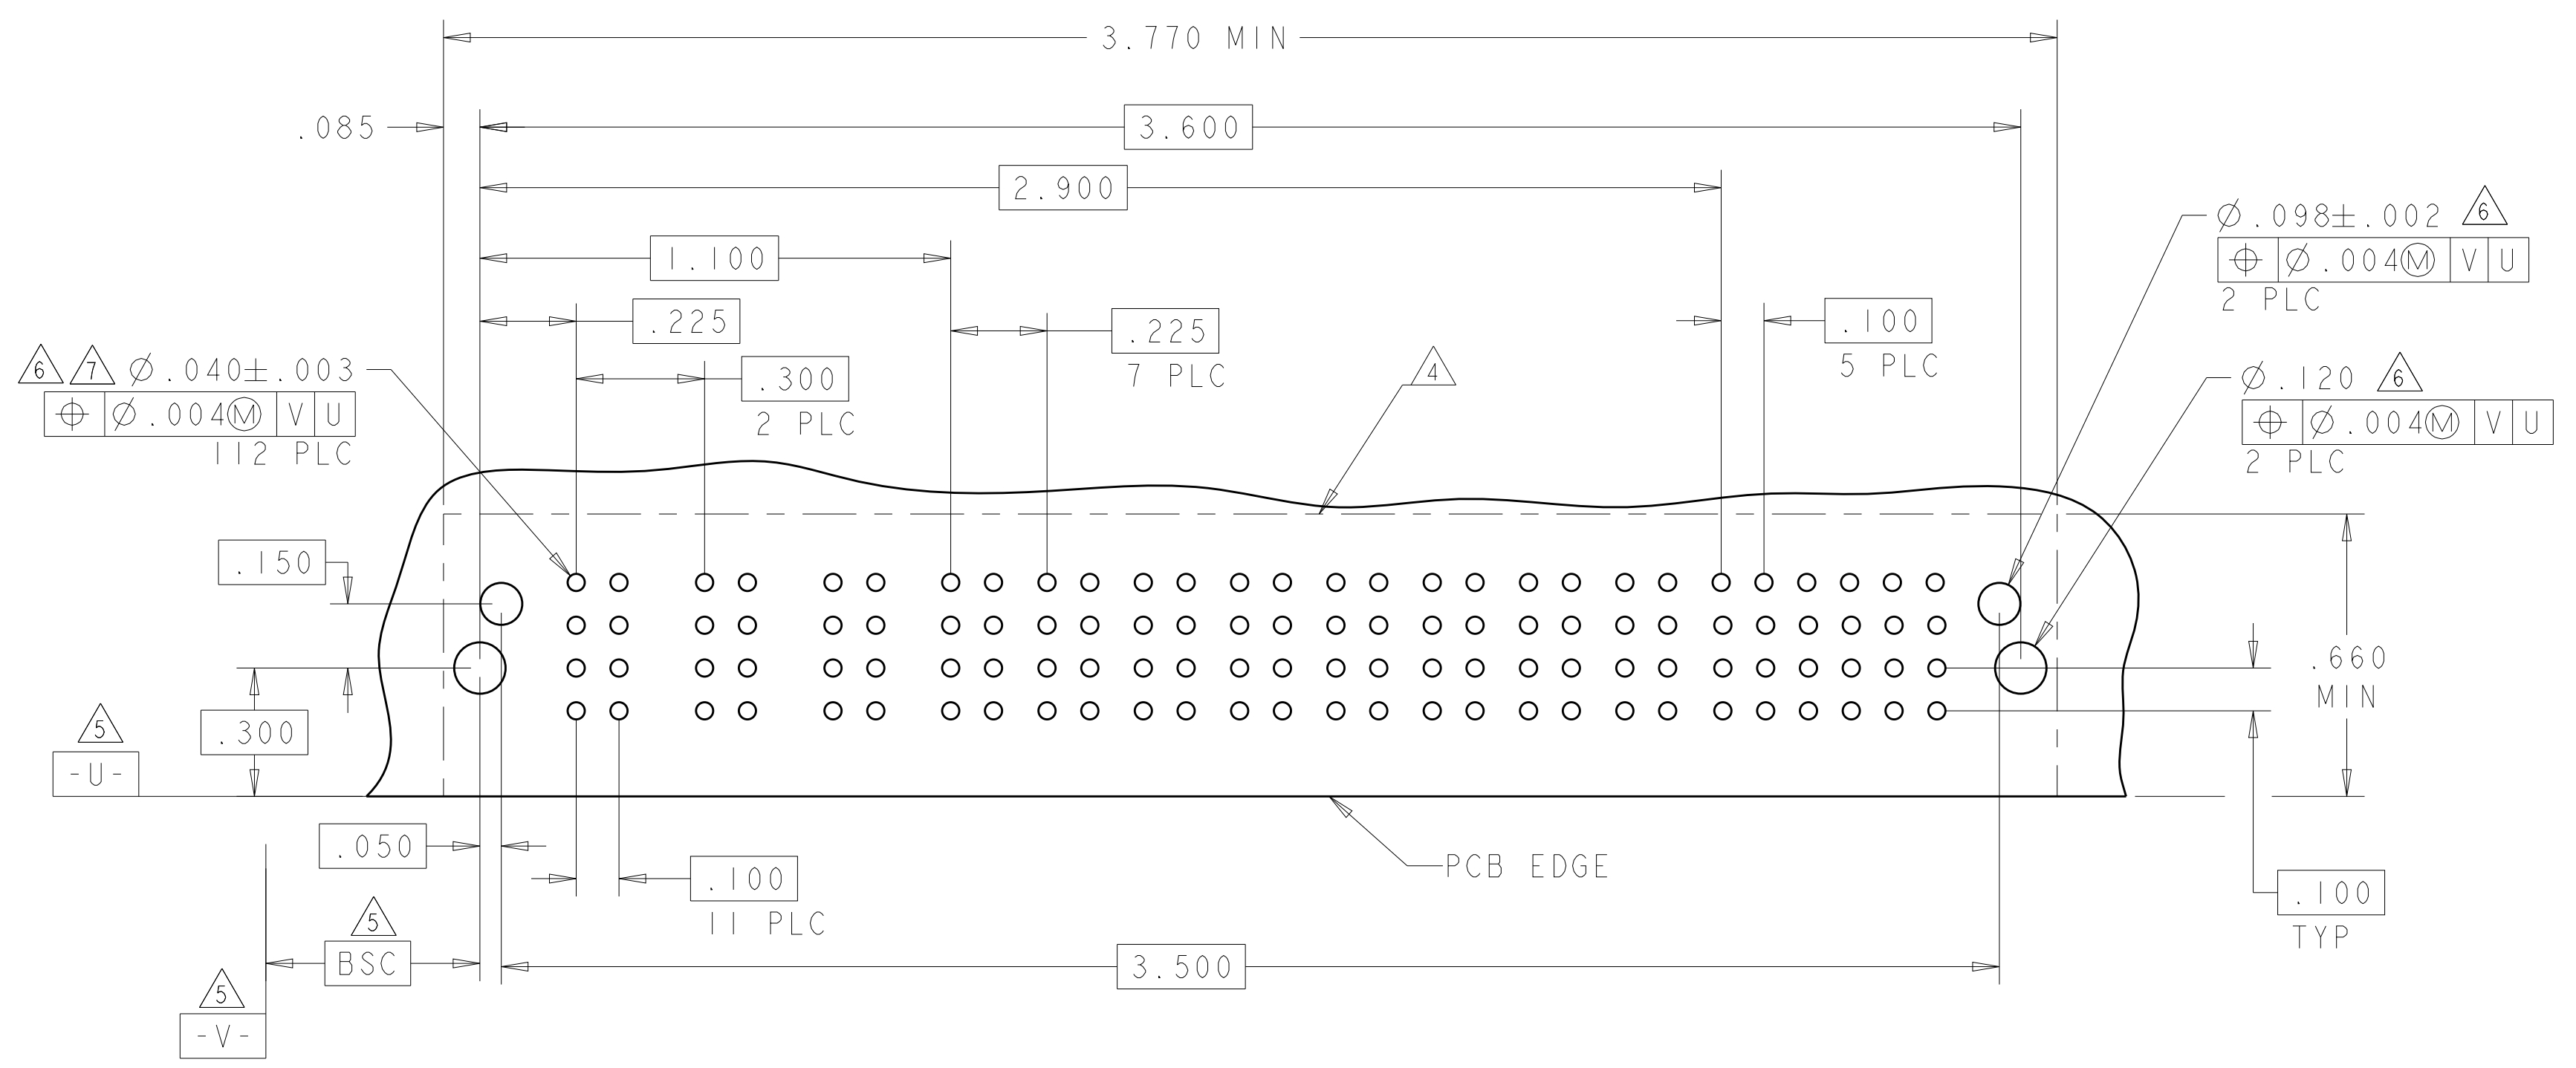

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: H. LIU 27MAY2008	TE Connectivity NAME: R/A HEADER WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE SIZE: 114-13251 WEIGHT: - MATERIAL: - FINISH: -
DIMENSIONS: INCHES		CHK: S. ZHAO 27MAY2008	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±.2°		APVD: S. ZHAO	
DIMENSIONS: INCHES TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±.2°		PRODUCT SPEC: 108-2292 APPLICATION SPEC: - CAGE CODE: 114-13251 DRAWING NO: 6450832 CUSTOMER DRAWING: -	
SCALE: 4:1 SHEET: 7 OF 24 REV: K6			

REVISONS			
LOC	DIST	DESCRIPTION	DATE
-	-	SEE SHEET 1	-

PART NUMBER	ROWS	POWER			SIGNAL			
		P1	P2	P3	1	2	3	4
6450832-9	D	TM	TM	TM	J			J
	C				K			K
	B				N			N
	A				S			S



2P + 8S

.400 NO LOADING CONTACTS

PART NUMBER	ROWS	POWER								SIGNAL					
		P1	P2	P3	P4	P5	P6	P7	P8	1	2	3	4	5	6
3-6450832-4	D	TM	TM	TM	TM	TM	TM	TM	TM	J	J	J	J	J	J
	C									K	K	K	K	K	
	B									N	N	N	N	N	
	A									S	S	S	S	S	

8P + 24S

H9

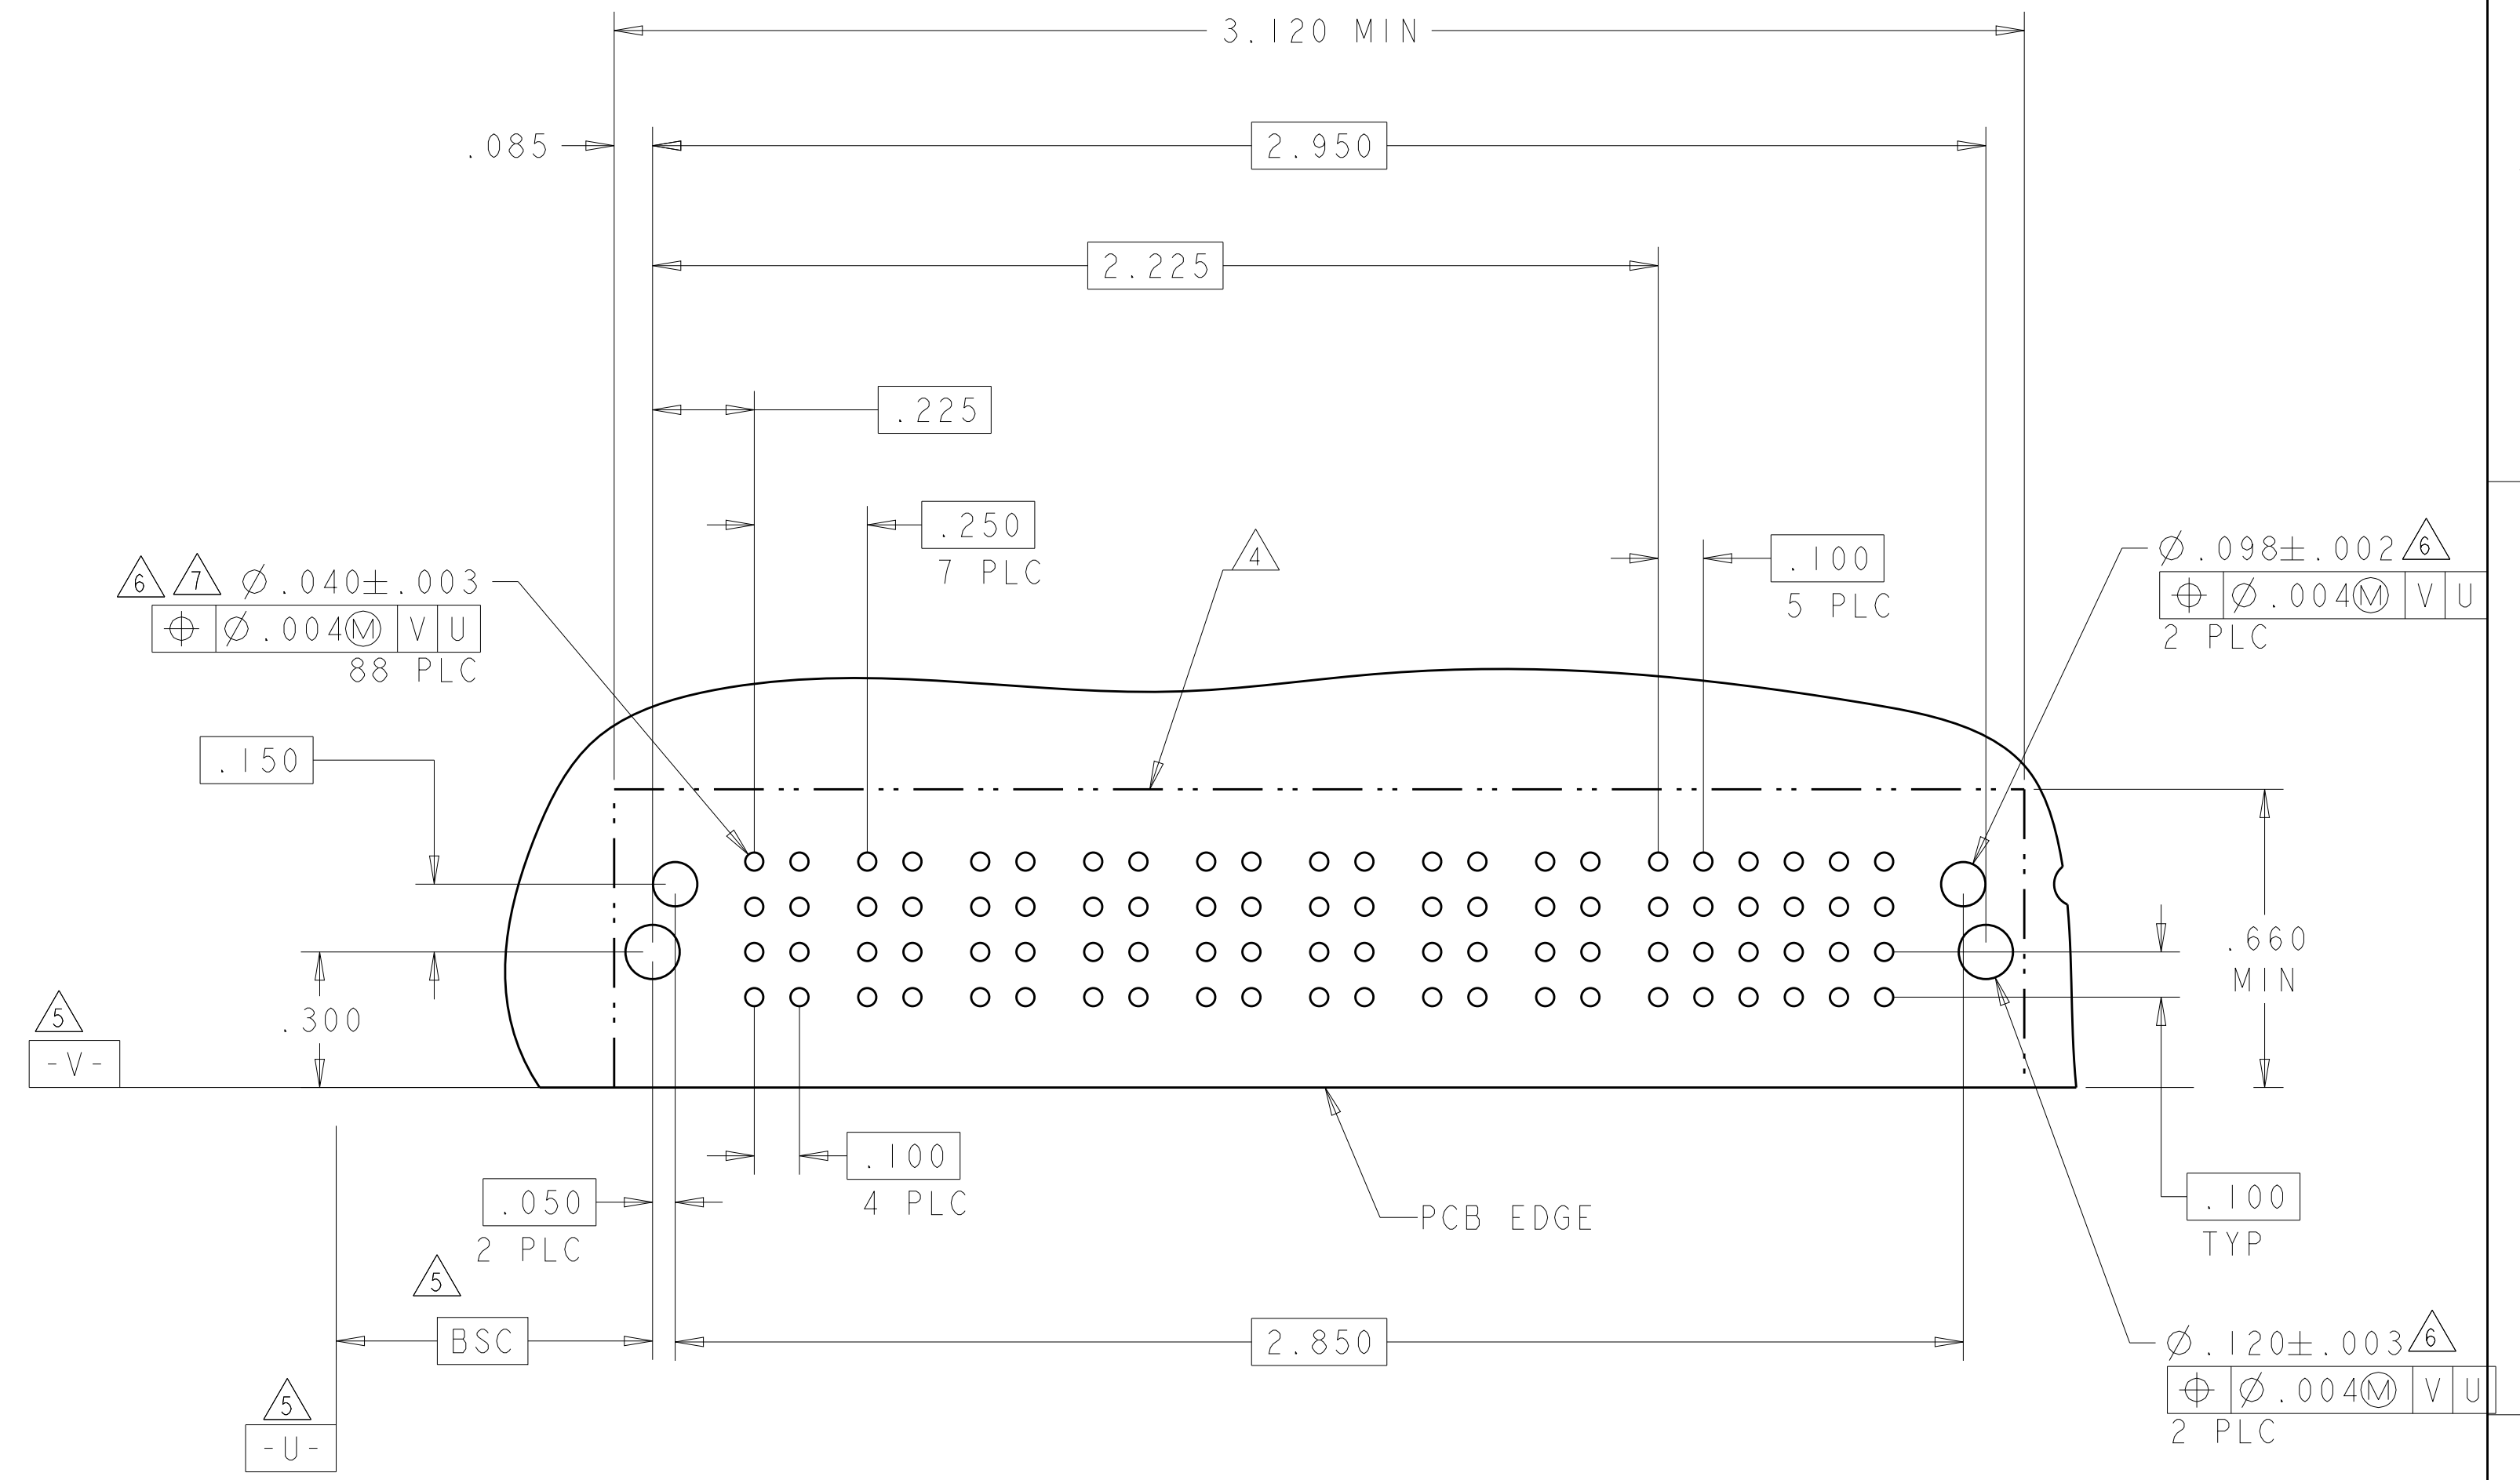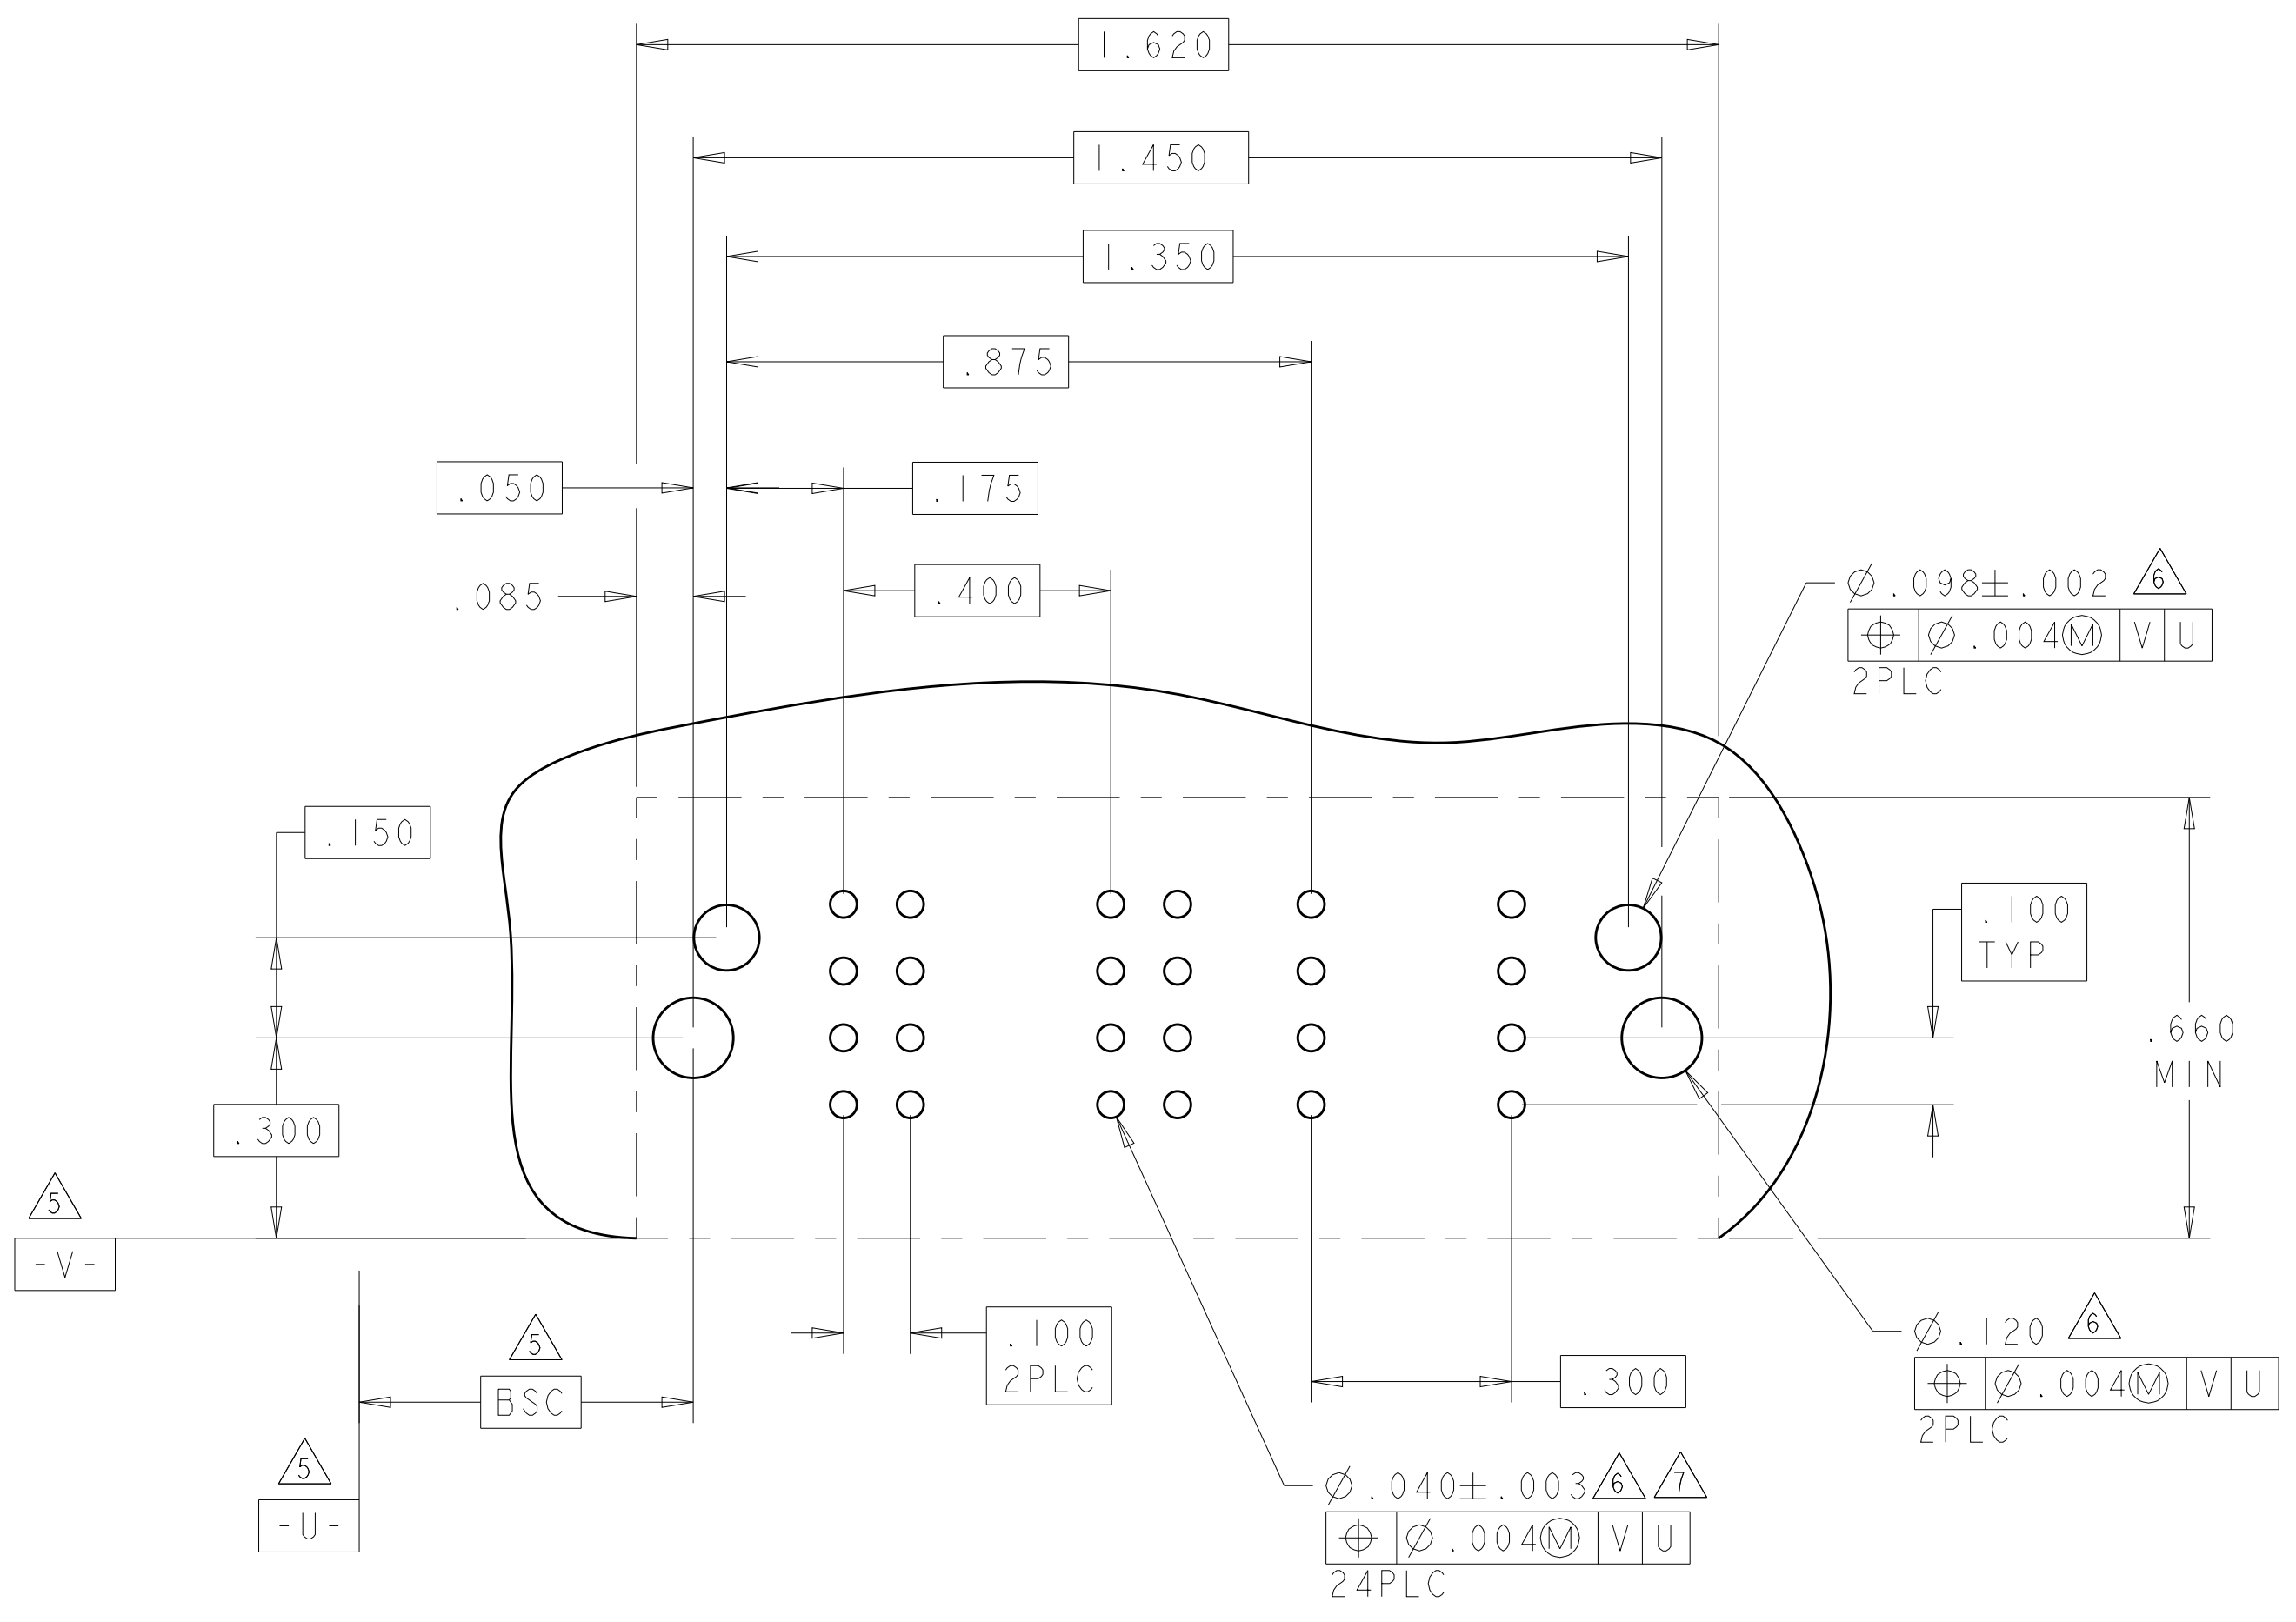


THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: H.LIU 27MAY2008	 TE Connectivity
DIMENSIONS: INCHES		CHK: S.ZHAO 27MAY2008	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: S.ZHAO	NAME: R/A HEADER WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY PRODUCT SPEC: 108-2292 APPLICATION SPEC: 114-13251 SIZE: A1 CAGE CODE: 00779 DRAWING NO: 6450832 CUSTOMER DRAWING
0 PLC ± .01		PRODUCT SPEC: 108-2292	
2 PLC ± .01		APPLICATION SPEC: 114-13251	
3 PLC ± .005		SIZE: A1	
4 PLC ± .002		CAGE CODE: 00779	
ANGLES: ± 2°		WEIGHT: -	RESTRICTED TO: -
MATERIAL: -		SCALE: 4:1	SHEET: 8 OF 24
FINISH: -		REV: K6	

LOC		DIST		REVISIONS			
P	LTN	DESCRIPTION	DATE	DWN	APVD		
-	-	SEE SHEET 1	-	-	-		

PART NUMBER	ROWS	POWER												SIGNAL			
		P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	1	2	3	4
1-6450832-0	D	TM			TM			TM				TM		J	J	J	J
	C													K	K	K	K
	B													N	N	N	N
	A													S	S	S	S
12P + 16S		HD															


NO CONTACT LOADED

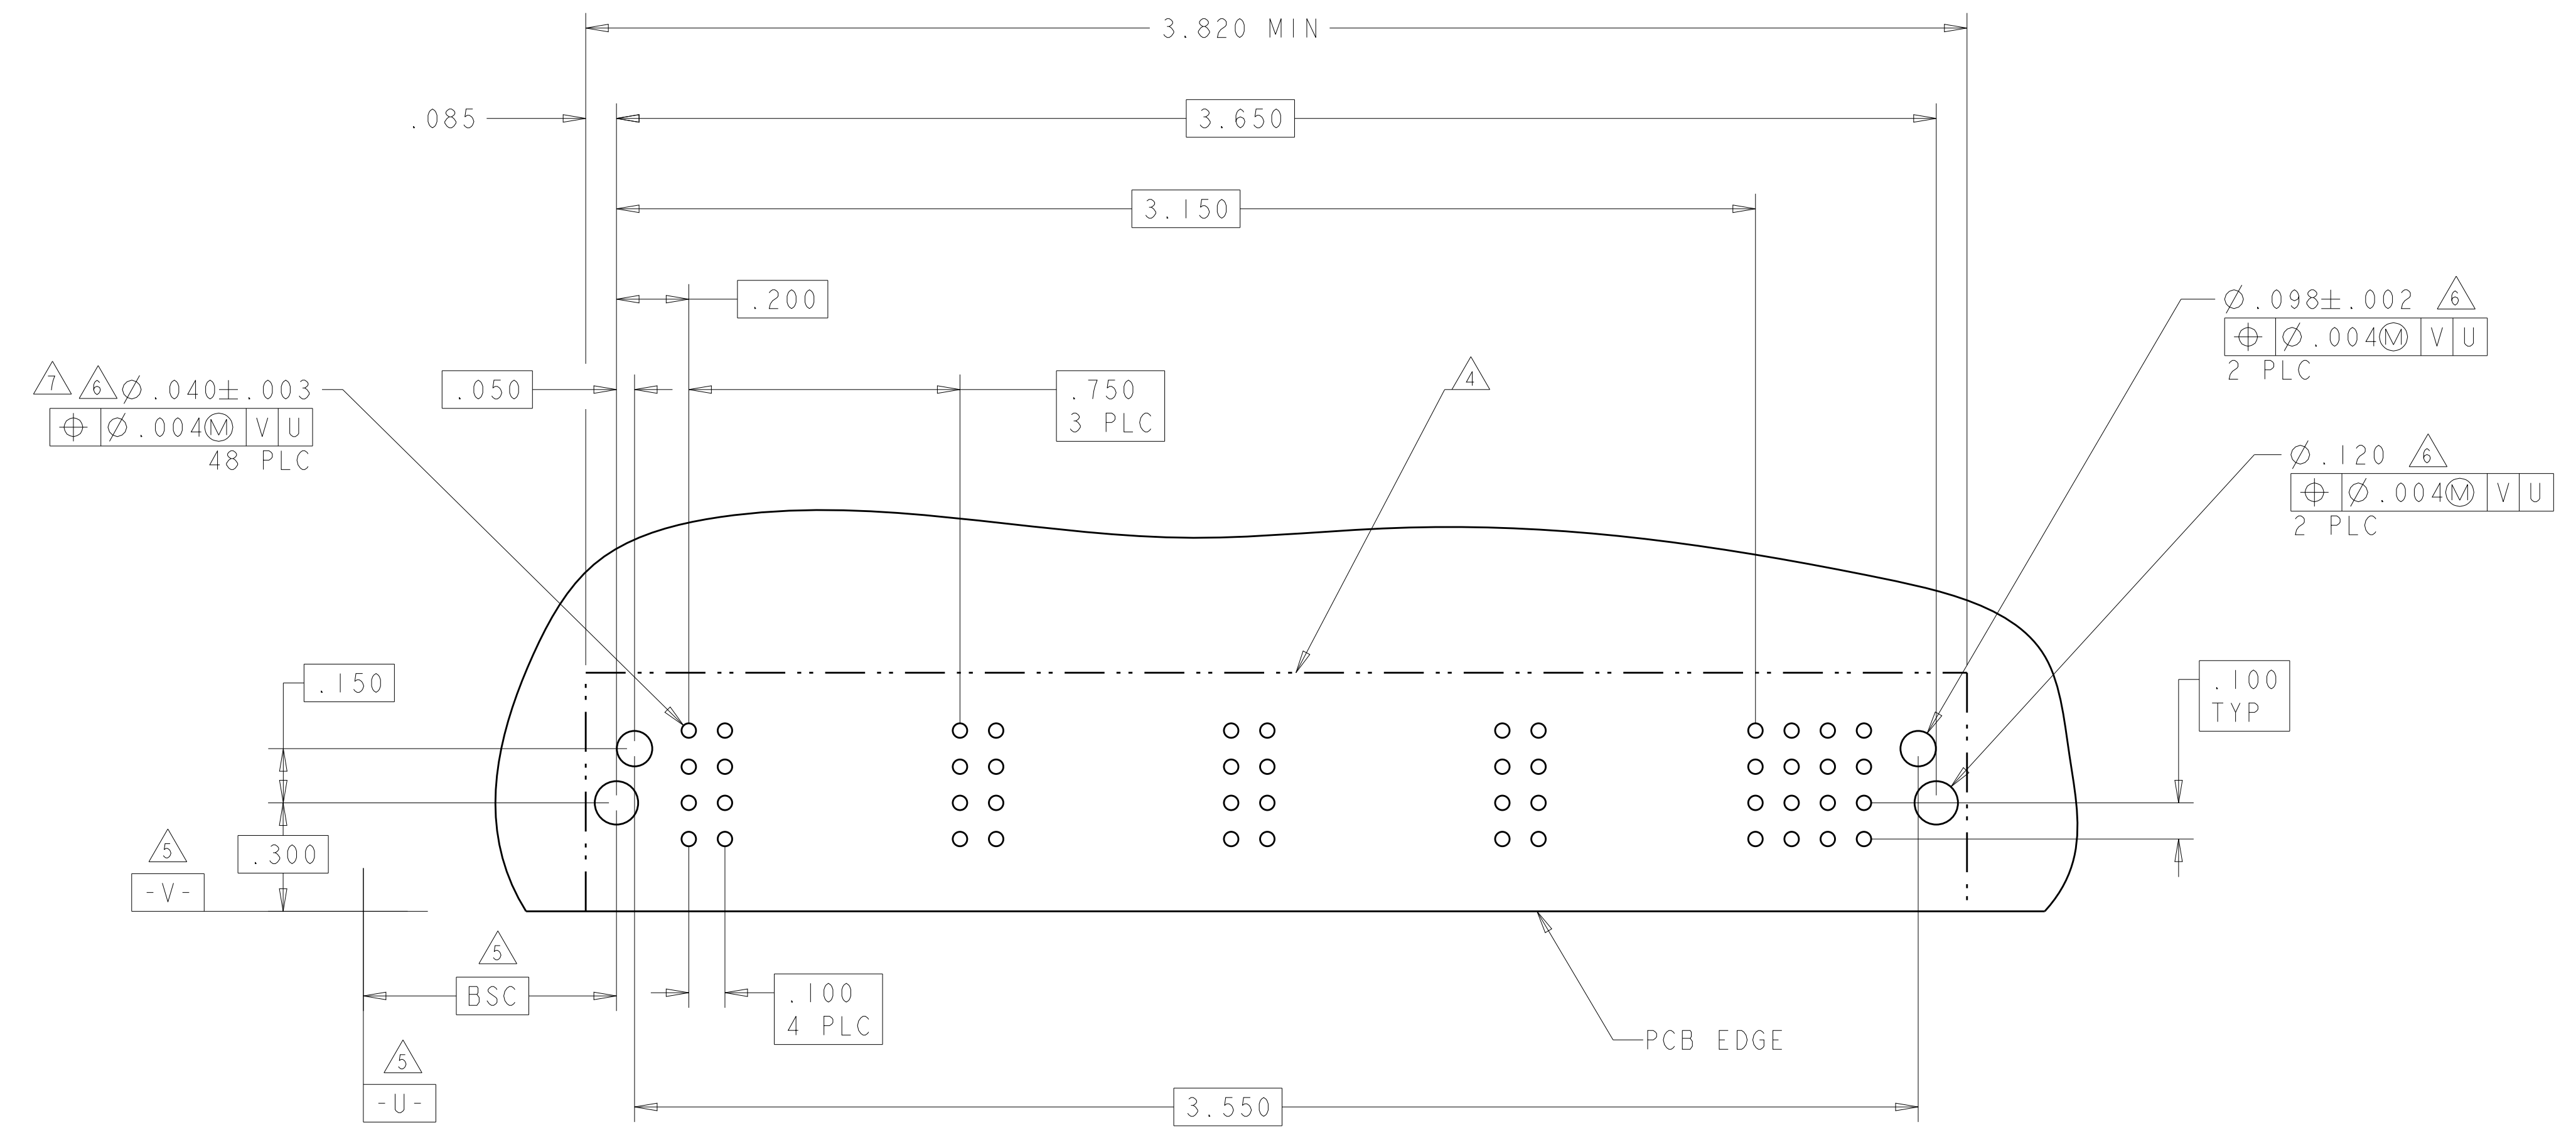



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: H.LIU 27MAY2008	TE Connectivity
DIMENSIONS: INCHES		CHK: S.ZHAO 27MAY2008	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±.2°		APVD: S.ZHAO	NAME: R/A HEADER WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY
MATERIAL		FINISH	PRODUCT SPEC: 108-2292
			APPLICATION SPEC: 114-13251
			SIZE: A100779
			DRAWING NO: C=6450832
			RESTRICTED TO: -
			CUSTOMER DRAWING
			SCALE: 4:1 SHEET 9 OF 24 REV: K6

LOC	DIST	REVISIONS			
REV	DATE	DESCRIPTION	DATE	OWN	APVD
-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS	POWER		SIGNAL					
		P1	P2	1	2	3	4	5	6
1-6450832-2	D	TM	TM	J	J	J	J	J	J
	C			K	K	K	K	K	K
	B			N	N	N	N	N	N
A	H	S	S	S	S	S	S		
2P + 24S		HD							HD

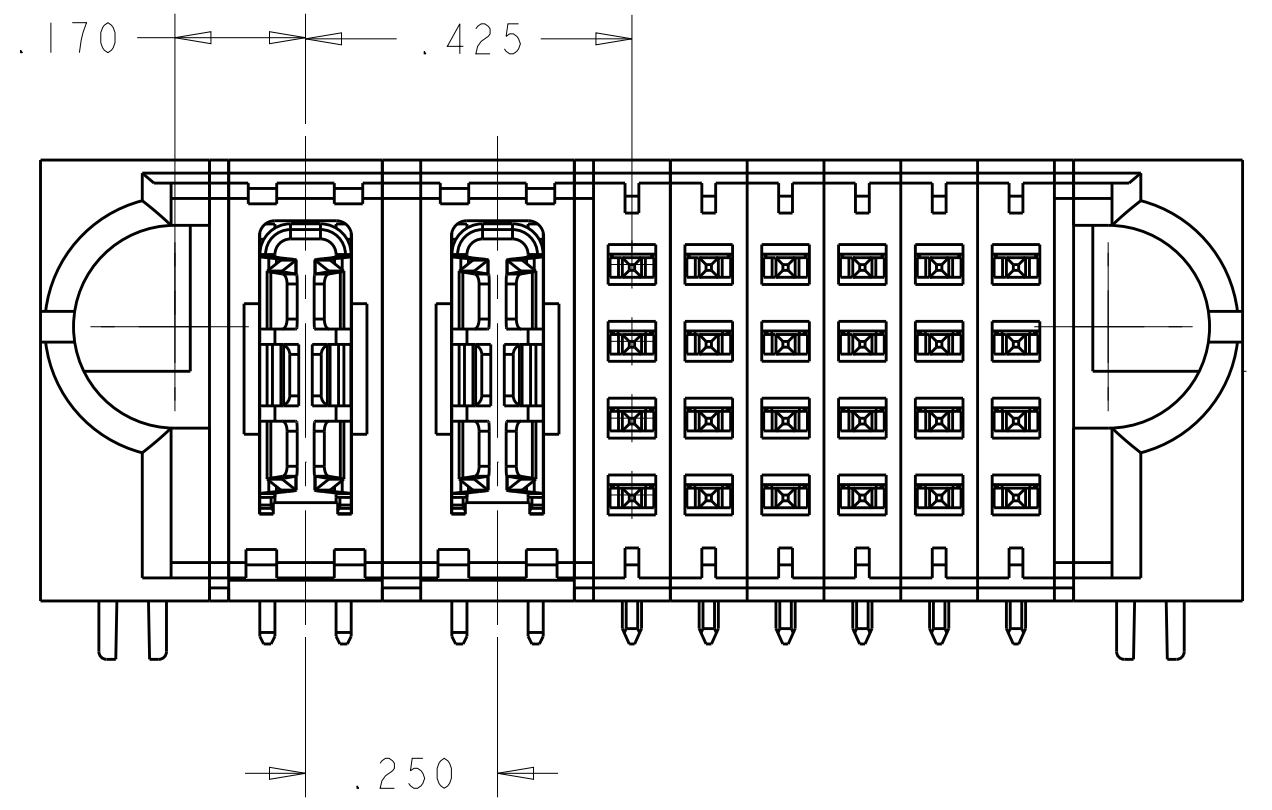


PART NUMBER	ROWS	POWER			SIGNAL		
		P1	P2	P3	1	2	3
1-6450832-4	D	TM	TM	TM	J	J	J
	C				K	F	K
	B				N	G	N
	A				S	S	S
3P + 12S							

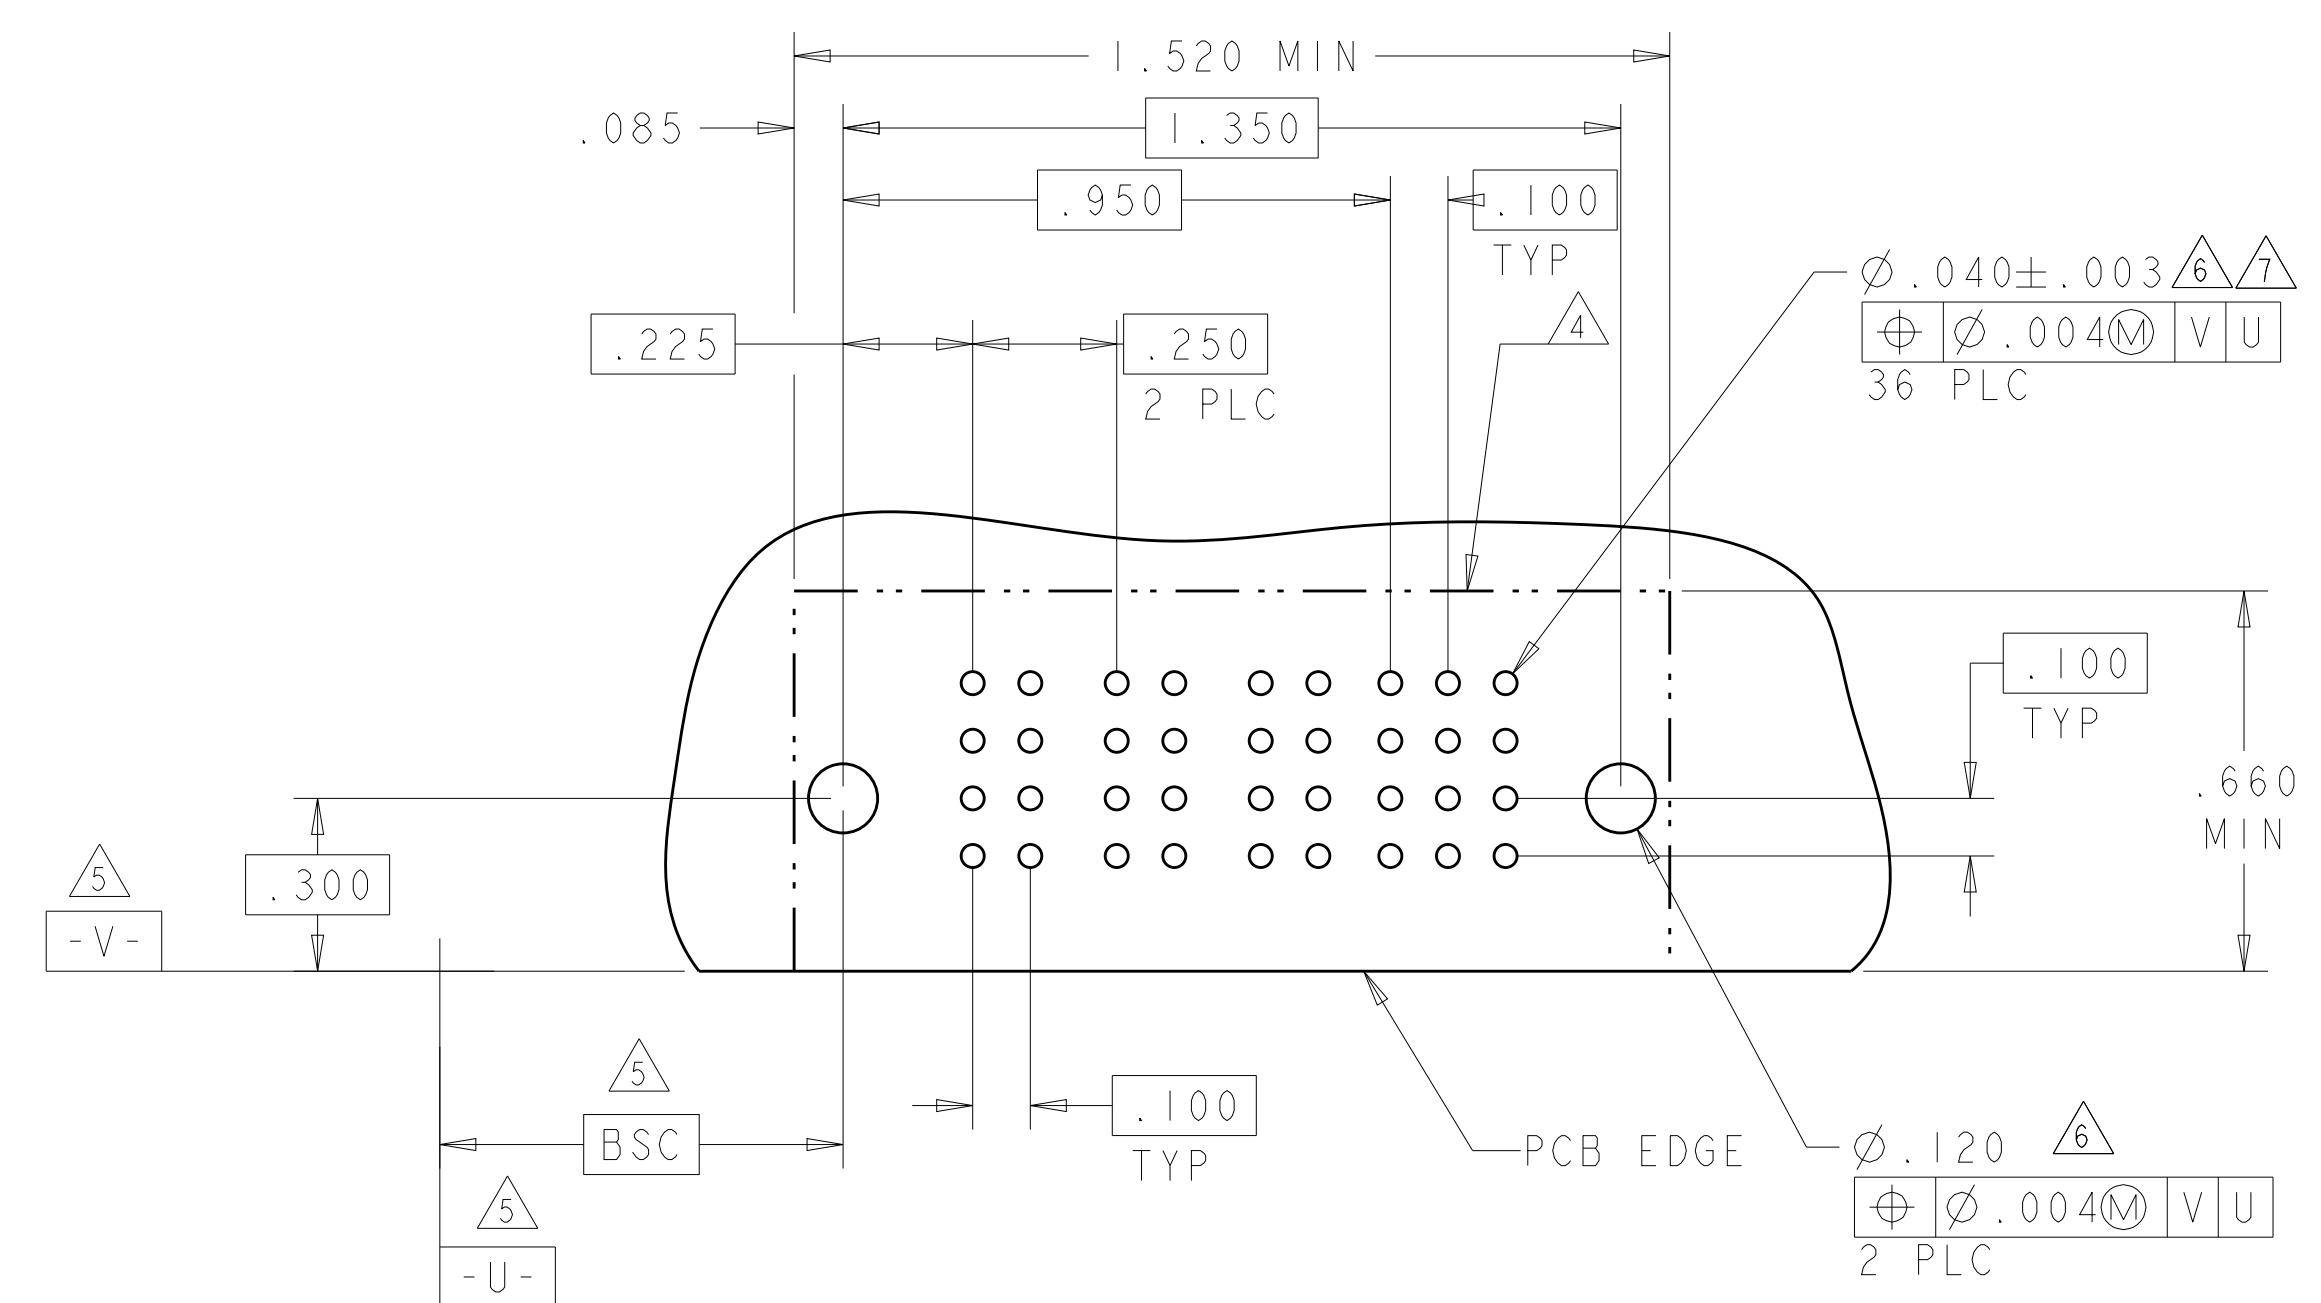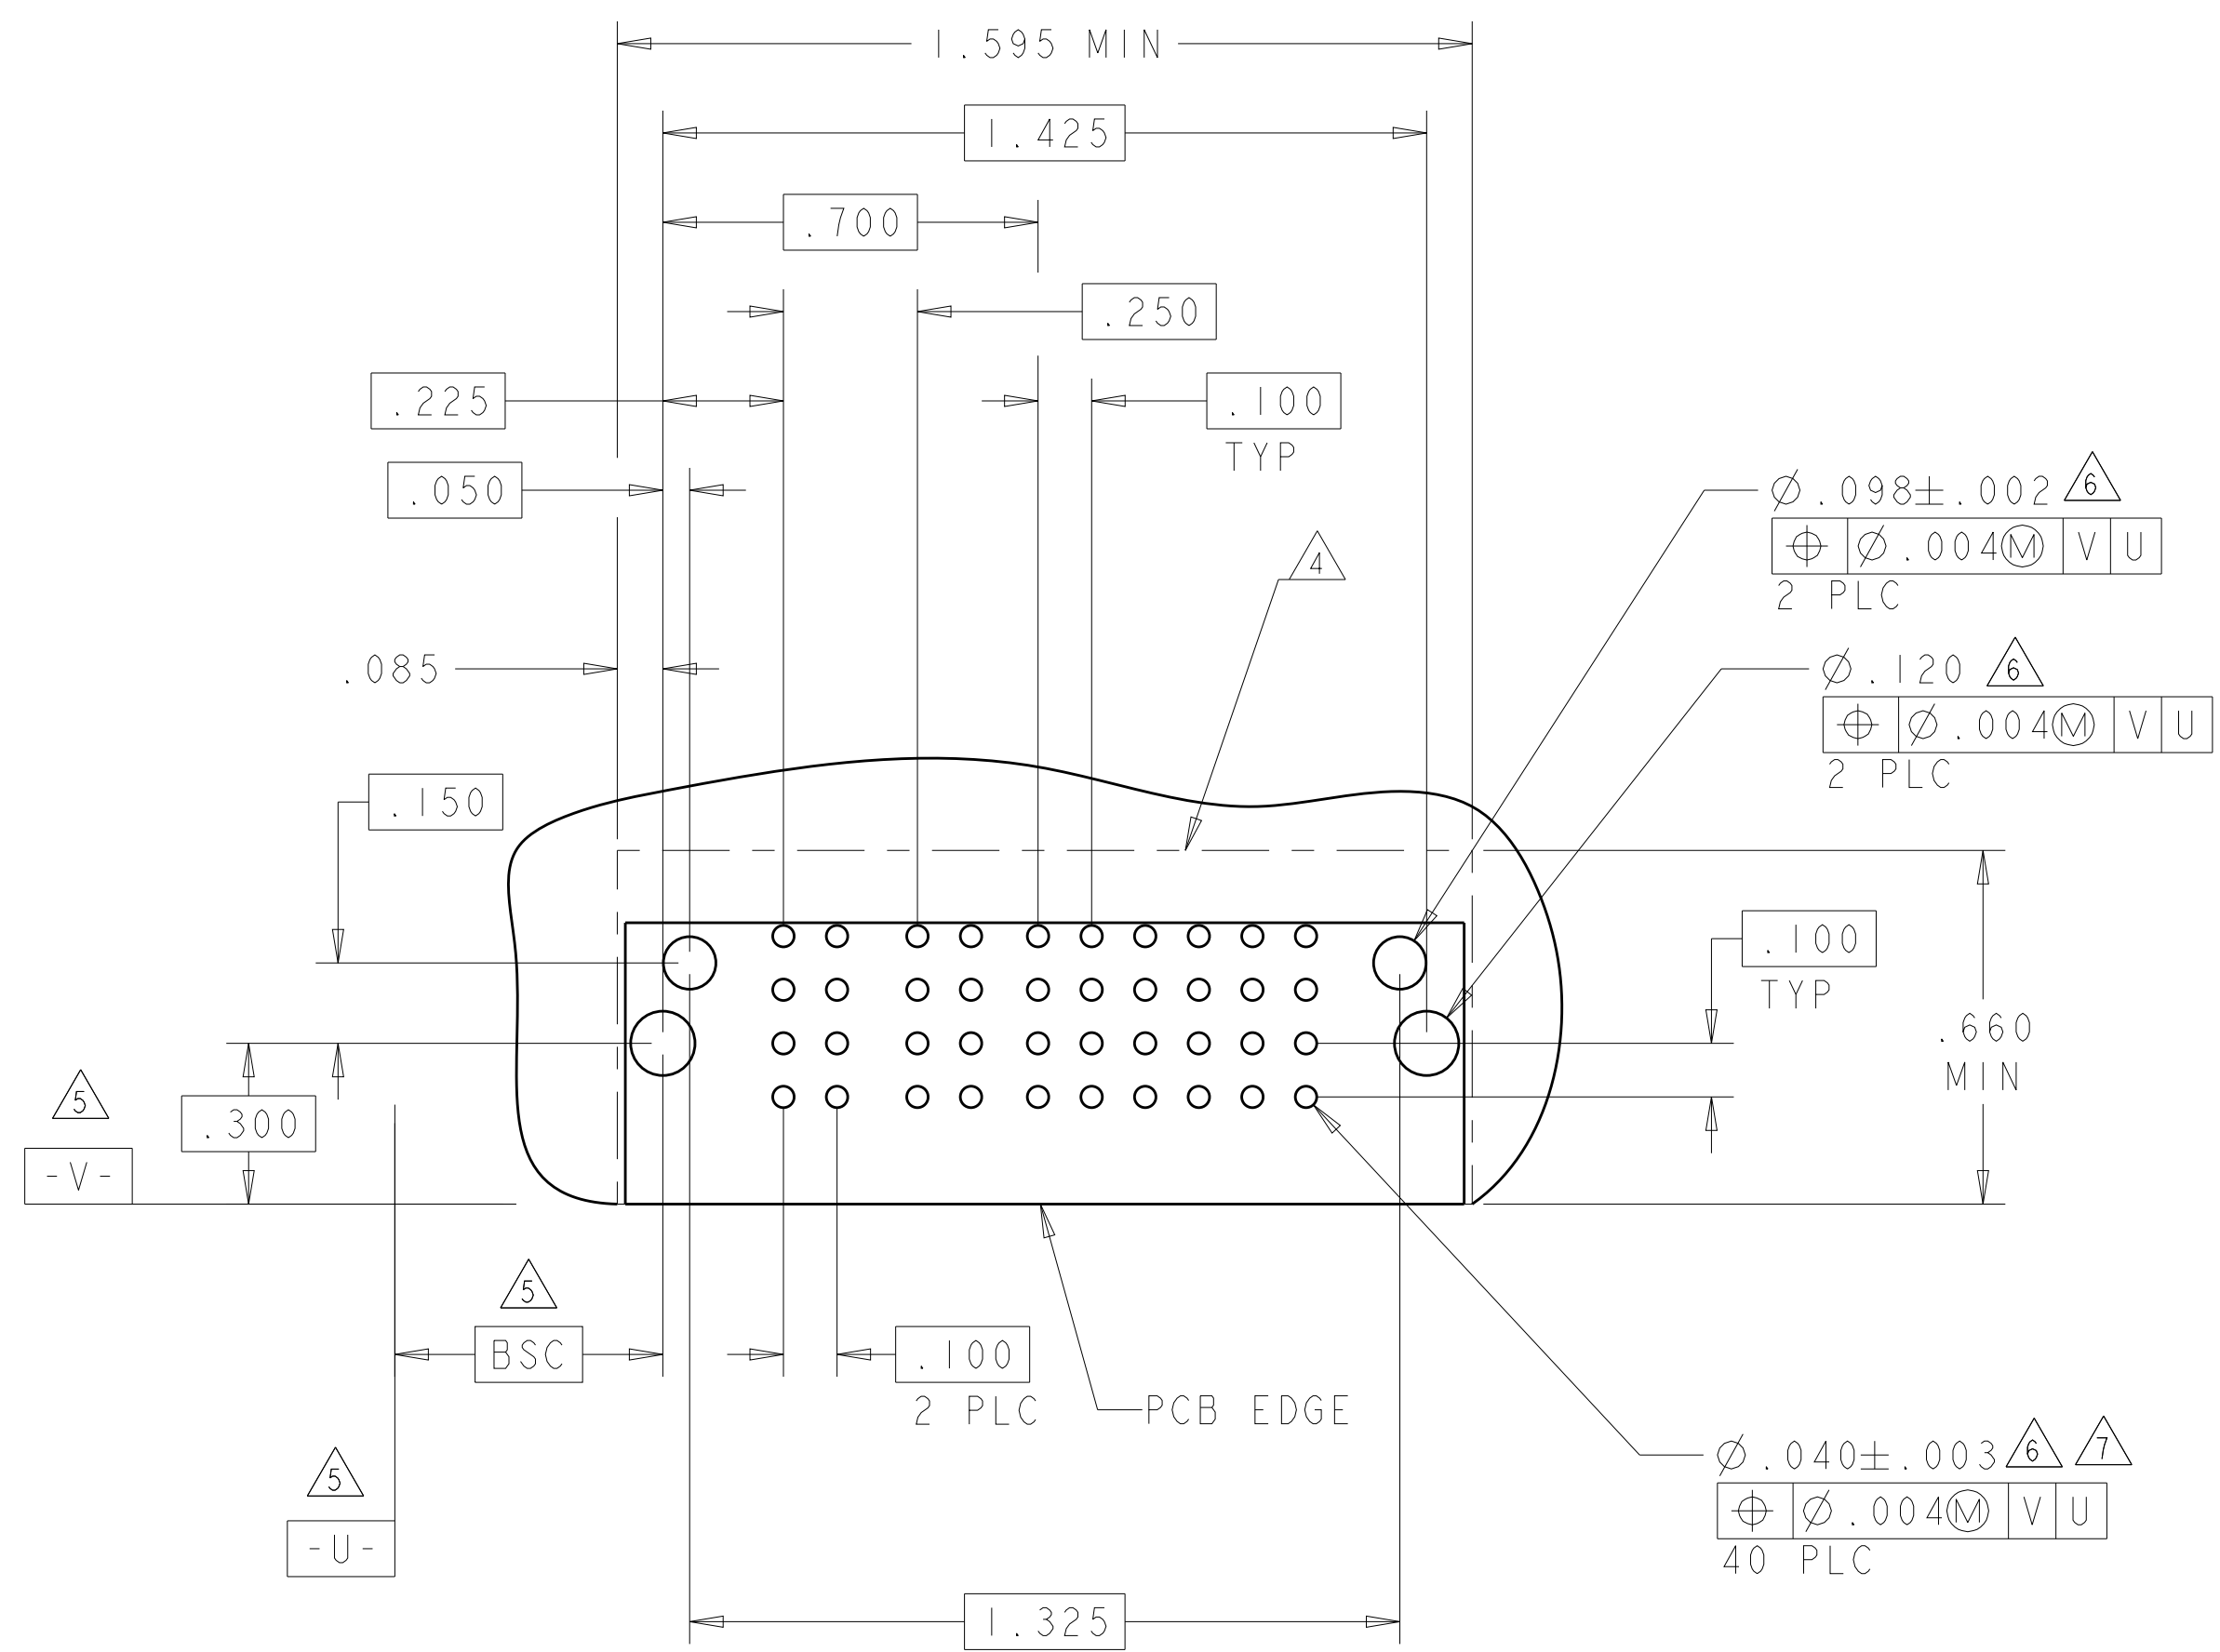




THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: H.LIU 27MAY2008	STE TE Connectivity										
DIMENSIONS: INCHES		CHK: S.ZHAO 27MAY2008											
<table border="1"> <tr><td>0 PLC</td><td>±</td></tr> <tr><td>2 PLC</td><td>±.01</td></tr> <tr><td>3 PLC</td><td>±.005</td></tr> <tr><td>4 PLC</td><td>±.0020</td></tr> <tr><td>ANGLES</td><td>*2°</td></tr> </table>	0 PLC	±	2 PLC	±.01	3 PLC	±.005	4 PLC	±.0020	ANGLES	*2°	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD: S.ZHAO	NAME: R/A HEADER WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE
	0 PLC	±											
	2 PLC	±.01											
	3 PLC	±.005											
4 PLC	±.0020												
ANGLES	*2°												
MATERIAL:	FINISH:	PRODUCT SPEC: 108-2292	SIZE: A100779 C=6450832										
CUSTOMER DRAWING		APPLICATION SPEC: 114-13251	RESTRICTED TO: K6										
		WEIGHT:	SCALE: 4:1 SHEET 10 OF 24										

LOC	DIST	REVISIONS			
P	LTN	DESCRIPTION	DATE	DMN	APVD
-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS	POWER										SIGNAL							
		P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	1	2	3	4	5
1-6450832-6	D	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	E	E	J	J	E	E
	C	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	K	F	K	K	K	K
	B	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	N	G	N	G	G	G
A	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	S	S	S	S	S	S	

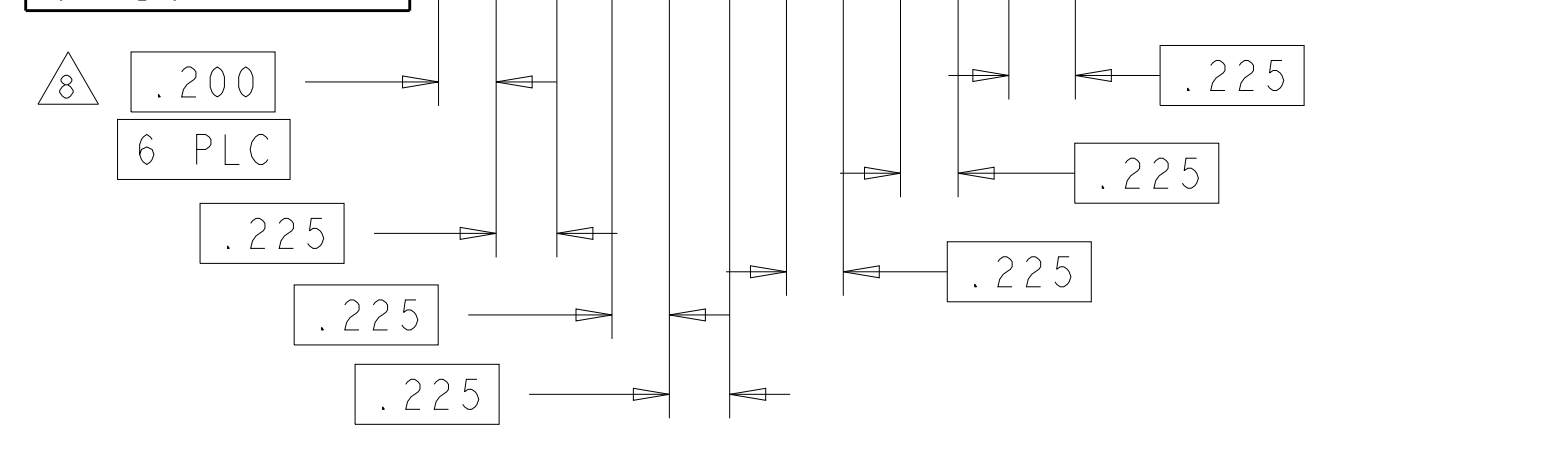

PART NUMBER	ROWS	POWER										SIGNAL						
		P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	1	2	3	4	5	6
1-6450832-7	D	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	E	E	J	J	E	E
	C	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	K	F	K	K	K	K
	B	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	N	G	N	G	G	G
A	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	S	S	S	S	S	S	

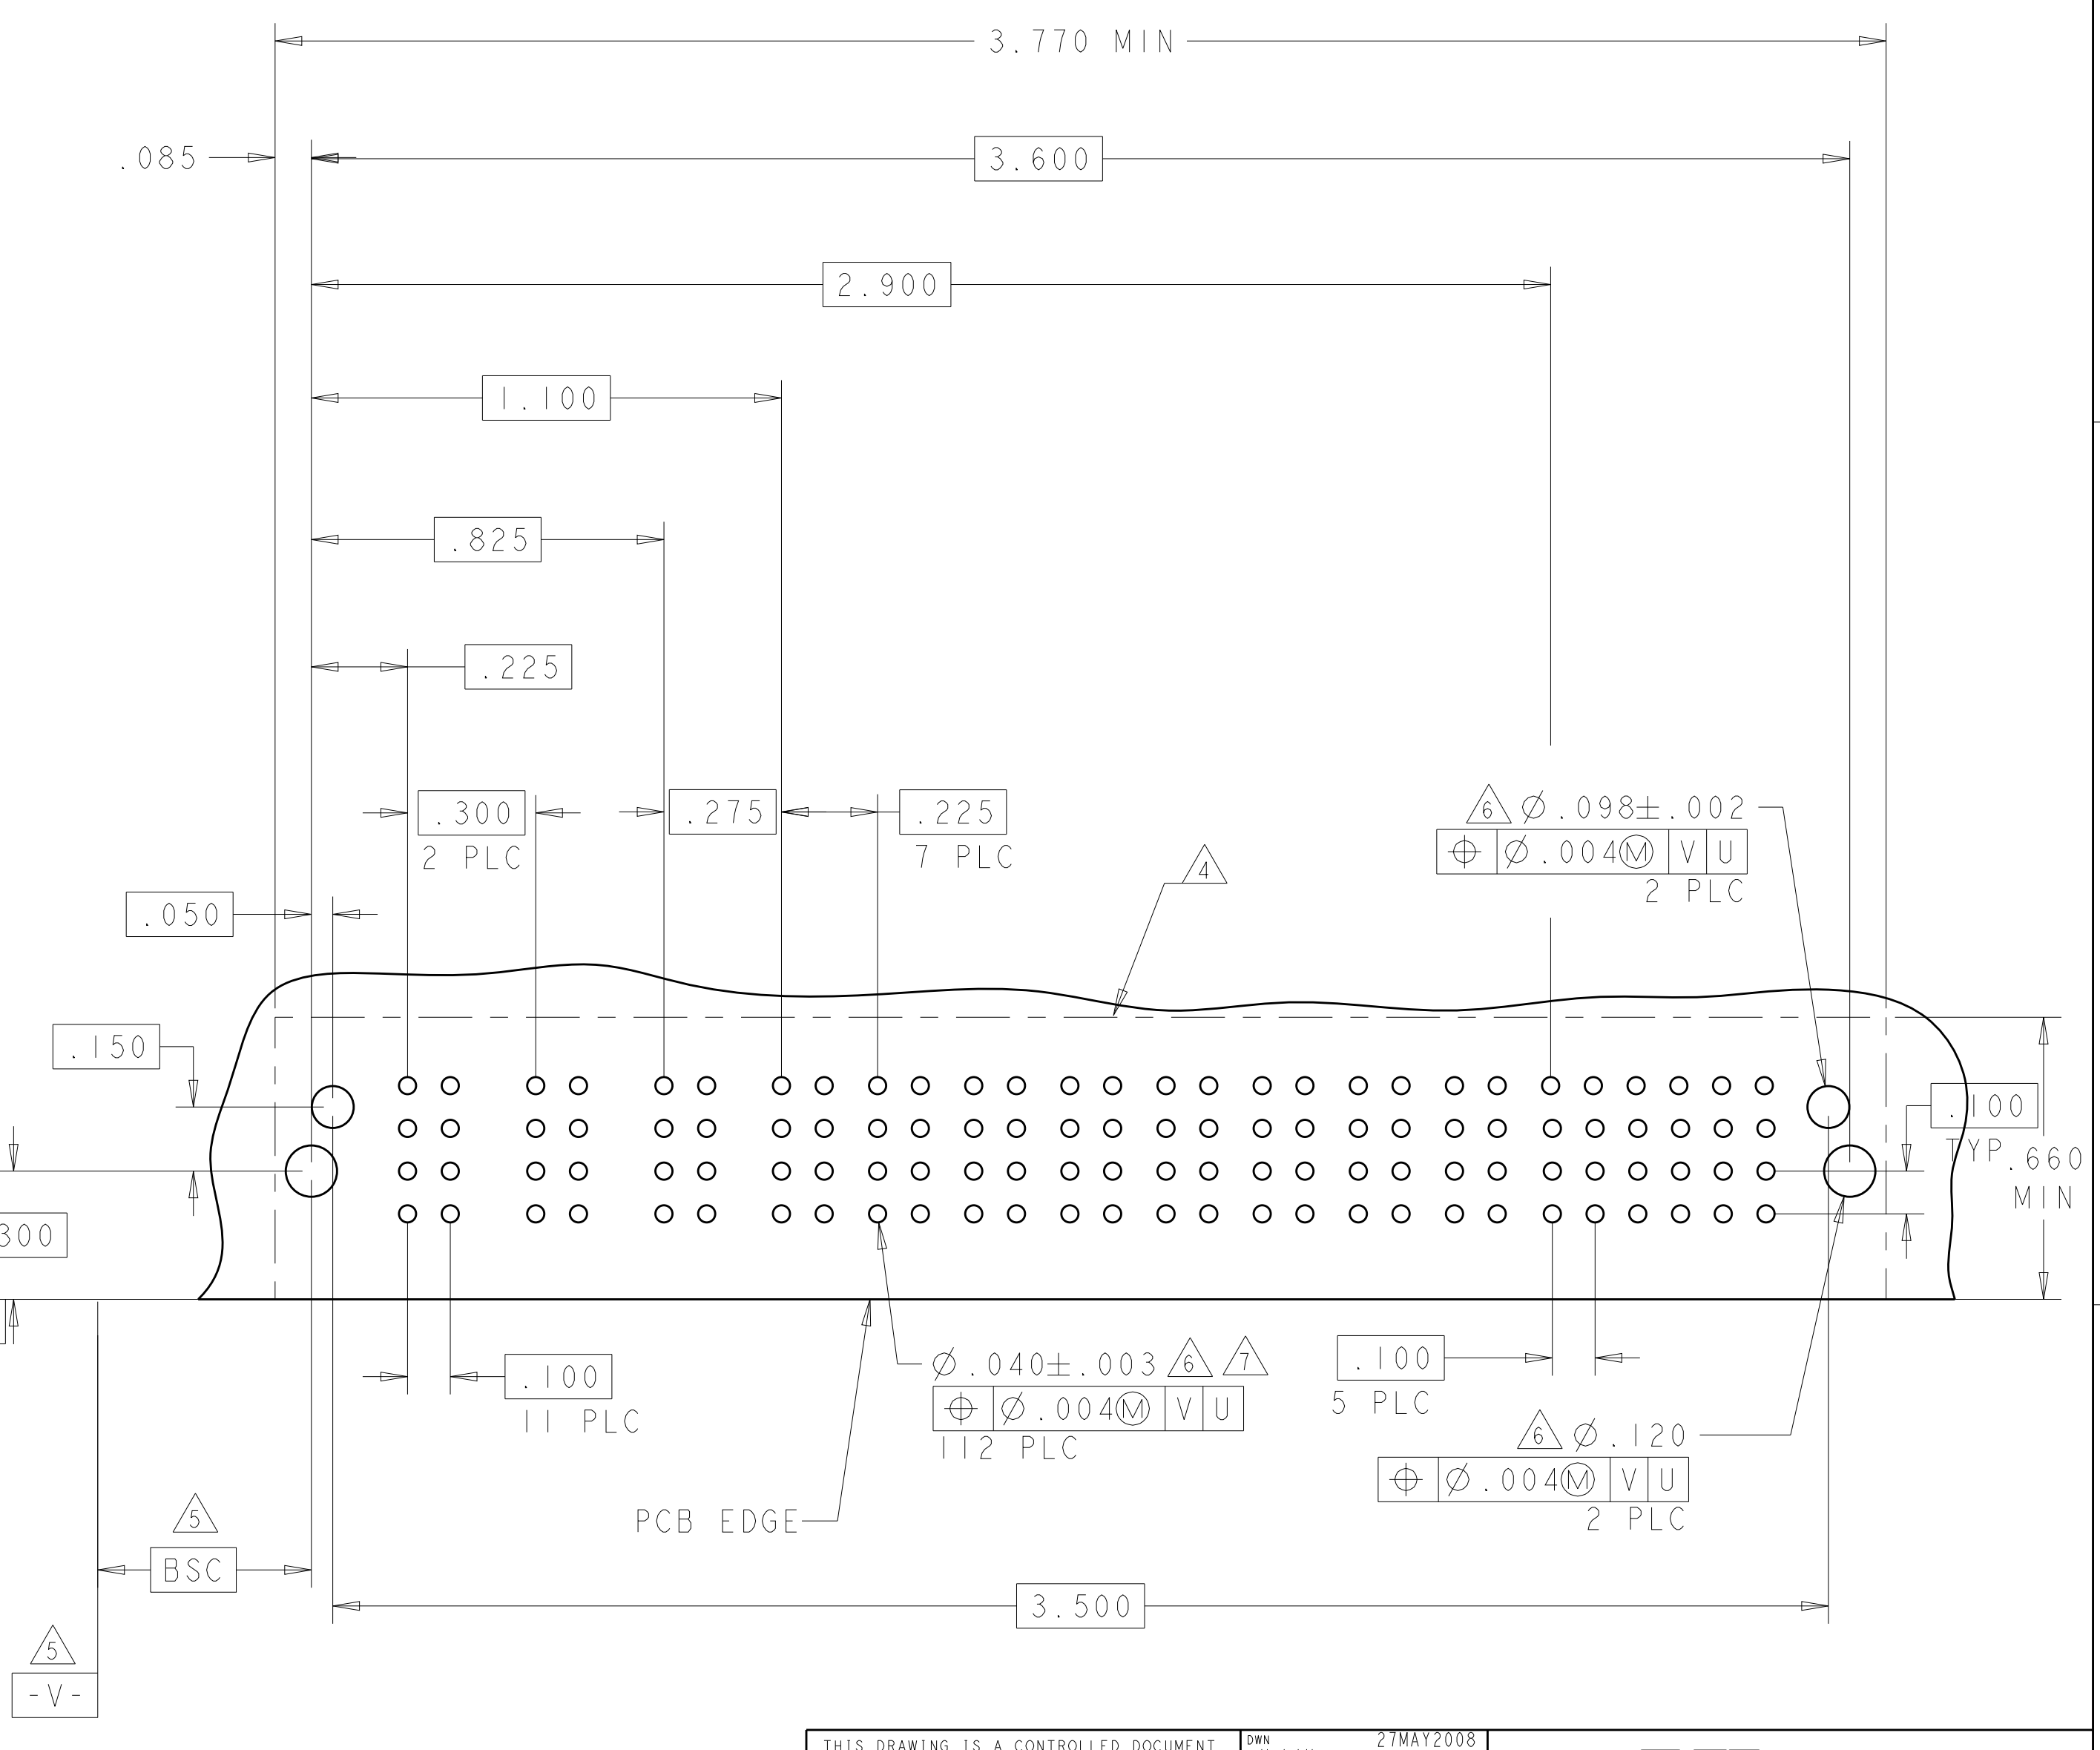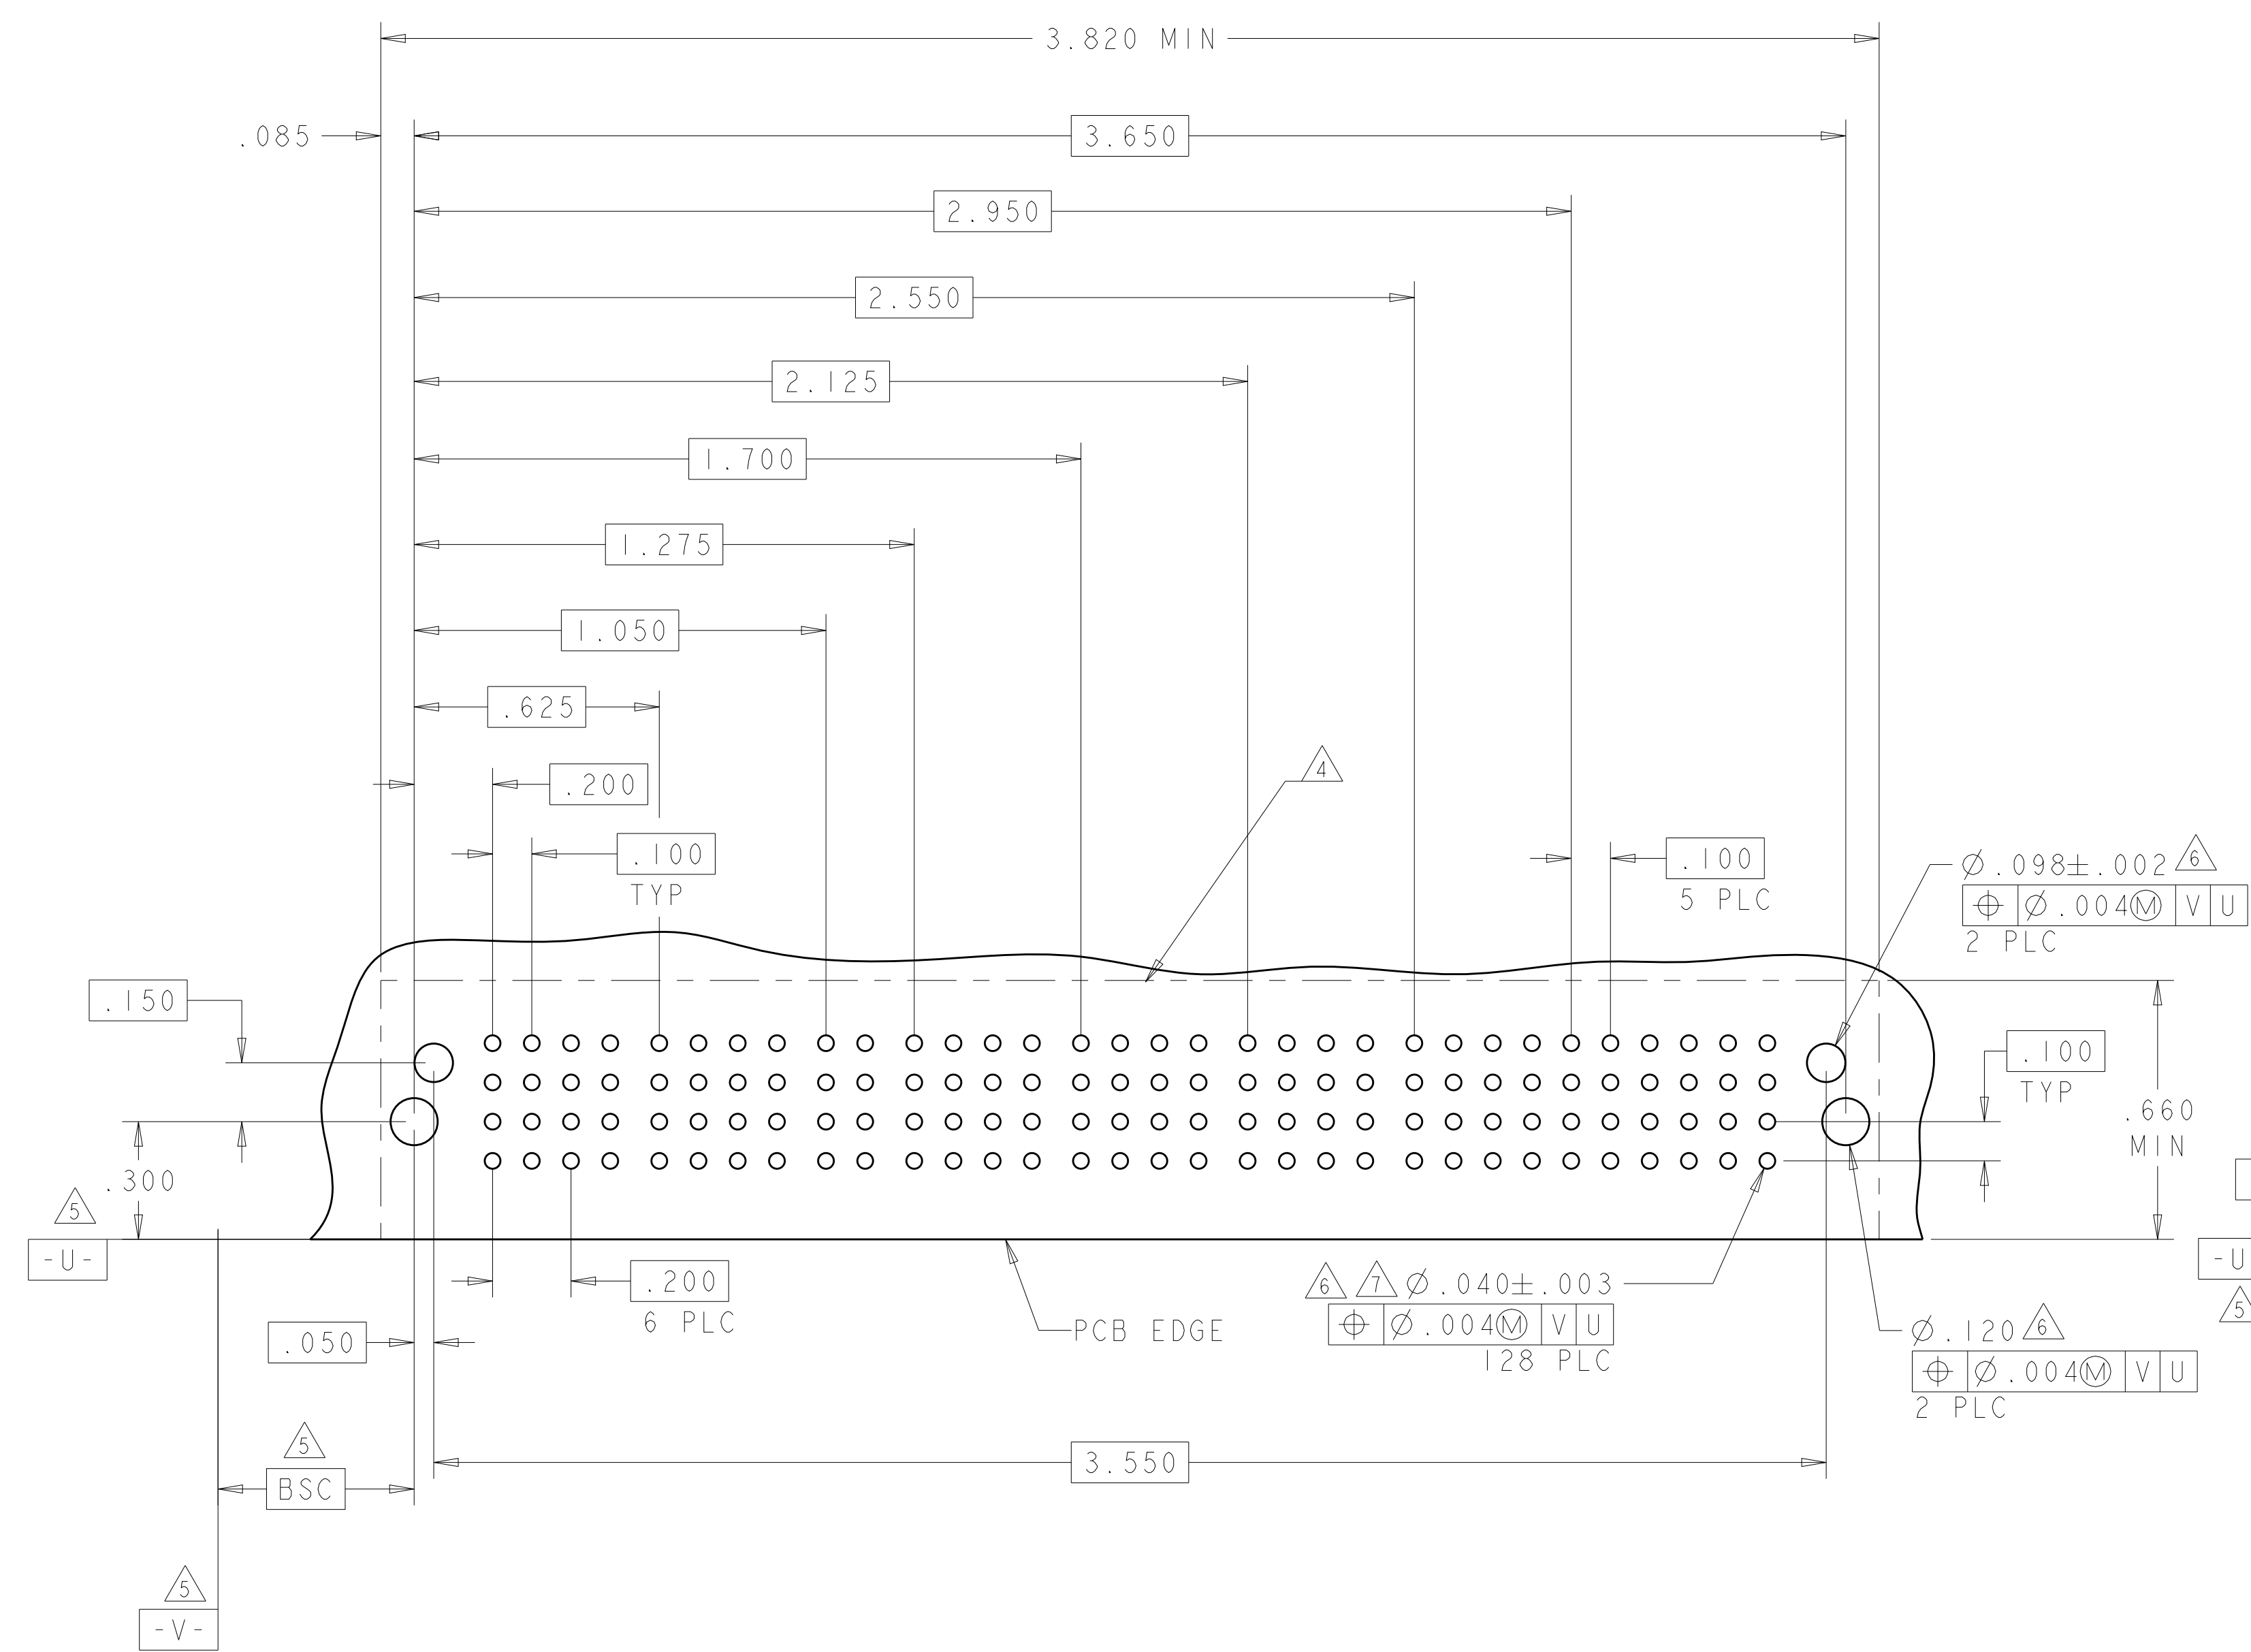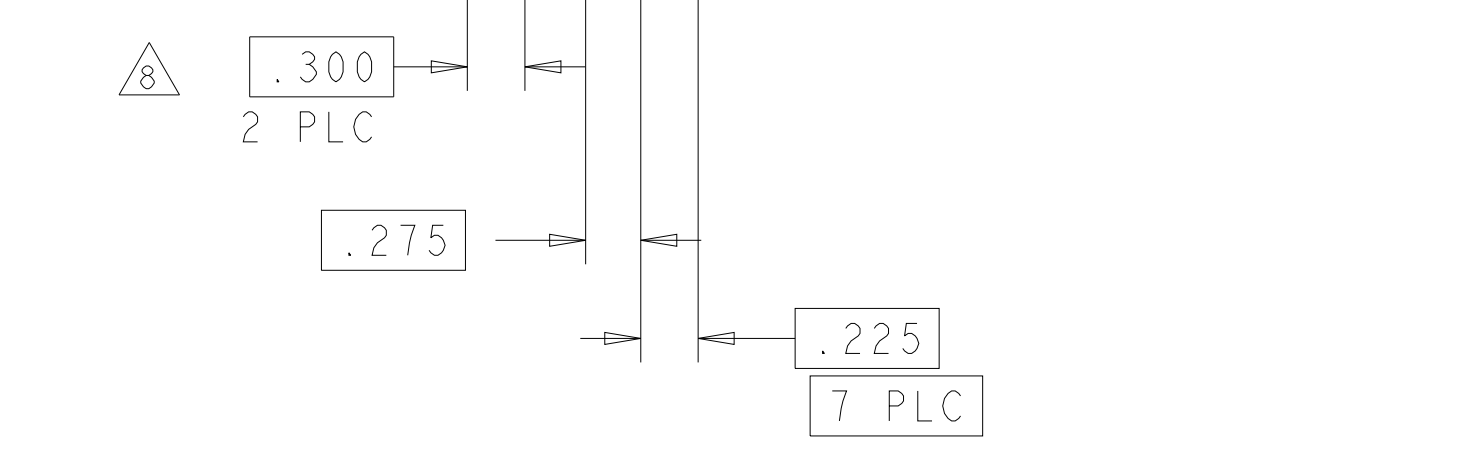

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DMN: H. LIU 27MAY2008	CHK: S. ZHAO 27MAY2008
INCHES:	0 PLC ±.01	APVD: S. ZHAO	NAME: R/A HEADER WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE
	1 PLC ±.01	PRODUCT SPEC	108-2292
	3 PLC ±.005	APPLICATION SPEC	114-13251
	4 PLC ±.0020	SIZE: CAGE CODE DRAWING NO	114-13251
	ANGLES ±.0020	WEIGHT	-
MATERIAL:	FINISH	CUSTOMER DRAWING	SCALE: 4:1 SHEET 11 OF 24 REV: K6



STC TE Connectivity

LOC	DIST	REVISIONS			
P	LTN	DESCRIPTION	DATE	DMN	APVD
-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS	POWER										SIGNAL					
		P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	1	2	3	4	5
1-6450832-9	D											J	E	J	J	J	E
	C											K	K	F	F	K	F
	B	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	G	N	G	G	N	G
	A											S	S	S	S	H	H
11P + 24S																	

PART NUMBER	ROWS	POWER							SIGNAL					
		P1	P2	P3	P4	P5	LP1	LP2	1	2	3	4	5	6
2-6450832-0	D								J	F	J	J	J	J
	C								K	FK	K	K	F	F
	B	TM	TM	TM	TM	TM	LM	LMF	N	FN	N	N	FN	FN
	A								S	FS	H	S	H	H
5P + 2LP + 24S														

PART NUMBER	ROWS	POWER							SIGNAL					
		P1	P2	P3	P4	P5	LP1	LP2	1	2	3	4	5	6
2-6450832-5	D								J	F	J	J	J	J
	C								K	FK	K	K	F	F
	B	TM	TM	TM	TM	TM	LMF	LMF	N	FN	N	N	FN	FN
	A								S	FS	H	S	H	H
5P + 2LP + 24S														

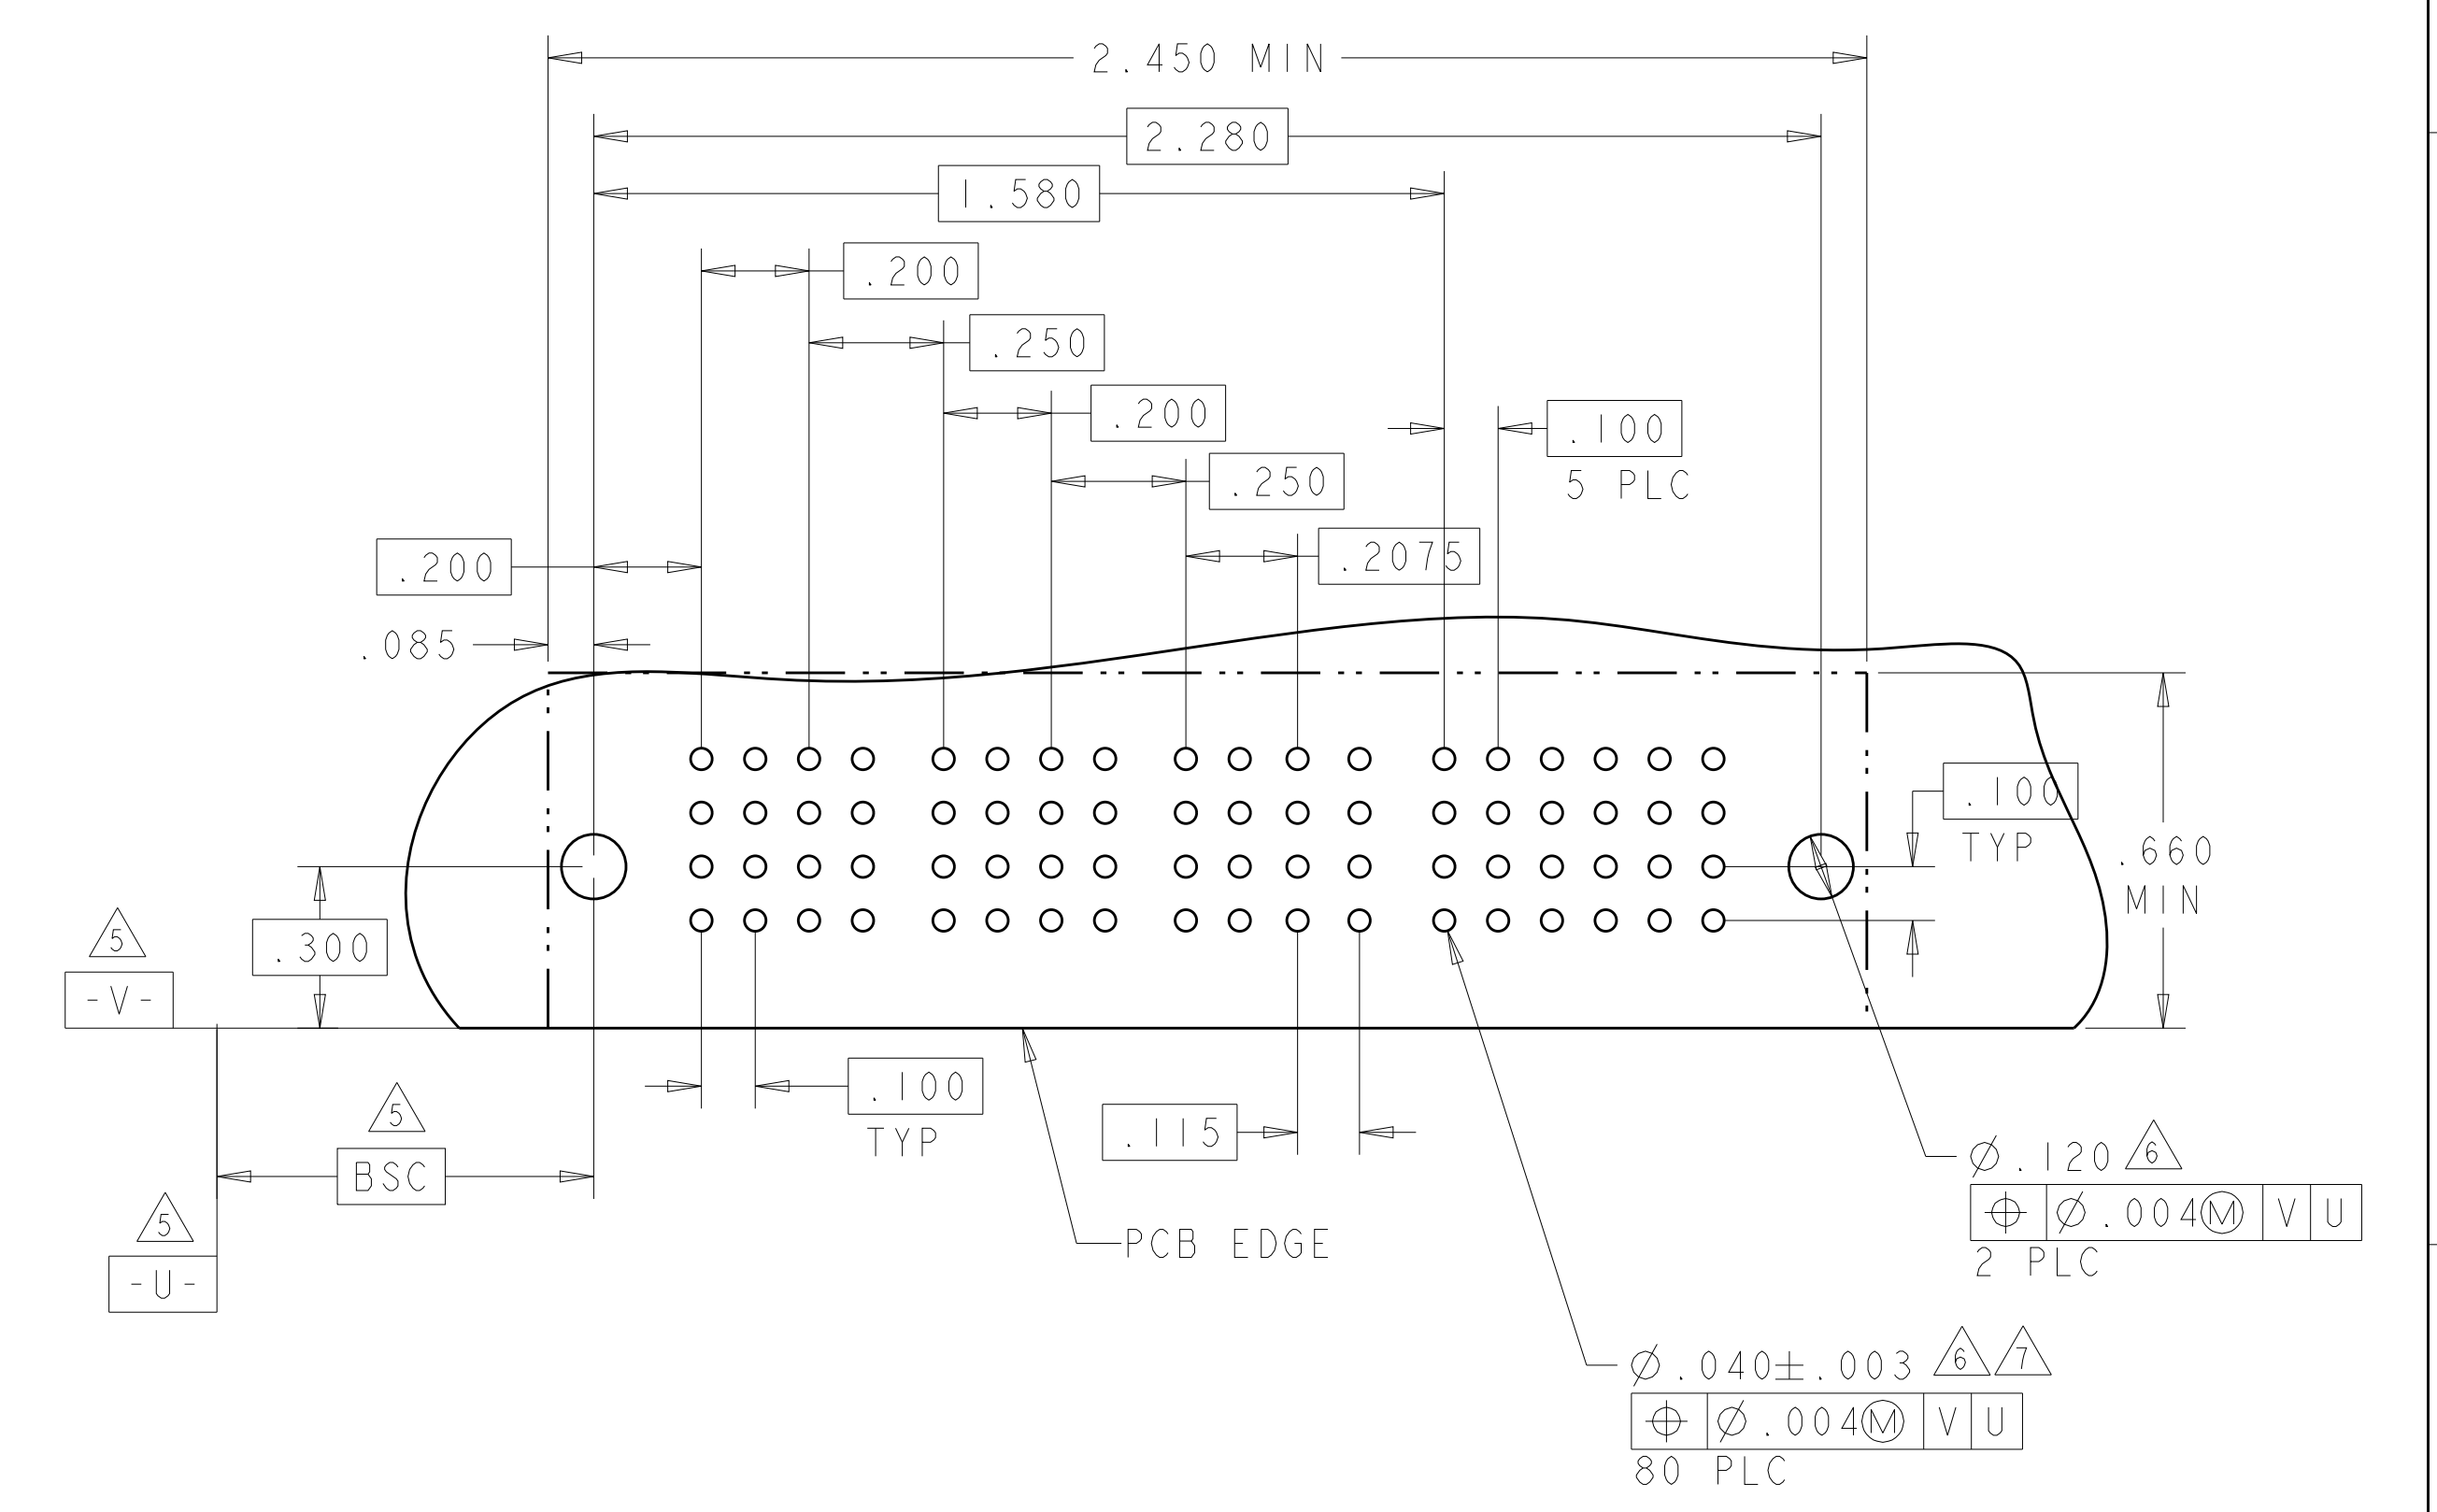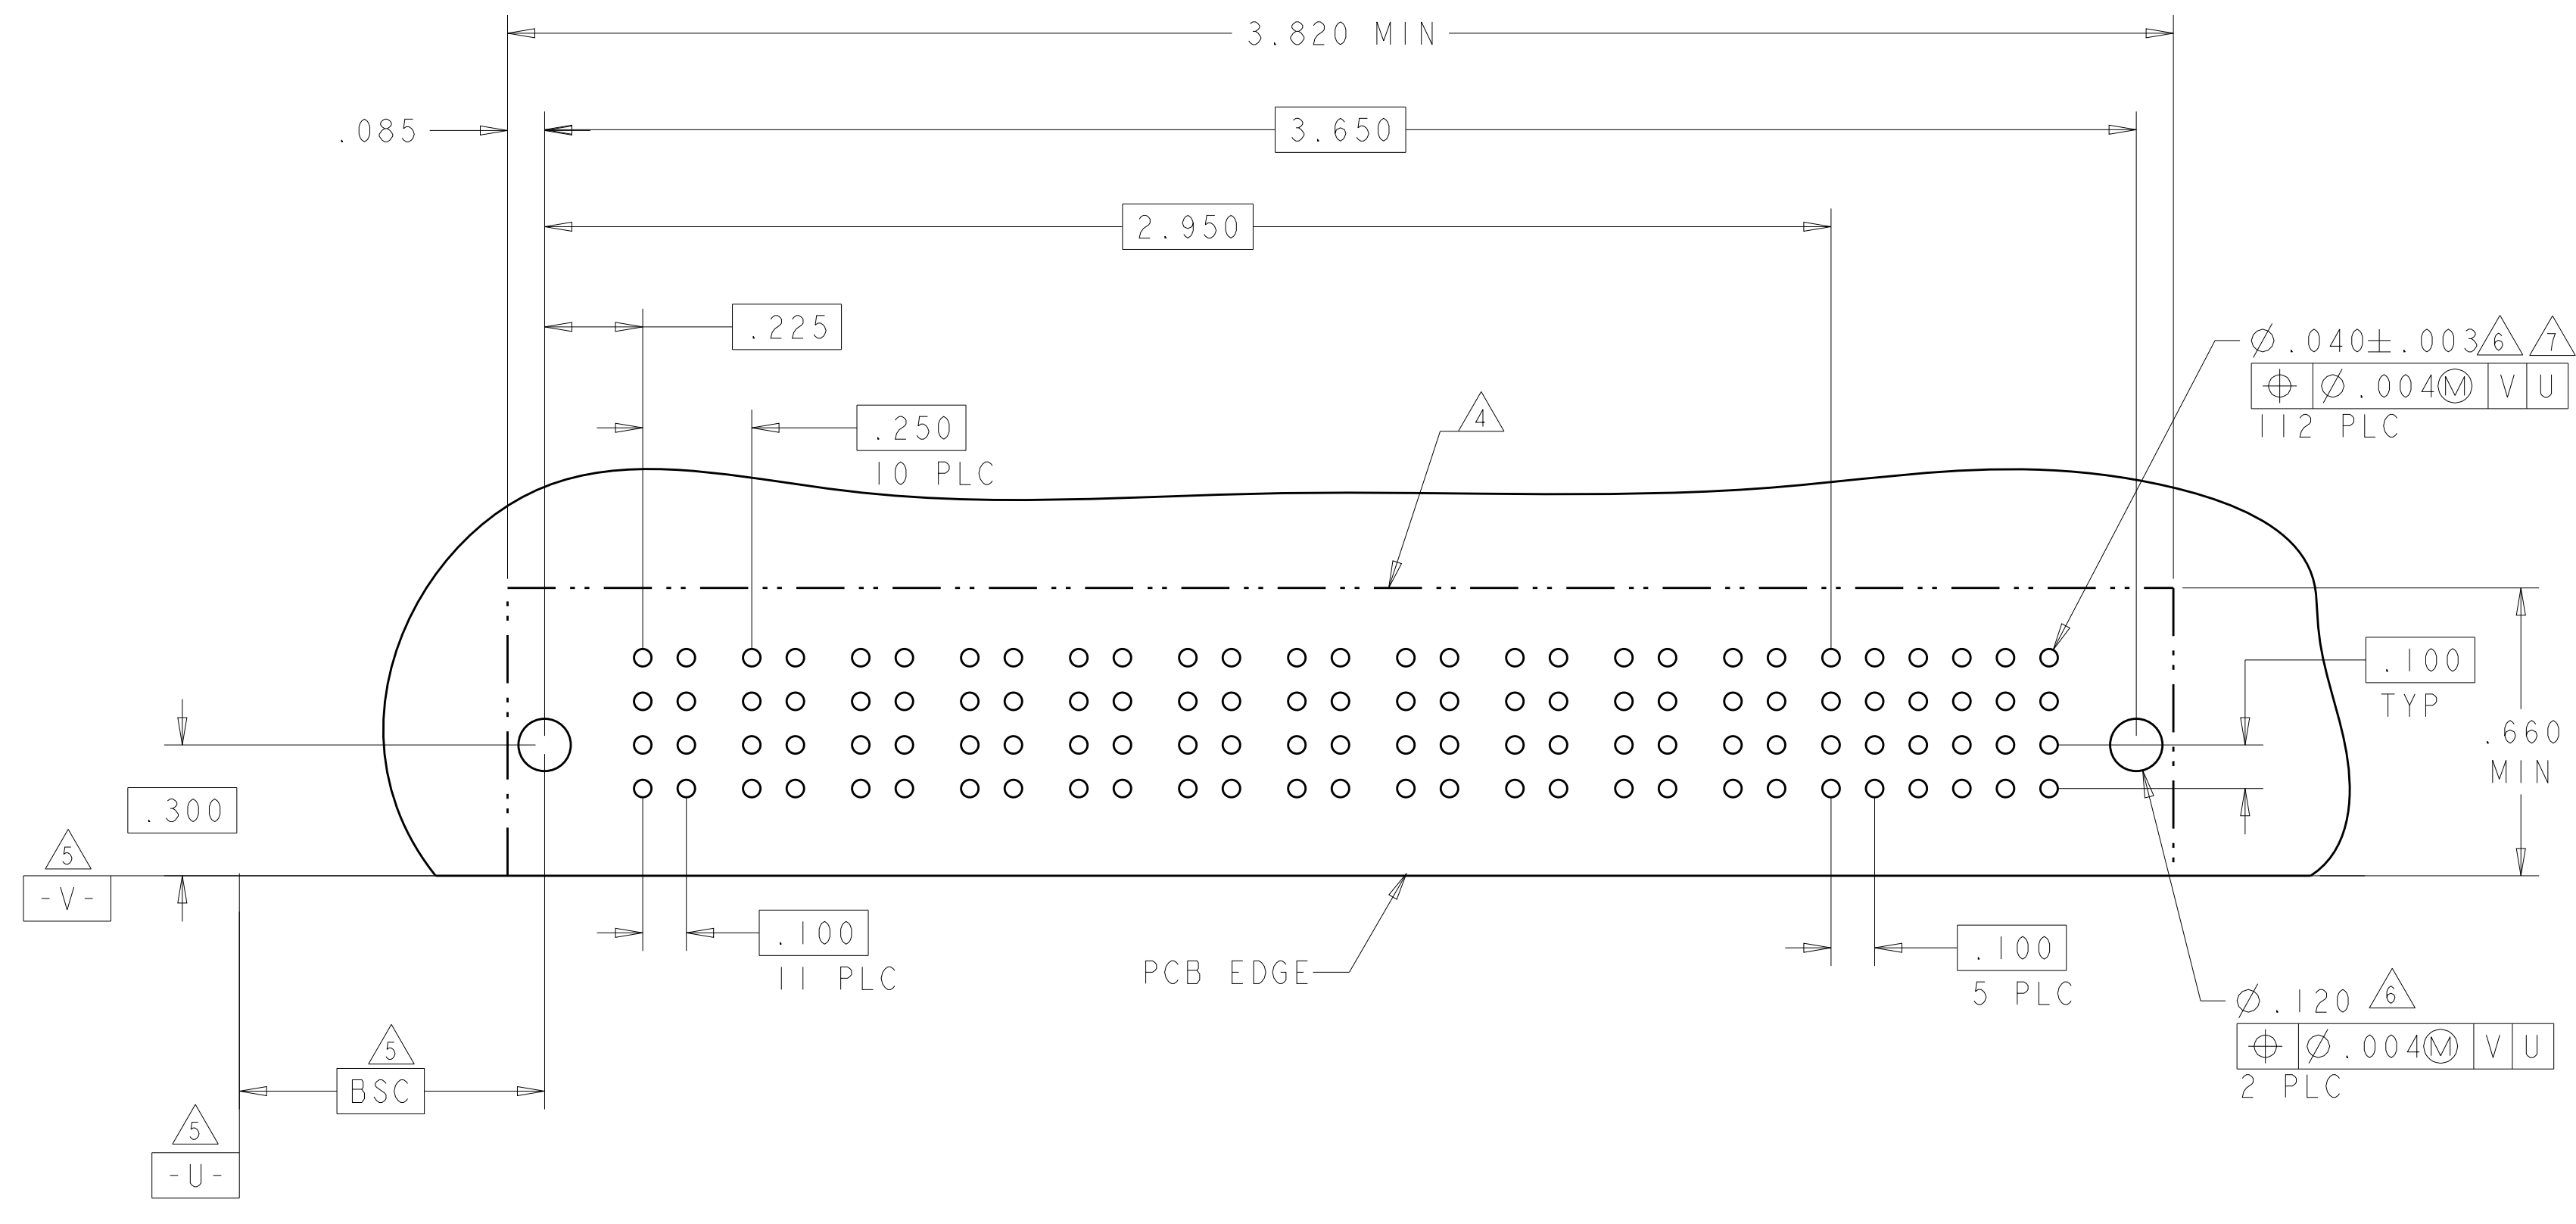



2-6450830-0 AND 2-6450830-5 PCB LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DMN: H.LIU 27MAY2008	TE Connectivity
DIMENSIONS: INCHES		CHK: S.ZHAO 27MAY2008	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: S.ZHAO	NAME: R/A HEADER WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY
0 PLC ±.01		PRODUCT SPEC: 108-2292	MULTI-BEAM XLE
1 PLC ±.01		APPLICATION SPEC: 114-13251	SIZE: A100779
2 PLC ±.01		WEIGHT: -	CAGE CODE: 6450832
3 PLC ±.005		CUSTOMER DRAWING	SCALE: 4:1 SHEET 12 OF 24 REV: K6
4 PLC ±.002			
ANGLES: .0020			
FINISH: -			

LOC		DIST		REVISIONS			
P	LTN	DESCRIPTION	DATE	DMN	APVD		
-	-	SEE SHEET 1	-	-	-		

PART NUMBER	ROWS	POWER						SIGNAL				
		P1	P2	P3	P4	P5	P6	1	2	3	4	5
2-6450832-2	D C B A	TM	TM	TM	TM	TM	J	J	J	J	J	HD
							K	K	K	K	K	
							N	G	N	N	N	
							S	S	S	S	S	
6P + 20S												


PART NUMBER	ROWS	POWER										SIGNAL						
		P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	1	2	3	4	5	6
2-6450832-8	D C B A	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	J	J	J	J	J	HD	
												K	K	K	K	K		F
												N	N	N	N	N		N
11HDP + 24S																		

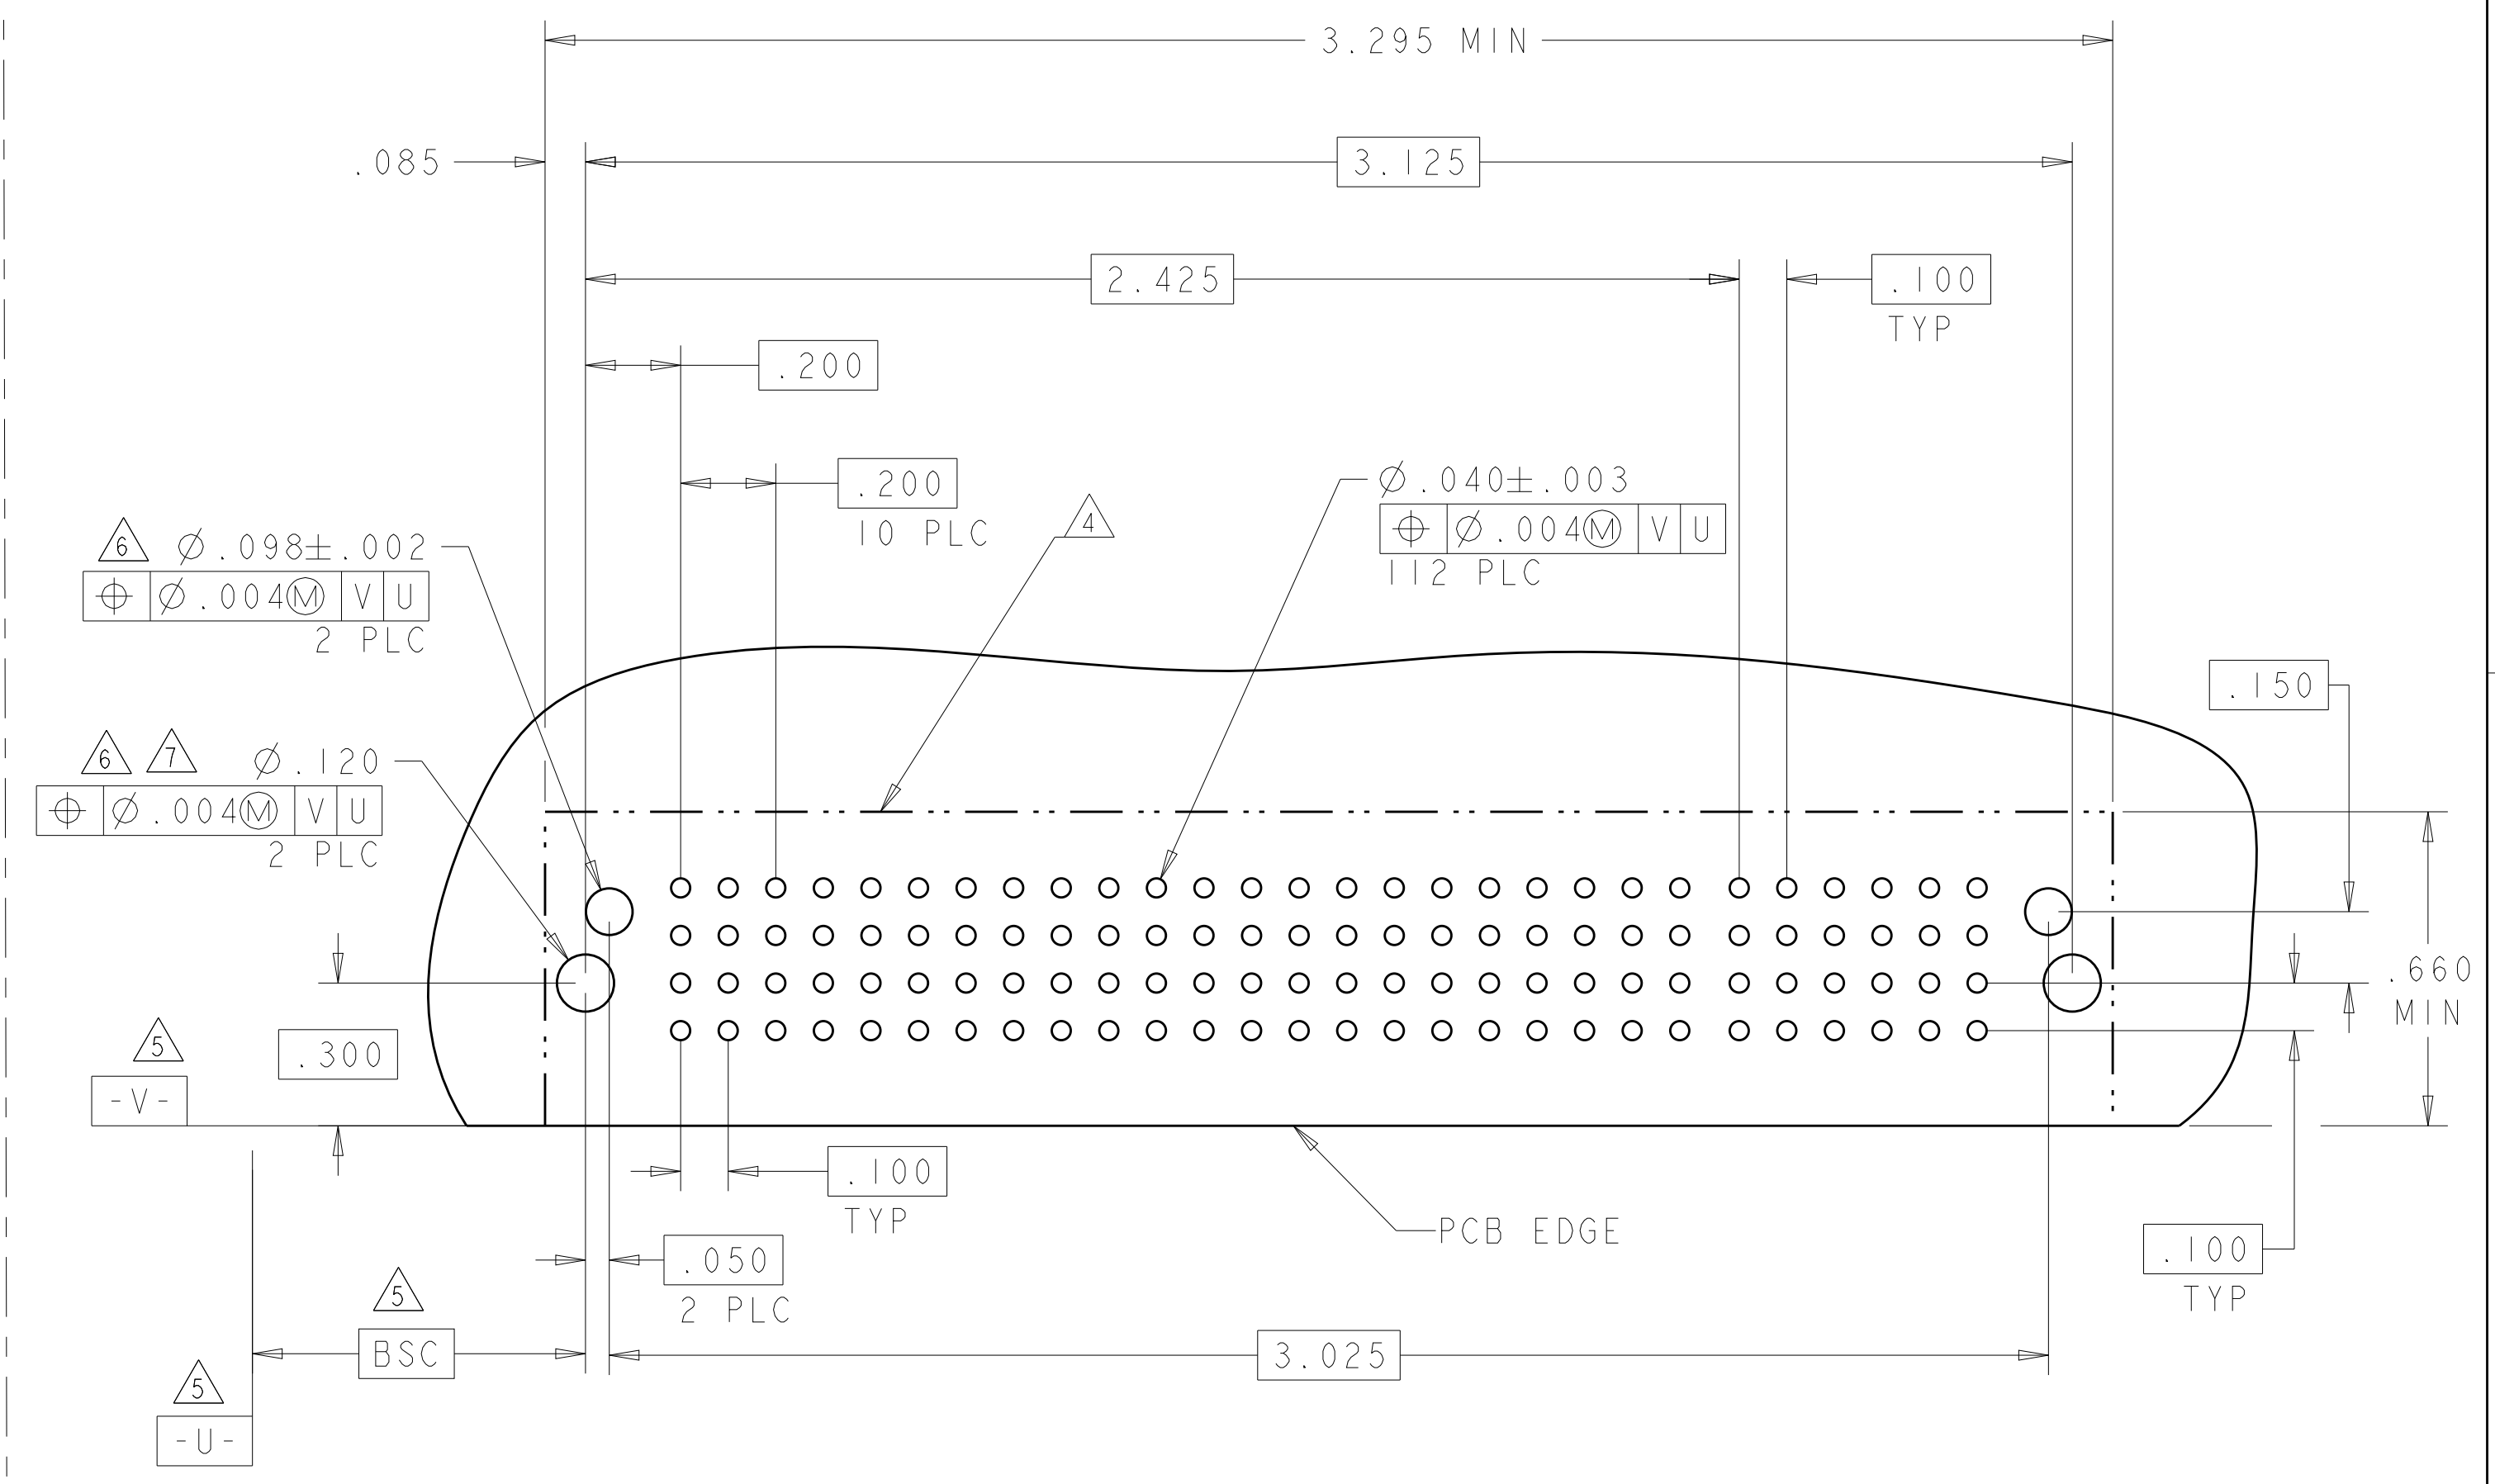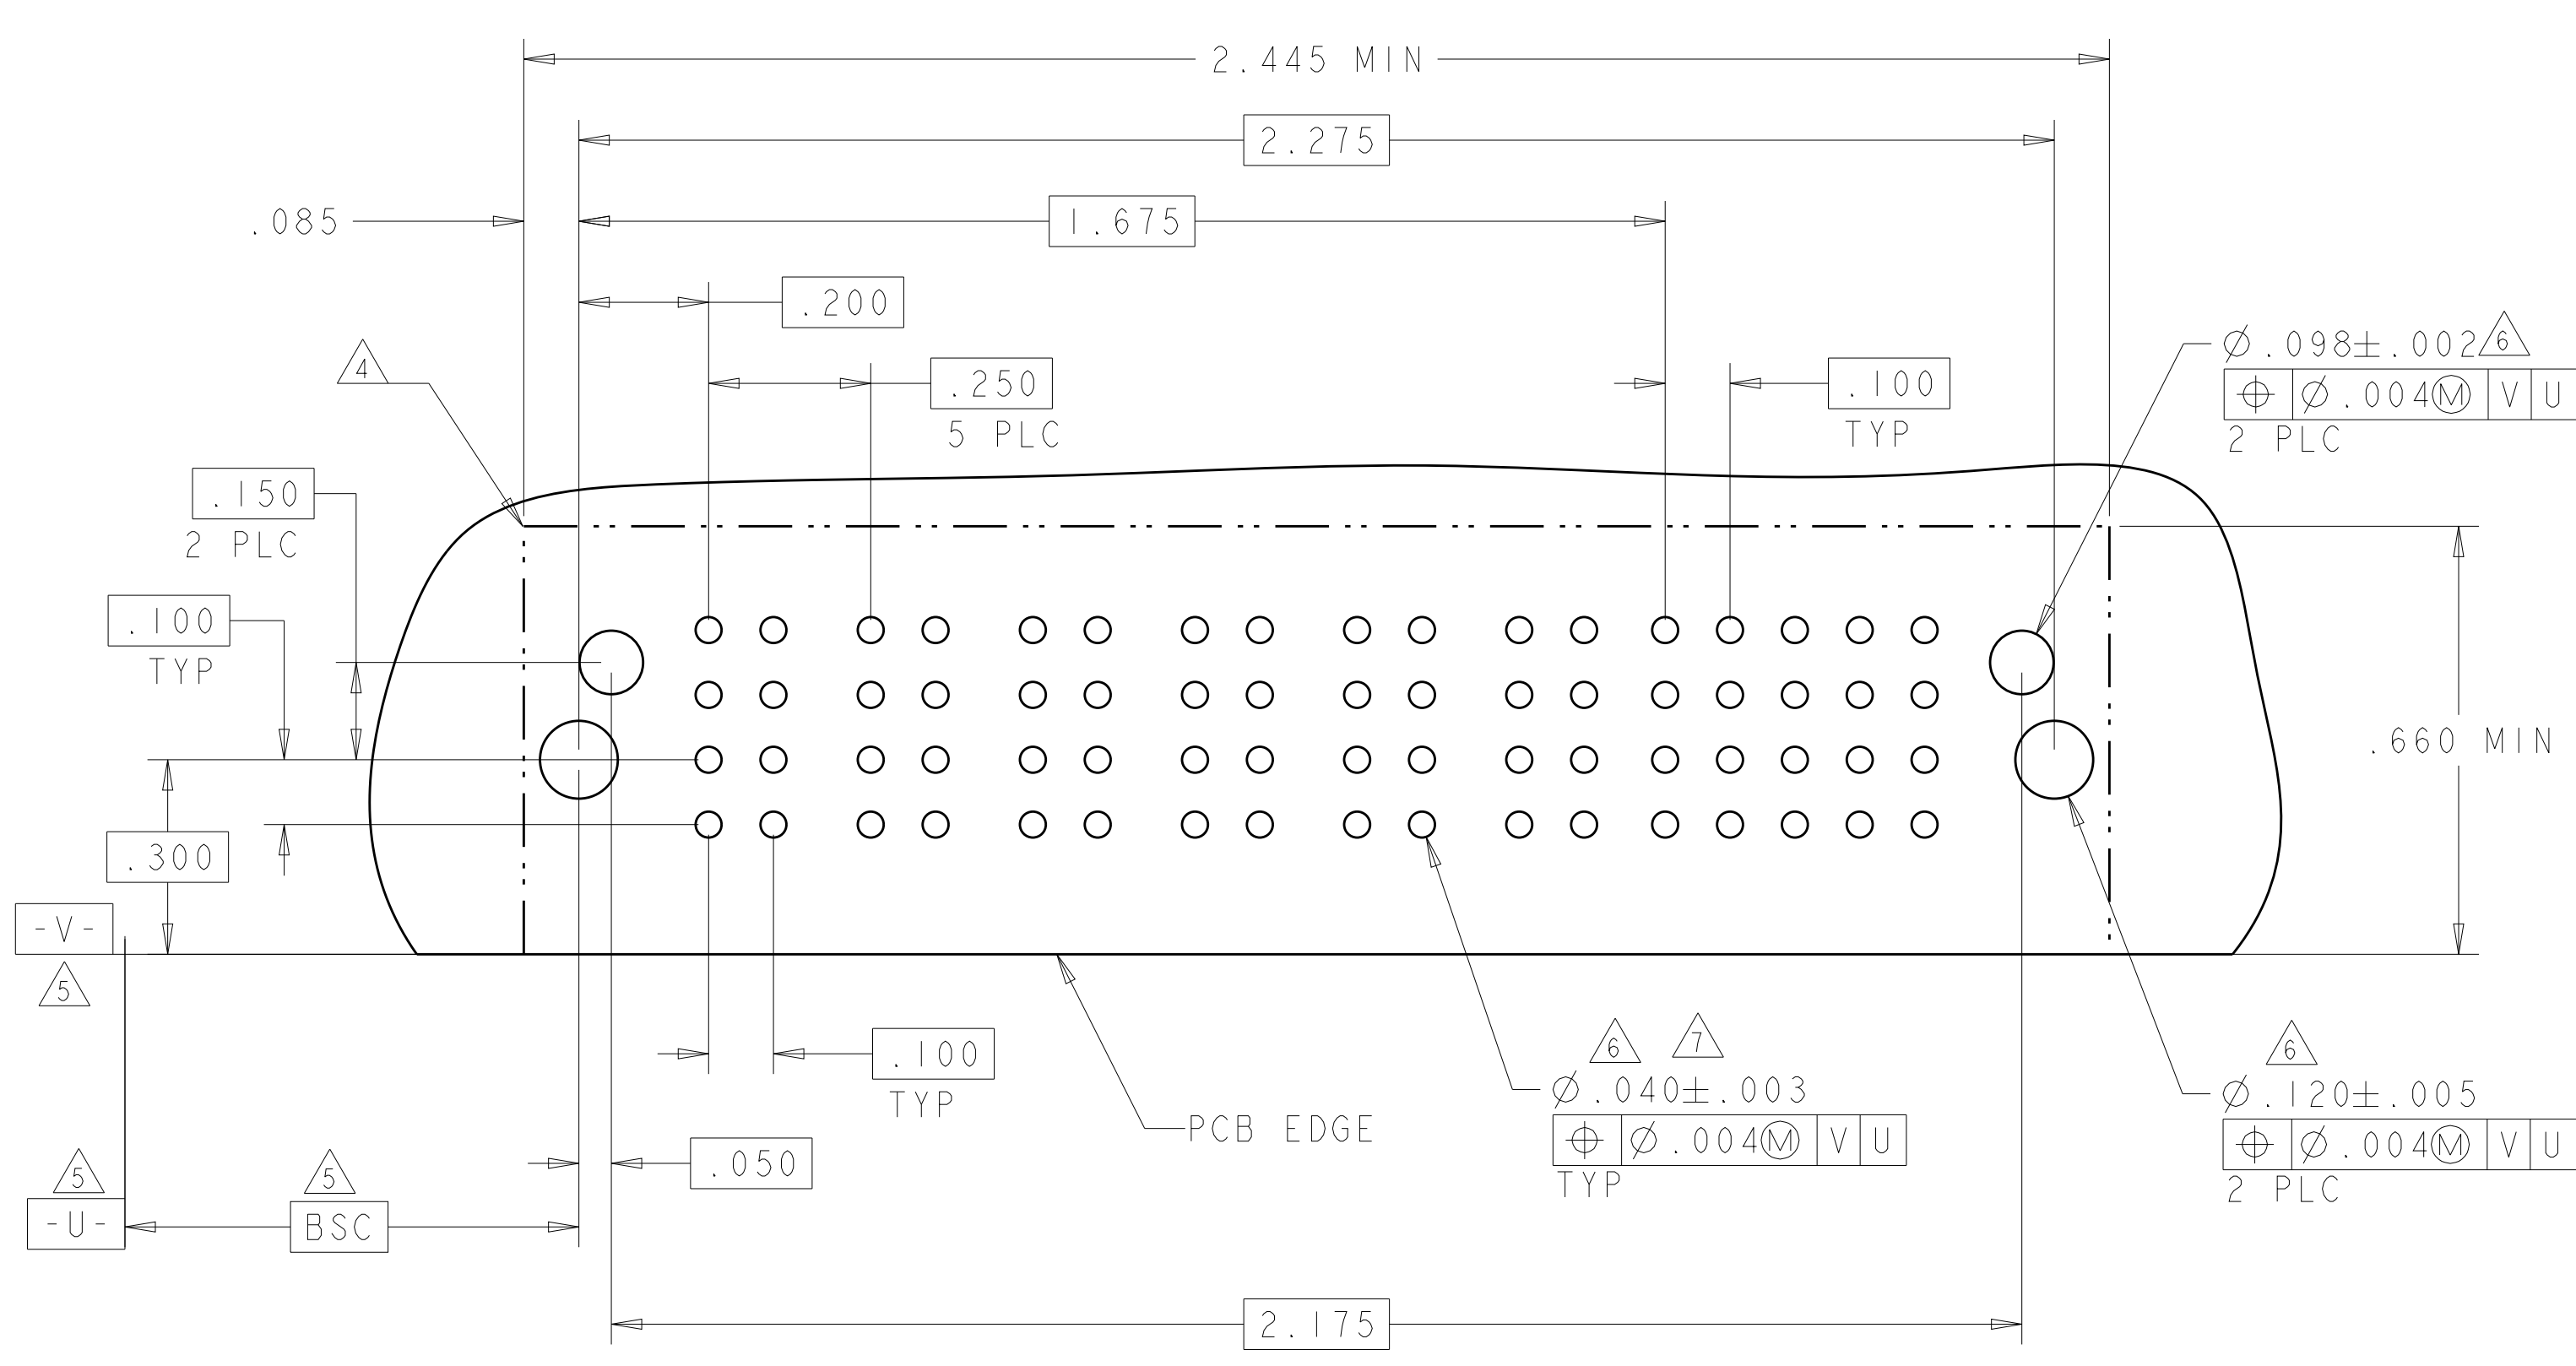

THIS DRAWING IS A CONTROLLED DOCUMENT.		DMN: H.LIU 27MAY2008	 TE Connectivity
DIMENSIONS: INCHES		CHK: S.ZHAO 27MAY2008	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: S.ZHAO	NAME: R/A HEADER WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY
0 PLC ±	1 PLC ±.01	PRODUCT SPEC: 108-2292	MULTI-BEAM XLE
2 PLC ±.005	3 PLC ±.002	APPLICATION SPEC: 114-13251	SIZE: A100779
4 PLC ±.002	ANGLES ±.020	WEIGHT: -	CAGE CODE: C=6450832
MATERIAL: FINISH: *		CUSTOMER DRAWING	SCALE: 4:1 SHEET 13 OF 24 REV: K6



LOC	DIST	REVISIONS			
P	LTN	DESCRIPTION	DATE	DMN	APVD
-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS	POWER												SIGNAL			
		P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	1	2	3	4
2-6450832-3	D	PS	PS	PS	PS	PS	PS	PS	PS	PS	PS	PS	PS	J	J	J	J
	C	PS	PS	PS	PS	PS	PS	PS	PS	PS	PS	PS	PS	K	K	K	K
	B	PS	PS	PS	PS	PS	PS	PS	PS	PS	PS	PS	PS	N	N	N	N
	A	PS	PS	PS	PS	PS	PS	PS	PS	PS	PS	PS	PS	S	S	S	H
3ACP + 9P + 16S																	

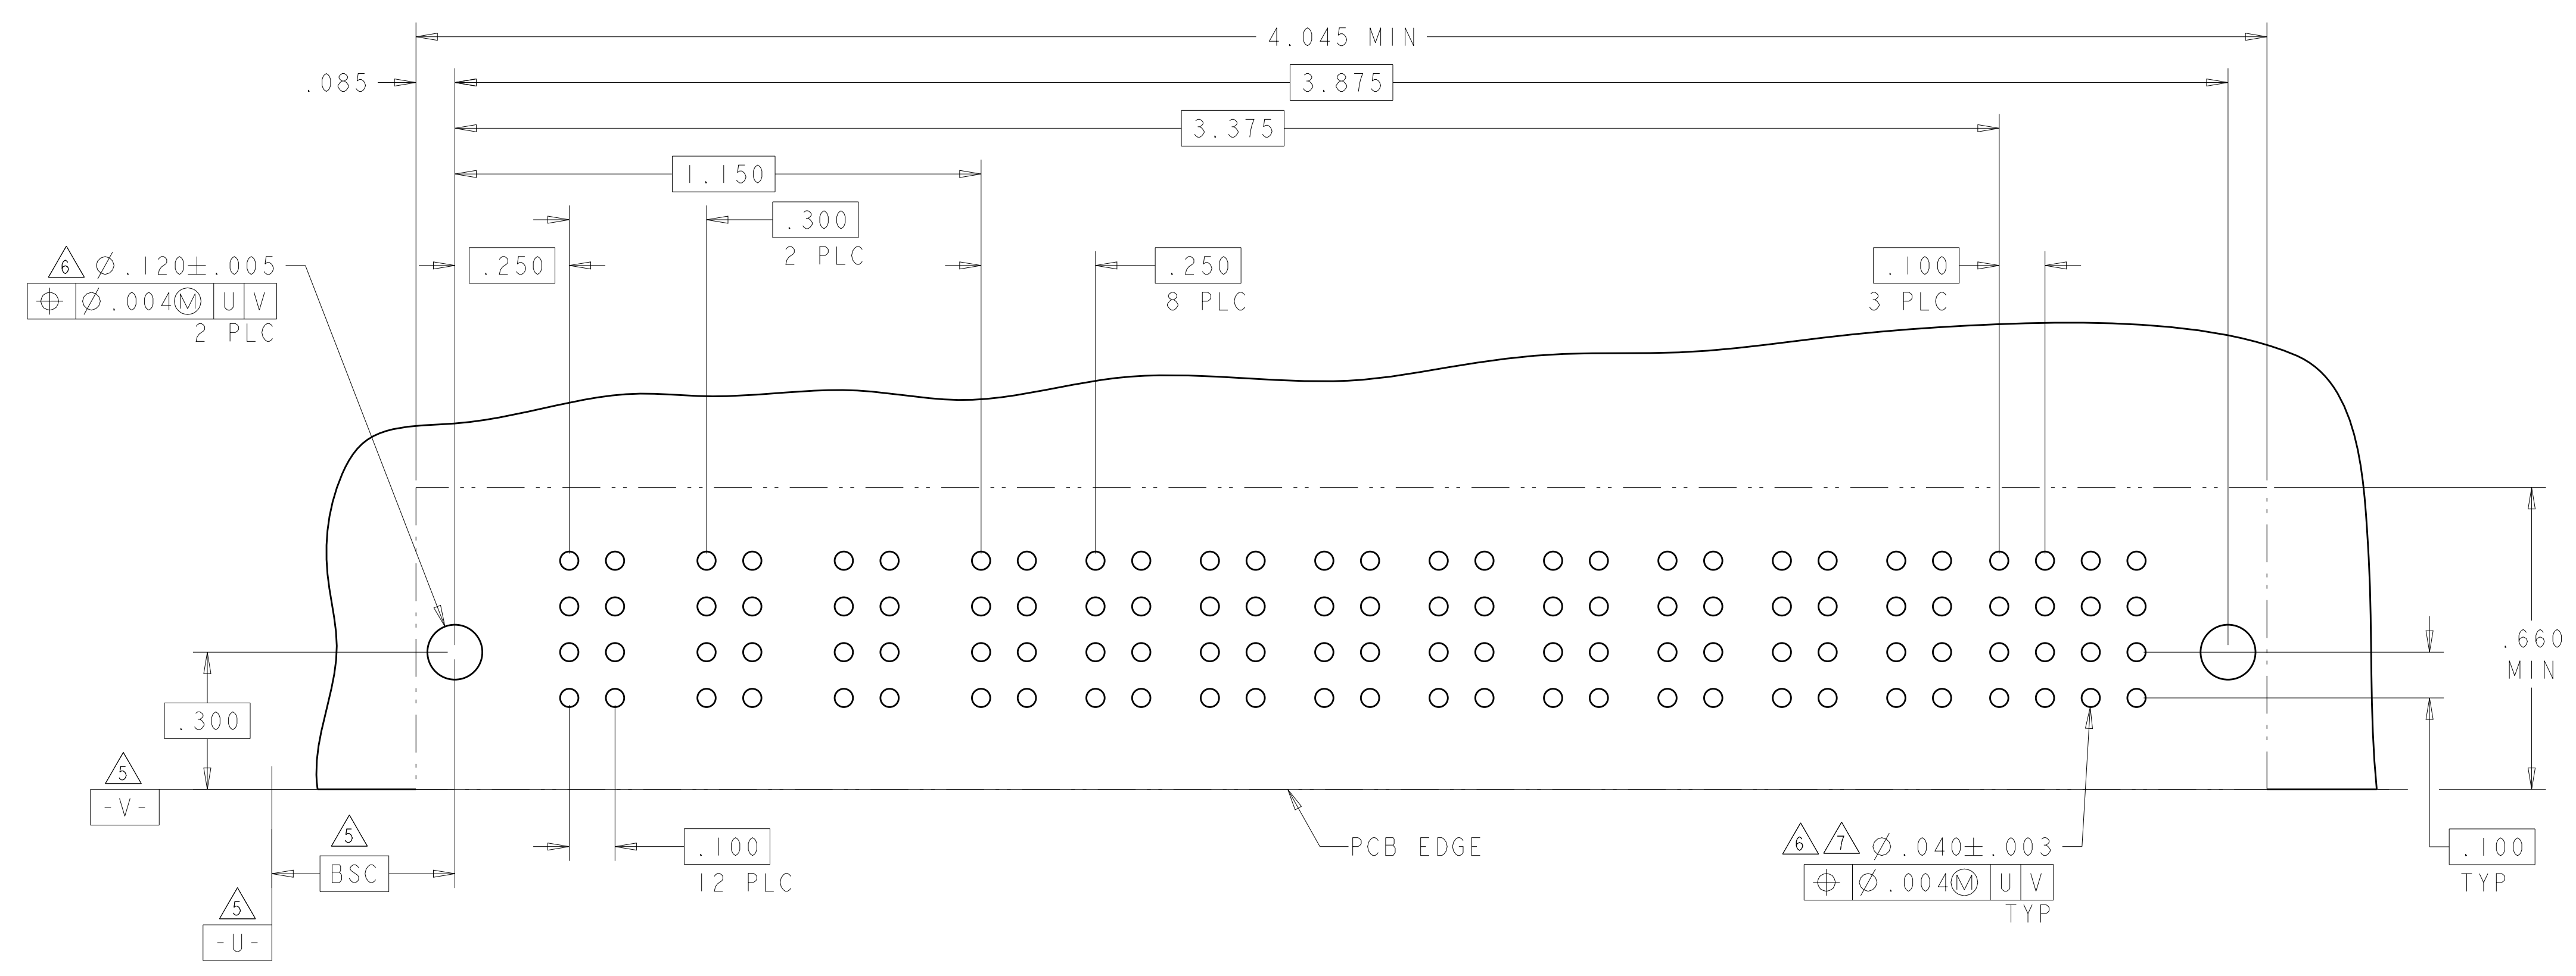

THIS DRAWING IS A CONTROLLED DOCUMENT.		DMN H. LIU 27MAY2008	TE Connectivity
DIMENSIONS: INCHES		CHK S. ZHAO 27MAY2008	
		APVD S. ZHAO	NAME R/A HEADER WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	RESTRICTED TO
0 PLC ±		108-2292	SIZE A100779
1 PLC ±.01		APPLICATION SPEC	CAGE CODE C=6450832
2 PLC ±.01		114-13251	DRAWING NO
3 PLC ±.005		WEIGHT	SHEET 14 OF 24
4 PLC ±.0020		CUSTOMER DRAWING	SCALE 4:1
ANGLES ±7°		SCALE	REV K6
FINISH		SCALE 4:1	SHEET 14 OF 24

LOC		REVISIONS			
NO	DATE	DESCRIPTION	DATE	BY	APPV
-	-	SEE SHEET 1	-	-	-

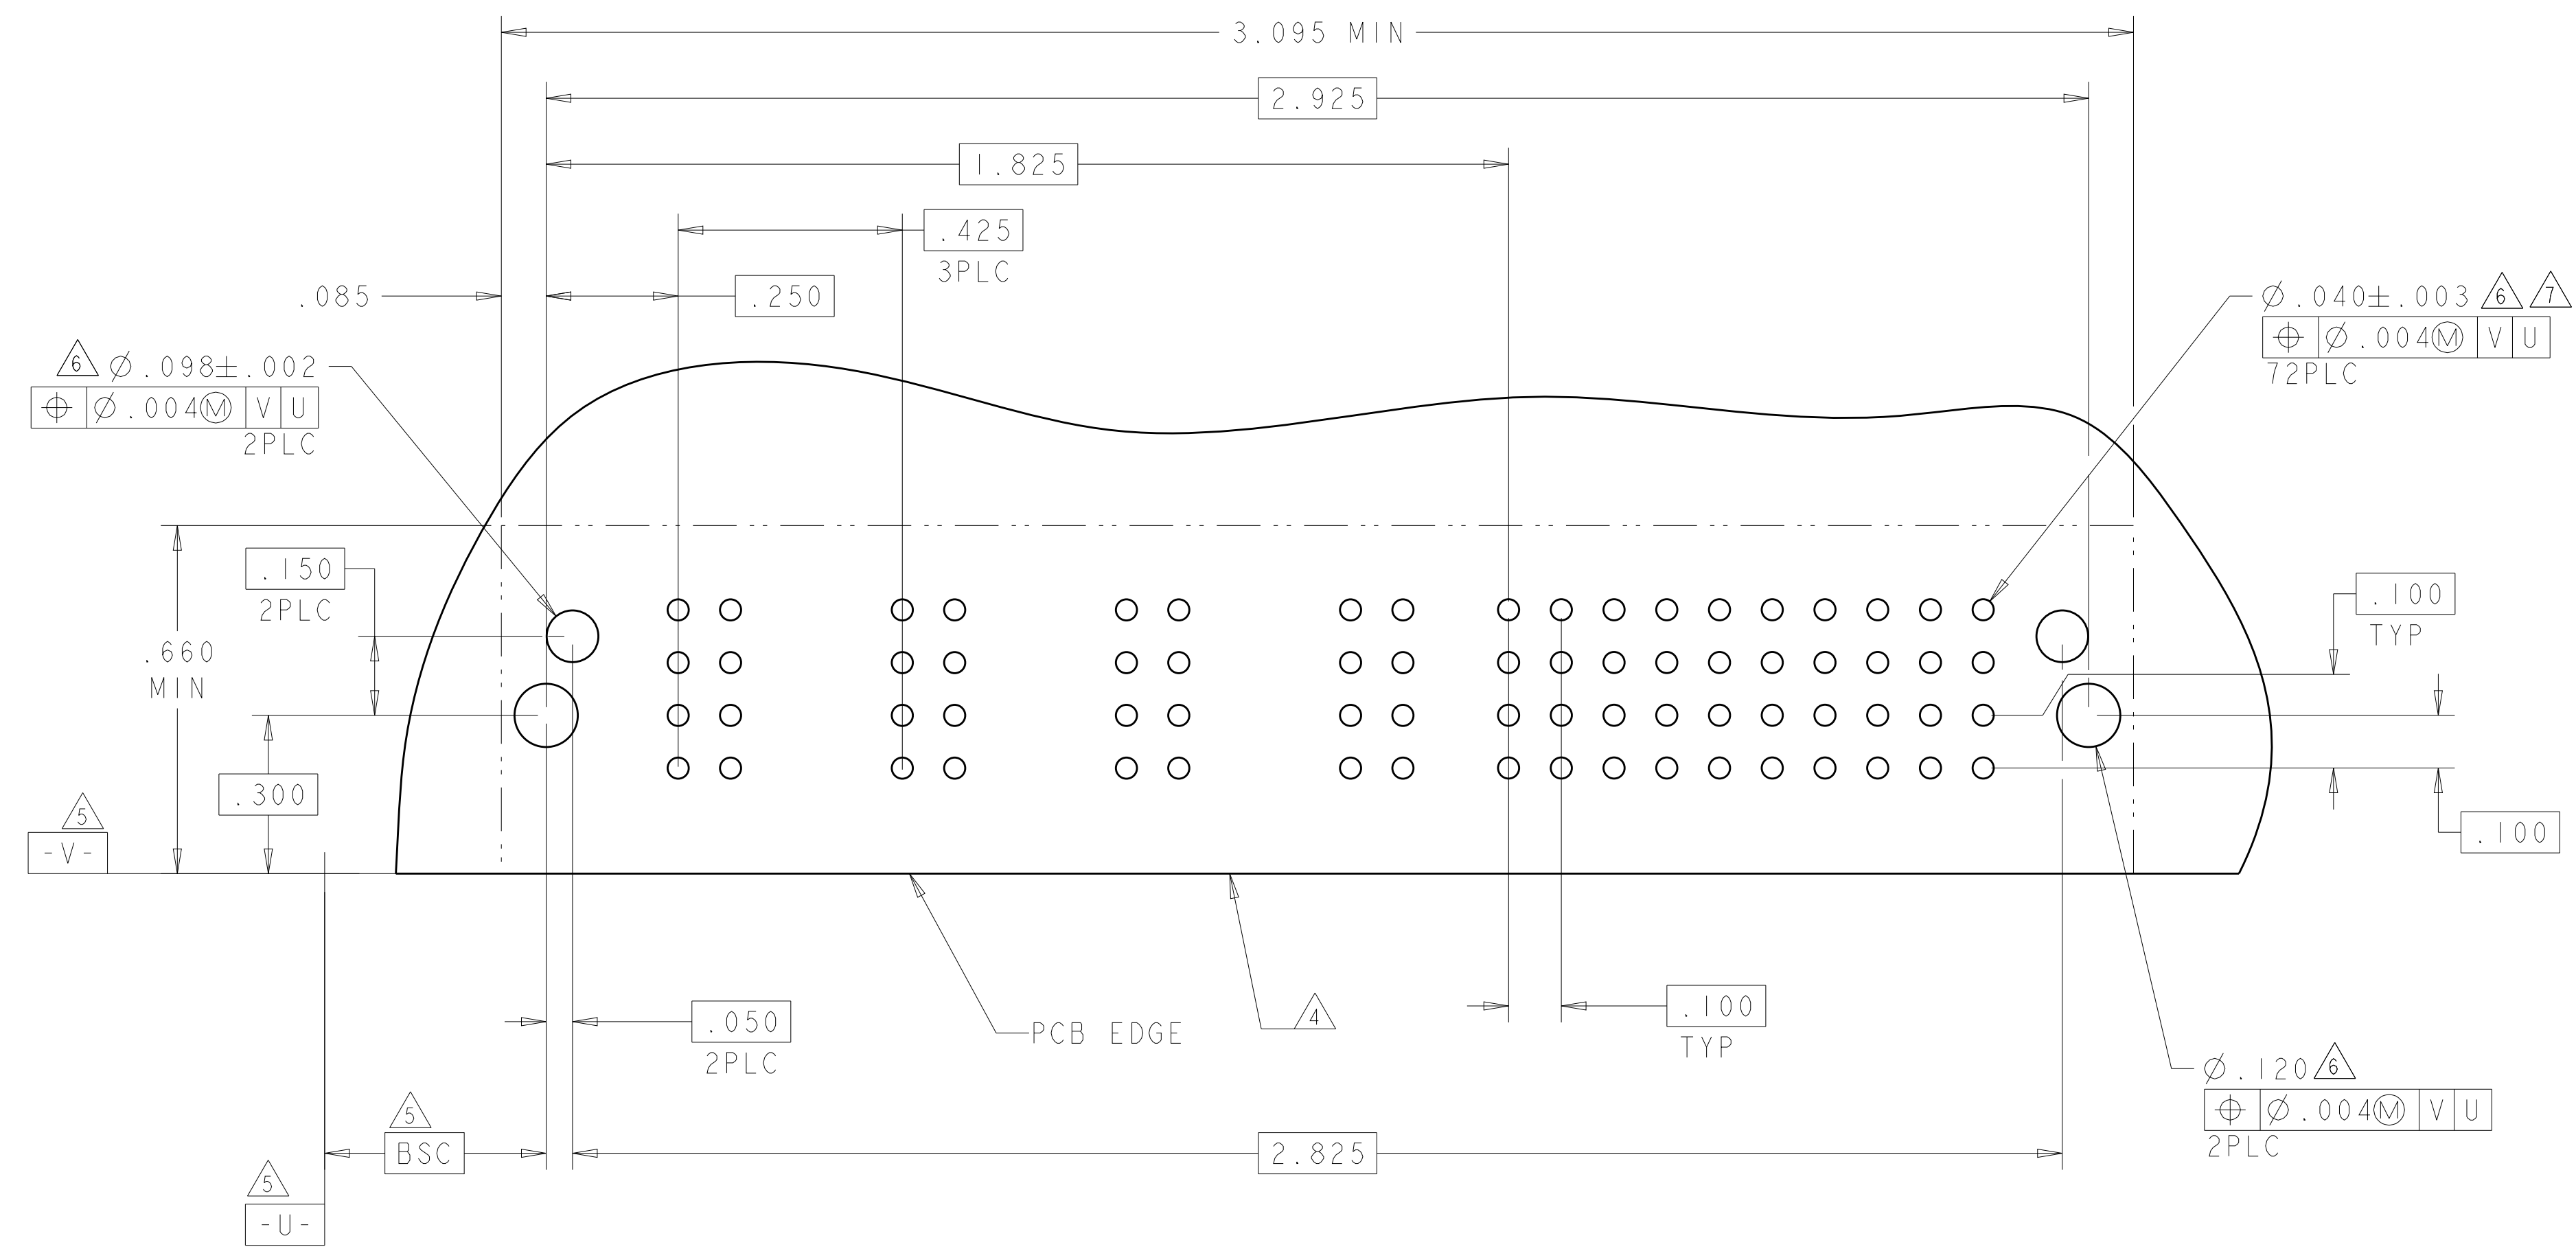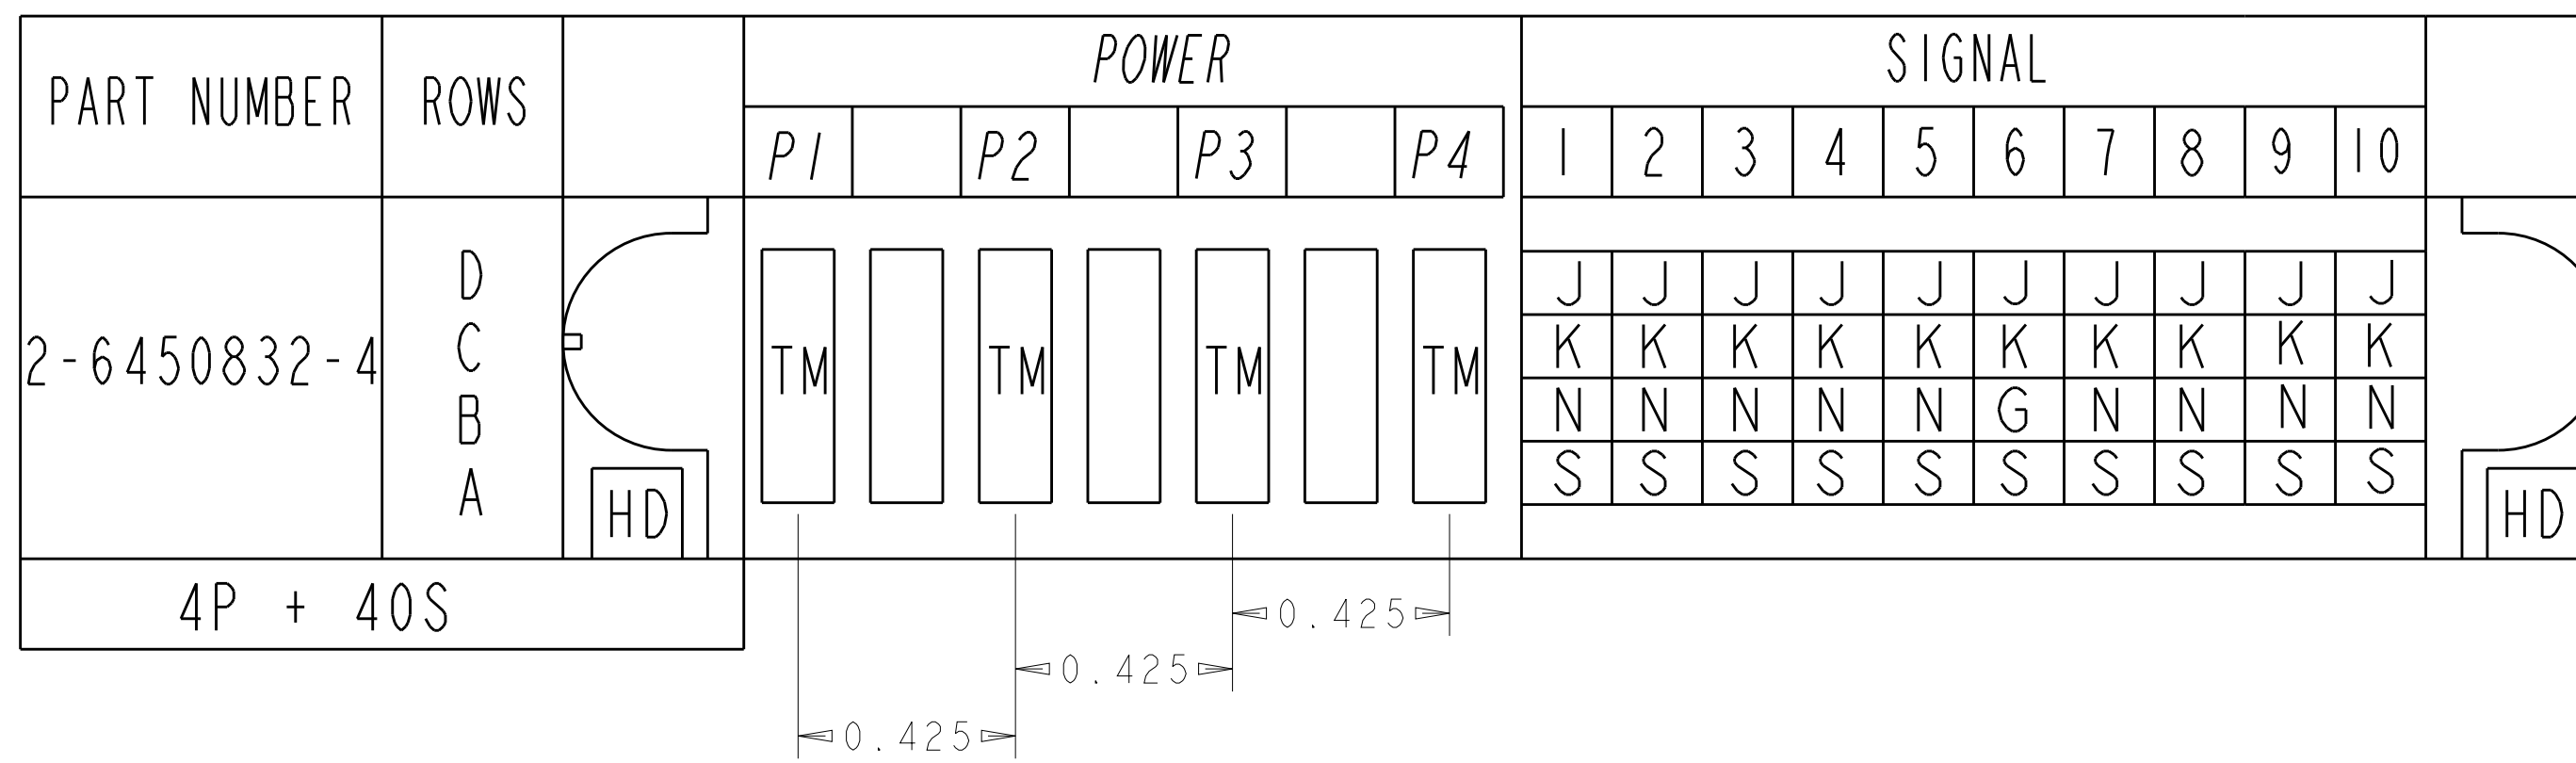



RECOMMENDED PCB LAYOUT BY TE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H.LIU 27MAY2008	
		CHK S.ZHAO 27MAY2008	
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APV S.ZHAO	NAME
INCHES	0 PLC ±.01 2 PLC ±.01 3 PLC ±.01 4 PLC ±.005 ANGLES ±.0020	PRODUCT SPEC 108-2292	R/A HEADER WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY
		APPLICATION SPEC 114-13251	MULTI-BEAM XLE
MATERIAL	FINISH	RESTRICTED TO	SIZE CAGE CODE DRAWING NO
			A100779C=6450832
CUSTOMER DRAWING			SCALE 4:1 SHEET 15 OF 24 REV K6

LOC	DIST	REVISIONS			
P	LTN	DESCRIPTION	DATE	DMN	APVD
-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS	HD	POWER						SIGNAL						HD
			P1	P2	P3	P4	P5	P6	1	2	3	4	5	6	
2-6450832-6	D	HD	TM	TM	TM	TM	TM	J	J	J	J	J	J	HD	
	C							K	K	K	K	K	K		
	B							N	N	N	N	N	N		
	A							S	S	S	S	S	S		
6HDP + 24S															

PART NUMBER	ROWS	HD	POWER				SIGNAL		HD
			P1	P2	P3	P4	1	2	
3-6450832-0	D	HD	TM	TM	TM	TM	J	E	HD
	C						K	F	
	B						N	G	
	A						S	H	
4ACP + 8S									

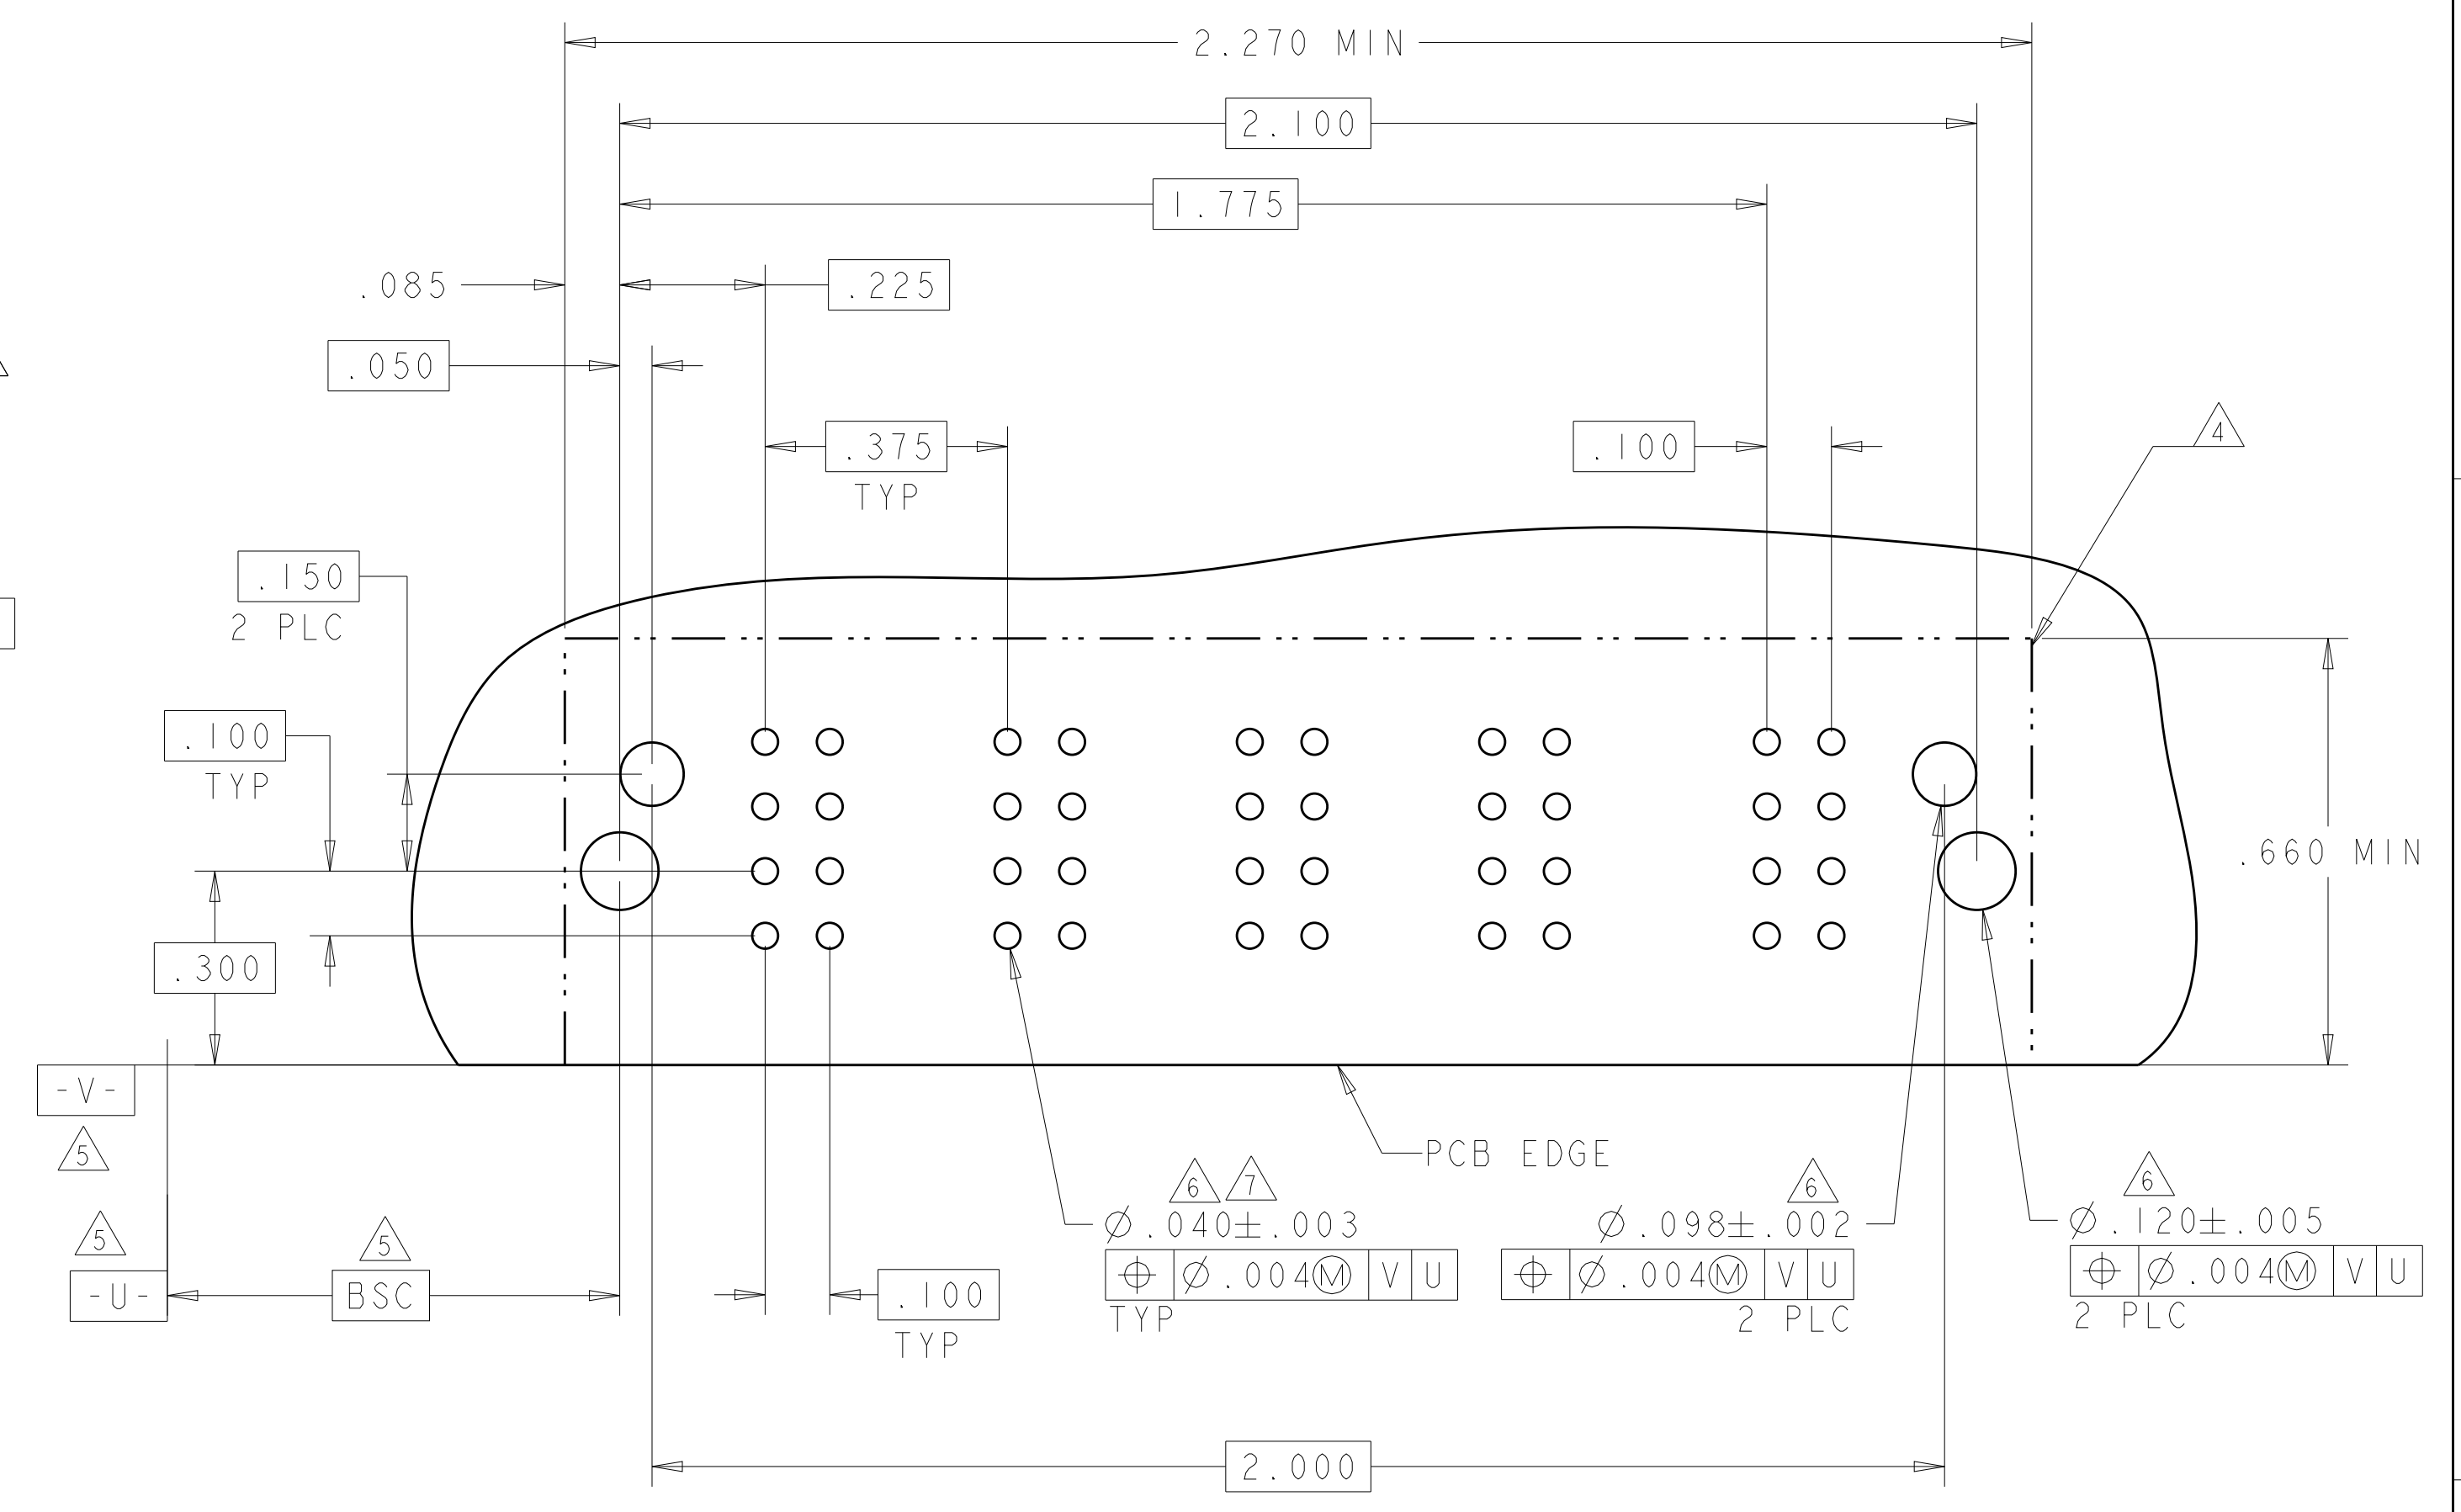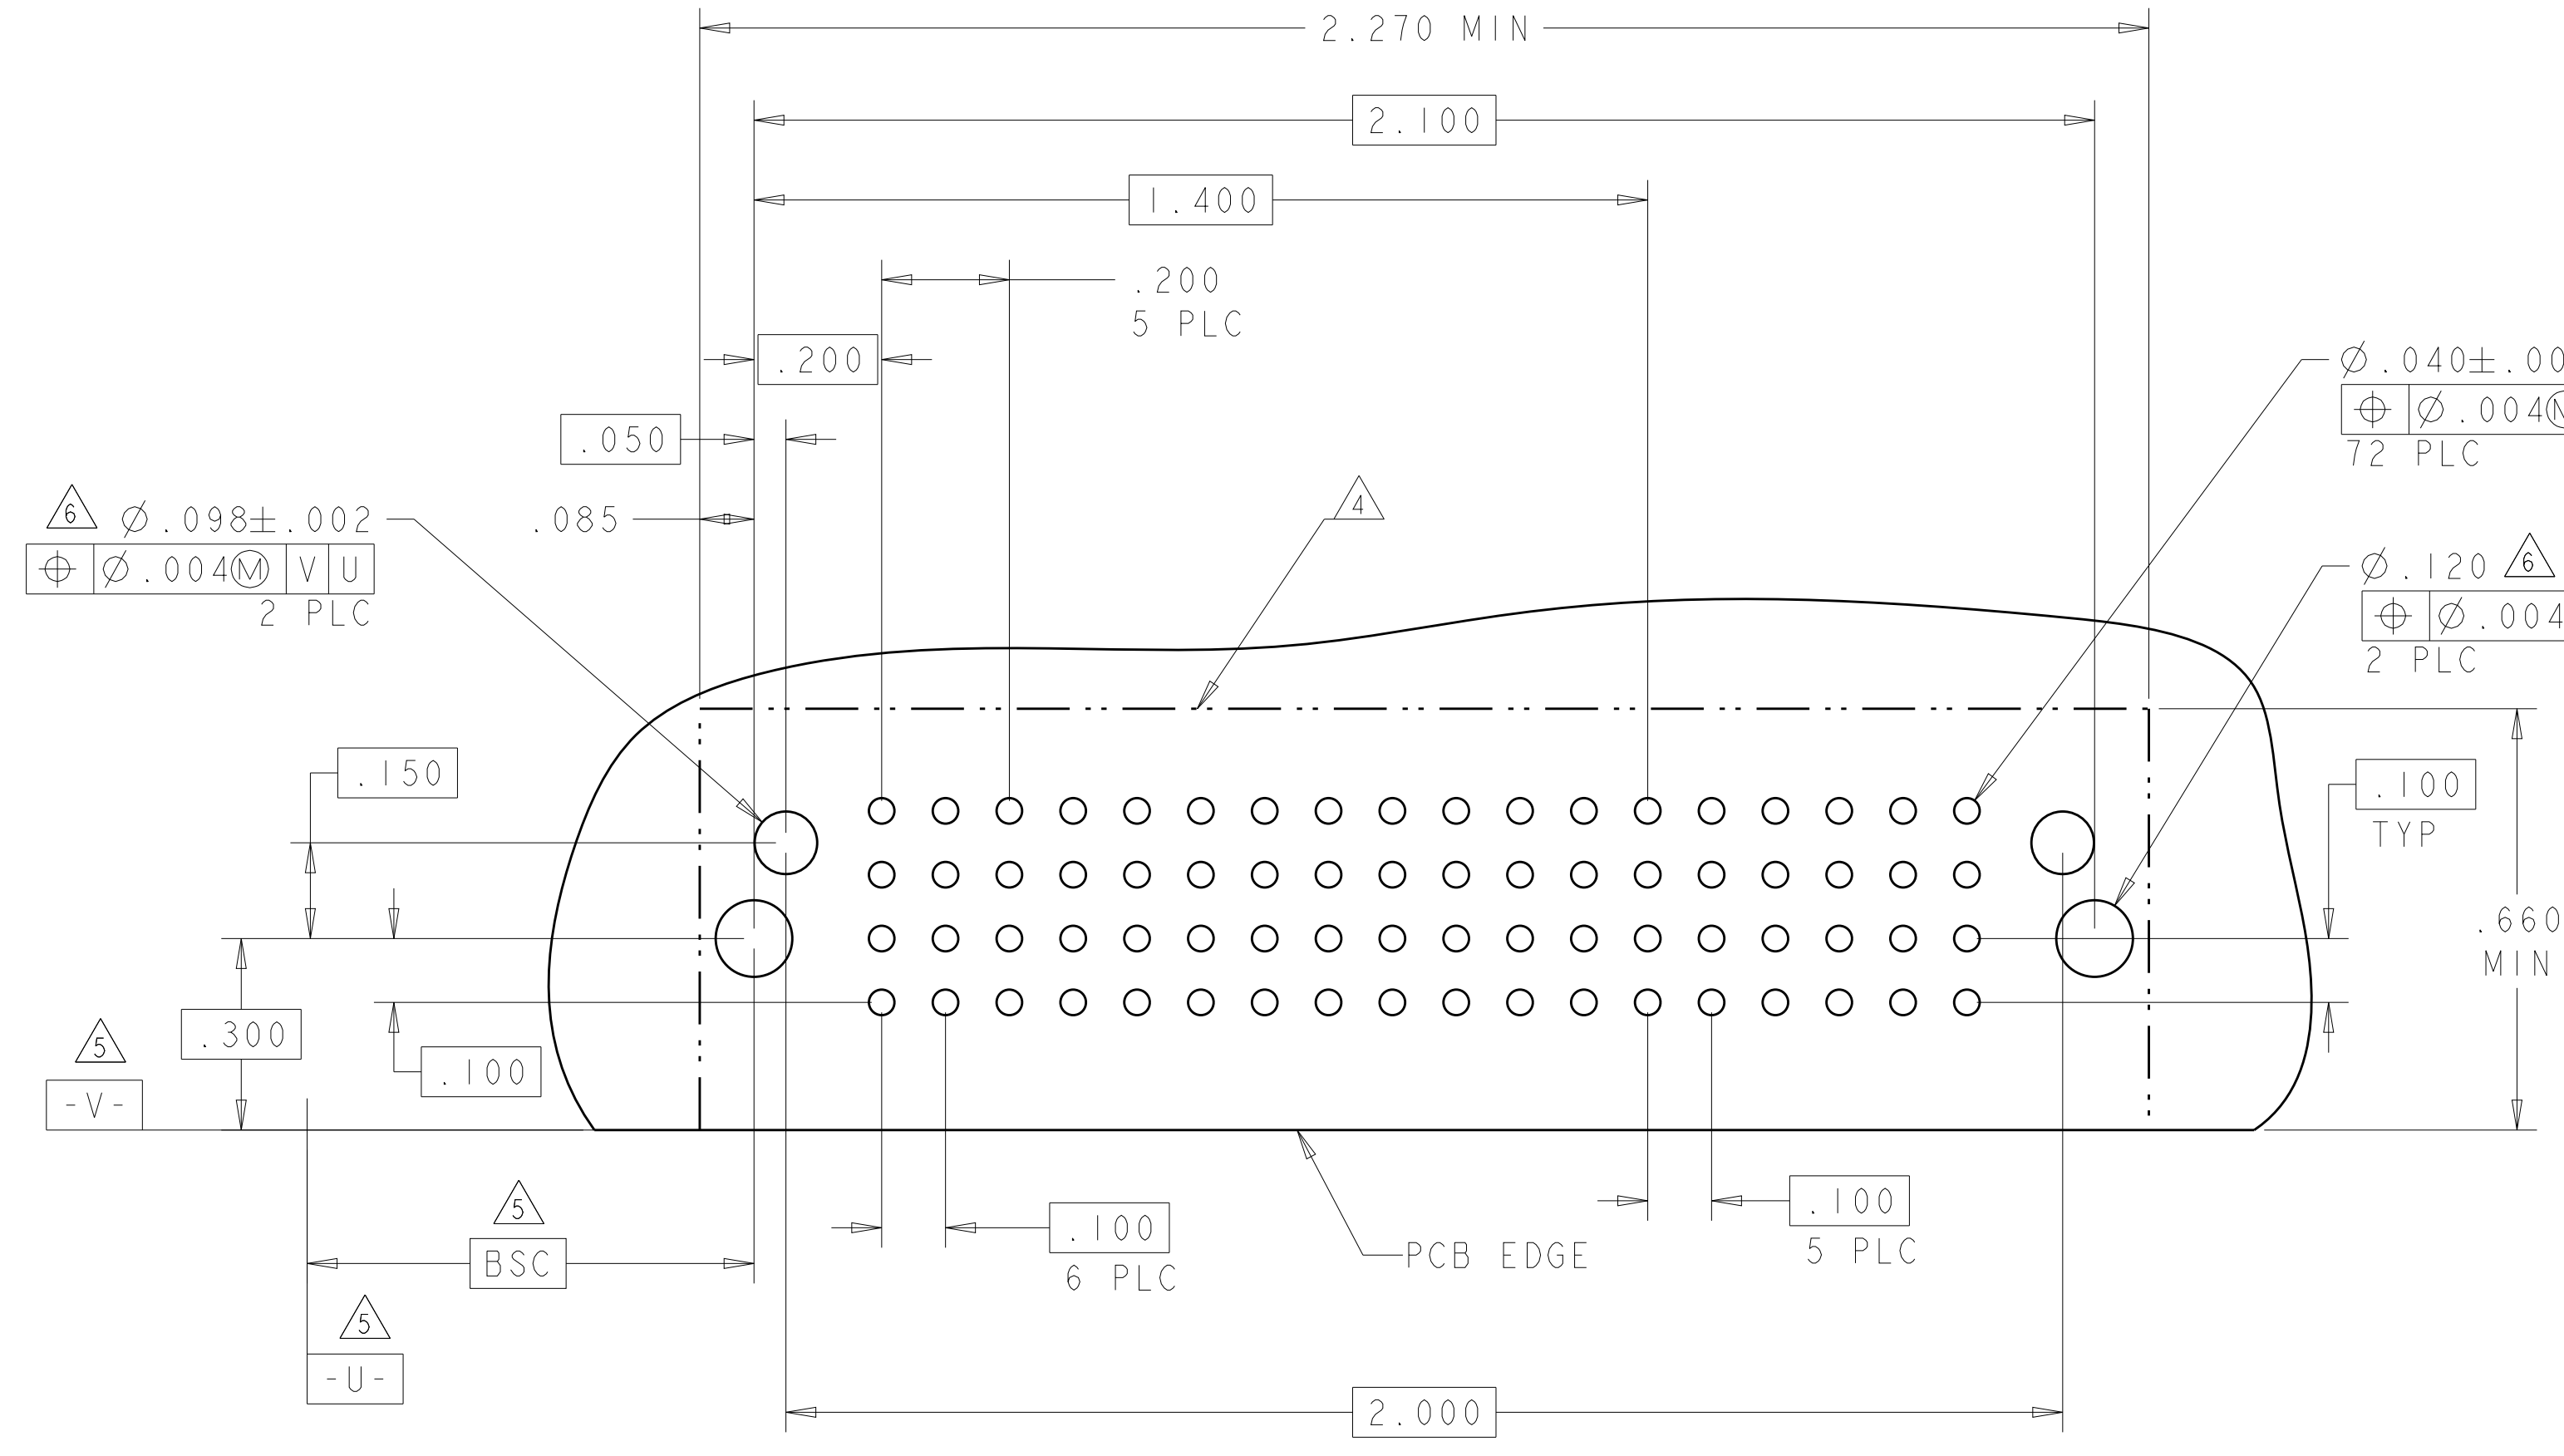



THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±.7°	OWN: H. LIU CHK: S. ZHAO APVD: S. ZHAO	DATE: 27MAY2008	 TE Connectivity
MATERIAL:	FINISH:	NAME: R/A HEADER WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE	PRODUCT SPEC: 108-2292	
CUSTOMER DRAWING		SIZE: 114-13251	SCALE: 4:1	SHEET 16 OF 24

LOC	DIST	REVISIONS			
P	LTM	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-






PART NUMBER	ROWS	POWER		SIGNAL	
		P1	P2	1	2
3-6450832-1	D	LM	LM	J	J
	C			N	N
	B			S	S
	A				
2LP + 8S					

PART NUMBER	ROWS	POWER										SIGNAL					
		P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	1	2	3	4	5
3-6450832-2	D	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	J	J	J	J	J	E
	C											K	K	K	K	K	F
	B											N	N	N	N	N	N
	A											S	S	S	S	S	S
11HDP + 24S																	

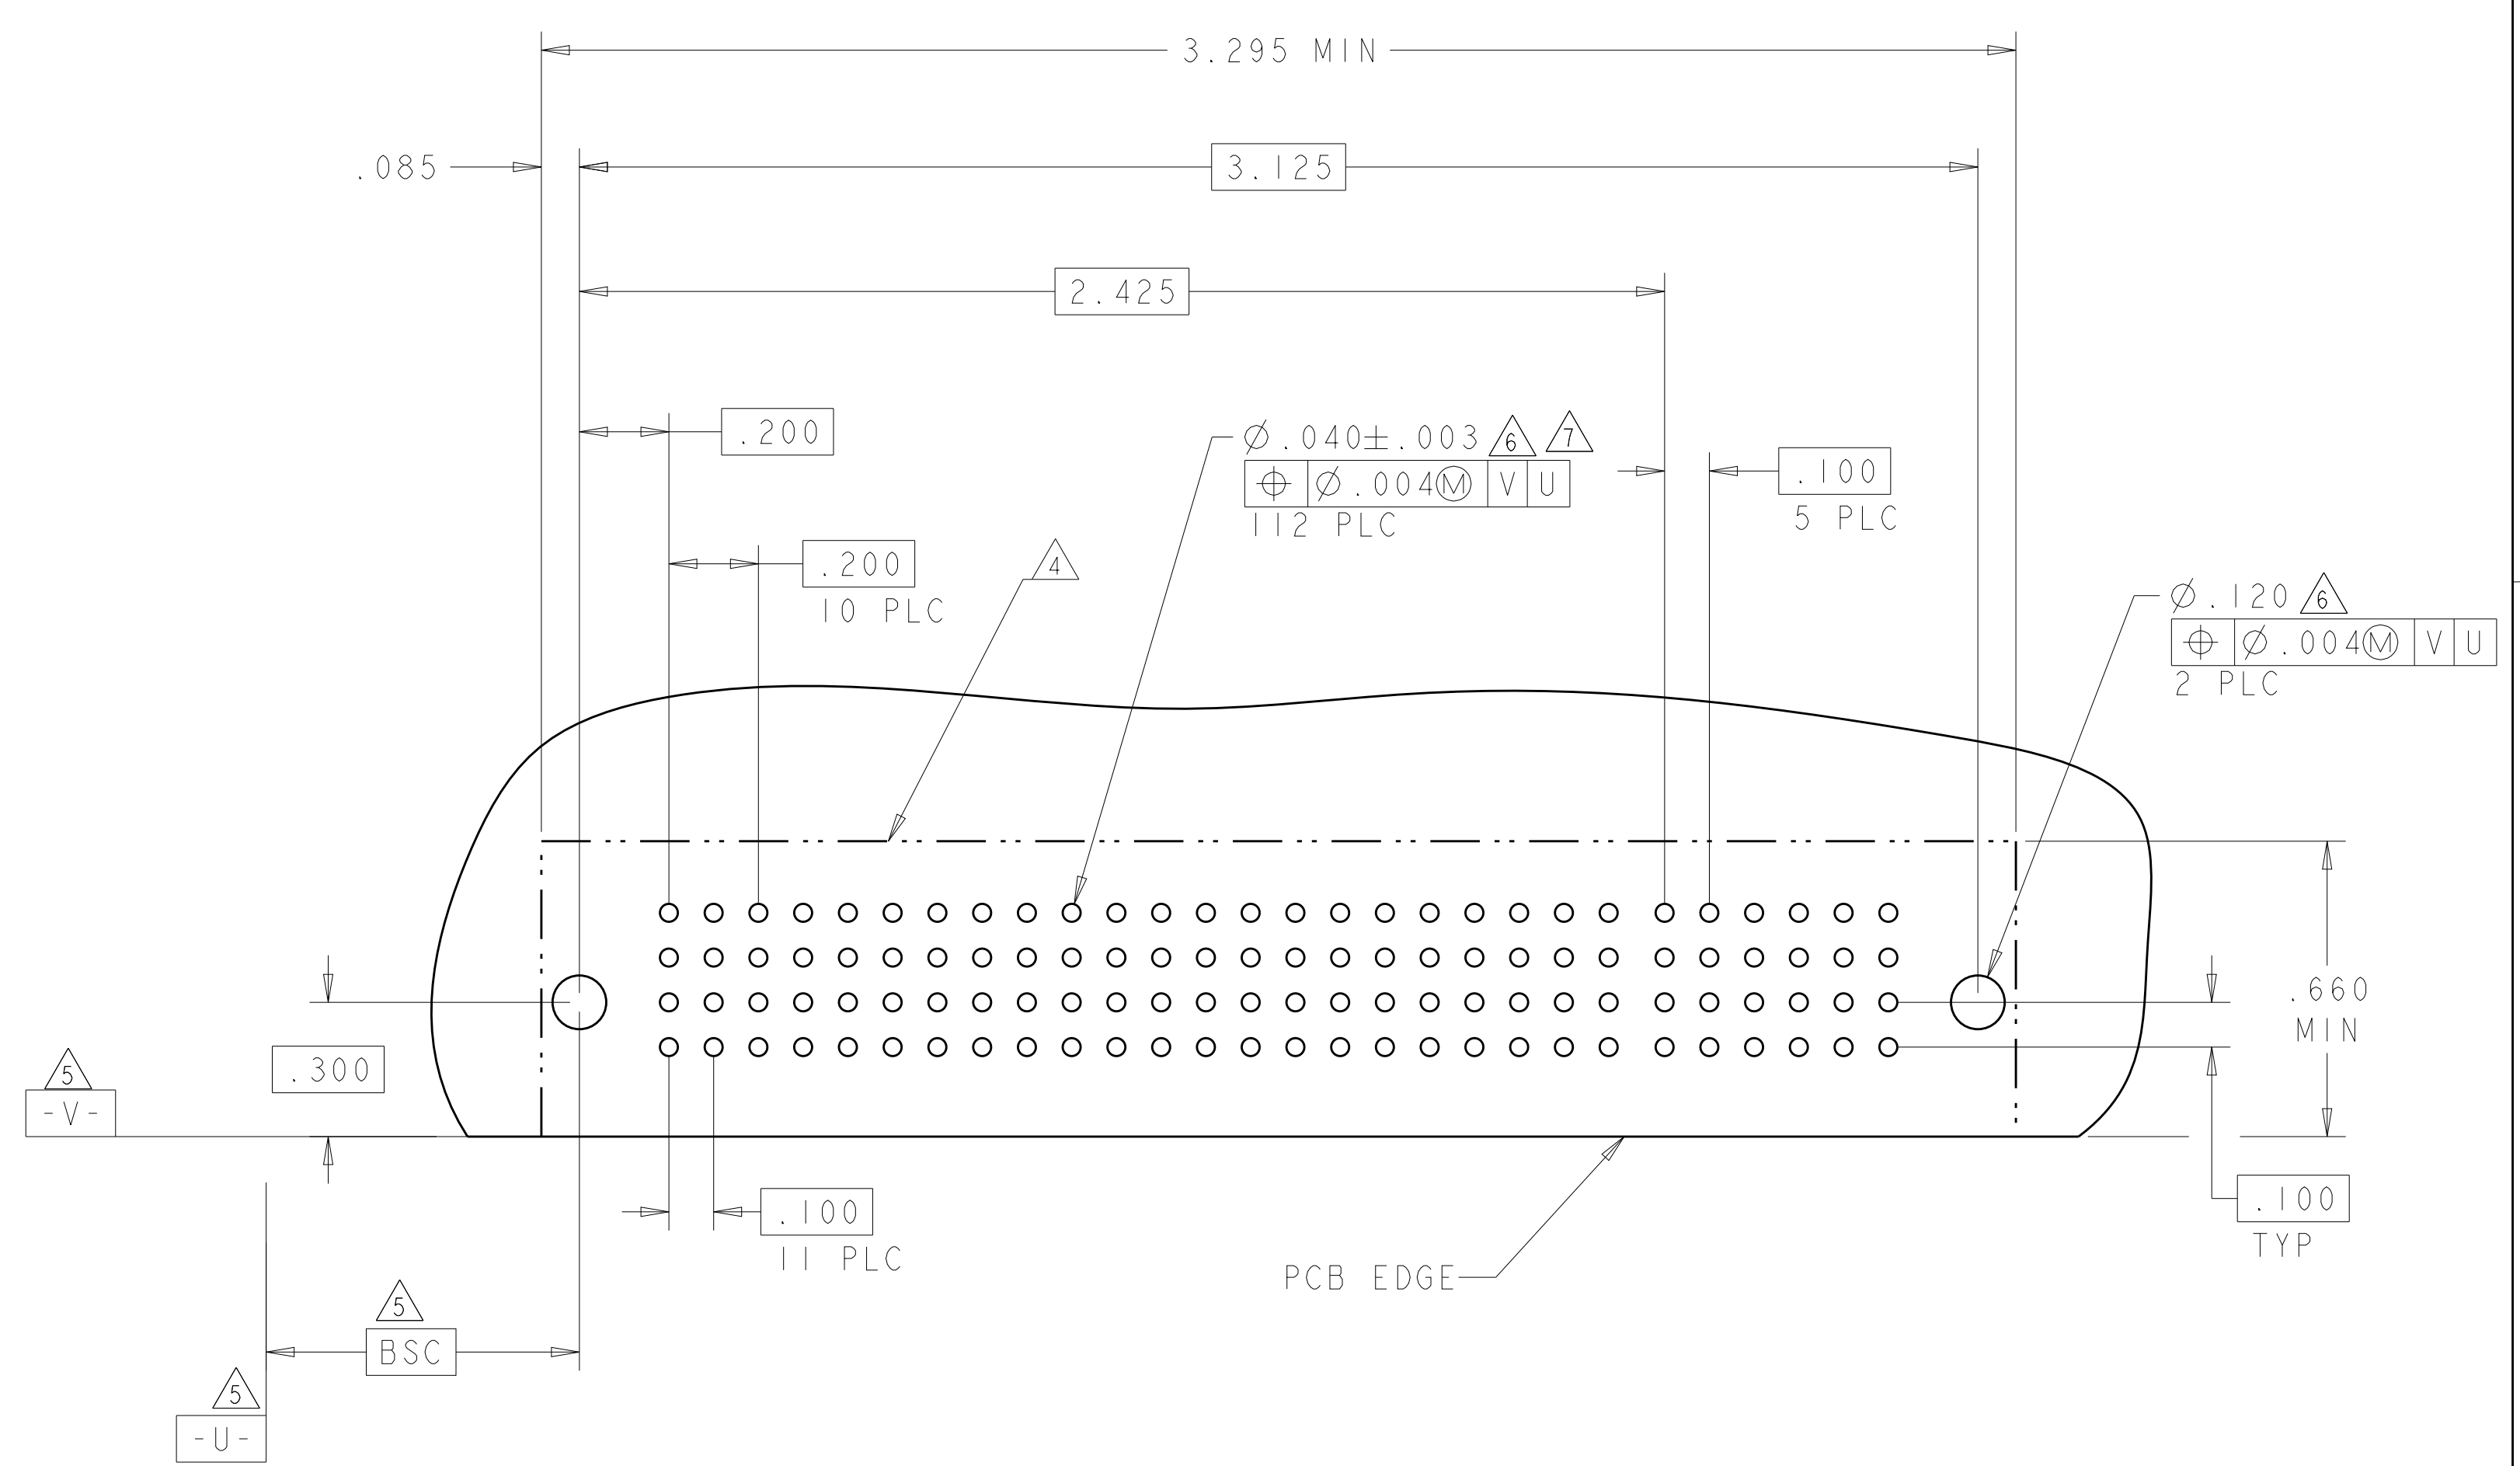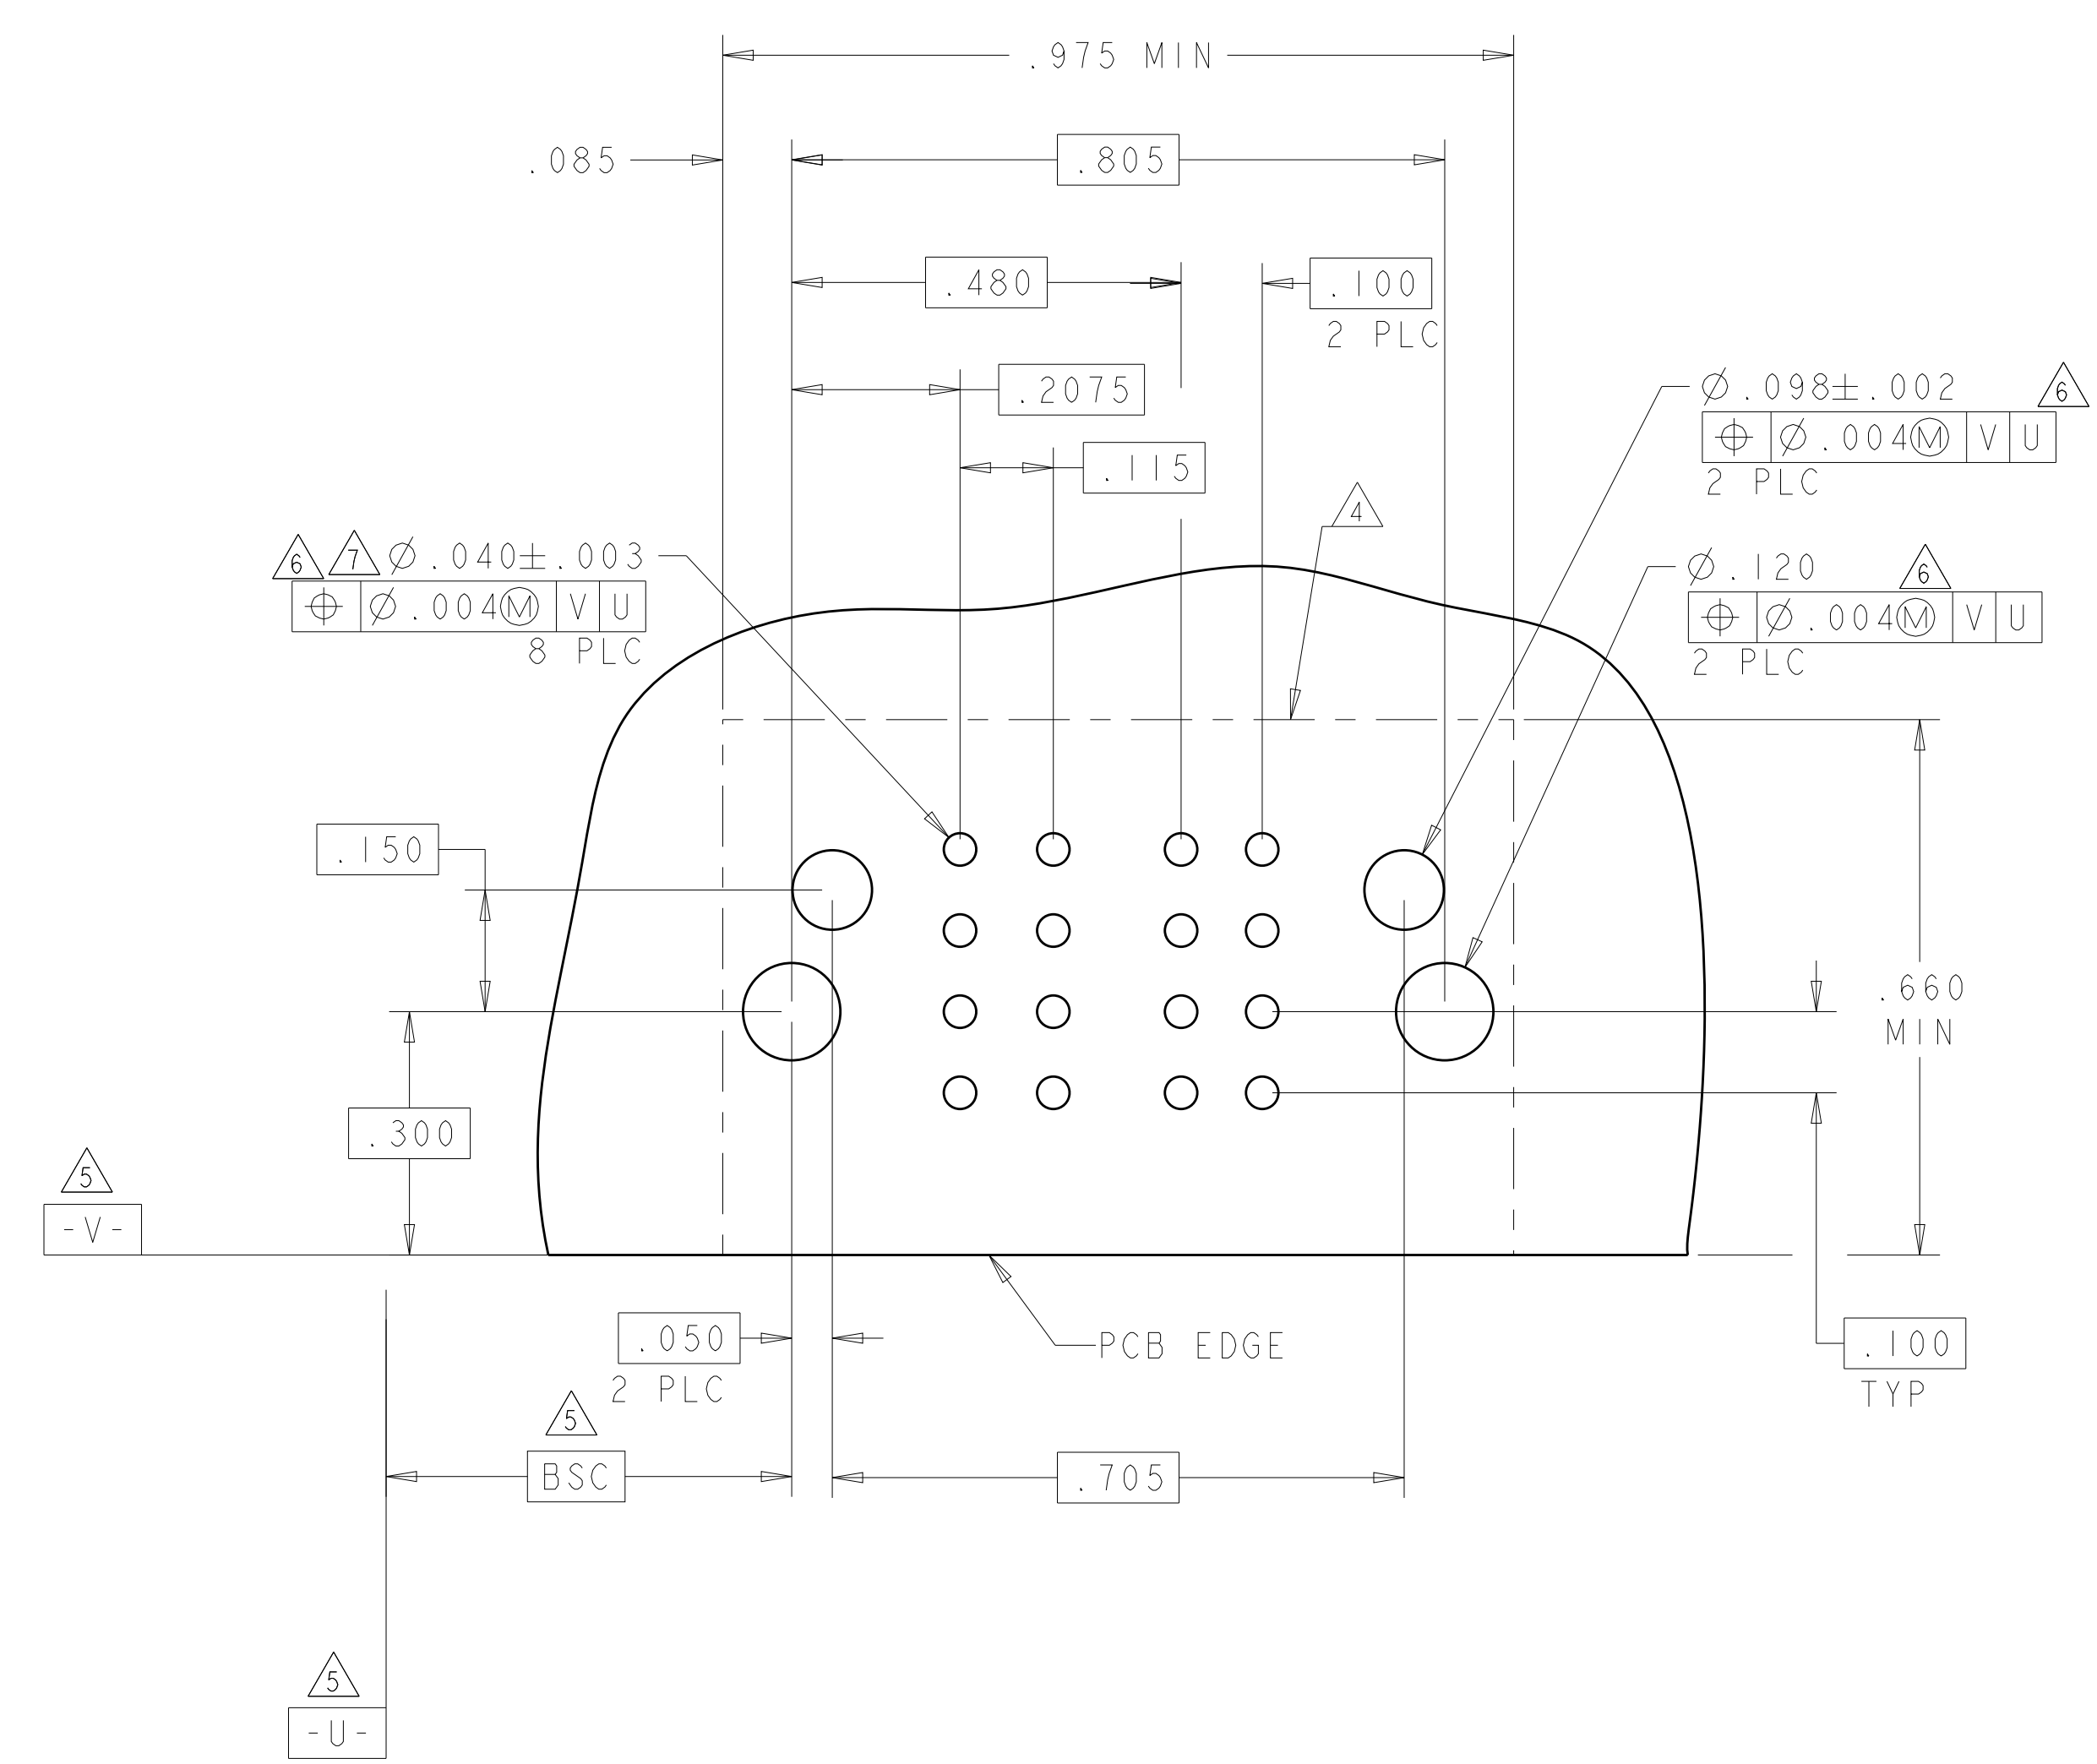

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: H.LIU 27MAY2008	 TE Connectivity
DIMENSIONS: INCHES		CHK: S.ZHAO 27MAY2008	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: S.ZHAO	NAME: R/A HEADER WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE
0 PLC ± .01		PRODUCT SPEC: 108-2292	SIZE: A100779
1 PLC ± .01		APPLICATION SPEC: 114-13251	CAGE CODE: 6450832
2 PLC ± .01		WEIGHT: -	RESTRICTED TO: -
3 PLC ± .005		CUSTOMER DRAWING	SCALE: 4:1 SHEET 17 OF 24 REV: K6
4 PLC ± .0020			
ANGLES: ± 2°			
FINISH:			

REVISIONS			DATE	OWN	APVD
P	LTN	DESCRIPTION			
-	-	SEE SHEET 1	-	-	-

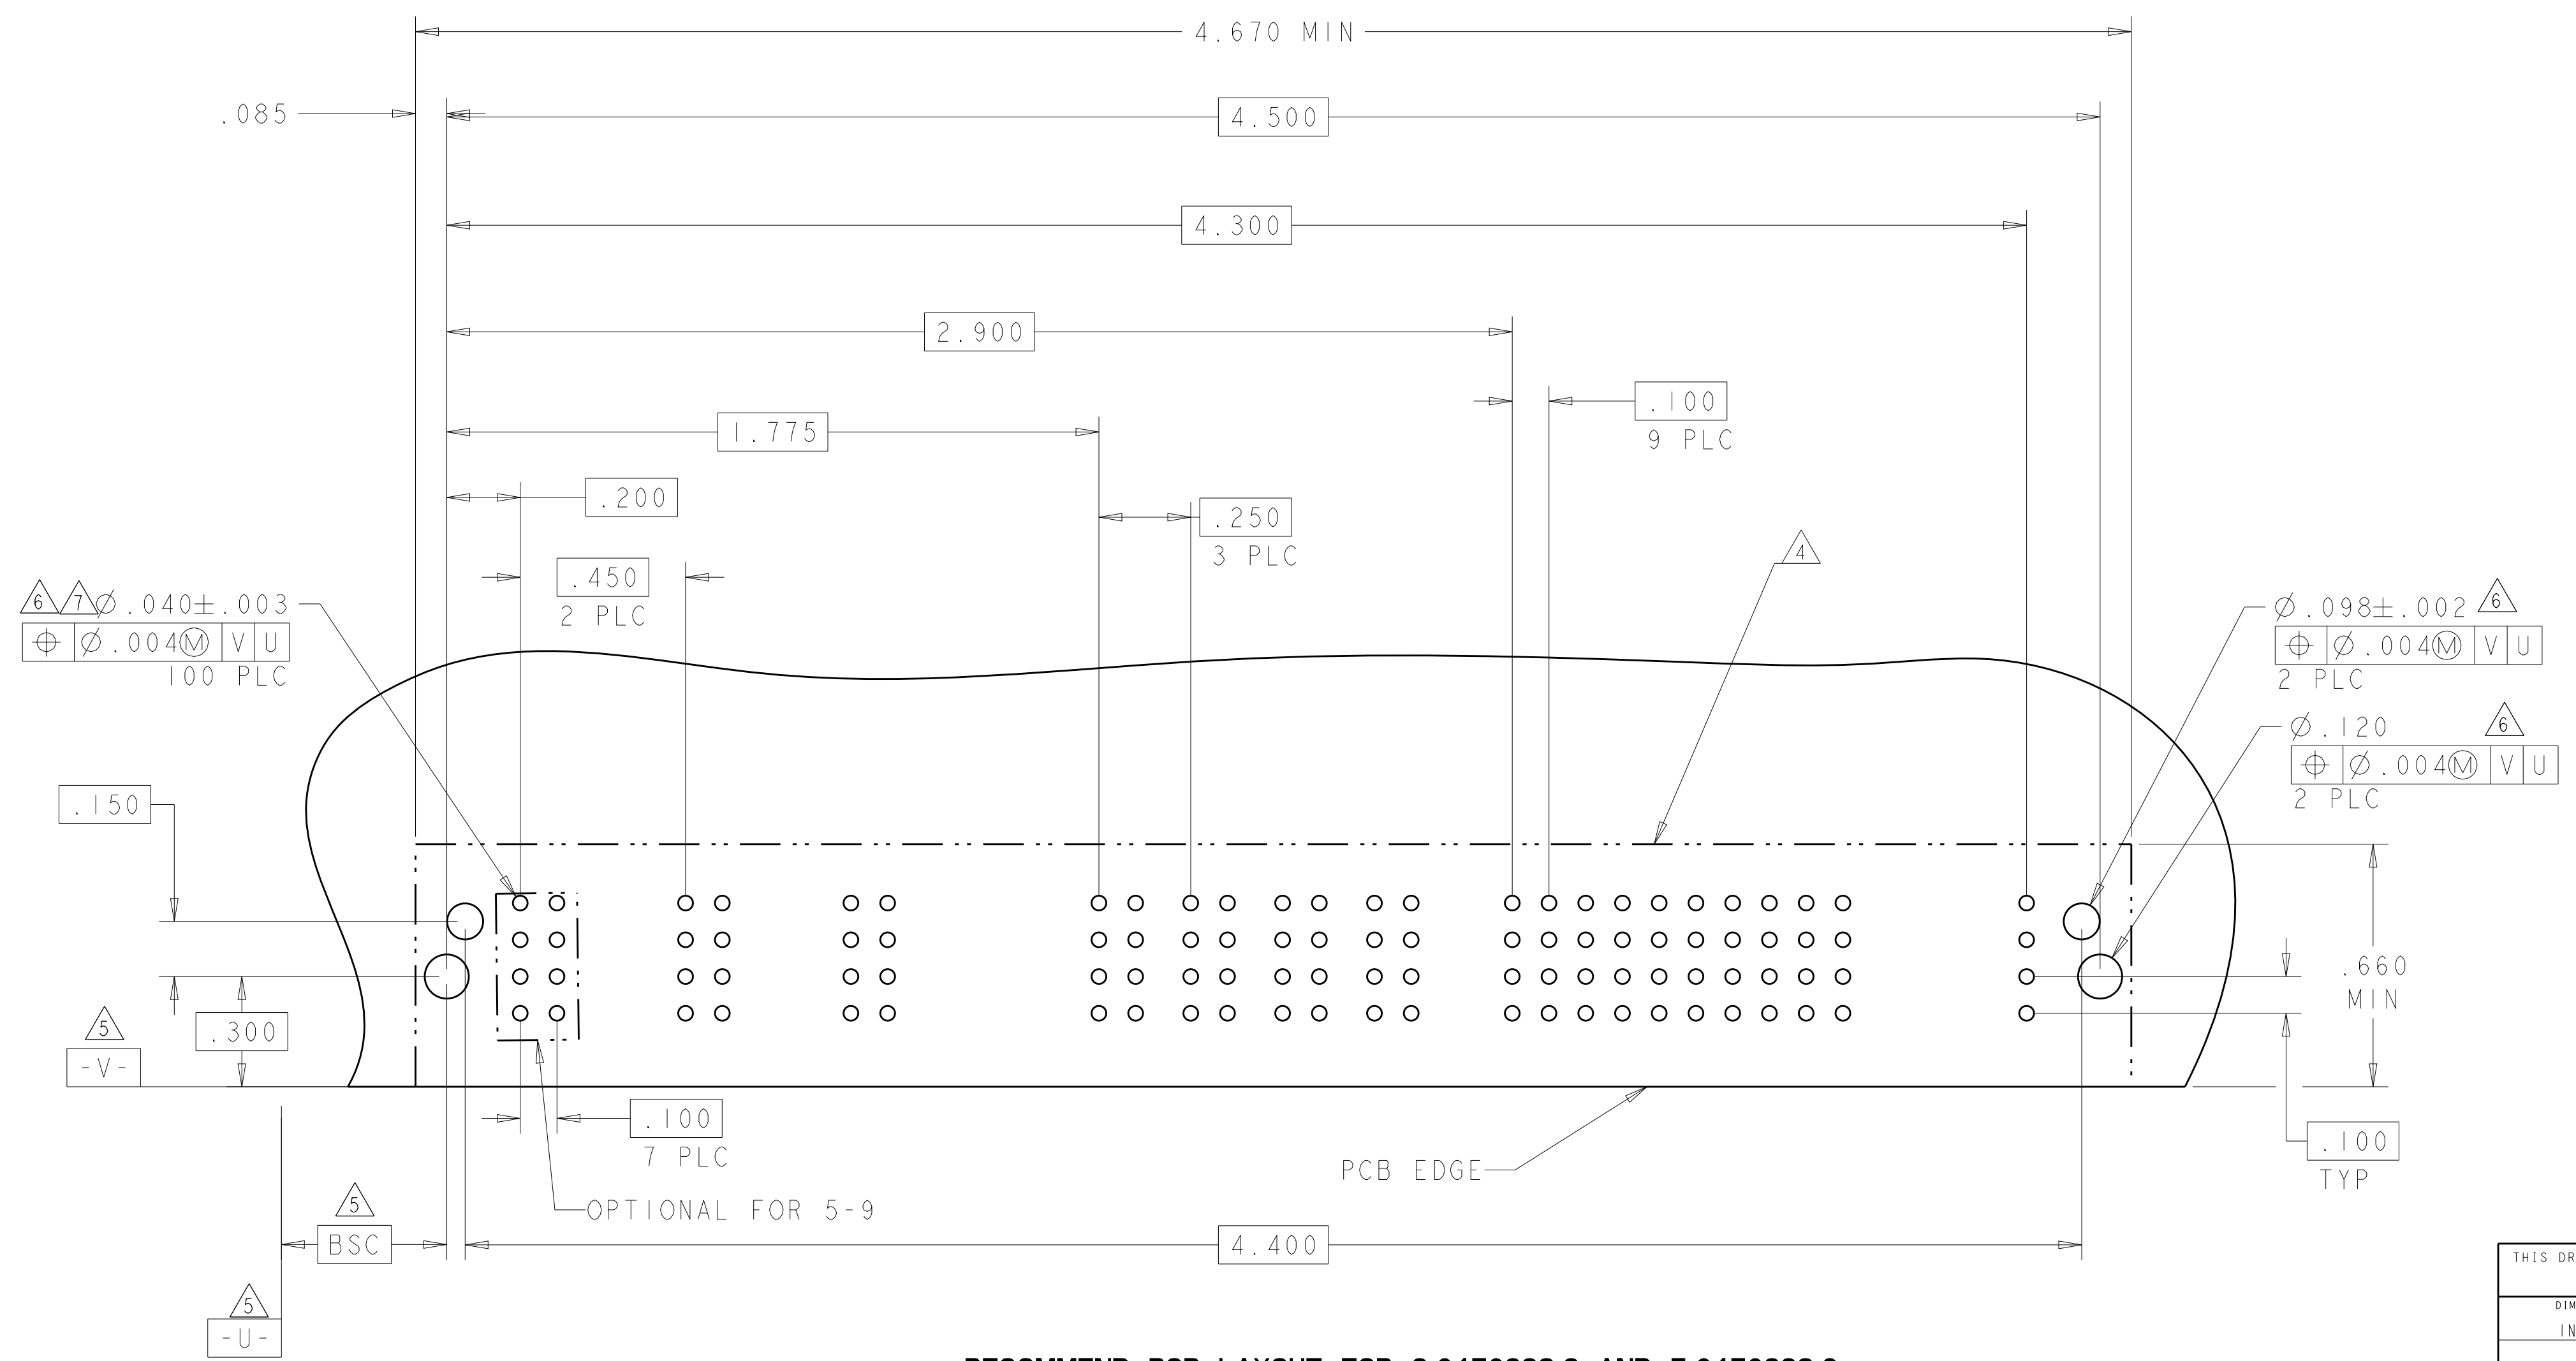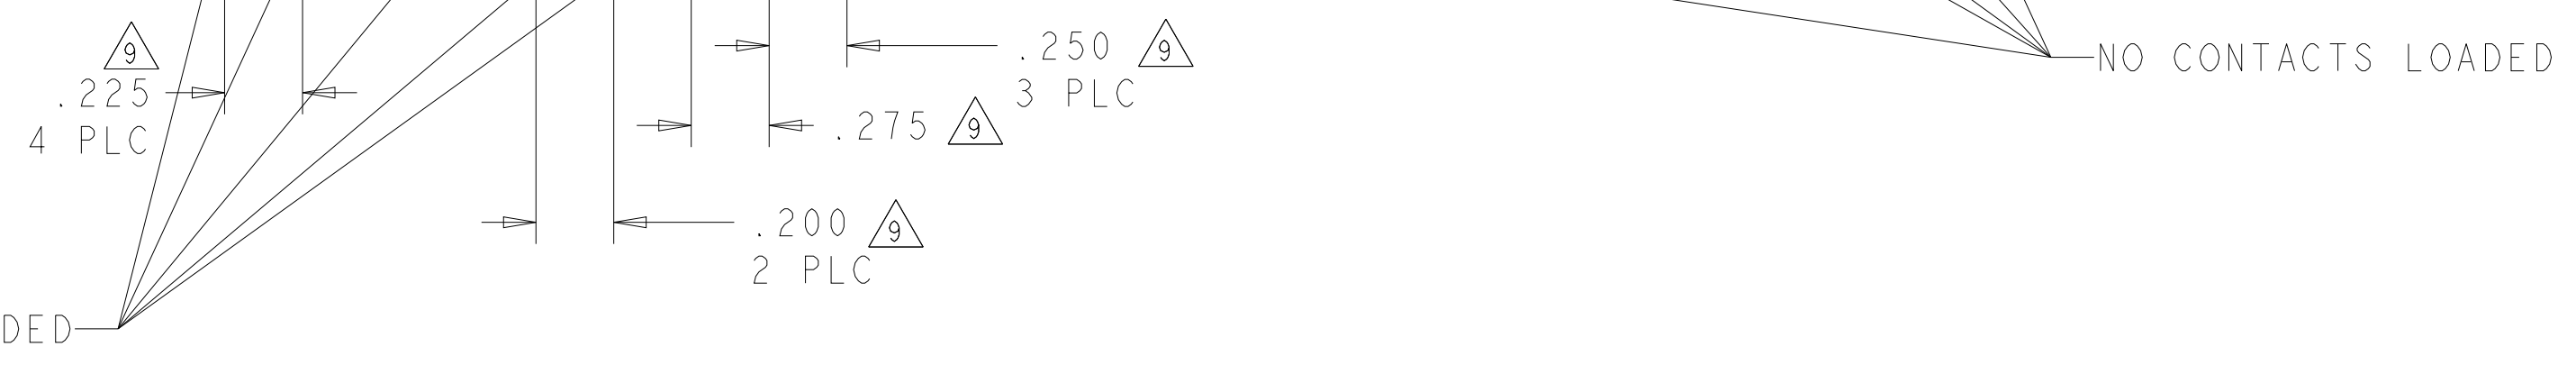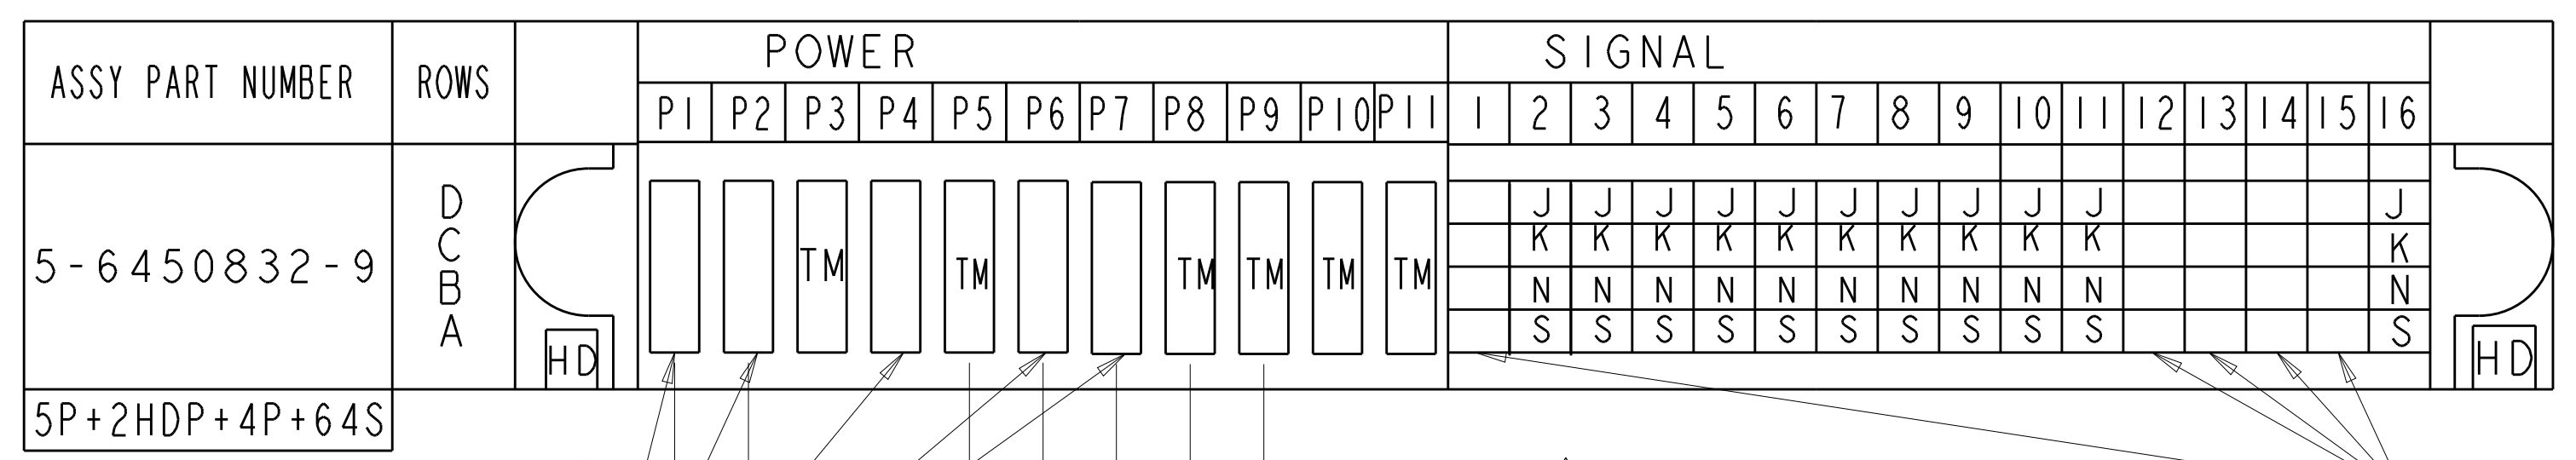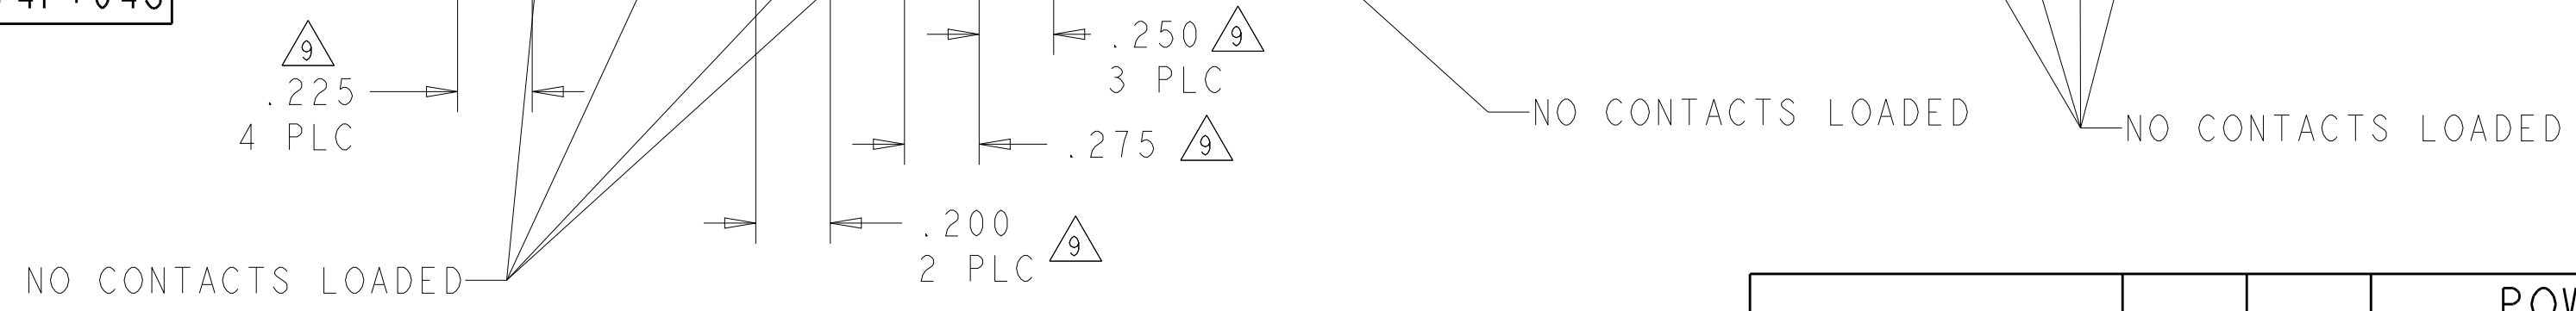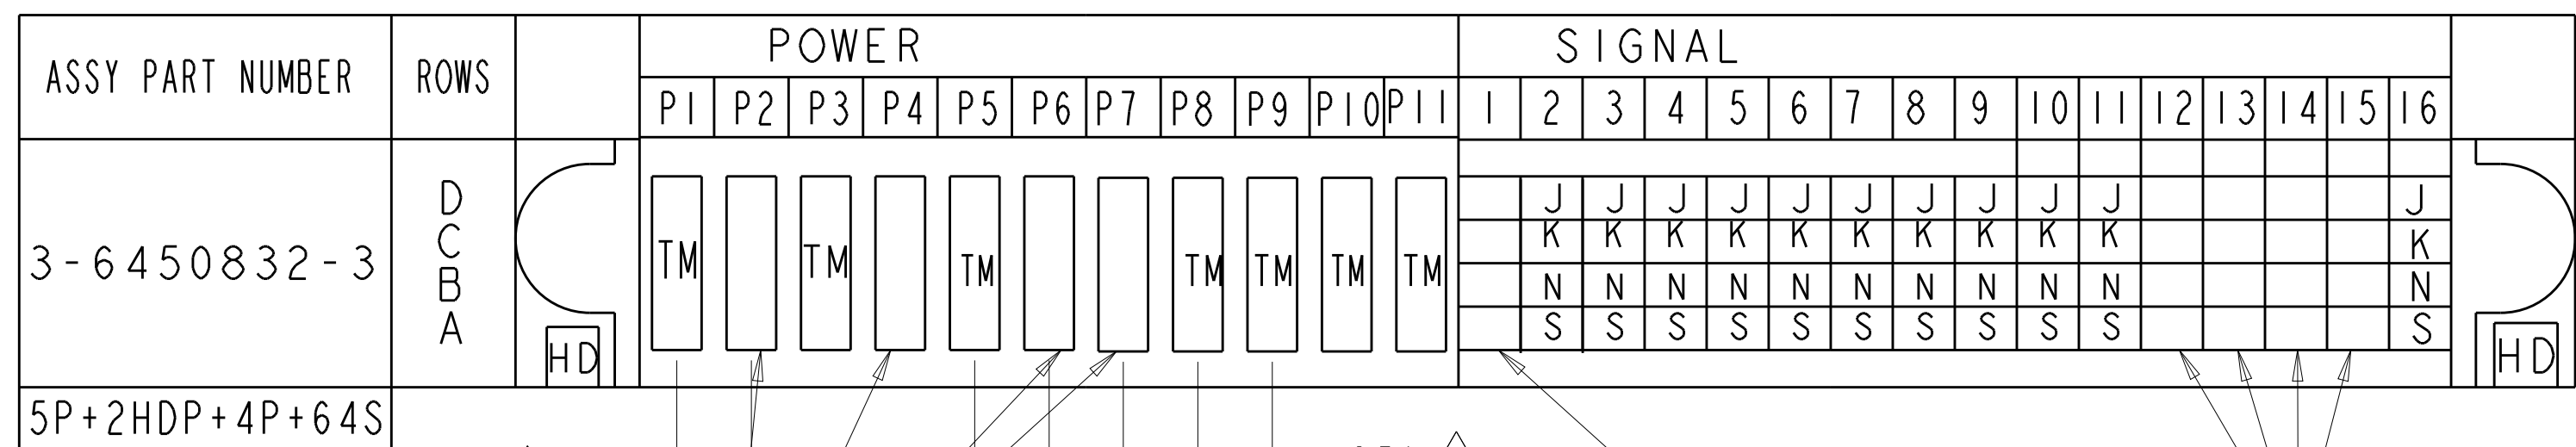

RECOMMEND PCB LAYOUT FOR 3-6450332-3 AND 5-6450832-9

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H.LIU 27MAY2008 CHK S.ZHAO 27MAY2008	TE Connectivity NAME R/A HEADER WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE PRODUCT SPEC 108-2292 APPLICATION SPEC 114-13251 WEIGHT CUSTOMER DRAWING
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD S.ZHAO	
	0 PLC ± 2 PLC ±.01 3 PLC ±.01 4 PLC ±.005 ANGLES ±.020	SIZE 100779 CAGE CODE 6450832	SCALE 4:1 SHEET 18 OF 24 REV K6 RESTRICTED TO
MATERIAL	FINISH	SCALE 4:1 SHEET 18 OF 24 REV K6	

LOC	DIST	REVISIONS			
P	LTN	DESCRIPTION	DATE	DMN	APVD
-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS	POWER					SIGNAL				
		P1	P2	P3	P4	P5	1	2	3	4	5
3-6450832-5	D	TM	TM	TM	TM	J	J	J	J	J	
	C					K	K	K	K	K	
	B					N	N	N	N	N	
	A					H	H	S	S	S	

5HDP + 20S




NO CONTACTS LOADED

PART NUMBER	ROWS	POWER															SIGNAL						
		P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	P14	P15	1	2	3	4	5	6	7
3-6450832-6	D	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	E	E	E	E	E	E		
	C															F	F	F	K	K	K		
	B															N	N	N	N	N	N		
	A															H	H	H	H	H	H		

15P + 28S

NO CONTACTS LOADED

NO CONTACTS LOADED

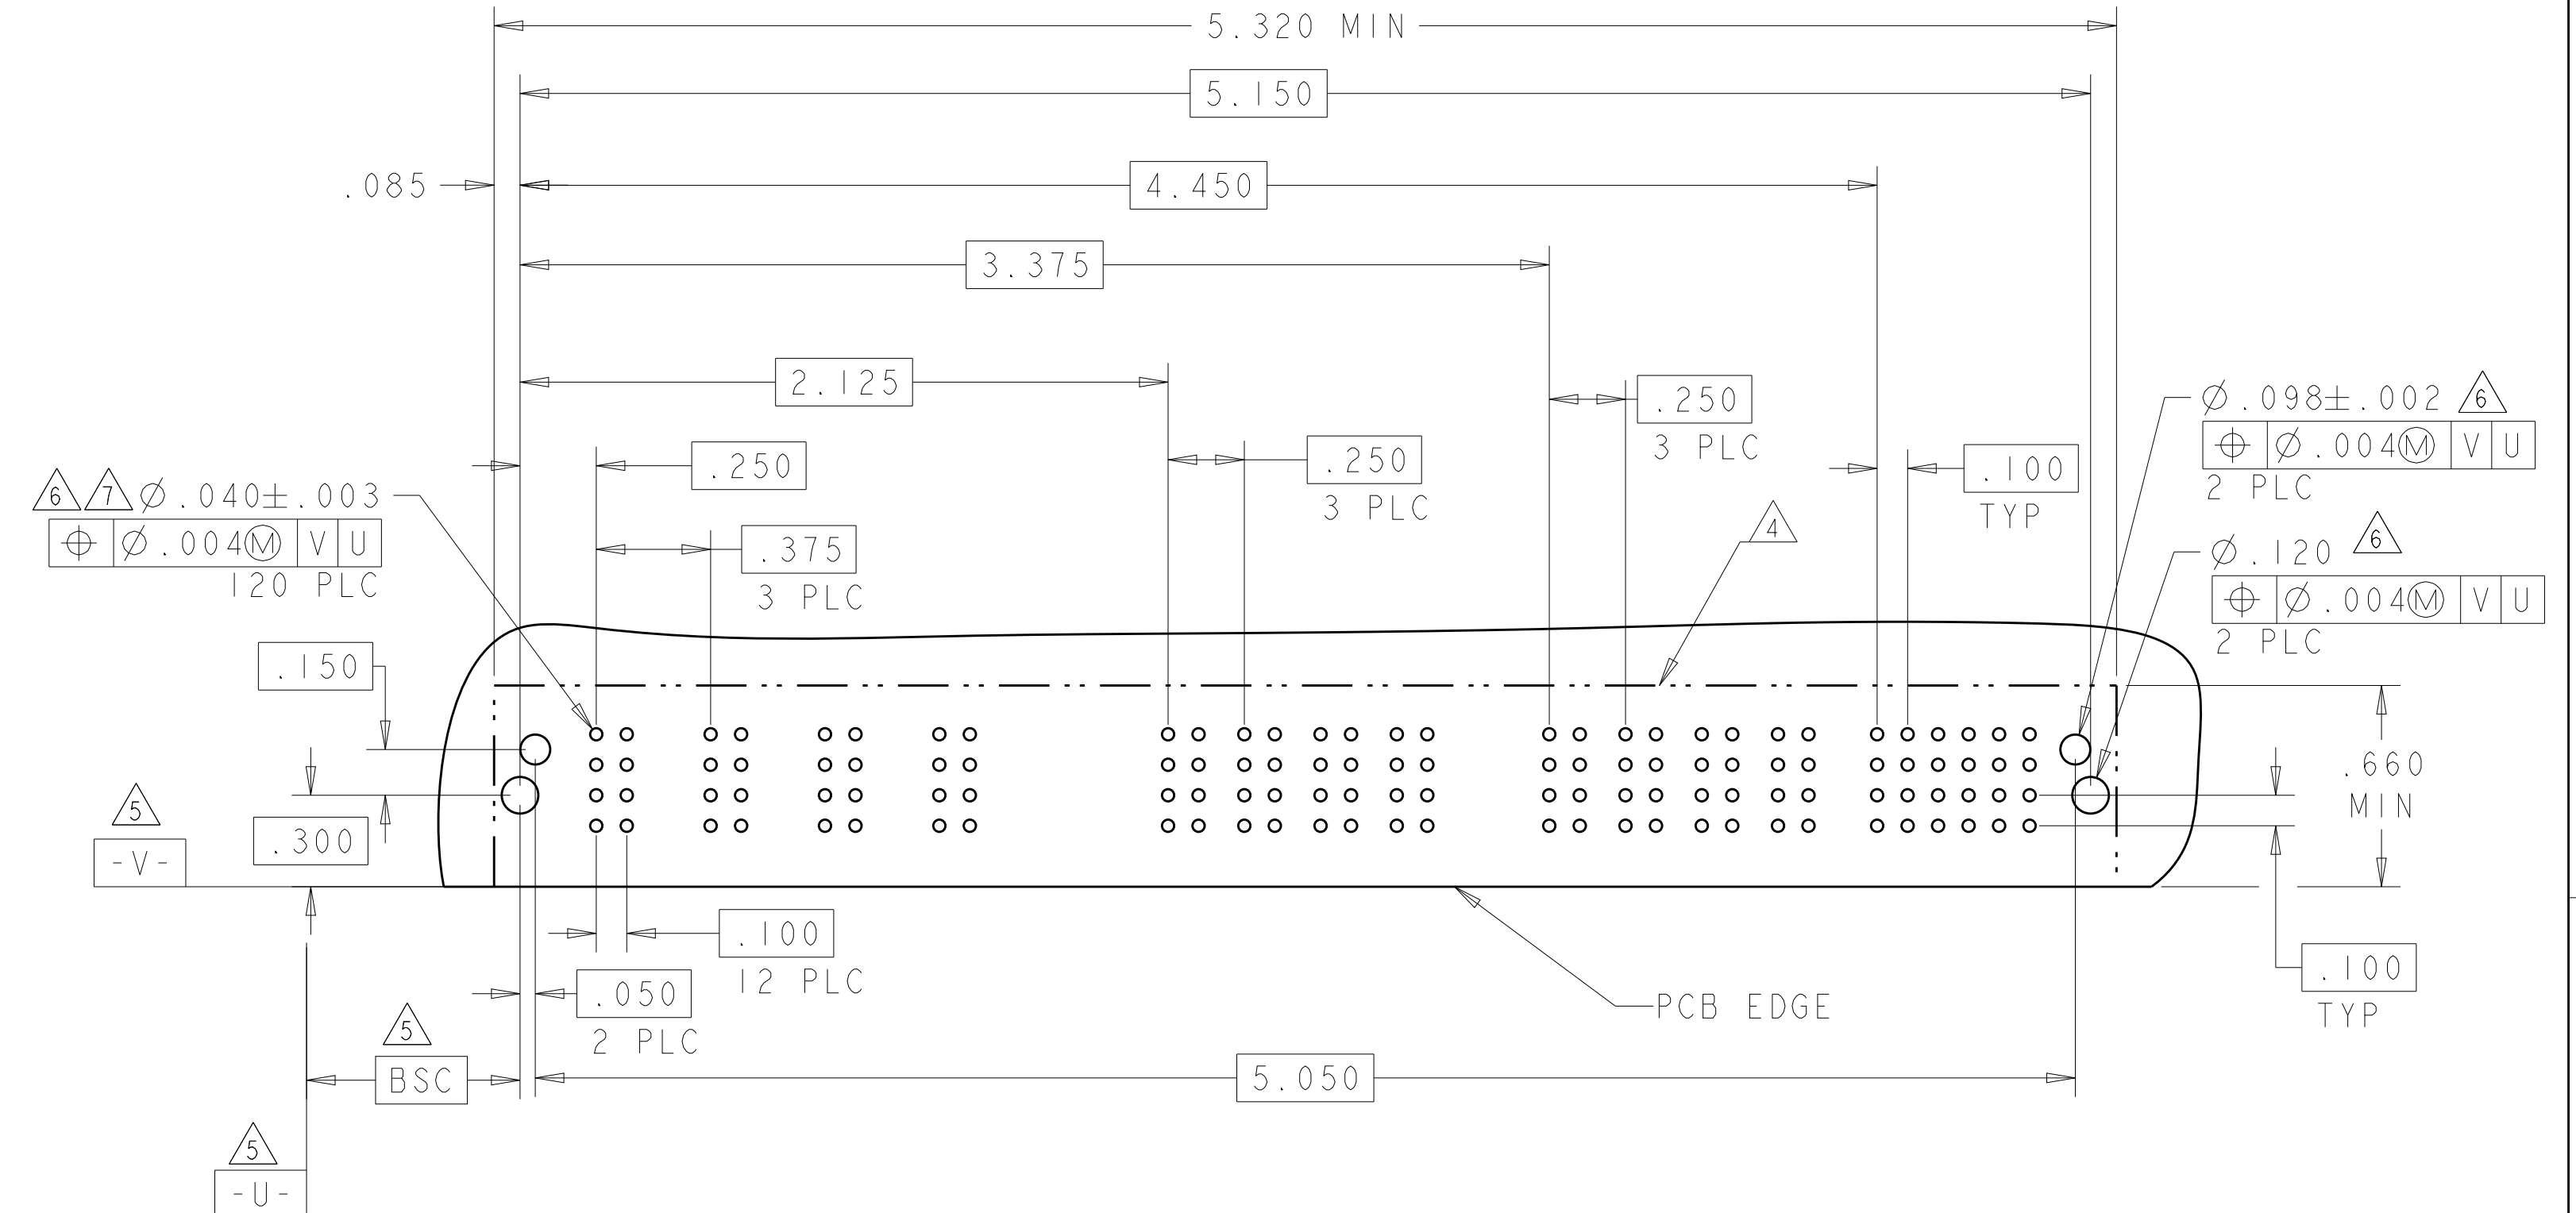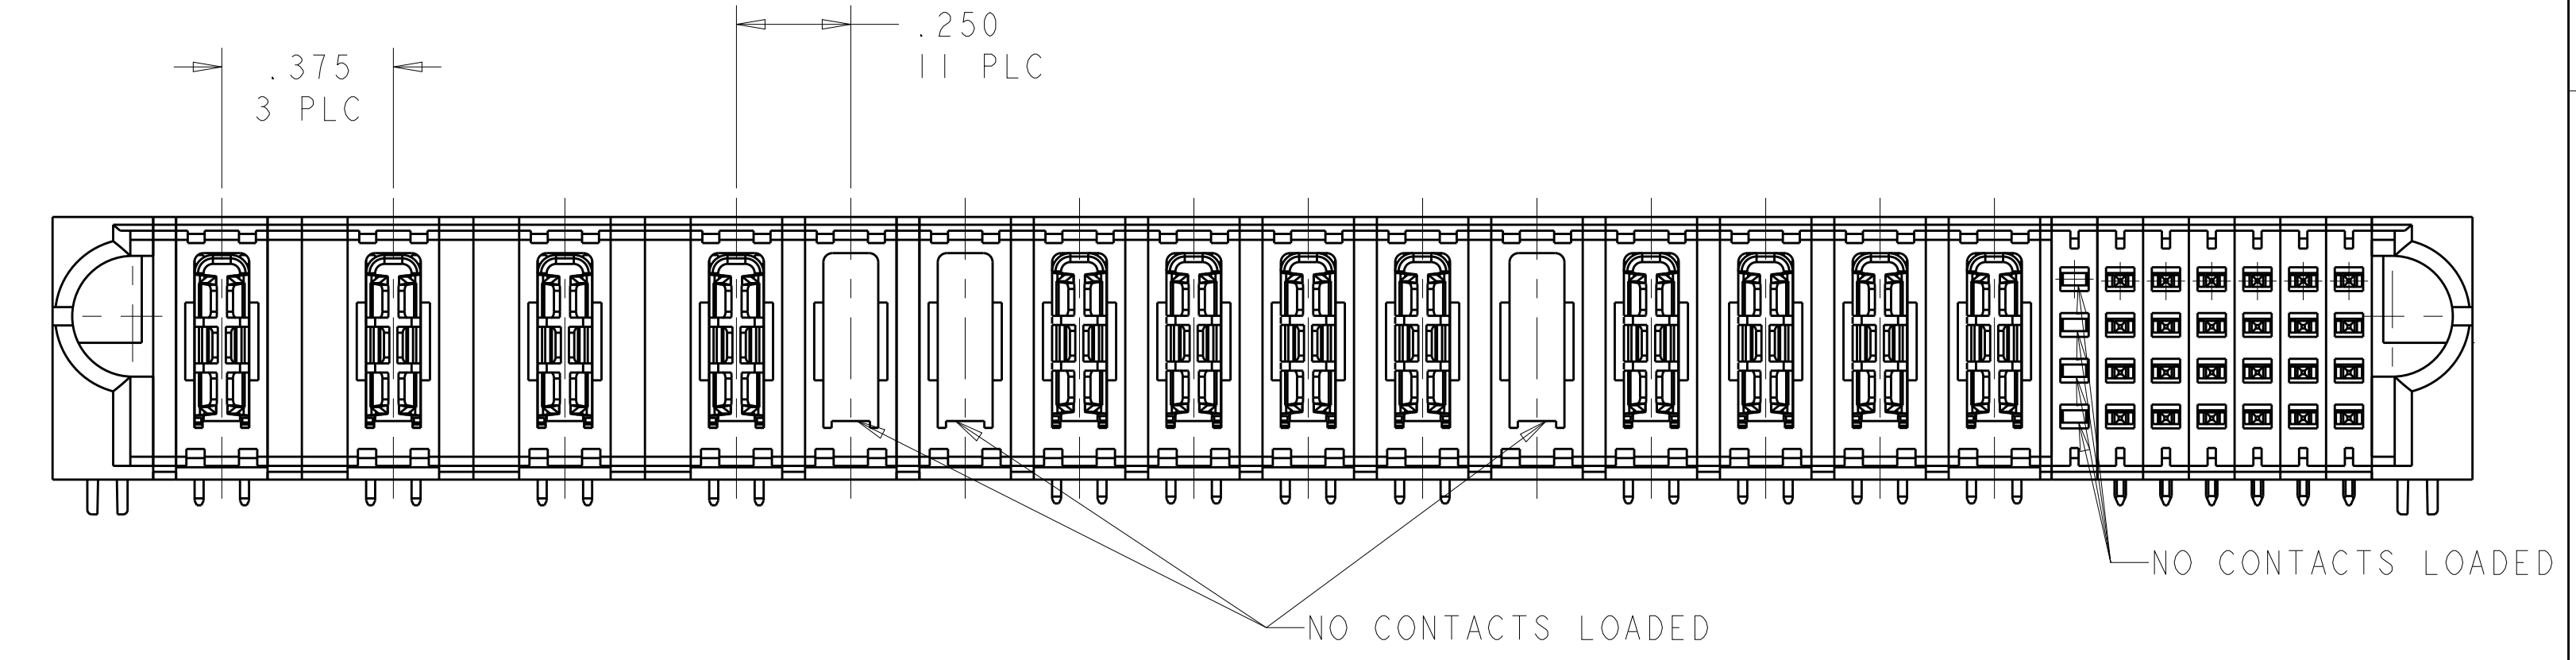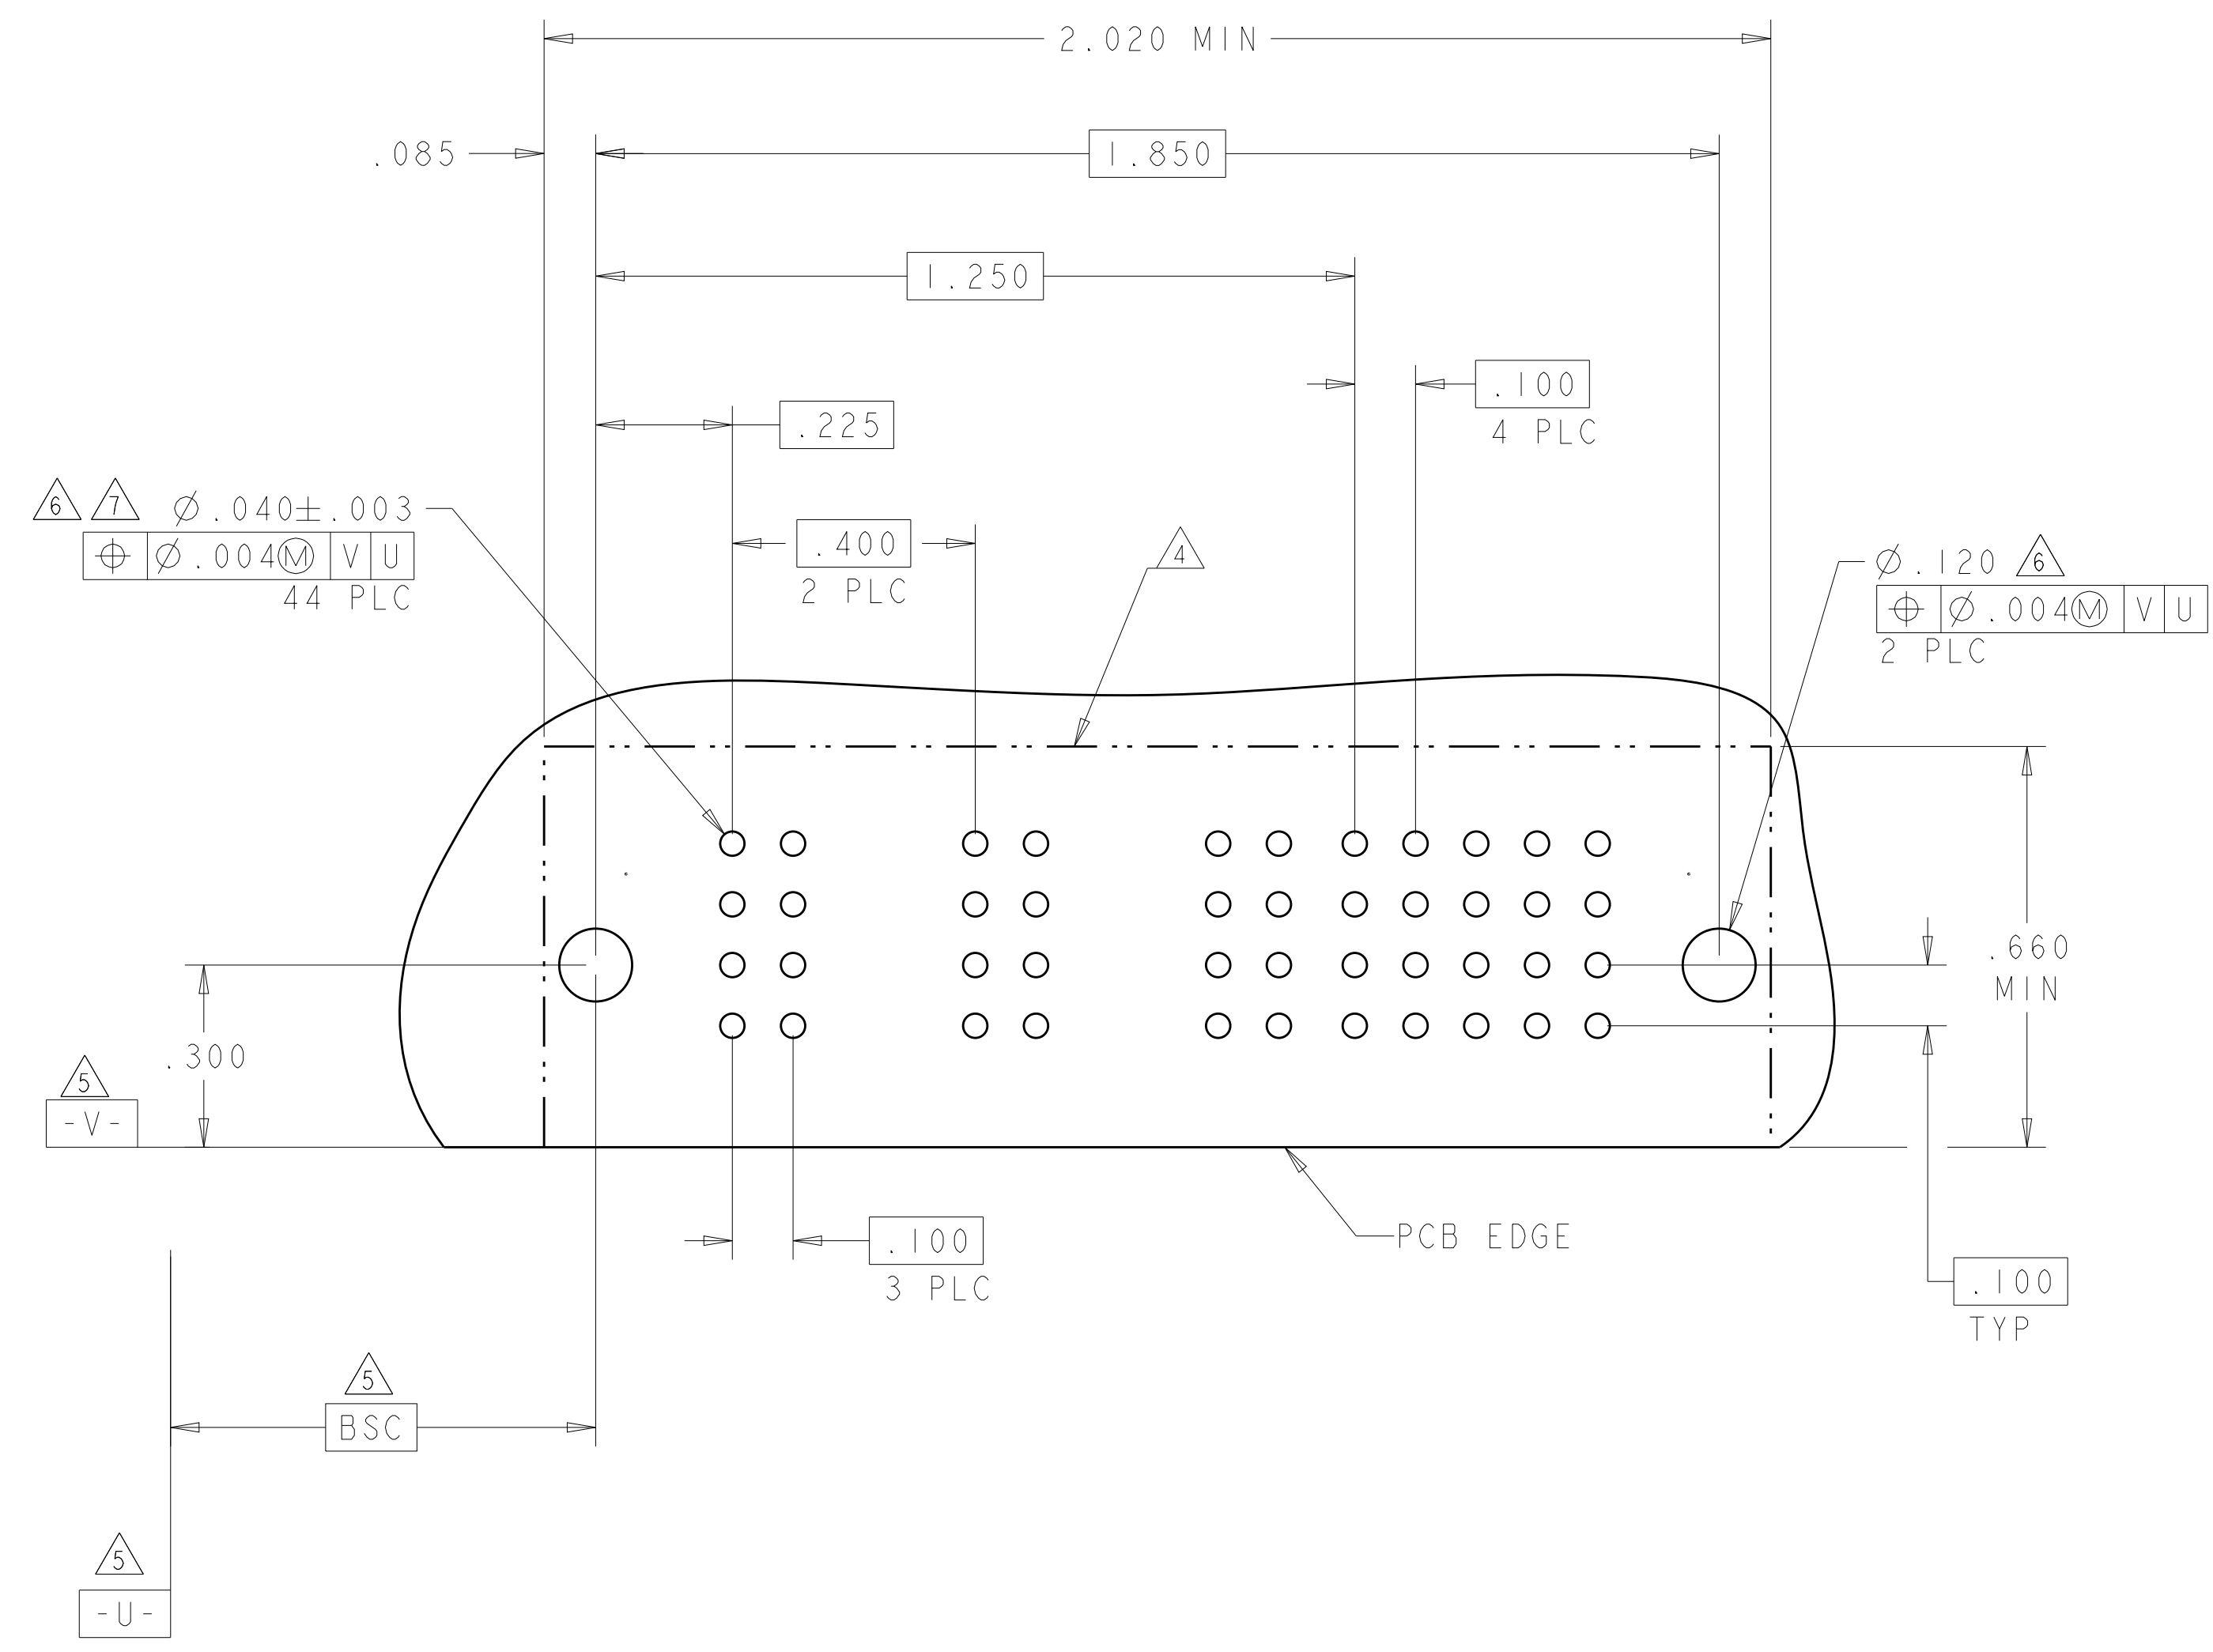

THIS DRAWING IS A CONTROLLED DOCUMENT. DWN: H.LIU 27MAY2008
 CHK: S.ZHAO 27MAY2008
 DIMENSIONS: INCHES. TOLERANCES UNLESS OTHERWISE SPECIFIED:
 0 PLC ±.01
 1 PLC ±.01
 2 PLC ±.01
 3 PLC ±.005
 4 PLC ±.002
 ANGLES ±.020

NAME: R/A HEADER WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE
 PRODUCT SPEC: 108-2292
 APPLICATION SPEC: 114-13251
 WEIGHT: -
 CUSTOMER DRAWING

SCALE: 4:1 SHEET 19 OF 24 REV: K6



STC TE Connectivity

LOC		DIST		REVISIONS			
P	LTN	DESCRIPTION	DATE	DMN	APVD		
-	-	SEE SHEET 1	-	-	-		

PART NUMBER	ROWS	POWER							SIGNAL						
		P1	P2	P3	P4	P5	P6	P7	1	2	3	4	5	6	
3-6450832-8	D	TM	TM	TM	TM	TM	TM	TM	E	E	J	J	J	E	
	C	TM	TM	TM	TM	TM	TM	TM	K	F	F	F	K	F	
	B	TM	TM	TM	TM	TM	TM	TM	N	G	G	G	N	G	
A	HD							S	H	S	S	H	H		
3ACP + 4P + 24S															

.300
3 PLC
 .250
3 PLC

PART NUMBER	ROWS	POWER								SIGNAL					
		P1	P2	P3	P4	P5	P6	P7	P8	1	2	3	4	5	6
3-6450832-9	D	TM	TM	TM	TM	TM	TM	TM	TM	J	J	E	J	J	E
	C	TM	TM	TM	TM	TM	TM	TM	TM	K	K	K	K	K	K
	B	TM	TM	TM	TM	TM	TM	TM	TM	N	N	G	G	G	G
A	HD									S	S	S	S	S	S
8HDP + 24S															

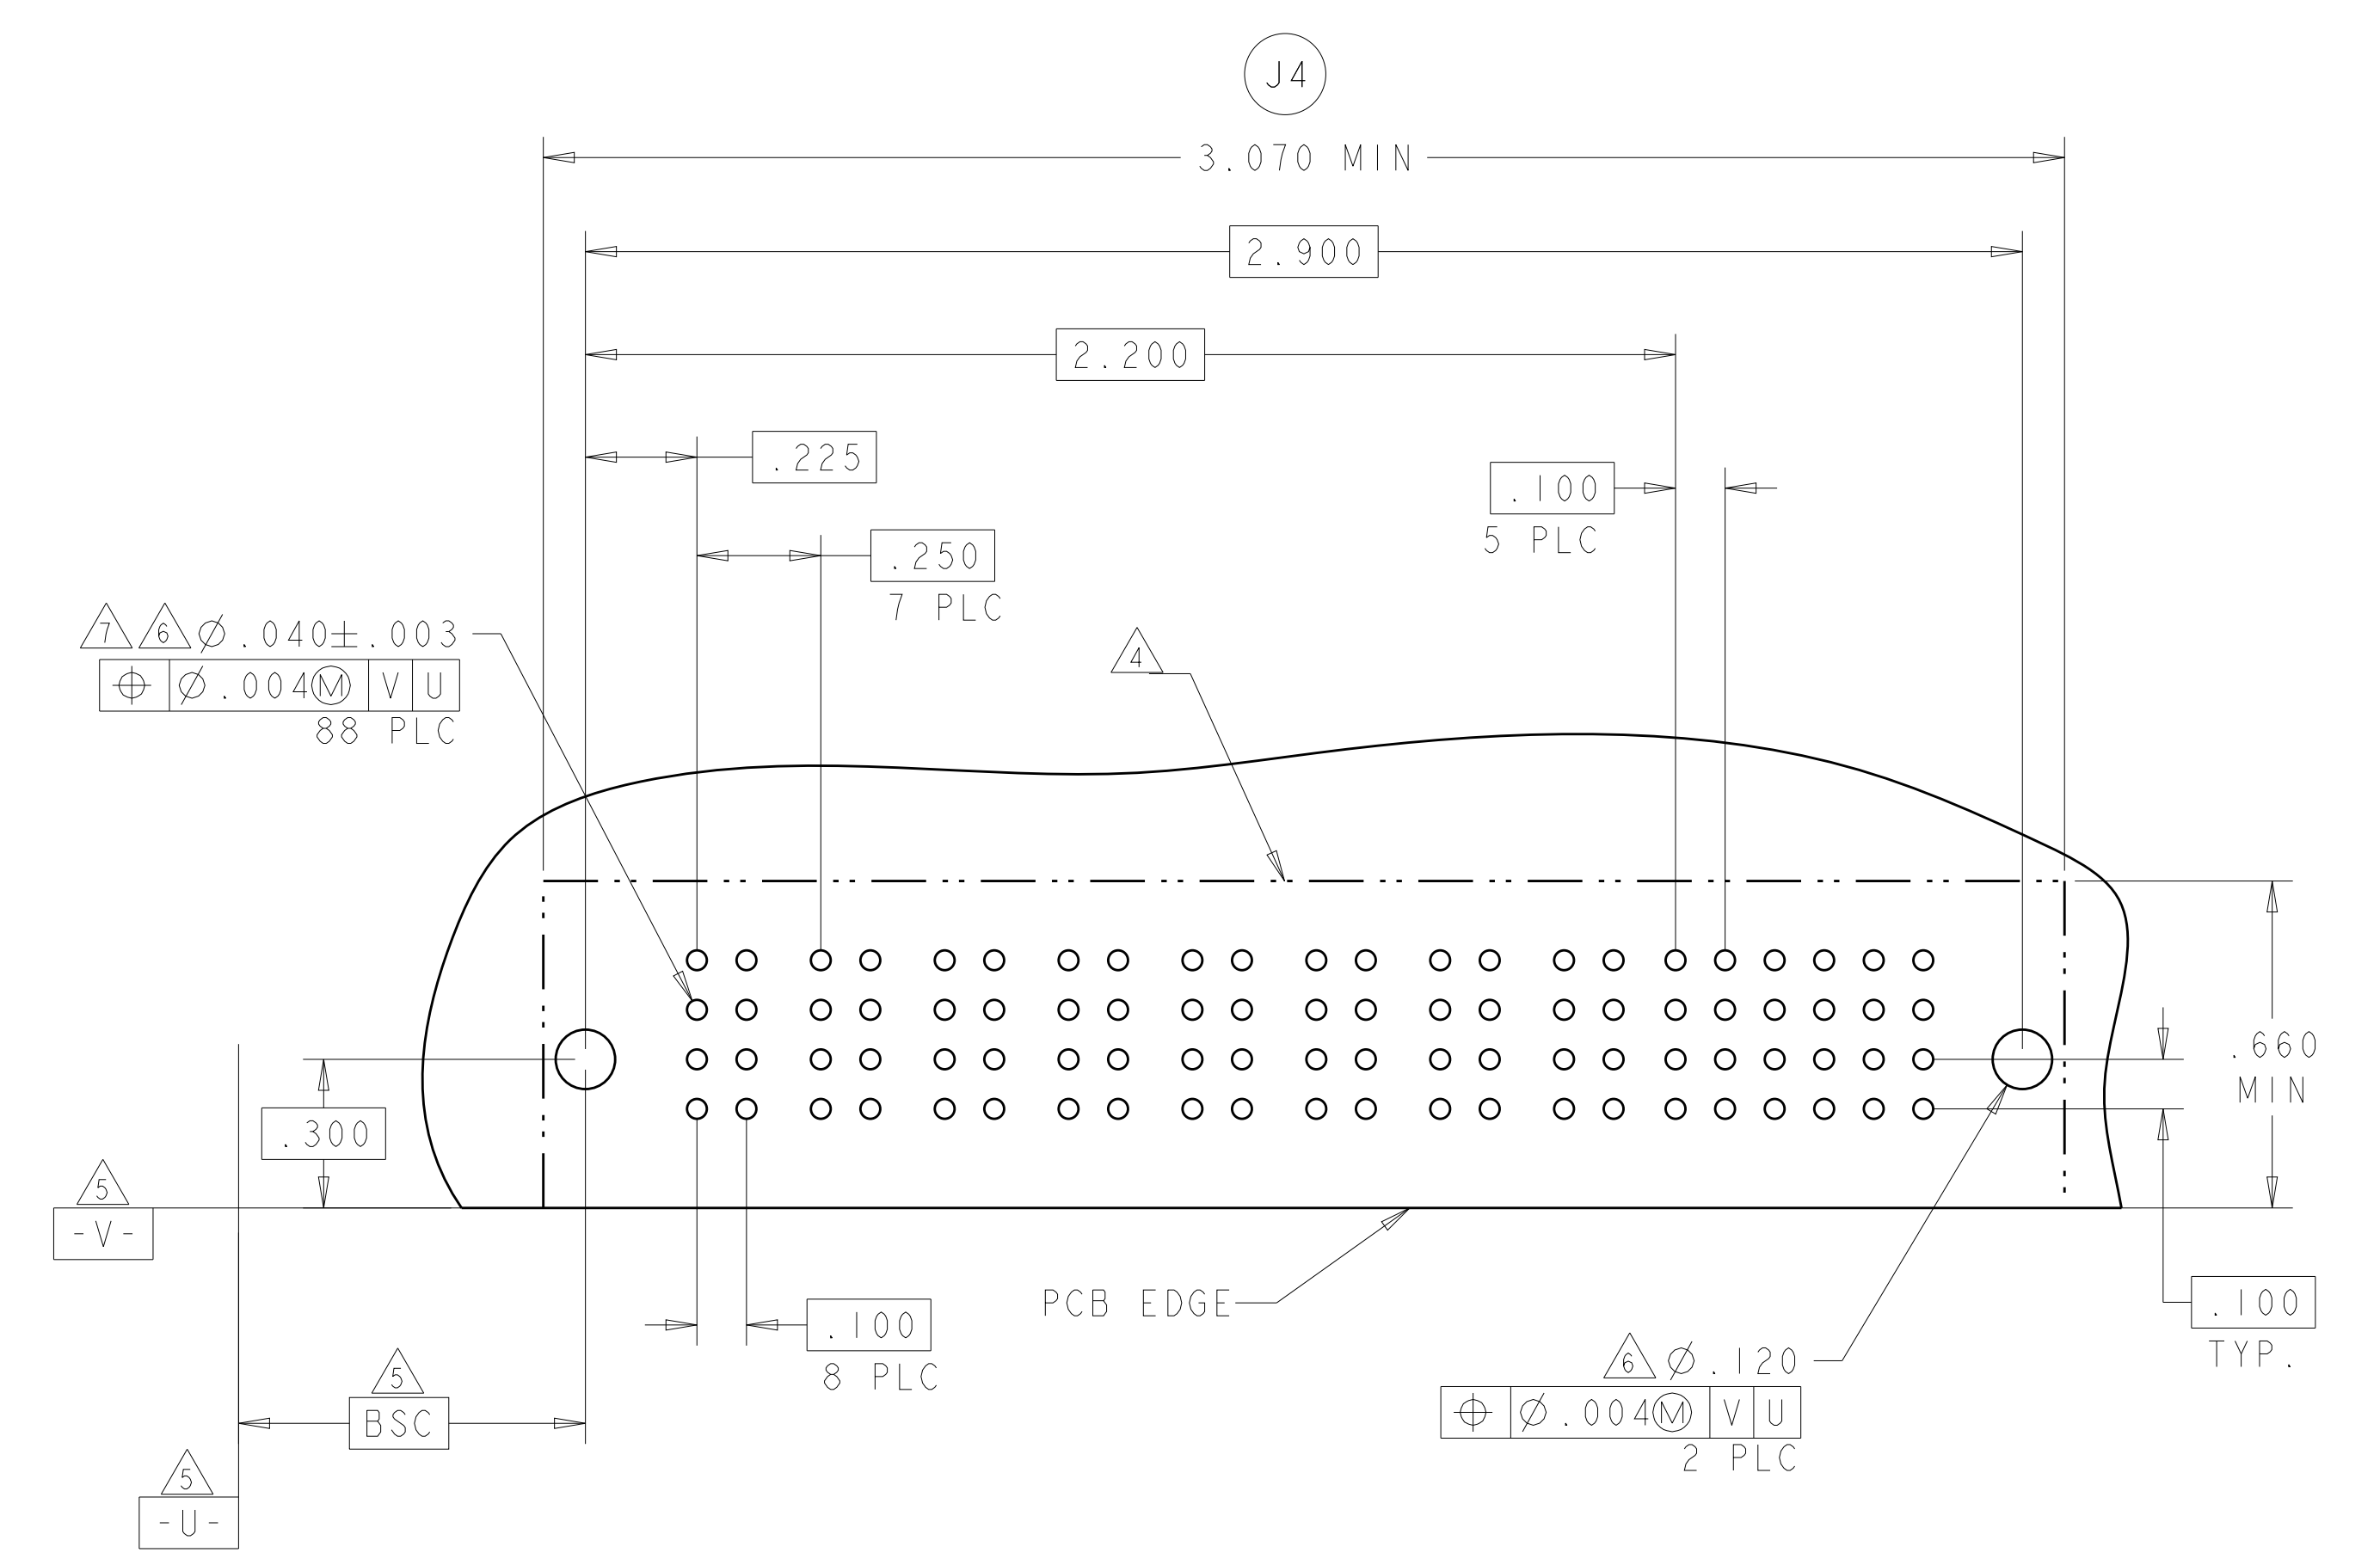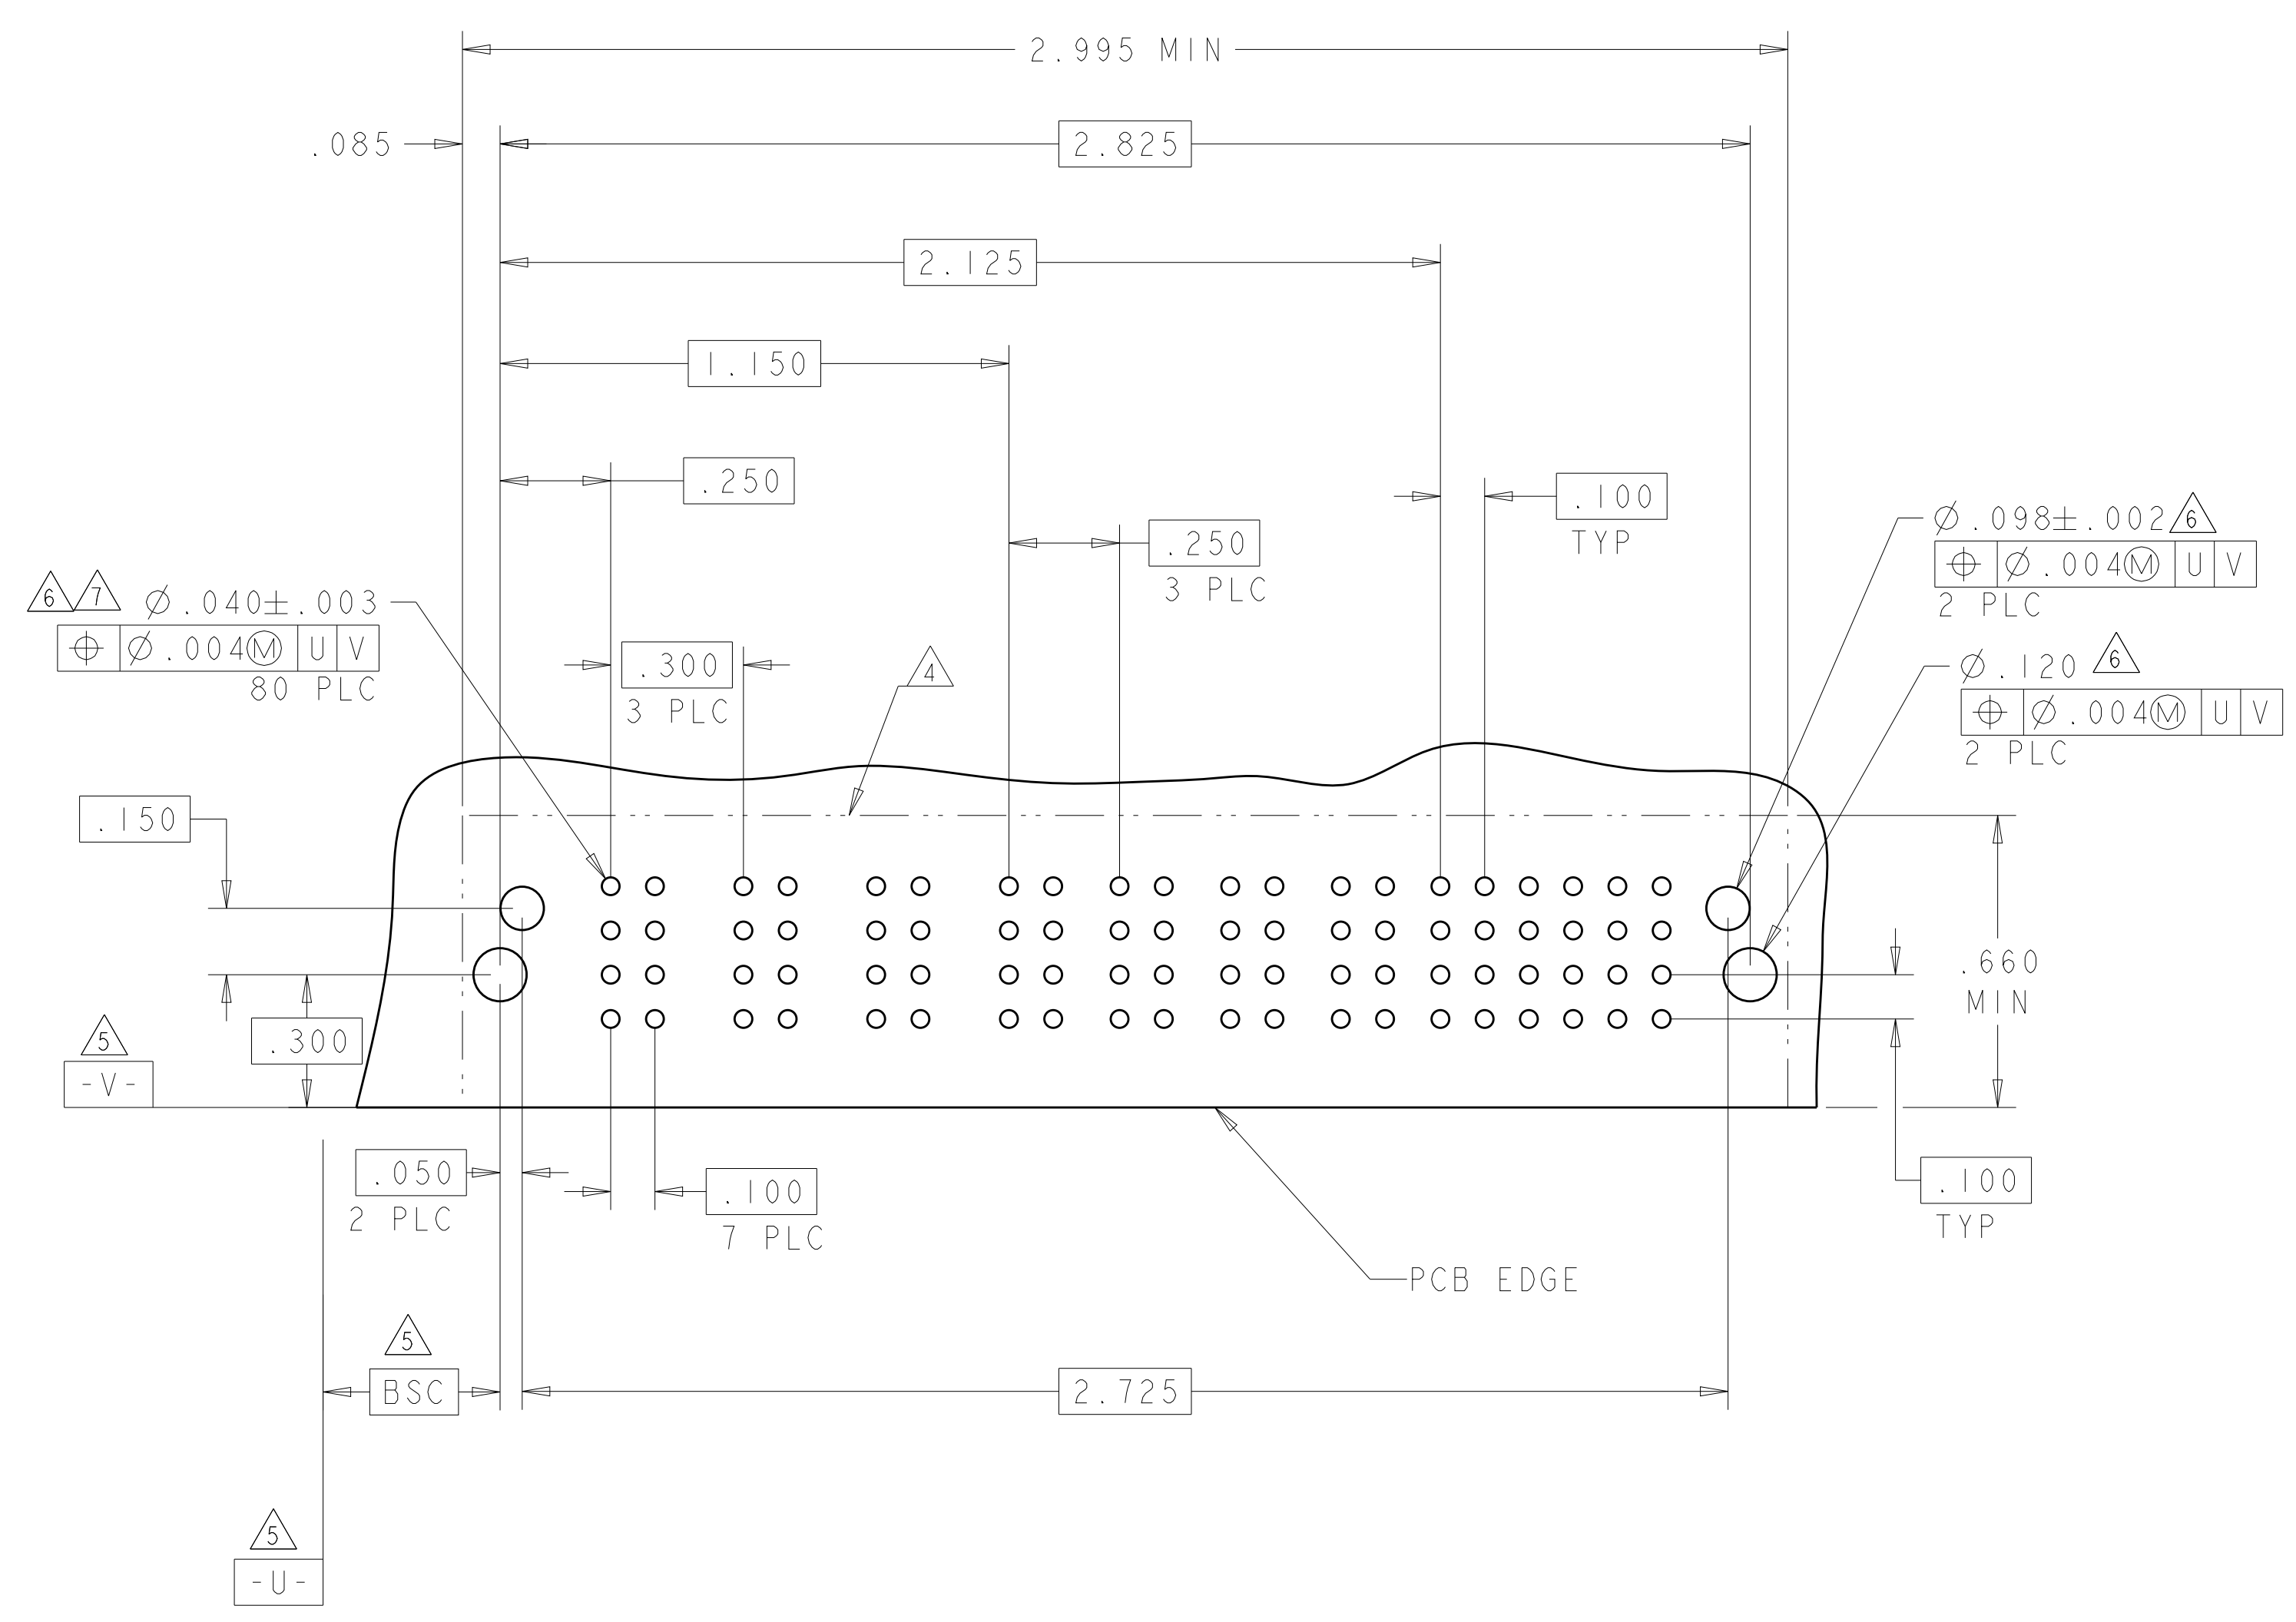

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DMN	H.LIU	27MAY2008
INCHES	0 PLC ± .01	CHK	S.ZHAO	27MAY2008
	2 PLC ± .01	APVD	S.ZHAO	
	3 PLC ± .01	NAME	R/A HEADER WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY	
	4 PLC ± .005	PRODUCT SPEC	MULTI-BEAM XLE	
	ANGLES ± .0020	APPLICATION SPEC	108-2292	
MATERIAL	FINISH	SIZE	CAGE CODE	DRAWING NO
		RESTRICTED TO	A100779	C=6450832
CUSTOMER DRAWING		SCALE	4:1	SHEET 20 OF 24

REV K6

LOC	DIST	REVISIONS			
P	LTN	DESCRIPTION	DATE	DMN	APVD
-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS	POWER			SIGNAL
		P1	P2	P3	I
4-6450832-0	D	TM	TM	TM	J
	C				K
	B				N
	A				S



3P + 4S

PART NUMBER	ROWS	POWER								SIGNAL											
		P1	P2	P3	P4	P5	P6	P7	P8	1	2	3	4	5	6	7	8				
4-6450832-1	D	TM	TM	TM	TM	TM	TM	TM	TM	J	J	J	J	J	J	J	J				
	C									K	K	K	K	K	K	K	K	K	K	K	
	B									N	N	N	N	N	N	N	N	N	N	N	N
	A									S	S	S	S	S	S	S	S	S	S	S	S

8P + 32S

PART NUMBER	ROWS	POWER								SIGNAL										
		P1	P2	P3	P4	P5	P6	P7	P8	1	2	3	4	5	6	7	8			
4-6450832-2	D	TM	TM	TM	TM	TM	TM	TM	TM	J	J	J	J	J	J	J	J			
	C									K	K	K	F	K	K	K	K	K		
	B									N	N	N	N	N	N	N	N	N	N	N
	A									S	S	S	S	S	S	S	S	S	S	S

8P + 32S

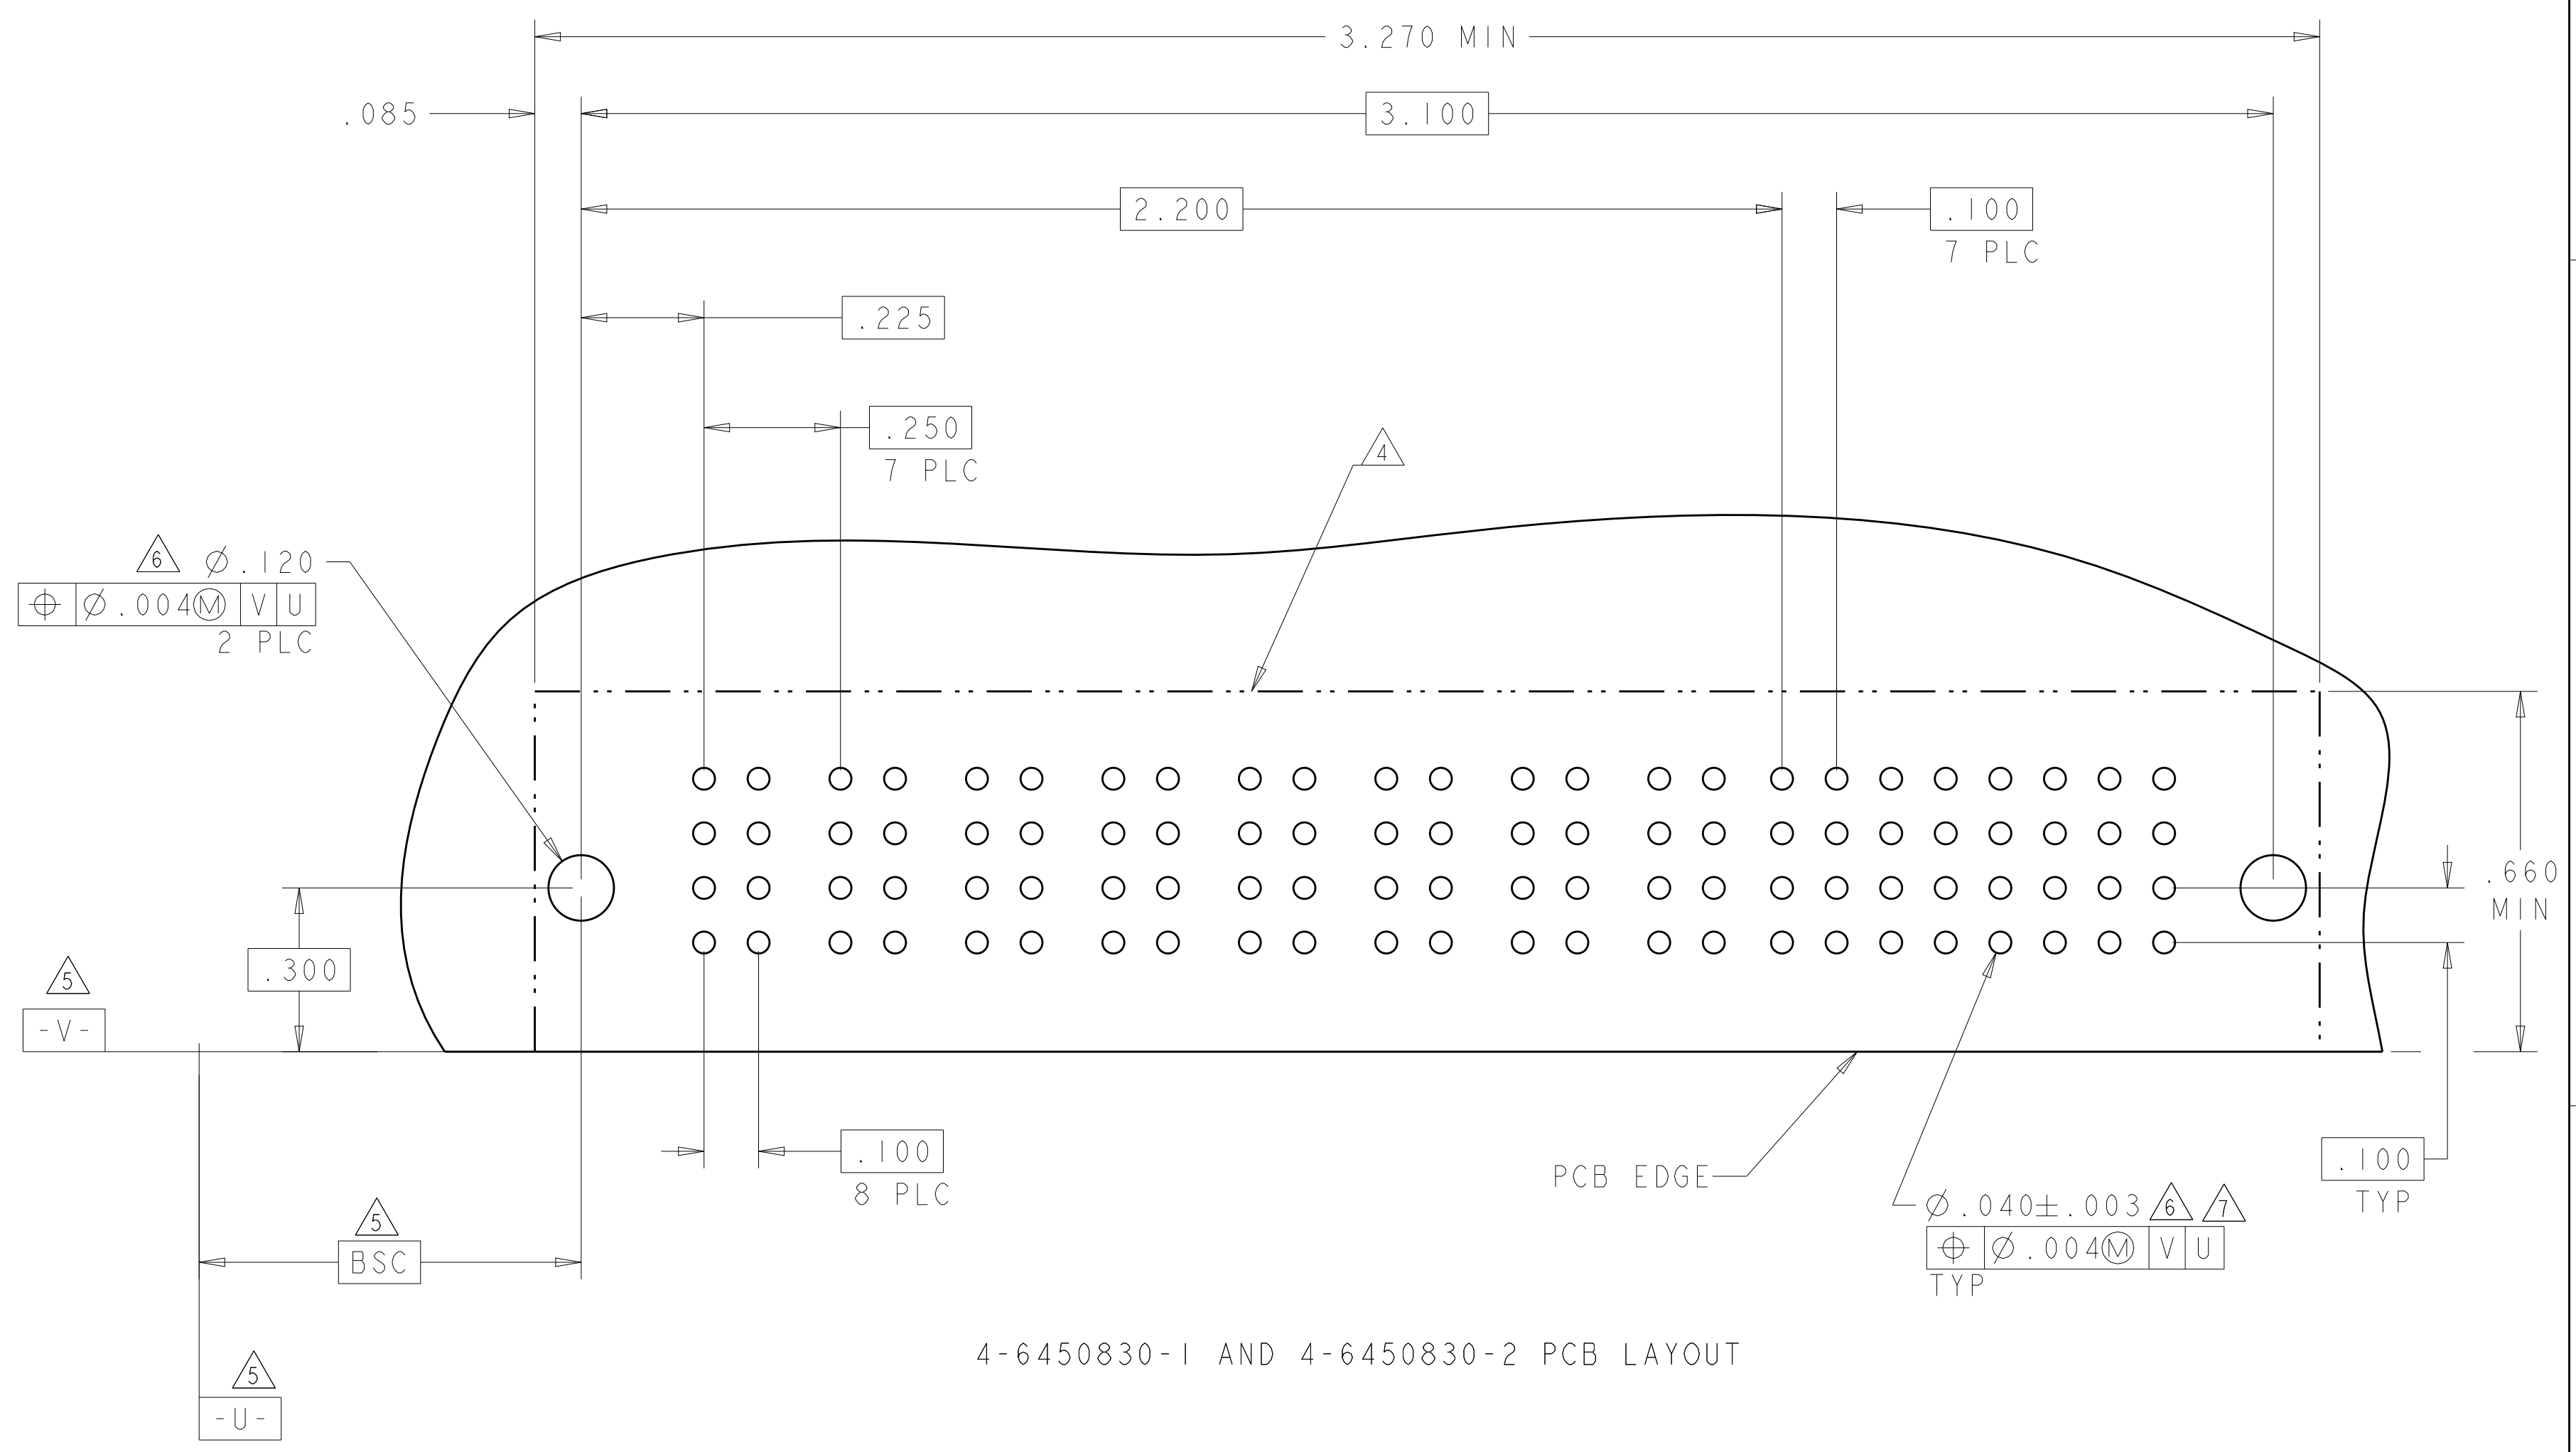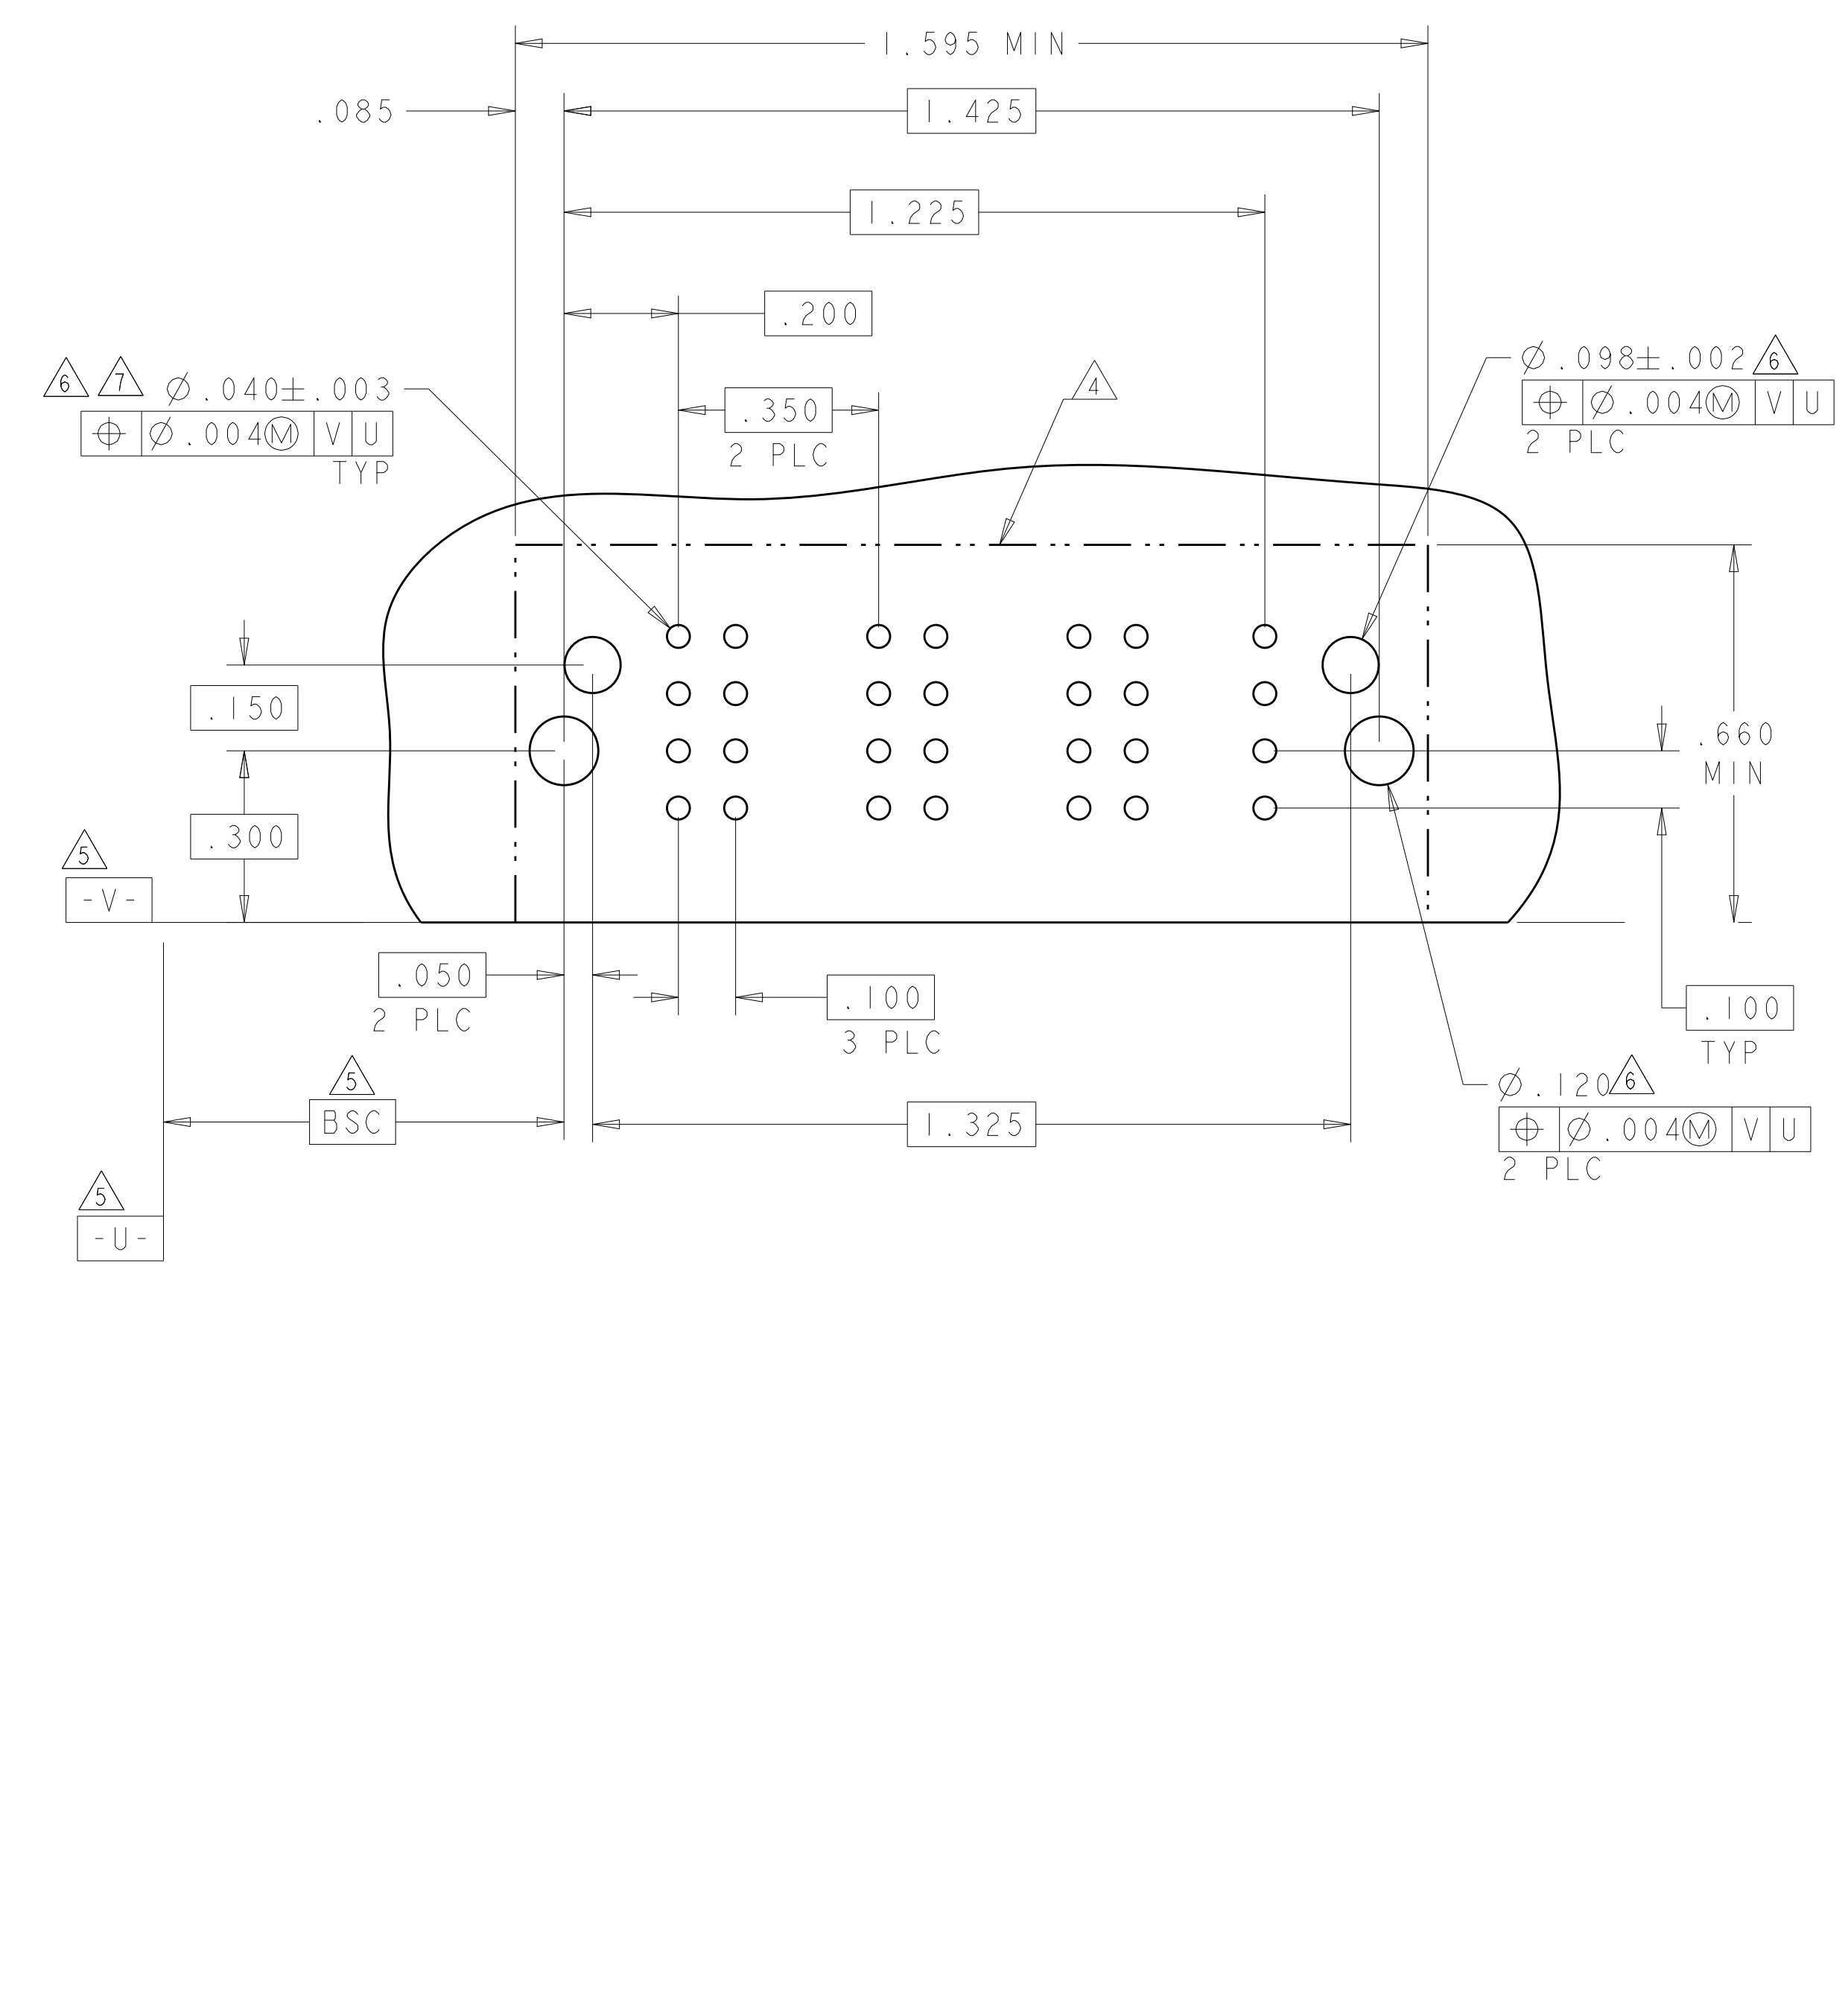

4-6450830-1 AND 4-6450830-2 PCB LAYOUT



THIS DRAWING IS A CONTROLLED DOCUMENT.		DMN: H.LIU 27MAY2008	TE Connectivity
DIMENSIONS: INCHES		CHK: S.ZHAO 27MAY2008	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: S.ZHAO	NAME: R/A HEADER WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY
0 PLC ±.01	1 PLC ±.01	PRODUCT SPEC	108-2292
2 PLC ±.01	3 PLC ±.005	APPLICATION SPEC	114-13251
4 PLC ±.002	ANGLES ±.020	WEIGHT	100779
MATERIAL	FINISH	CUSTOMER DRAWING	SCALE: 4:1 SHEET 21 OF 24 REV: K6

LOC	DIST	REV	DATE	BY	APPV
		1			
		2			

PART NUMBER	ROWS	POWER												SIGNAL						
		P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	1	2	3	4	5	6	
4-6450832-3	D																			
	C																			
	B	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM							
	A	HD																		





PART NUMBER	ROWS	POWER					SIGNAL													
		P1	P2	P3	P4	P5	1	2	3	4	5									
4-6450832-4	D																			
	C																			
	B	TM		TM		TM														
	A	HD																		

NO CONTACTS LOADED

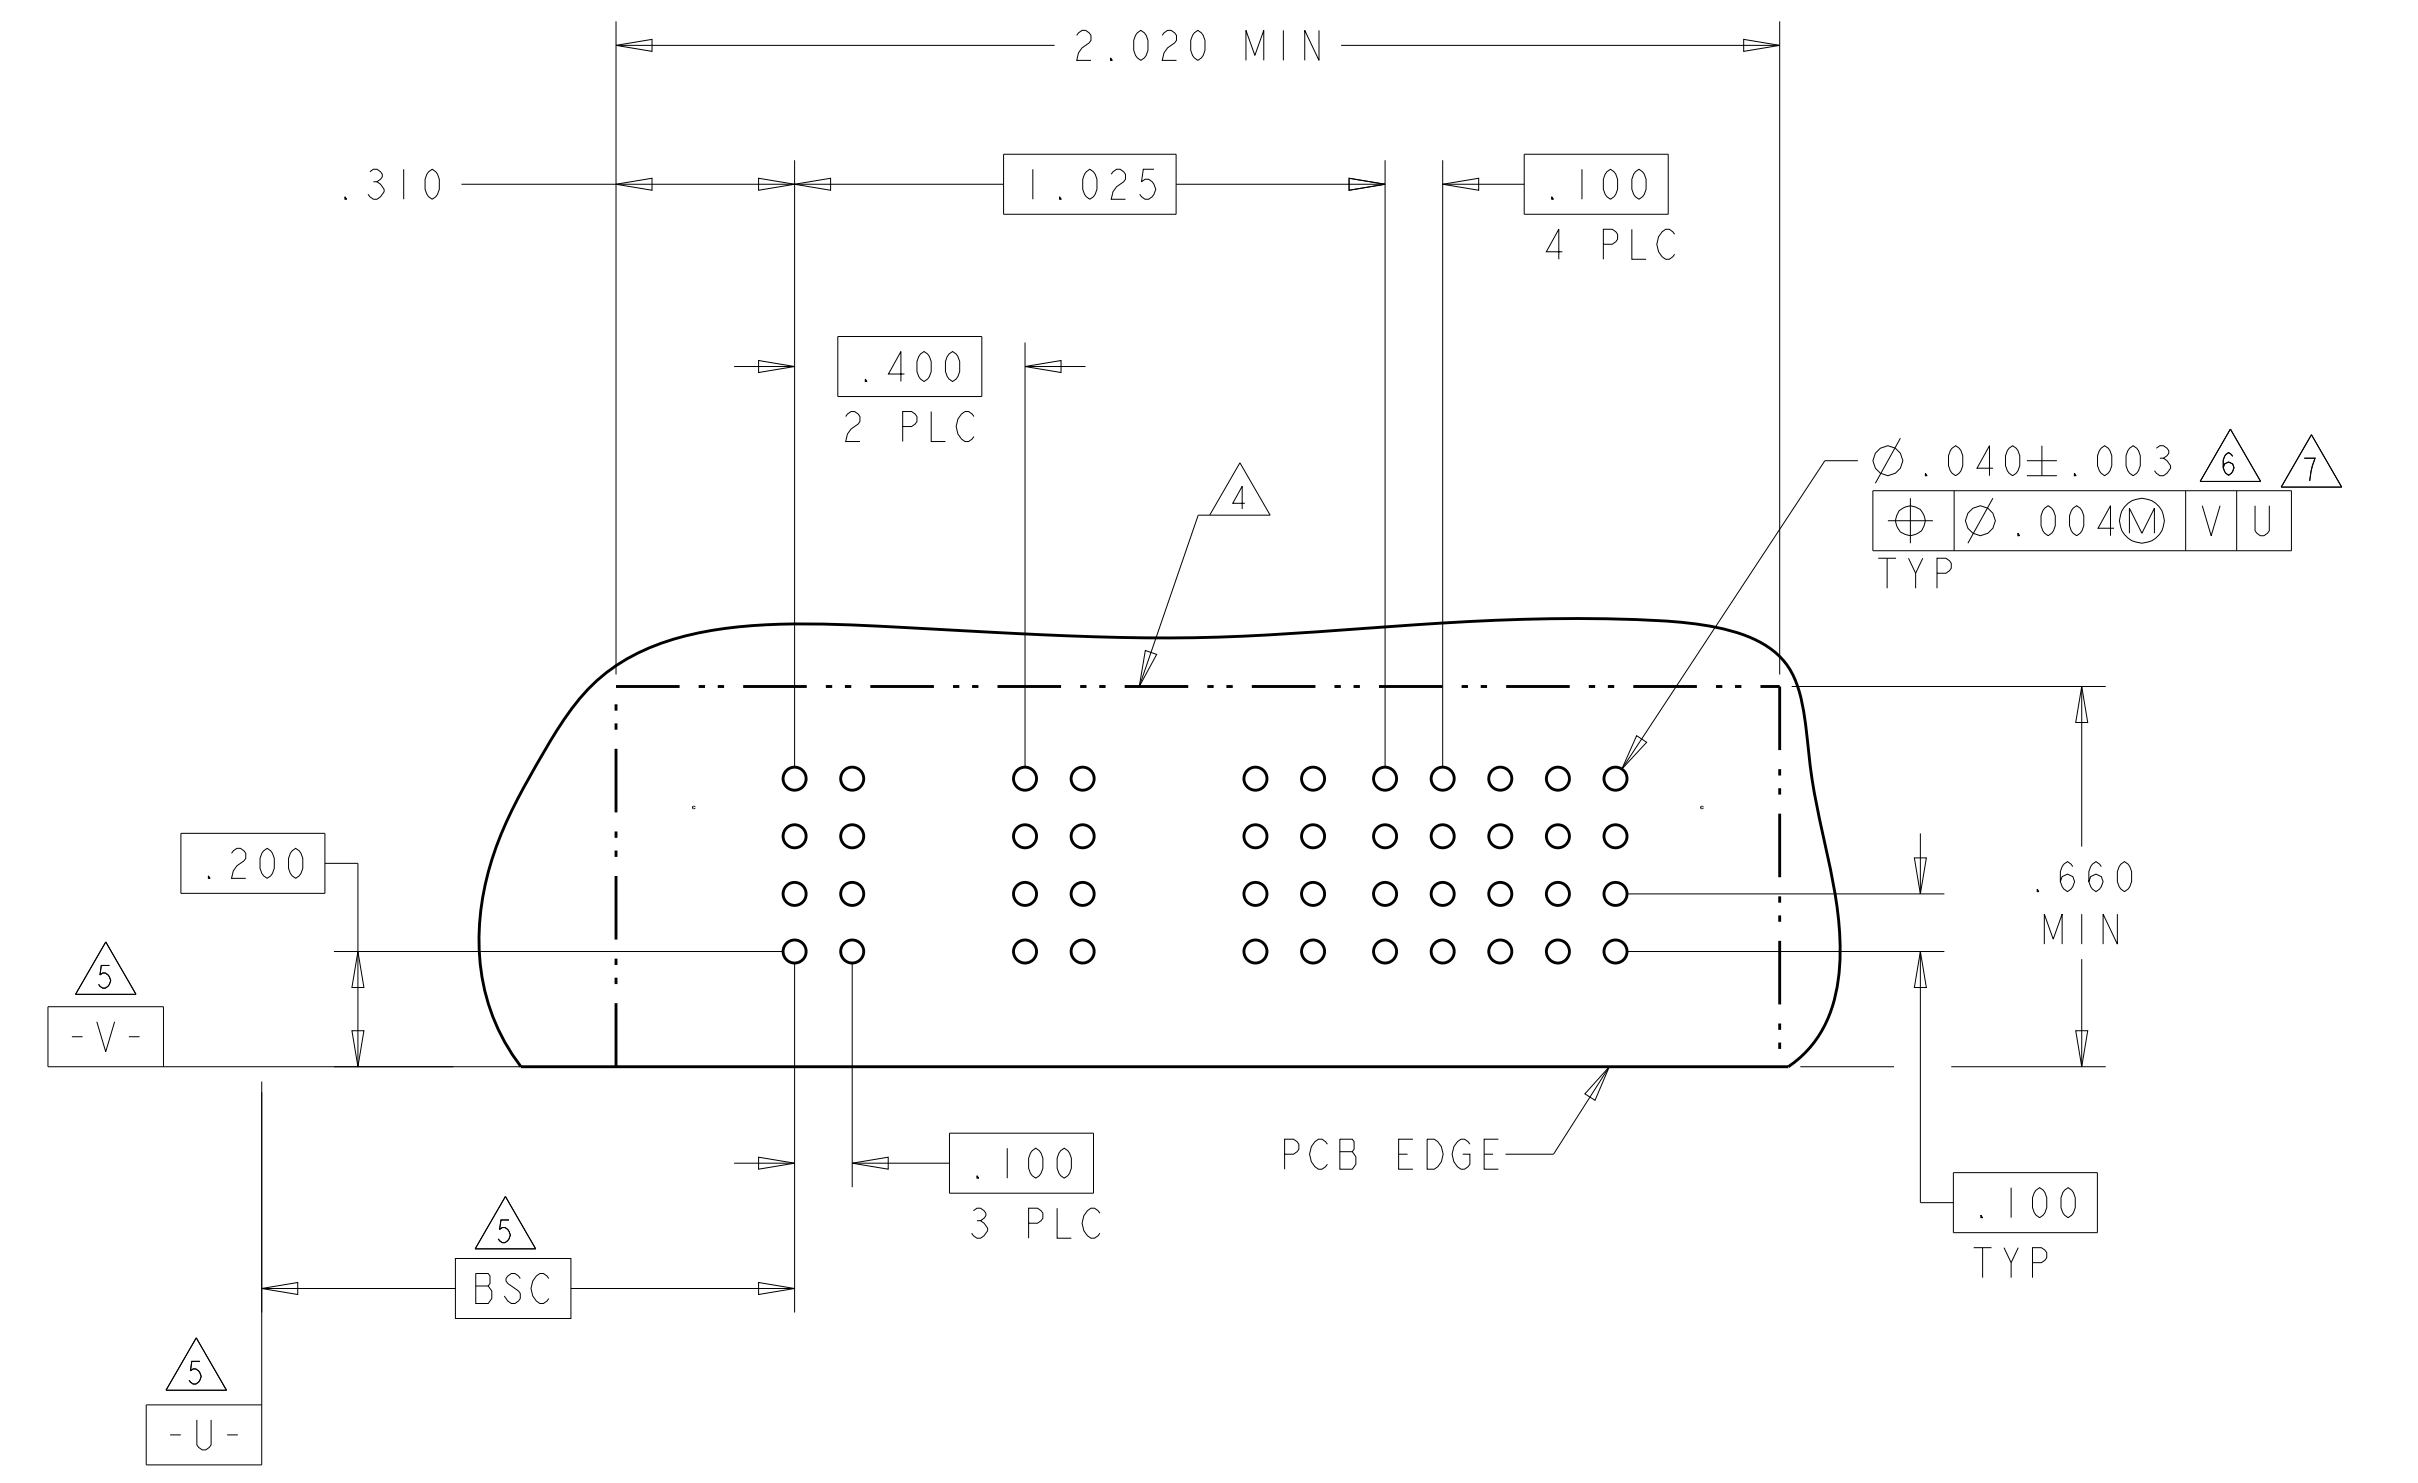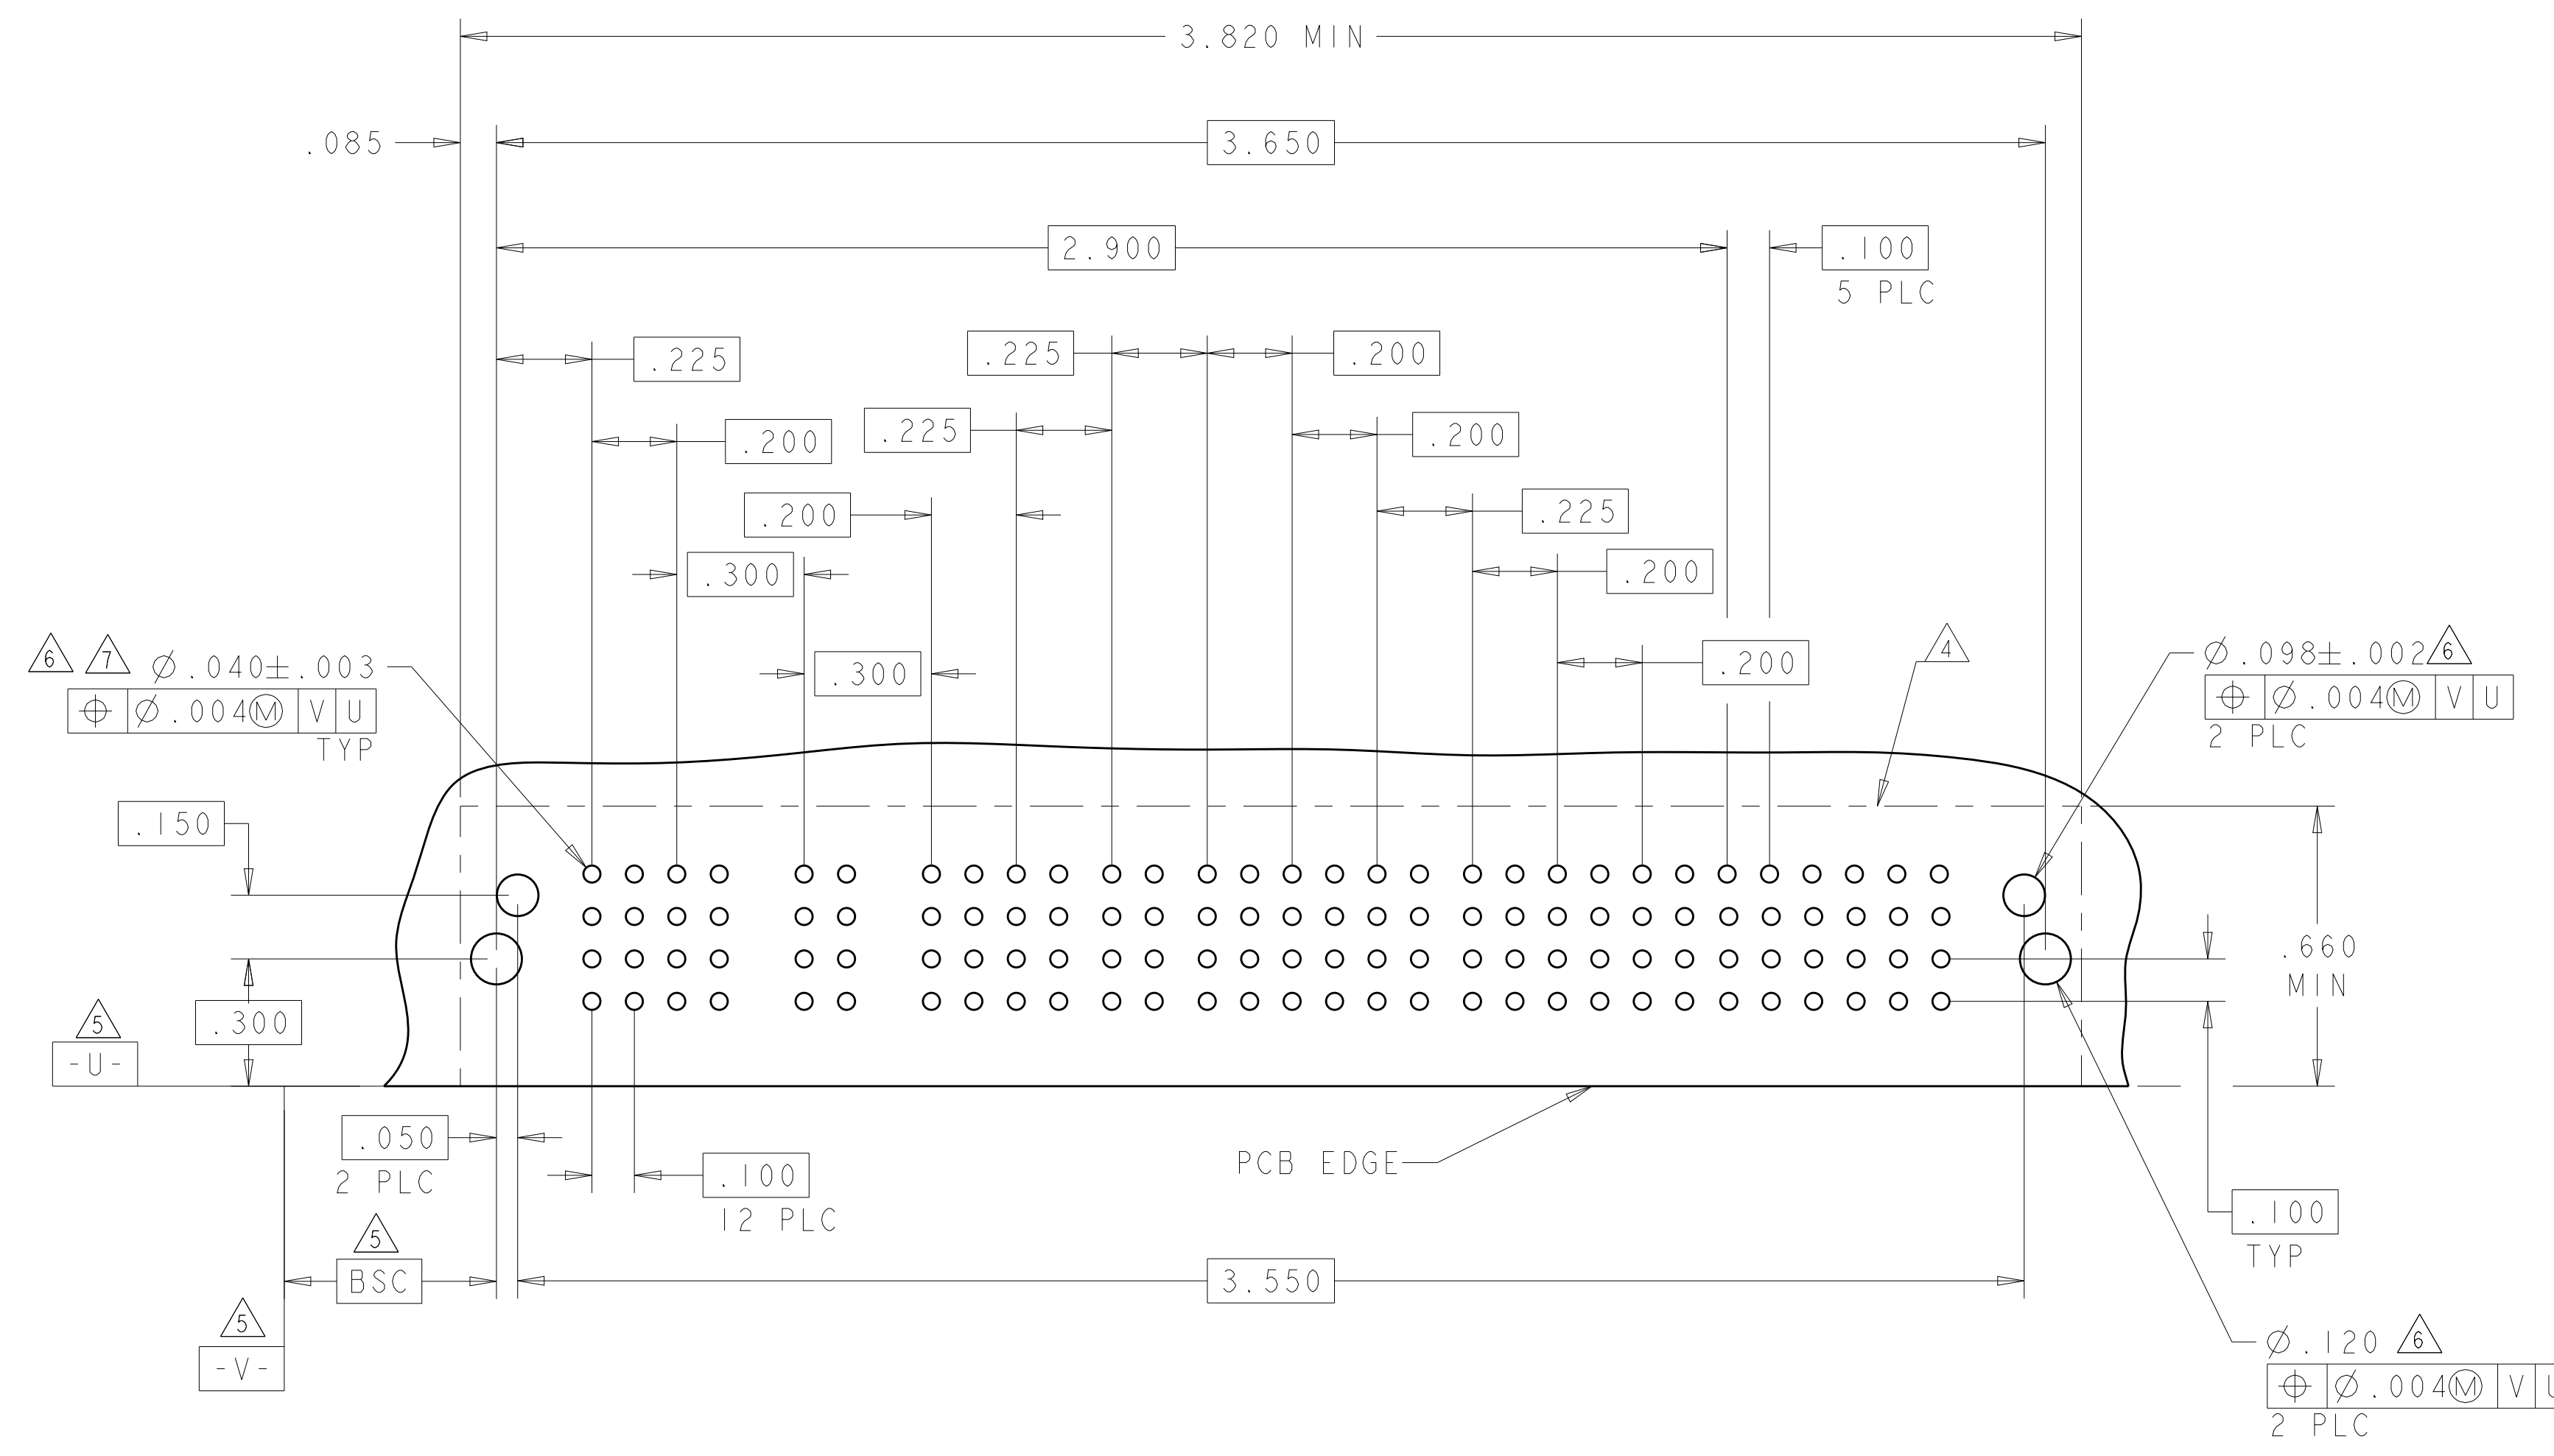

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: H. LIU 27MAY2008		TE Connectivity
DIMENSIONS: INCHES		CHK: S. ZHAO 27MAY2008		NAME: R/A HEADER WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: S. ZHAO	PRODUCT SPEC: 108-2292	
0 PLC ±.01		APPLICATION SPEC: 114-13251	SIZE: A1	
1 PLC ±.01		WEIGHT: -	CAGE CODE: C=6450832	
2 PLC ±.01		SCALE: 4:1	SHEET 22 OF 24	
3 PLC ±.005		REVISION: K6	REV: K6	
4 PLC ±.002		CUSTOMER DRAWING		

LOC	DIST	REVISIONS			
P	LTH	DESCRIPTION	DATE	DMN	APVD
-	-	SEE SHEET 1	-	-	-

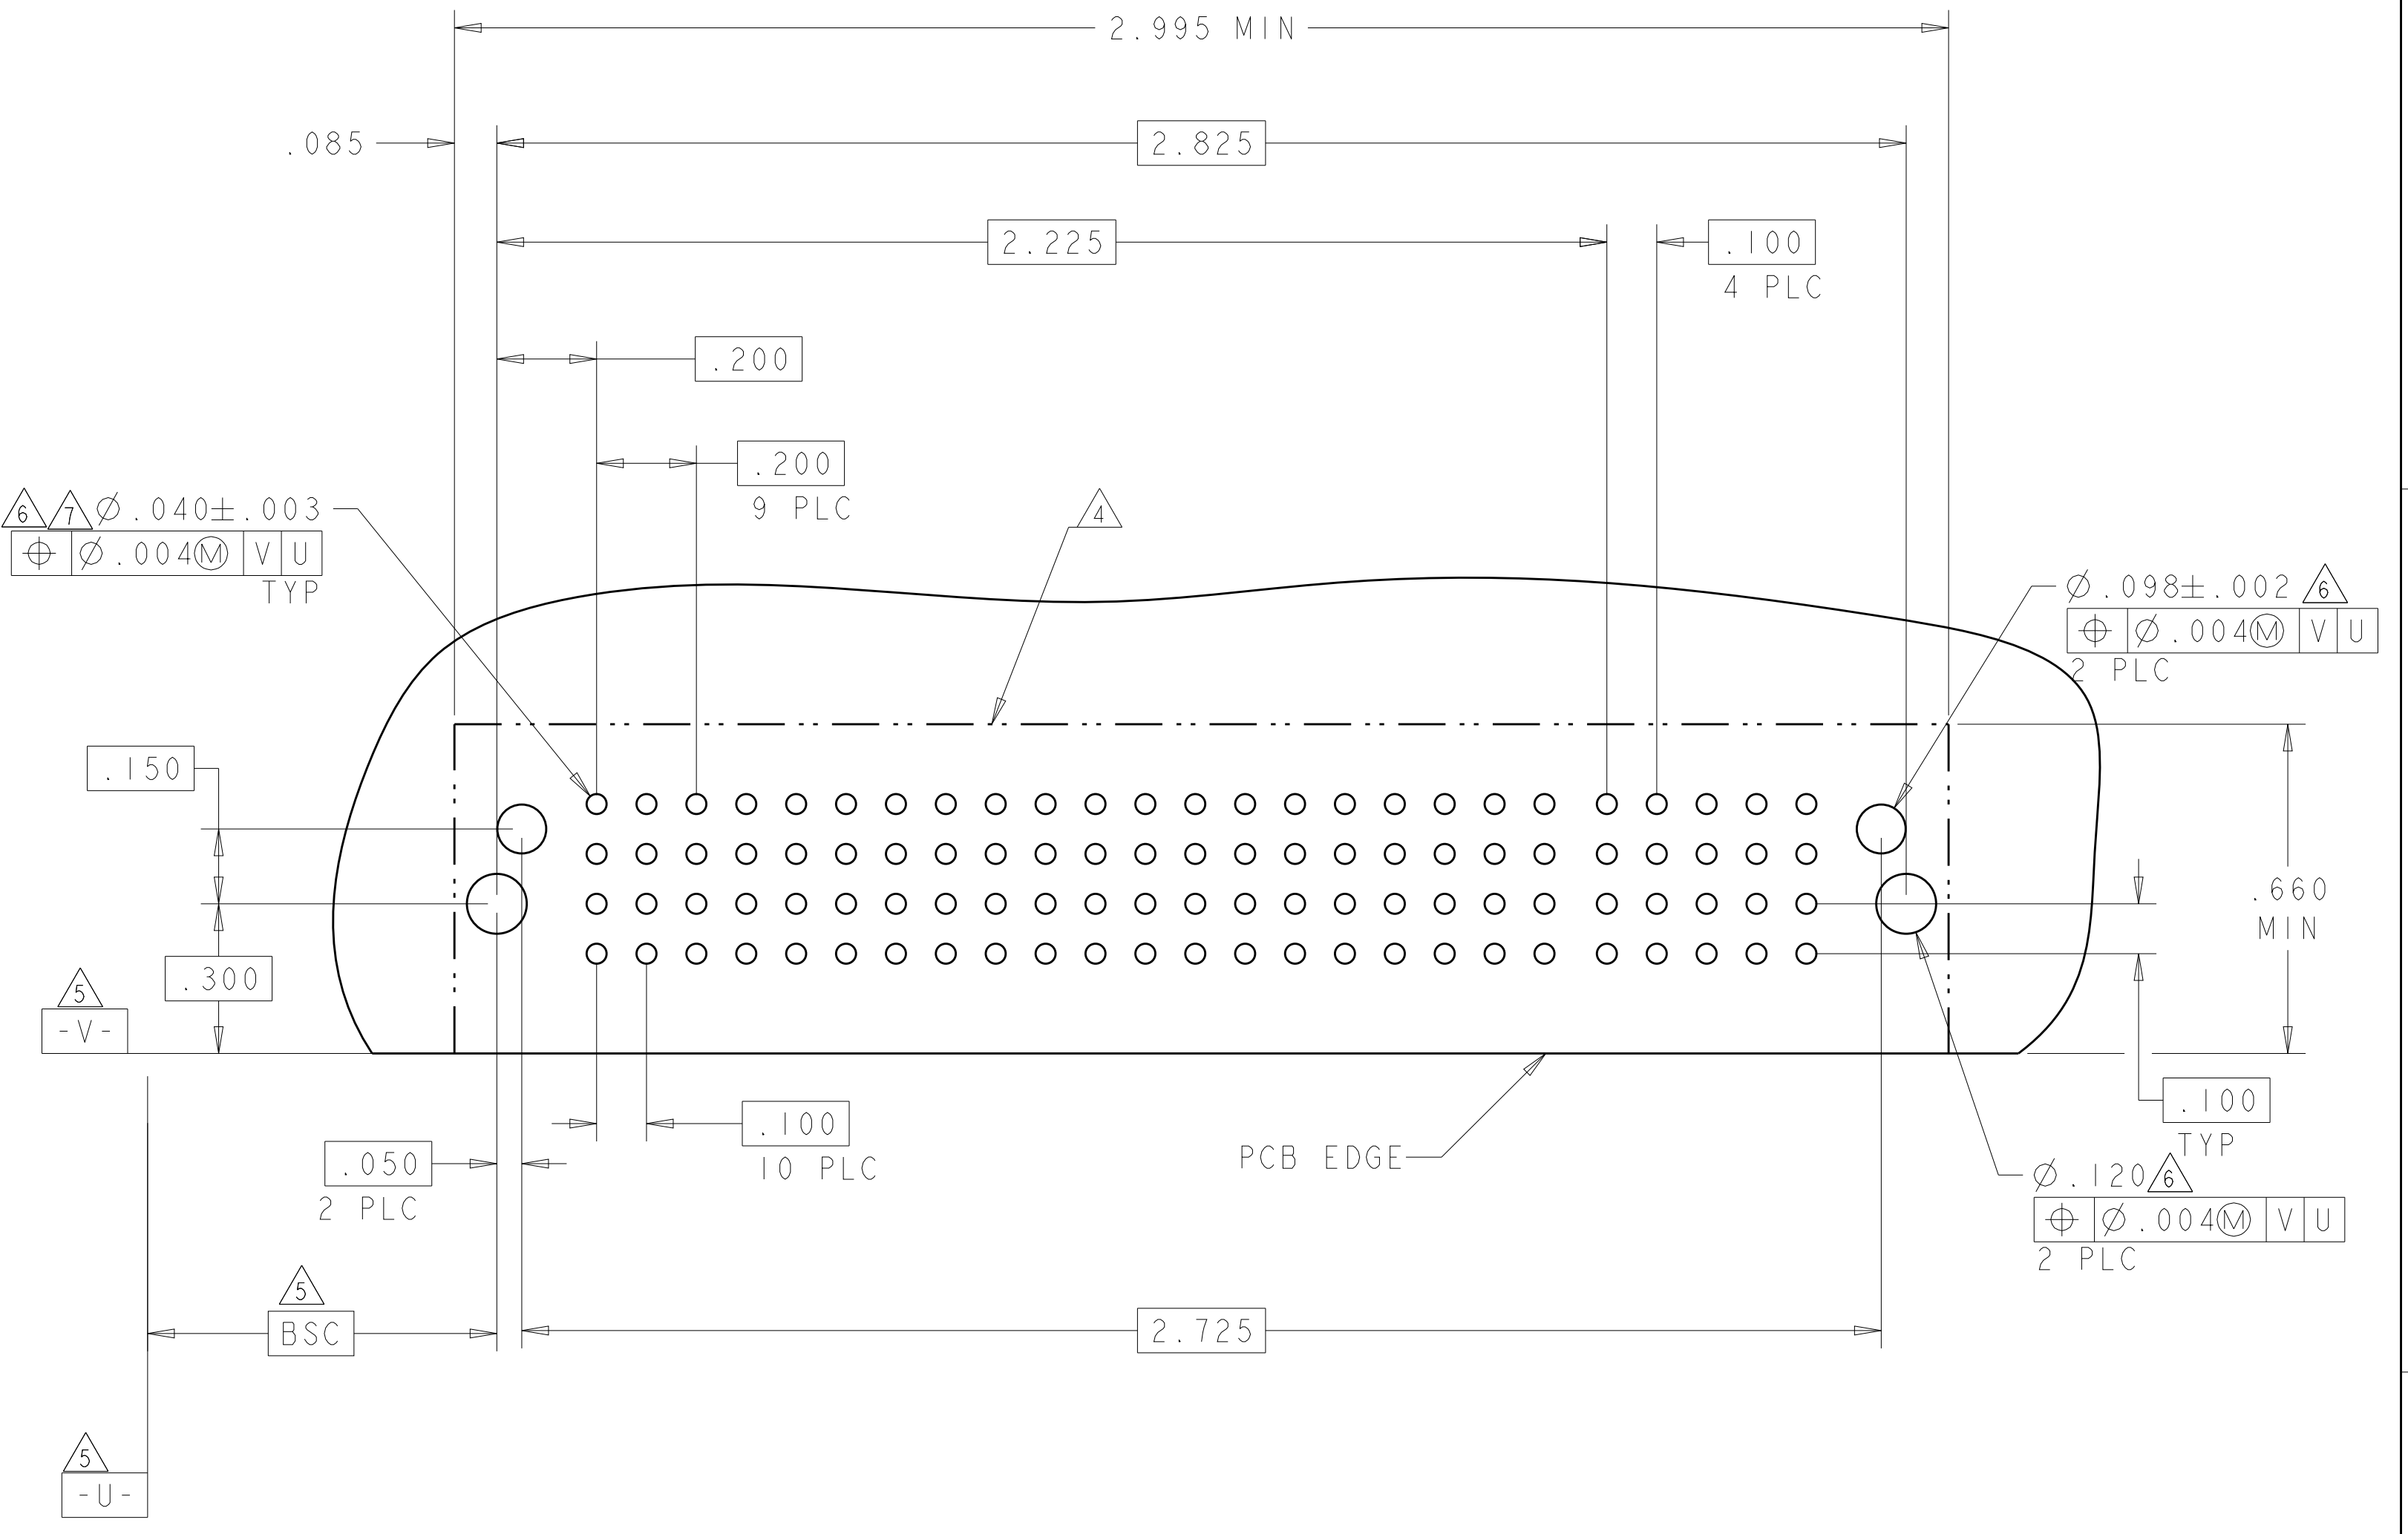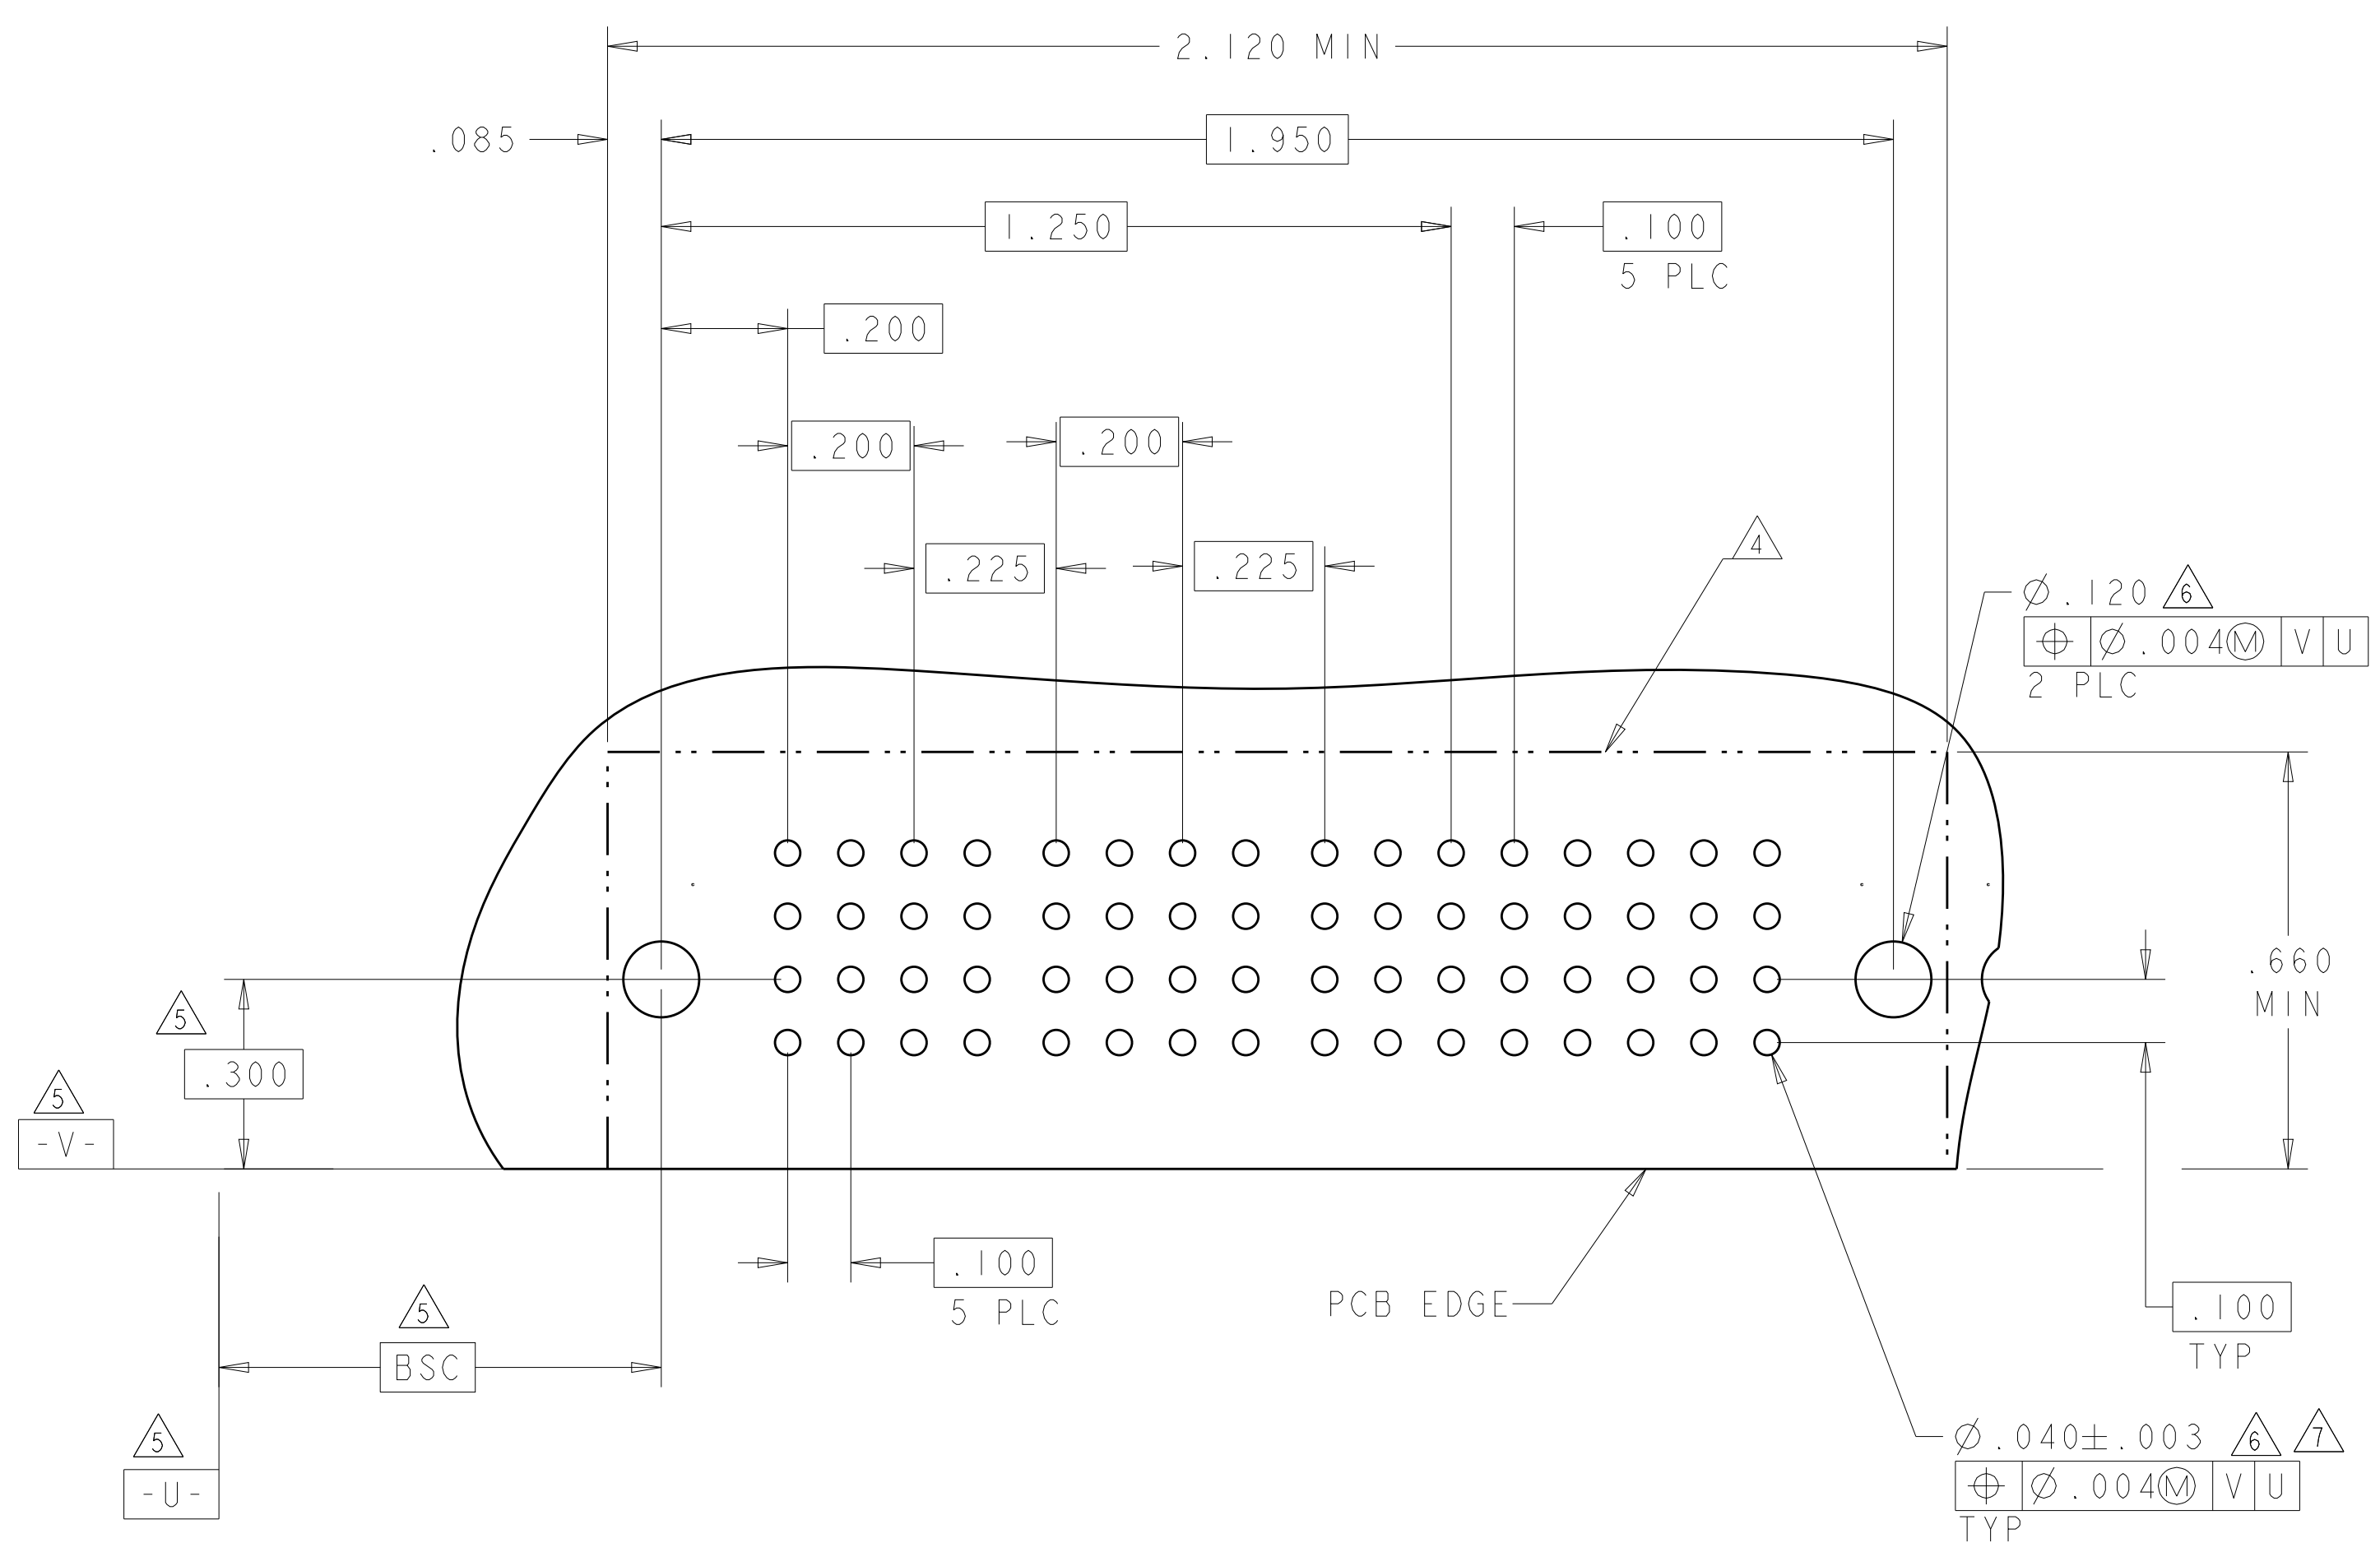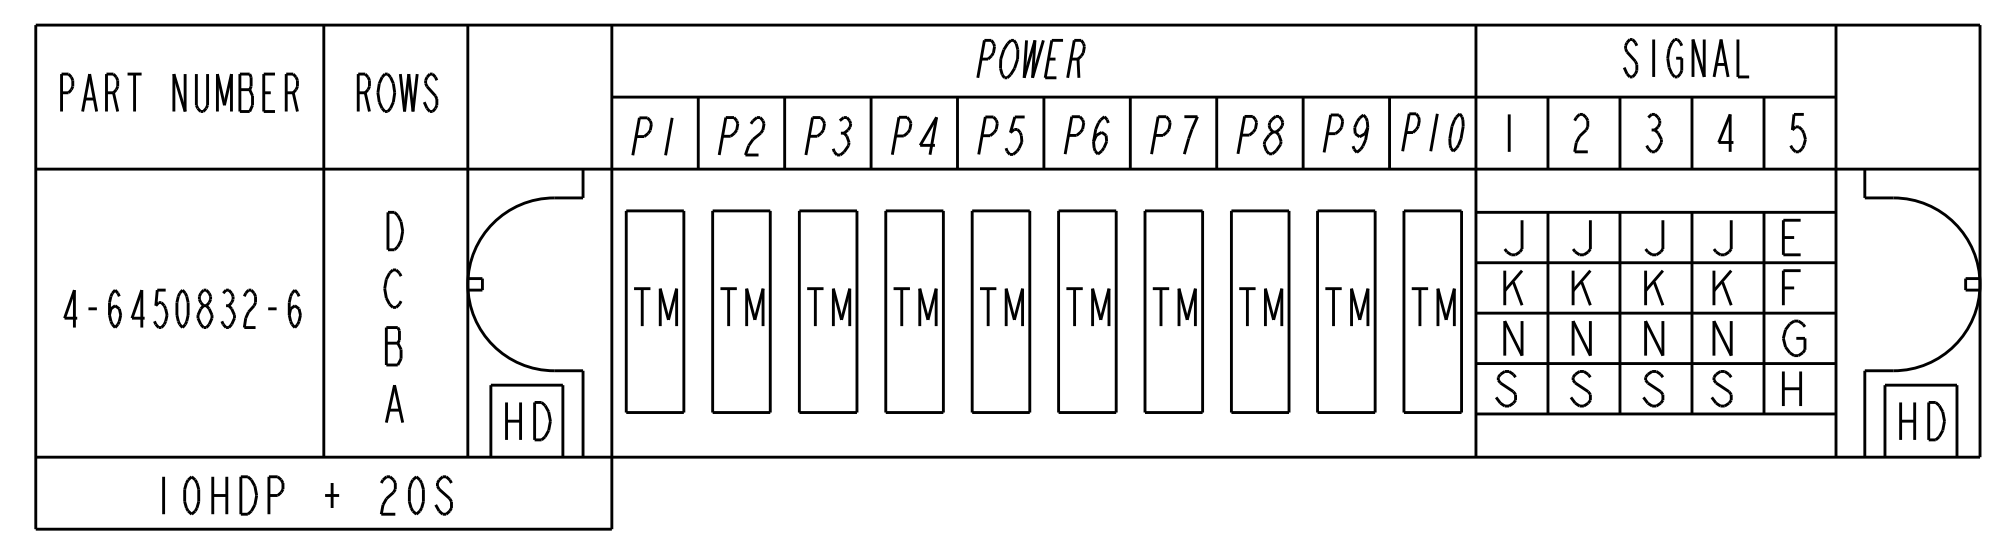
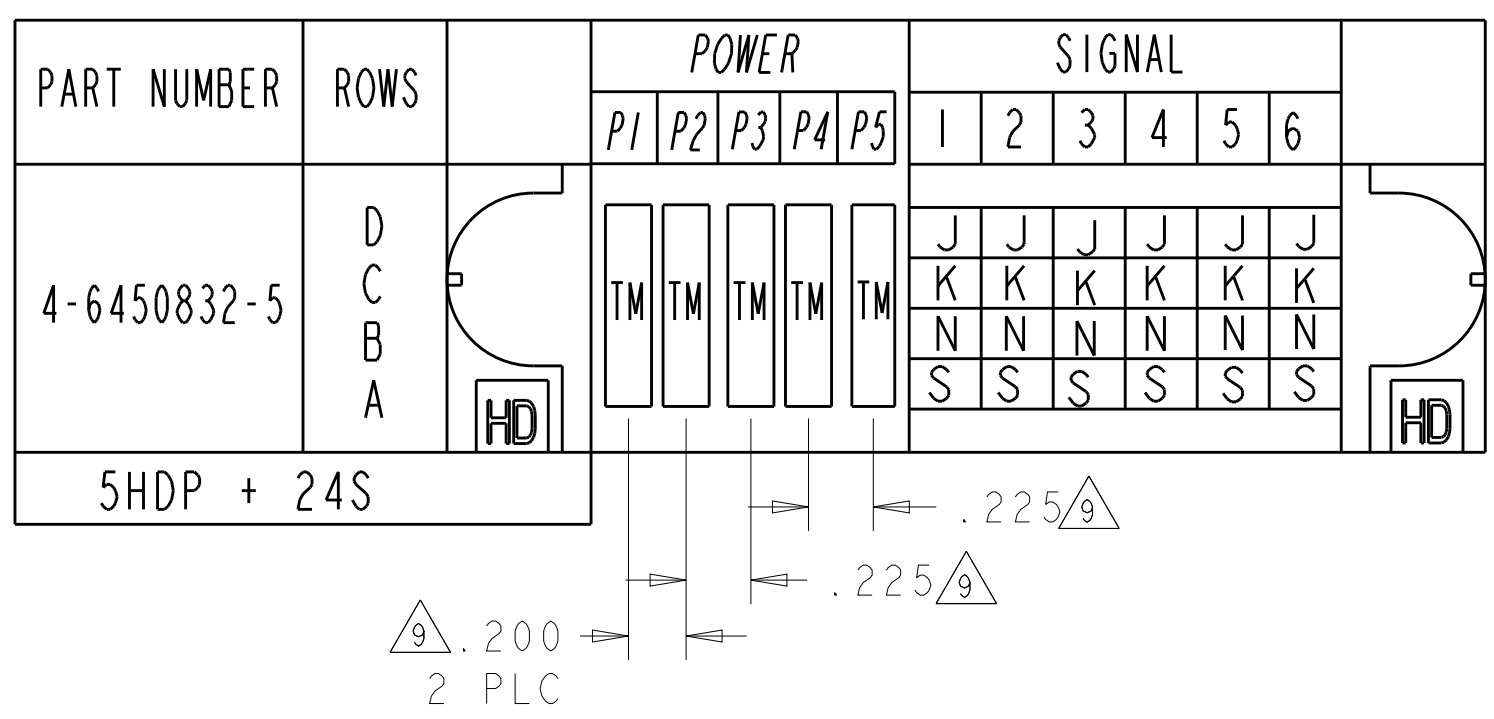


THIS DRAWING IS A CONTROLLED DOCUMENT.		DMN: H. LIU 27MAY2008	TE Connectivity
DIMENSIONS: INCHES		CHK: S. ZHAO 27MAY2008	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: S. ZHAO	NAME: R/A HEADER WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE
0 PLC ±	1 PLC ±.01	PRODUCT SPEC: 108-2292	SIZE: A
2 PLC ±.01	3 PLC ±.01	APPLICATION SPEC: 114-13251	CAGE CODE: C=6450832
4 PLC ±.005	5 PLC ±.005	WEIGHT: -	RESTRICTED TO: -
6 PLC ±.0020	ANGLES ±.020	CUSTOMER DRAWING	SCALE: 4:1 SHEET 23 OF 24 REV: K6

LOC	DIST	REVISIONS					
		P	LTN	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1			

PART NUMBER	ROWS	POWER															SIGNAL							
		P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	P14	P15	1	2	3	4	5	6	7	
4-6450832-7	D															-	J	-	-	J	J	J		
	C															-	K	-	-	K	K	K		
	B	TM	TM	TM	TM	-	-	-	TM	TM	-	-	-	TM	TM	-	-	G	-	-	G	G	G	
	A															-	H	-	-	H	H	H		
15P + 28S																								

- NO CONTACTS LOADED

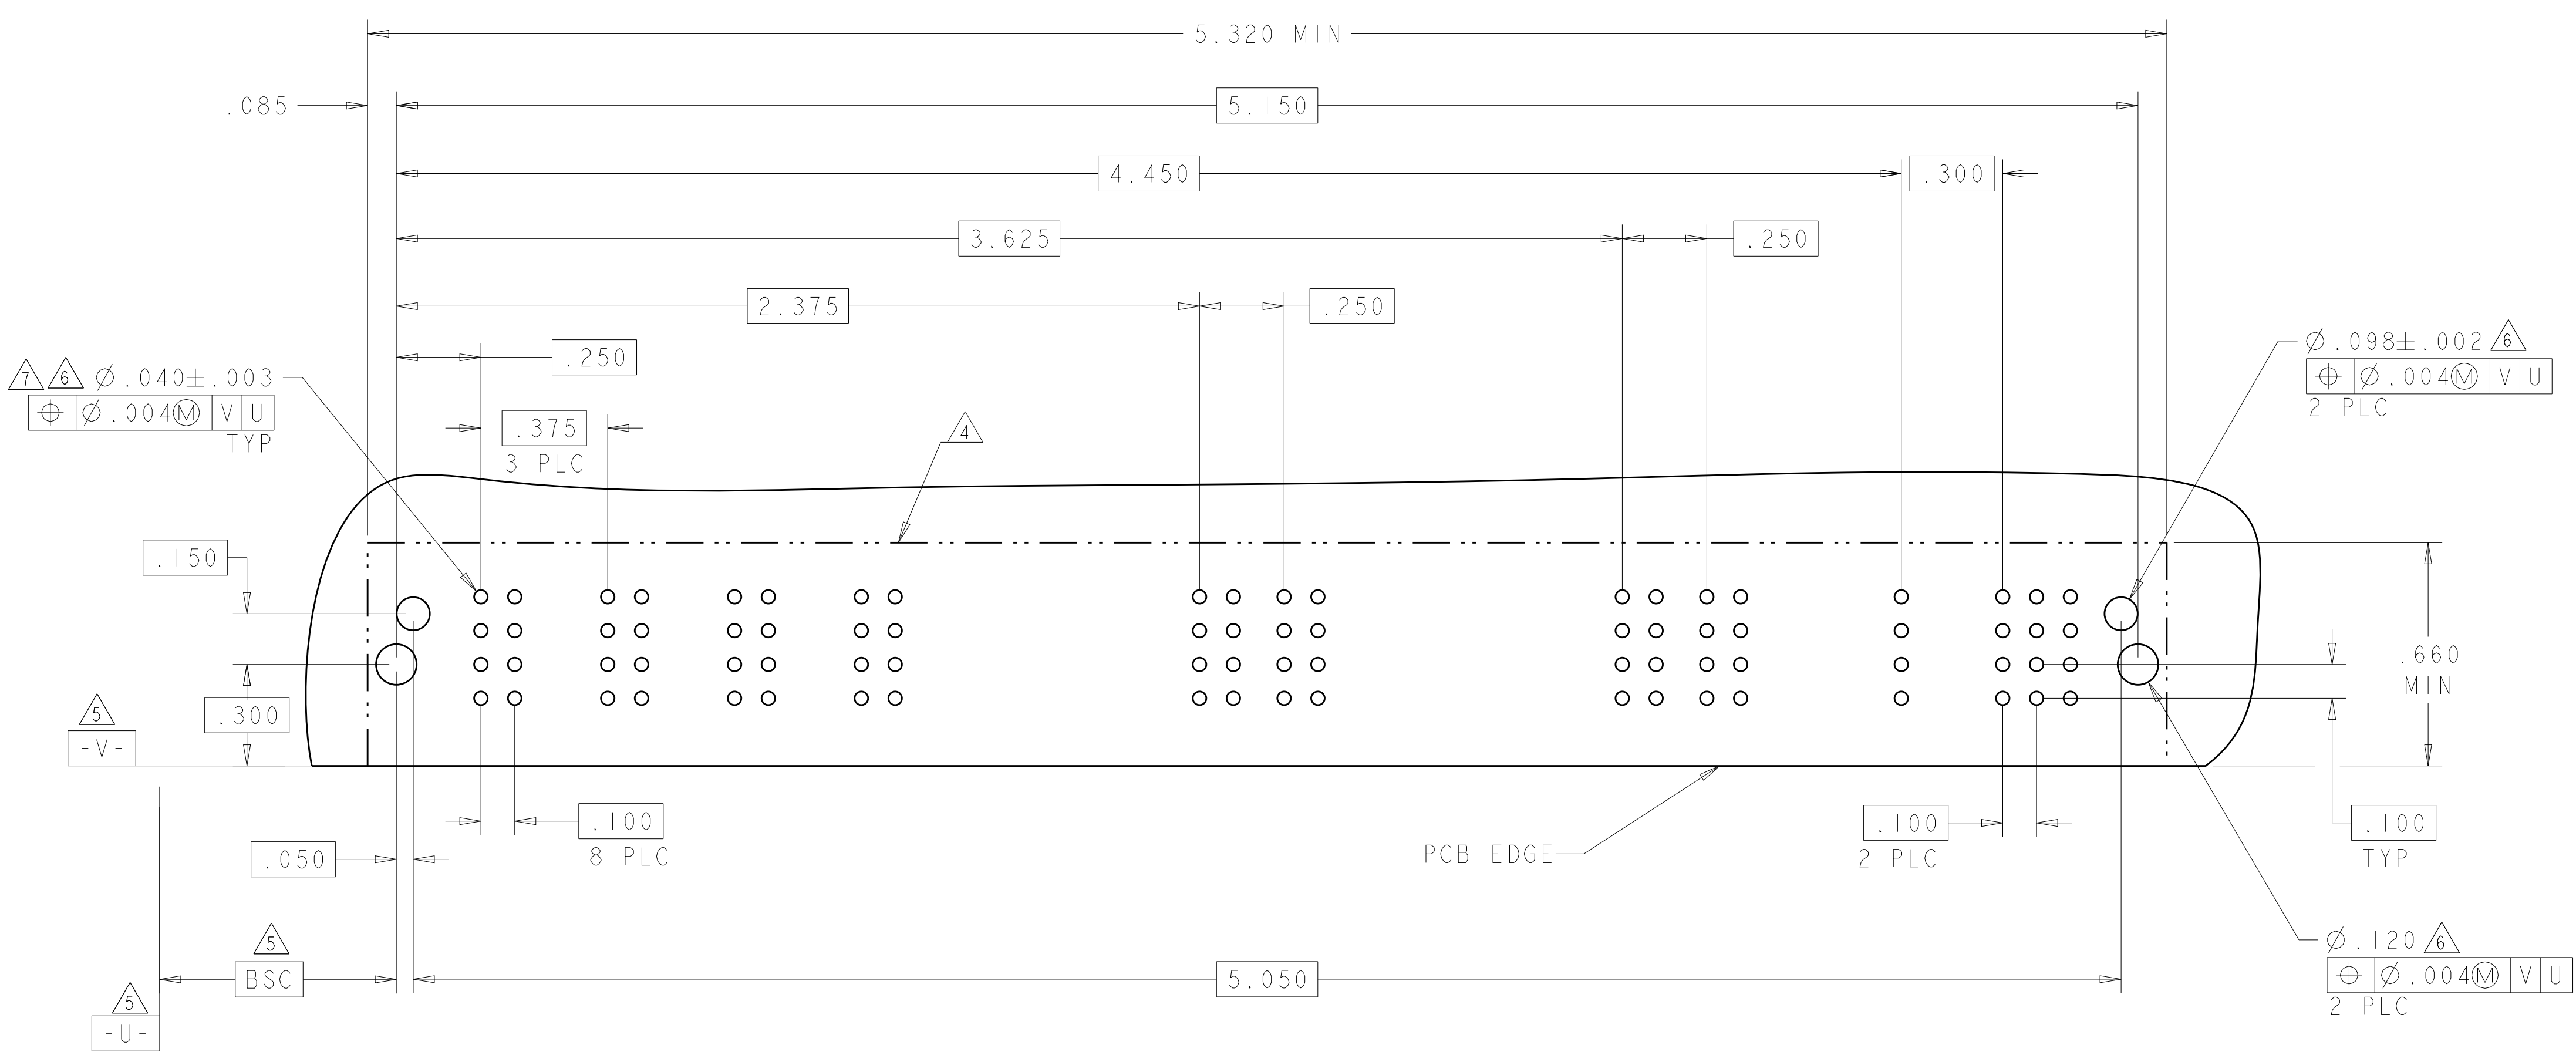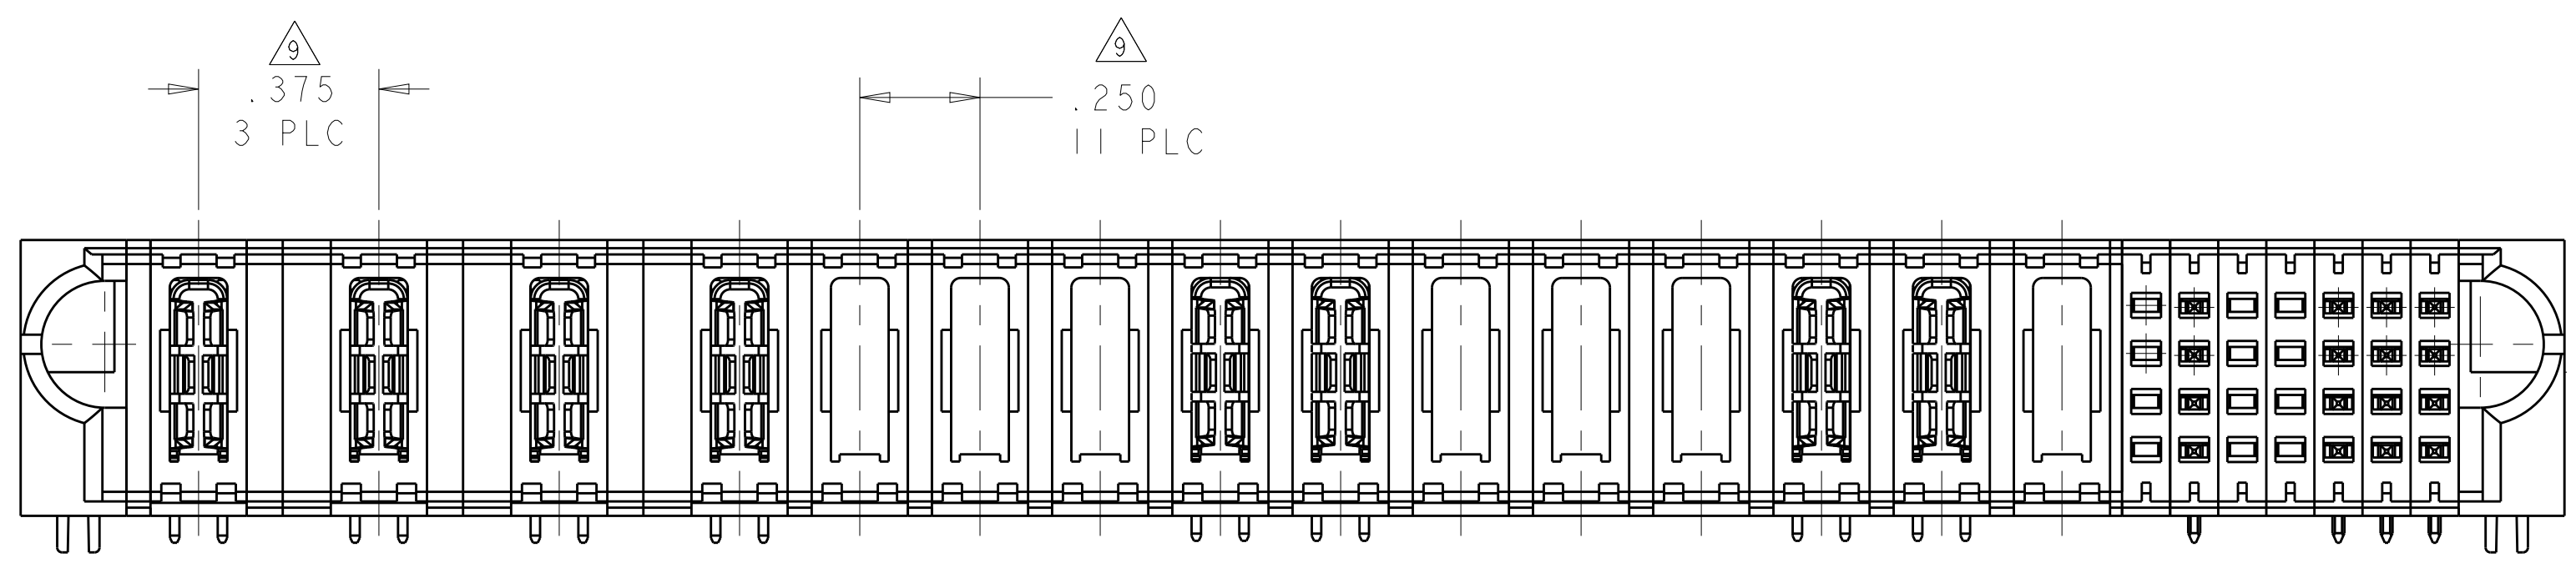

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H. LIU 27MAY2008	
DIMENSIONS: INCHES		CHK S. ZHAO 27MAY2008	
		APVD S. ZHAO	NAME R/A HEADER WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-2292	RESTRICTED TO
0 PLC ± 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.002 ANGLES ±.020		APPLICATION SPEC 114-13251	SIZE A100779
MATERIAL		WEIGHT	CAGE CODE C=6450832
FINISH		CUSTOMER DRAWING	SCALE 4:1 SHEET 24 OF 24 REV K6

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru