

TECHNICAL DATA SHEET

Description: 4G/WiFi/Active GNSS Direct

Mount Antenna

PART NUMBER: GNSSDM700/5800SSS



Features:

- 3-Feeds (4G, WiFi, GNSS)
- GNSS Active Antenna
 - LNA gain 30dB
 - Pre and post LNA filtering
- Direct mount
- Connector SMA Male
- Cable 17 feet
- · RoHS compliant

Applications:

- 4G LTE 698-2700MHz
- WiFi dualband 2.4/5GHz
- DSRC 5850-5925GHz
- GNSS (Beidou, GPS, Galileo, Glonass)
- Vehicular mounting
- Asset Tracking, Navigation, Fleet Management
- Mobile and Fixed broadband

All dimensions are in mm / inches

Issue: 1709

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551

Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



Frequency(LTE Cable)

Series: SharkFin

TECHNICAL DATA SHEET

MHz

Description: 4G/WiFi/Active GNSS Direct

Mount Antenna

PART NUMBER: GNSSDM700/5800SSS

698-960/1710-2170/2300-2700

ELE	ECTF	RICAL	SPEC	IFIC/	SMOITA
	_ 🔾	\			1110110

Frequency(WiFi cable)	2400-2485/5150-5925	MHz	
Frequency(GNSS cable)	1561.098±2.046/ 1575.42±1.023/ 1602.5625±4	MHz	
Nominal Impedance	50	Ω	
VSWR (LTE)*	2.5:1	Max	
VSWR (WiFi/GNSS)*	2:1	Max	
Peak Gain (LTE,698-960MHz,Typical)**	3.0	dBi	
Peak Gain (LTE,1710-2700MHz,Typical)**	4.5	dBi	
Peak Gain (WiFi, 2400-2500MHz,Typical)**	4.1	dBi	
Peak Gain (WiFi, 5150-5925MHz,Typical)**	5.9	dBi	
Efficiency (LTE,698-960MHz,Typical)**	83	%	
Efficiency (LTE,1710-2700MHz,Typical)**	82	%	
Efficiency (WiFi,2400-2500MHz,Typical)**	82	%	
Efficiency (WiFi,5150-5925MHz,Typical)**	54	%	
HPBW / Horizontal Plane (LTE/WiFi)**	O	Omni	
HPBW / Vertical Plane (LTE, 698-960MHz, Typi	ical)** 52	52°	
HPBW / Vertical Plane (LTE,1710-2700MHz, Ty	/pical)** 3	35°	
HPBW / Vertical Plane (WiFi, 2400-2485MHz, T	ypical)** 32	<u>2</u> °	

Polarization (LTE/WiFi) Vertical Polarization (GNSS) RHCP

Power Withstanding (LTE, 698-960MHz)

Power Withstanding (LTE, 1710-2700MHz)

20 W

Power Withstanding (WiFi, 2400-5925MHz)

20 W

Power Withstanding (WiFi, 2400-5925MHz)
Issue: 1709

ROHS

25°

HPBW / Vertical Plane (WiFi,5150-5925MHz, Typical)**



TECHNICAL DATA SHEET

Description: 4G/WiFi/Active GNSS Direct

Mount Antenna

PART NUMBER: GNSSDM700/5800SSS

RHCP Peak Gain (Radiating element, Typical)***	1	dBic
Gain (LNA gain)	30	$dB\pm 2\;dB$
Out of Band Rejection		
698 MHz	>70	dB
960MHz	>65	dB
1710MHz	>60	dB
2170MHz	>65	dB
2400MHz	>65	dB
2700MHz	>65	dB
Noise Figure	<2.4	dB
Operating Voltage	3.3-5	Vdc±0.5V
Current Consumption	9	mA± 2 mA



^{*} Tested with 5.18m cable and with 500mm ground plane

^{**}Tested with 200mm cable and with 500mm ground plane

^{***}Tested with 70X70mm ground plane



TECHNICAL DATA SHEET

Description: 4G/WiFi/Active GNSS Direct

Mount Antenna

PART NUMBER: GNSSDM700/5800SSS

MECHANICAL SPECIFICATIONS

Overall Length 3.5 H x Ø4.26 /88.3 x Ø108[in/mm]

Weight 470g

Antenna Color BLACK or WHITE

Connector type SMA MALE

Cable type RG58/RG174[GNSS/ LTE&WLAN]

Cable length 17' / 5.18m

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature -40/+85 ° C

Storage Temperature -40/+85 ° C

Ingress Protection IP65

Wind-loading 120km/h

RoHS Compliant Yes






TECHNICAL DATA SHEET

Description: 4G/WiFi/Active GNSS Direct

Mount Antenna

PART NUMBER: GNSSDM700/5800SSS

MECHANICAL DRAWING

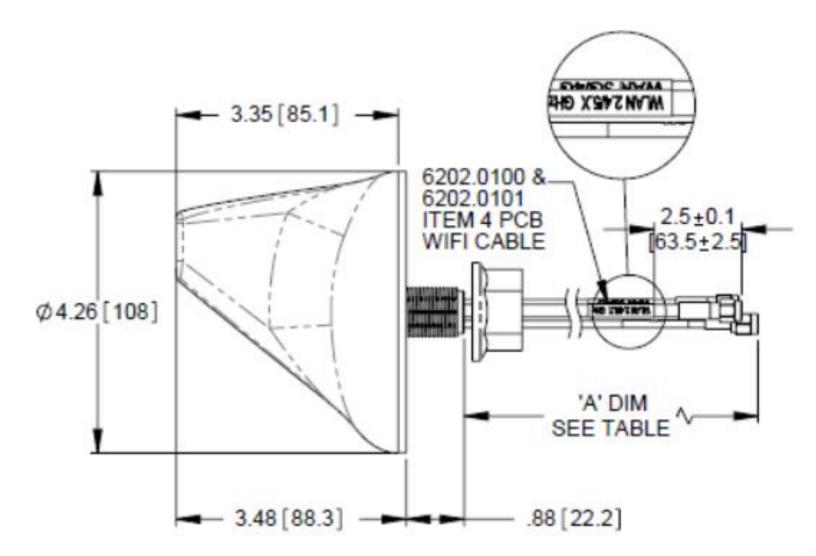







TECHNICAL DATA SHEET

Description: 4G/WiFi/Active GNSS Direct

Mount Antenna

PART NUMBER: GNSSDM700/5800SSS

Test Setup

* VSWR is tested with 5.18m cable and with 500mm ground plane

**Radiation performance is tested with 200mm cable and with 500mm ground plane

***GNSS module is tested with 70X70mm ground plane





TECHNICAL DATA SHEET


Description: 4G/WiFi/Active GNSS Direct

Mount Antenna


PART NUMBER: GNSSDM700/5800SSS

CHARTS

VSWR of LTE

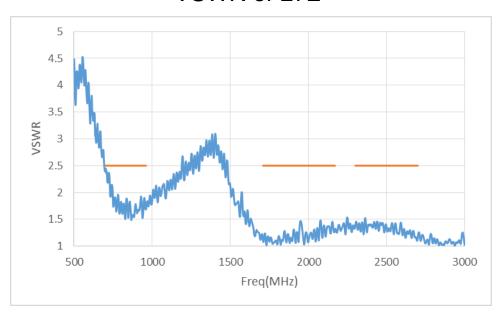

VSWR of WiFi

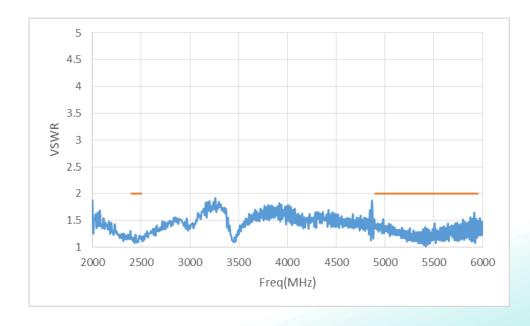





TECHNICAL DATA SHEET


Description: 4G/WiFi/Active GNSS Direct

Mount Antenna


PART NUMBER: GNSSDM700/5800SSS

CHARTS

Radiation Efficiency of LTE

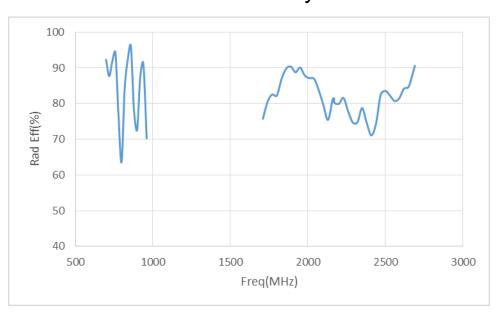

Radiation Efficiency of WiFi

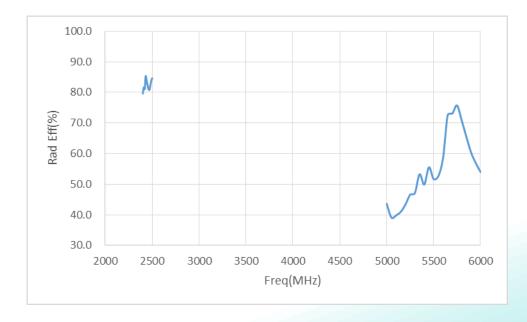





TECHNICAL DATA SHEET


Description: 4G/WiFi/Active GNSS Direct

Mount Antenna


PART NUMBER: GNSSDM700/5800SSS

CHARTS

Peak Gain of LTE

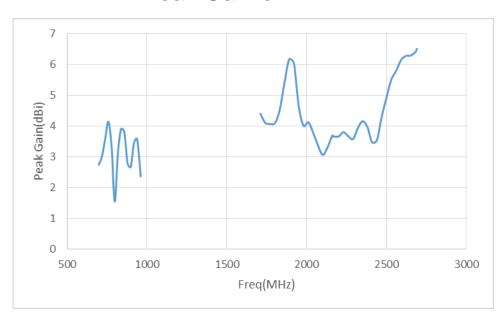

Peak Gain of WiFi

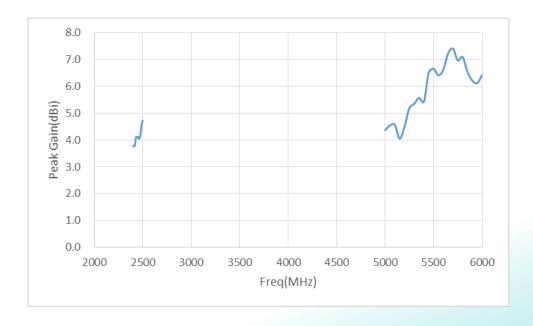







TECHNICAL DATA SHEET


Description: 4G/WiFi/Active GNSS Direct

Mount Antenna


PART NUMBER: GNSSDM700/5800SSS

CHARTS

LTE antenna X-Y plane radiation pattern at LTE low band

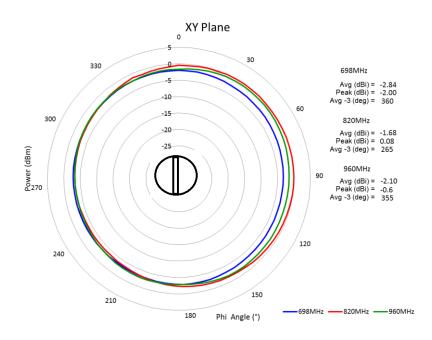

LTE antenna Z-X plane radiation pattern at LTE low band

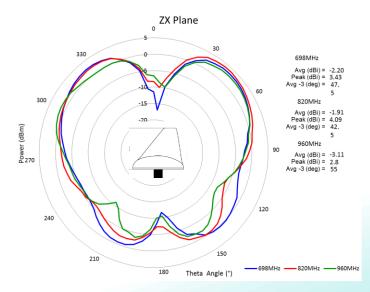





TECHNICAL DATA SHEET


Description: 4G/WiFi/Active GNSS Direct

Mount Antenna


PART NUMBER: GNSSDM700/5800SSS

CHARTS

LTE antenna Y-Z plane radiation pattern at LTE low band

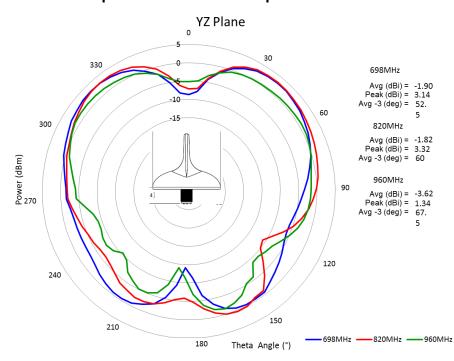

LTE antenna X-Y plane radiation pattern at LTE high band

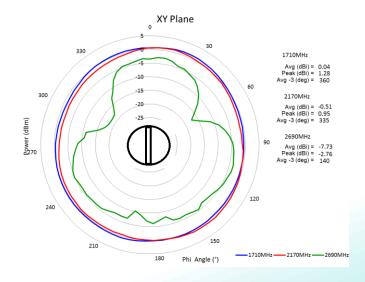





TECHNICAL DATA SHEET


Description: 4G/WiFi/Active GNSS Direct

Mount Antenna


PART NUMBER: GNSSDM700/5800SSS

CHARTS

LTE antenna Z-X plane radiation pattern at LTE high band

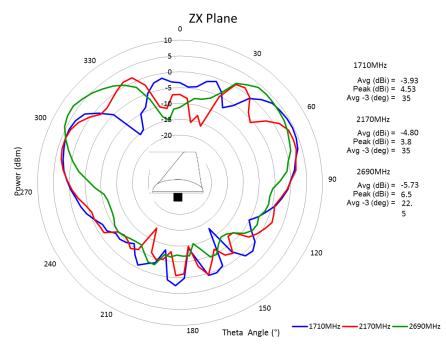

LTE antenna Y-Z plane radiation pattern at LTE high band

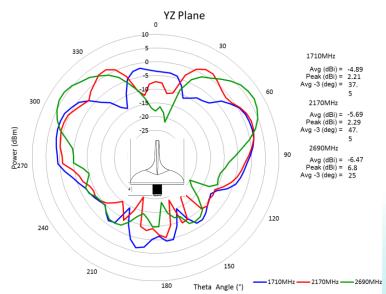

Issue: 1709

RoHS

12



TECHNICAL DATA SHEET


Description: 4G/WiFi/Active GNSS Direct

Mount Antenna


PART NUMBER: GNSSDM700/5800SSS

CHARTS

WiFi antenna X-Y plane radiation pattern at WiFi low band

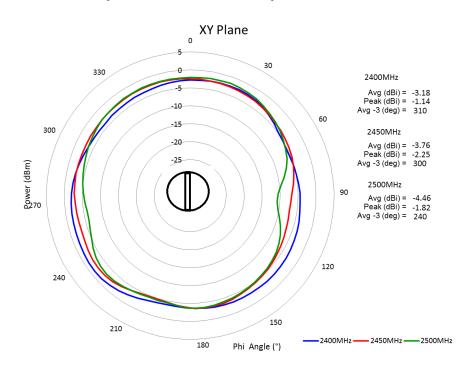

WiFi antenna Z-X plane radiation pattern at WiFi low band

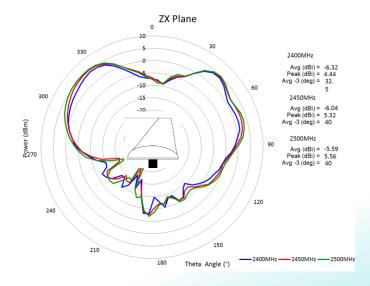





TECHNICAL DATA SHEET


Description: 4G/WiFi/Active GNSS Direct

Mount Antenna


PART NUMBER: GNSSDM700/5800SSS

CHARTS

WiFi antenna Y-Z plane radiation pattern at WiFi low band

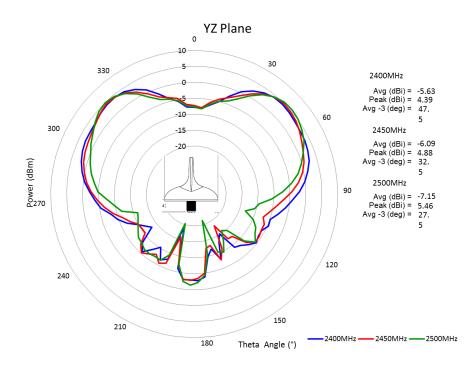

WiFi antenna X-Y plane radiation pattern at WiFi high band

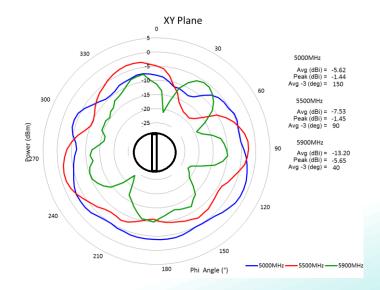





TECHNICAL DATA SHEET


Description: 4G/WiFi/Active GNSS Direct

Mount Antenna


PART NUMBER: GNSSDM700/5800SSS

CHARTS

WiFi antenna Z-X plane radiation pattern at WiFi high band

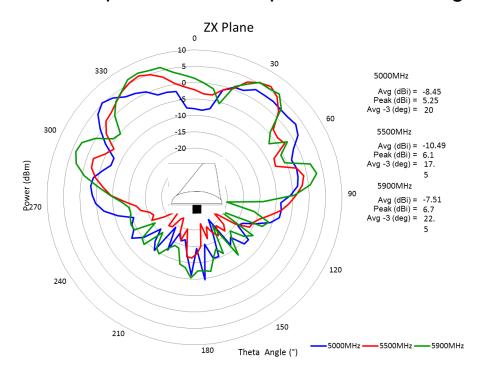

WiFi antenna Y-Z plane radiation pattern at WiFi high band

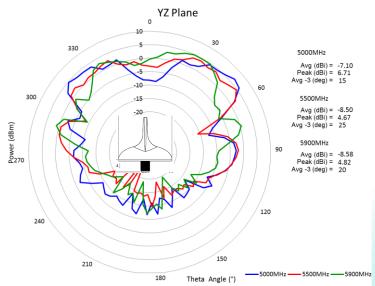



TECHNICAL DATA SHEET


Description: 4G/WiFi/Active GNSS Direct

Mount Antenna


PART NUMBER: GNSSDM700/5800SSS

CHARTS

LNA Gain and out-of-band rejection

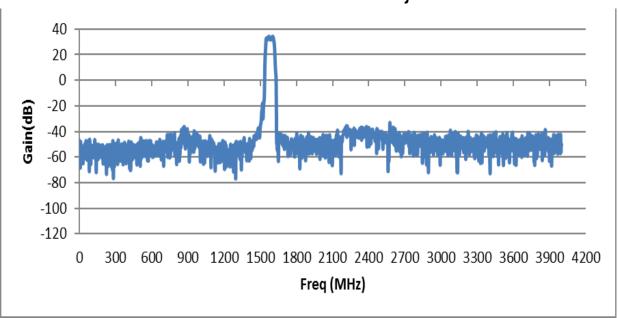

Radiation Pattern (70mm x 70mm ground plane) GPS & Galileo

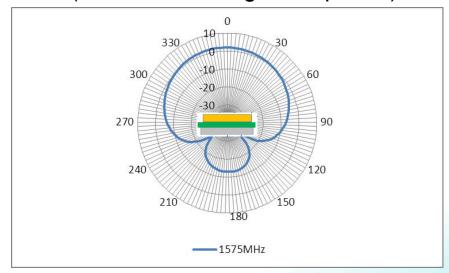



TECHNICAL DATA SHEET


Description: 4G/WiFi/Active GNSS Direct

Mount Antenna


PART NUMBER: GNSSDM700/5800SSS

CHARTS

Radiation Pattern (70mm x 70mm ground plane) GLONASS

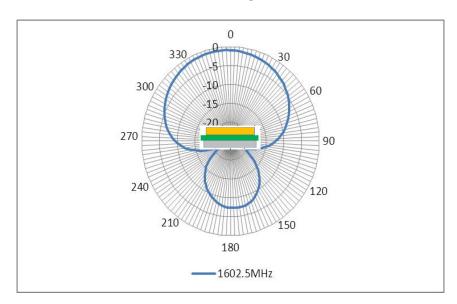

Radiation Pattern (70mm x 70mm ground plane) BD2

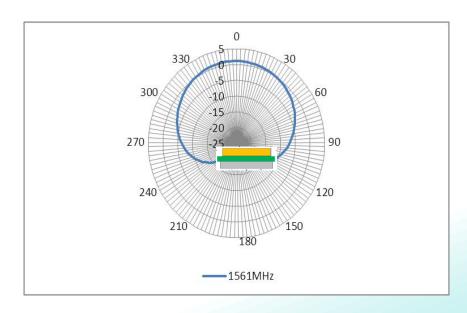





TECHNICAL DATA SHEET

Description: 4G/WiFi/Active GNSS Direct

Mount Antenna

PART NUMBER: GNSSDM700/5800SSS

PACKAGING

1pcs antennas per PE bag

12pcs antenna per package box

Package box: 400mm*300mm*30mm



OOO «ЛайфЭлектроникс" "LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 P/C 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 3010181090000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный) Email: org@lifeelectronics.ru