PCIE-1750U

32-ch Isolated Digital I/O with universal output PCI Express Card

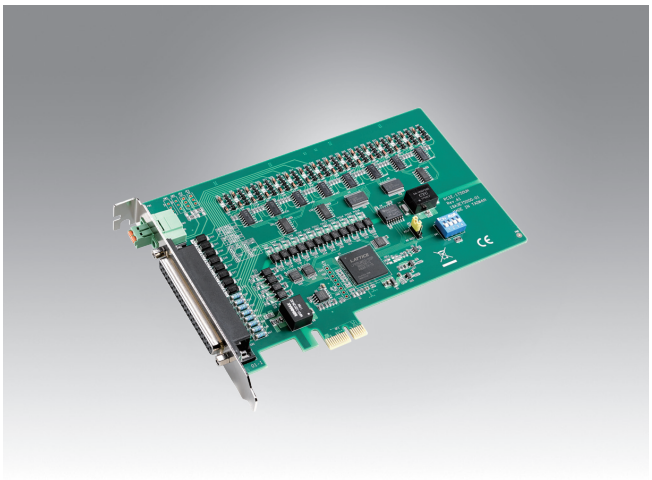

Features

- 16-ch isolated digital input
- 16-ch isolated digital output for both PNP(source)/ NPN (sink) type
- High output driving capacity
- DO type selectable by software
- High isolation voltage (2,500 V_{DC})

FCC CE RoHS COMPLIANT 2002/95/EC

Introduction

PCIE-1750U provide 32 isolated DI/O with 2500V_{DC} protection. Featured with software-configurable DO-polarity, users can apply either NPN(sink type) or PNP(source type) to the DO channels according to the application scenarios. The high sink current capability ensures this card to be applied on industrial automation environments.

Specifications

Isolated Digital Input

- **Channels** 16
- **Input Voltage** Logic 0: 3 V max.
Logic 1: 10 V min. (30 V max.)
- **Interruptible Channels** 2 (IDI0, IDI8)
- **Isolation Protection** 2,500 V_{DC}
- **Opto-Isolator Response** 100 µs
- **Input Resistance** 3.37KΩ @ 1W
- **Input current** 3.4mA @ 12 V_{DC}
7.13mA @ 24 V_{DC}

Isolated Digital Output

- **Channels** 16
- **Output Type** Sink type (NPN) or Source type (PNP), software-configurable
- **Isolation Protection** 2,500 V_{DC}
- **Output Voltage** 5 ~ 40 V_{DC}
- **Sink Current** 350 mA max./channel
- **Opto-Isolator Response** 100 µs

General

- **Bus Type** PCI Express V1.0
- **I/O Connectors** 1 x DB37, female
- **Dimensions (L x H)** 168 x 100 mm (6.6" x 3.9")
- **Power Consumption** Typical: 3.3V @ 255mA, 12V @ 30mA
Max.: 3.3V @ 280mA, 12V @ 60mA
- **Operating Temperature** 0 ~ 60 °C (32 ~ 140 °F)
- **Storage Temperature** -25 ~ 85 °C (-13 ~ 185 °F)
- **Storage Humidity** 5 ~ 95% RH, non-condensing

Ordering Information

- **PCIE-1750U** 32-ch Isolated Digital I/O with universal output PCI Express Card

Accessories

- **ADAM-3937-BE** DB37 DIN rail wiring board
- **PCL-10137-1E** DB37 cable, 1 m
- **PCL-10137-2E** DB37 cable, 2 m
- **PCL-10137-3E** DB37 cable, 3 m

All product specifications are subject to change without notice.

ООО «ЛайфЭлектроникс» “LifeElectronics” LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru