


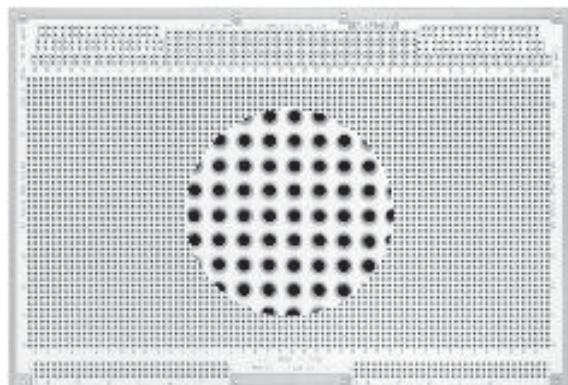

E160-6U-3

6U X 160MM

Circuit Pattern:

Width/Thick:

Height:

16-Pin DIP Capacity:

Material:

Wire-Wrap Terminals:

Wire-Wrap Socket Pins:

Rec. Card Cage:

96-Pin Din Connector:

Hole Diameter:

Voltage/Ground Plane

6.30"/.062"

9.19"

105

FR4 Epoxy Glass

T44, T46, T49, T68

R50, R51, R52, R53


CCK160-6U

RE96MWR

(Available Separately)

.055"

- Overall voltage and ground planes on opposite board sides provide excellent shielding and power distribution
- To simulate plated-thru holes committed to voltage or ground planes, use Vector T123 eye lets, available separately) for use without pins)
- Layout paper and instructions included
- Row and column legends provided

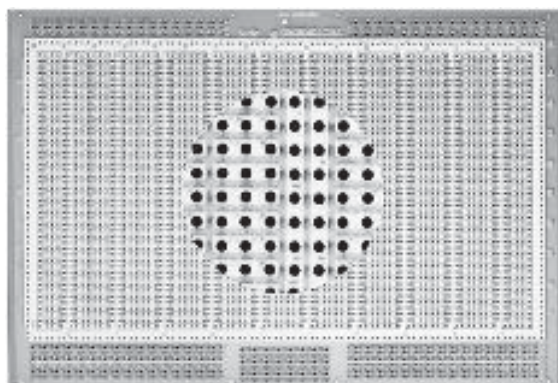

4615

6U X 160MM

Circuit Pattern:

Width/Thick:

Height:

16-Pin DIP Capacity:

Material:

Wire-Wrap Terminals:

Wire-Wrap Socket Pins:

Rec. Card Cage:

96-Pin Din Connector:

Hole Diameter:

3-Hole Solder Pad

6.30"/.062"

9.19"

50

FR4 Epoxy Glass

T44, T46, T49, T68

R32


CCK160-6U

RE96MWR

(Available Separately)

.042"

- 3-hole solder pads (0.28" x 0.080") for interconnecting multiple component leads
- Bus and pad surfaces solder-coated for user convenience
- Interleaved buses on both sides, back-to-back
- Layout paper and instructions included
- Row and column legends provided

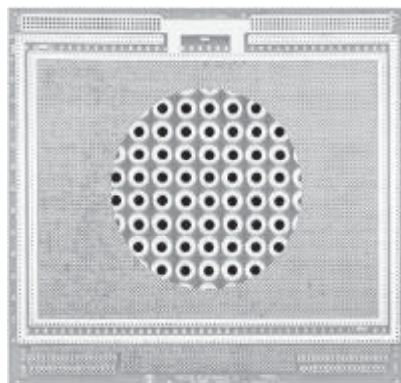

E220-6U-1

6U X 220MM

Circuit Pattern:

Width/Thick:

Height:

16-Pin DIP Capacity:

Material:

Wire-Wrap Terminals:

Wire-Wrap Socket Pins:

Rec. Card Cage:

96-Pin Din Connector:

Hole Diameter:

Pad-per-hole

8.66"/0.62"

9.19"

140

FR4 Epoxy Glass

T44, T46, T49, T68

R32


CCK220-6U

RE96MWR

(Available Separately)

.042"

- Plated-thru holes
- Voltage and ground buses around board perimeter both sides
- Pad and Bus surfaces solder-coated for user convenience
- Also accepts PGA's and PLCC's
- Layout paper and instructions included
- Row and column legends provided

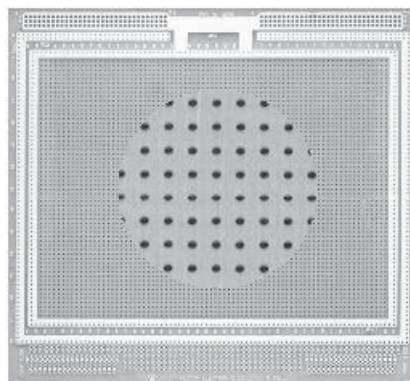

E220-6U-2

6U X 220MM

Circuit Pattern:

Width/Thick:

Height:

16-Pin DIP Capacity:

Material:

Wire-Wrap Terminals:

Wire-Wrap Socket Pins:

Rec. Card Cage:

96-Pin Din Connector:

Hole Diameter:

Peripheral Buses

8.66"/.062"

9.19"

140

FR4 Epoxy Glass

T44, T46, T49, T68

R32

CCK220-6U

RE96MWR

(Available Separately)

.042"

- Voltage and ground buses around board perimeter both sides
- Bus surfaces solder-coated for user convenience
- Also accepts PGA's and PLCC's
- 58 x 78 grid unrestricted component placement area
- Layout paper and instructions included
- Row and column legends provided

E220-6U-3**6U X 220MM****Circuit Pattern:****Width/Thick:****Height:****16-Pin DIP Capacity:****Material:****Wire-Wrap Terminals:****Wire-Wrap Socket Pins:****Rec. Card Cage:****96-Pin Din Connector:****Hole Diameter:****Voltage/Ground plane**

8.66"/.062"

9.19"

168

FR4 Epoxy Glass

T44, T46, T49, T68

R50, R51, R52, R53


CCK220-6U

RE96MWR

(Available Separately)

.055"

- Overall voltage and ground planes on opposite board sides provide excellent shielding and power distribution
- Plane surfaces solder-coated for user convenience
- To simulate plated-thru holes committed to voltage or ground planes, use Vector T123 eyelets, available separately (for use without pins)
- Layout paper and instructions included

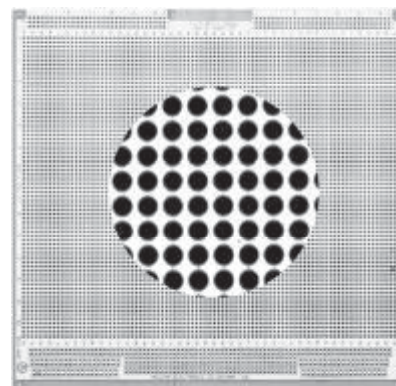**9U****E280-9U-1****9U X 280MM****Hole Diameter:**

.042"

Circuit Pattern:

Pad-Per-Hole

Width/Thick:

11.02"/.062"

Height:

14.44"

16-Pin DIP Capacity:

270

Material:

FR4 Epoxy Glass

Wire-Wrap Terminals:

T44, T46, T49, T68

Wire-Wrap Socket Pins:

R32

Rec. Card Cage:


CCK280-9U

96-Pin Din Connector:

RE96MWR

(Available Separately)

- Voltage and ground buses around board perimeter both sides
- Accepts PGA and PLCC devices
- Additional power and ground buses in signal area
- Layout paper and instructions included
- Row and column legends provided
- Plated-thru holes

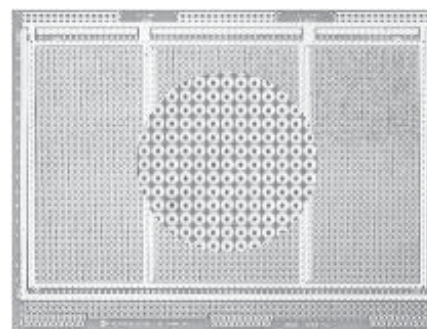**E280-9U-2****9U X 280MM****Circuit Pattern:**

Peripheral Buses

Width/Thick:

11.02"/.062"

Height:

14.44"

16-Pin DIP Capacity:

270

Material:

FR4 Epoxy Glass

Wire-Wrap Terminals:

T44, T46, T49, T68

Wire-Wrap Socket Pins:

R32

Rec. Card Cage:

CCK280-9U


96-Pin Din Connector:

RE96MWR

Hole Diameter:

.042"

- Voltage and ground buses around board perimeter both sides
- Bus surfaces solder-coated for user convenience
- Capacity for mounting 270, 16-pin DIP IC devices; also accepts PGA and PLCC devices
- Additional power and ground buses in signal area
- Three 79 x 36 grid unrestricted component placement areas
- Layout paper and instructions included
- Row and column legends provided

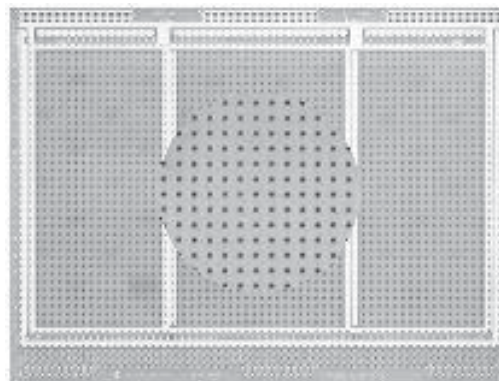**E280-9U-3****9U X 280MM****Circuit Pattern:**

Voltage/Ground Plane

Width/Thick:

11.02"/.062"

Height:

14.44"

16-Pin DIP Capacity:

348

Material:

FR4 Epoxy Glass

Wire-Wrap Terminals:

T44, T46, T49, T68

Wire-Wrap Socket Pins:

R50, R51, R52, R53

Rec. Card Cage:

CCK280-9U


96-Pin Din Connector:

RE96MWR

Hole Diameter:

.055"

- Overall voltage and ground planes on opposite board sides provide excellent shielding and power distribution
- Additional power and ground buses in signal area
- To simulate plated-thru holes committed to voltage or ground planes, use Vector T123 eyelets, available separately (for use without pins)
- Layout paper and instructions included
- Row and column legends provided

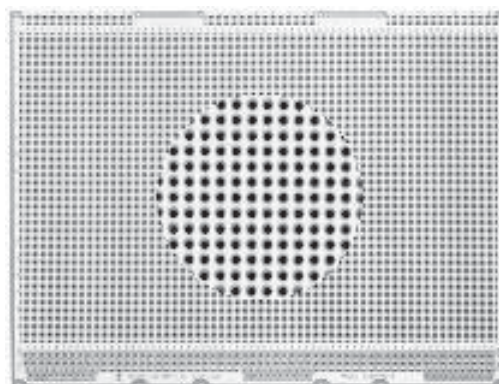

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru