



**CONNECTOR
 DESIGNATORS**




A-B*-C-D-E-F
G-H-J-K-L-S

* Conn. Design. B See Note 5
DIRECT COUPLING


**TYPE F INDIVIDUAL
 AND/OR OVERALL
 SHIELD TERMINATION**

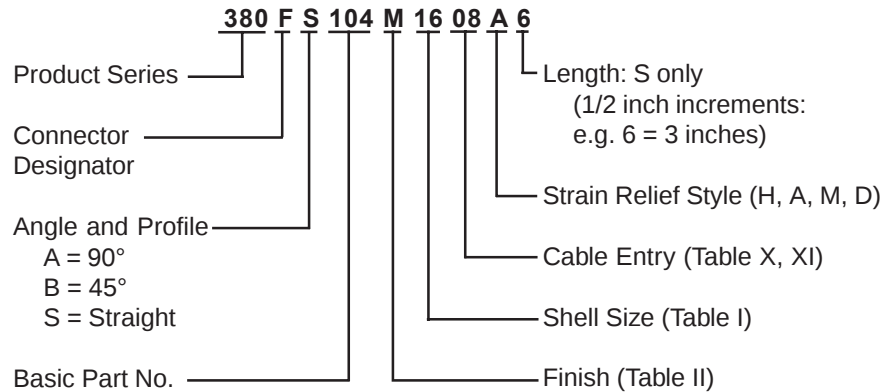


**STYLE 2
 (STRAIGHT
 See Note 1)**

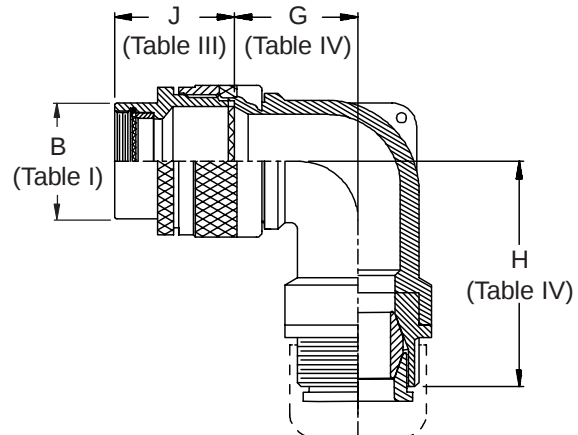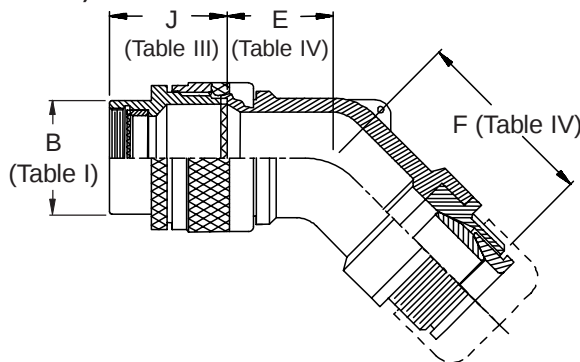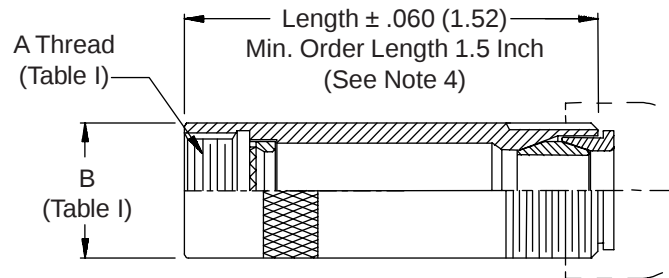


**STYLE H
 Heavy Duty
 (Table X)**




**STYLE A
 Medium Duty
 (Table XI)**



**STYLE M
 Medium Duty
 (Table XI)**



**STYLE D
 Medium Duty
 (Table XI)**



380-104
EMI/RFI Non-Environmental Backshell
with Strain Relief
Type F - Direct Coupling - Low Profile



TABLE III: FRONT ADAPTER			
Shell Size	J Max - Conn. Designator		
	A-E-F		
	J-H-L-S	D-B-G-K	C
08/09	1.180 (30.0)	1.440 (36.6)	
10/11	1.180 (30.0)	1.440 (36.6)	
12/13	1.180 (30.0)	1.440 (36.6)	1.735 (44.1)
14/15	1.180 (30.0)	1.440 (36.6)	1.915 (48.6)
16/17	1.380 (35.0)	1.560 (39.6)	1.915 (48.6)
18/19	1.380 (35.0)	1.560 (39.6)	1.915 (48.6)
20/21	1.380 (35.0)	1.560 (39.6)	1.915 (48.6)
22/23	1.380 (35.0)	1.560 (39.6)	1.915 (48.6)
24/25	1.380 (35.0)	1.560 (39.6)	1.915 (48.6)
28/29	1.610 (40.9)	1.560 (39.6)	1.915 (48.6)
32/33	1.610 (40.9)	1.750 (44.5)	1.915 (48.6)
36	1.610 (40.9)	1.750 (44.5)	1.915 (48.6)
40	1.610 (40.9)	2.190 (55.6)	1.915 (48.6)

TABLE IV: ELBOW DIMENSIONS									
Elbow Size	E Max		F Max		G Max		H Max		
03	.457	(11.6)	1.602	(40.7)	.500	(12.7)	1.612	(40.9)	
04	.457	(11.6)	1.662	(42.2)	.500	(12.7)	1.732	(44.0)	
06	.520	(13.2)	1.722	(43.7)	.595	(15.1)	1.752	(44.5)	
08	.582	(14.8)	2.062	(52.4)	.610	(15.5)	2.072	(52.6)	
10	.645	(16.4)	2.172	(55.2)	.700	(17.8)	2.162	(54.9)	
12	.738	(18.7)	2.362	(60.0)	.885	(22.5)	2.332	(59.2)	
16	.926	(23.5)	2.362	(60.0)	.975	(24.8)	2.332	(59.2)	
20	1.020	(25.9)	2.512	(63.8)	1.125	(28.6)	2.442	(62.0)	
24	1.145	(29.1)	2.512	(63.8)	1.225	(31.1)	2.442	(62.0)	
28	1.207	(30.7)	2.562	(65.1)	1.575	(40.0)	2.612	(66.3)	
32	1.238	(31.4)	2.662	(67.6)	1.775	(45.1)	2.862	(72.7)	

See inside back cover fold-out or pages 13 and 14
for unabridged Tables I and II.

TABLE II: STANDARD FINISHES	
GLENAIR SYMBOL	FINISH
B	Cadmium Plate, Olive Drab
M	Electroless Nickel
NF	Cadmium Plate, Olive Drab Over Electroless Nickel
See Inside Back Cover for Additional Finish Options	

TABLE X: CABLE ENTRY						
Dash No.	T Max		V Max		Cable Range	
					Min	Max
04	.780	(19.8)	.957	(24.3)	.125 (3.2)	.312 (7.9)
06	.780	(19.8)	1.145	(29.1)	.250 (6.4)	.437 (11.1)
08	.780	(19.8)	1.332	(33.8)	.312 (7.9)	.562 (14.3)
10	.780	(19.8)	1.332	(33.8)	.350 (8.9)	.625 (15.9)
12	.811	(20.6)	1.551	(39.4)	.500 (12.7)	.750 (19.1)
16	.905	(23.0)	1.770	(45.0)	.625 (15.9)	.937 (23.8)
20	1.092	(27.7)	2.113	(53.7)	.875 (22.2)	1.250 (31.8)
24	1.124	(28.5)	2.363	(60.0)	1.000 (25.4)	1.375 (34.9)
28	1.399	(35.5)	2.770	(70.4)	1.250 (31.8)	1.625 (41.3)
32	1.399	(35.5)	3.020	(76.7)	1.437 (36.5)	1.875 (47.6)

1. When maximum cable entry (page 22) is exceeded, Style 2 will be supplied. Dimensions E, F, G and H will not apply. Please consult factory.
2. Metric dimensions (mm) are indicated in parentheses.
3. Cable range is defined as the accommodations range for the wire bundle or cable. Dimensions shown are not intended for inspection criteria.
4. Consult factory for shorter lengths on straight backshells.
5. When using Connector Designator B refer to pages 18 and 19 for part number development.

TABLE XI: CABLE ENTRY									
Dash No.	W Max		X Max		Y Max		Z Max		Cable Range
									Min ** Max
03*	.437	(11.1)	.760	(19.3)	.843	(21.4)	.630	(16.0)	.156 (4.0) .250 (6.4)
04*	.437	(11.1)	.760	(19.3)	.906	(23.0)	.755	(19.2)	.188 (4.8) .312 (7.9)
06*	.500	(12.7)	.760	(19.3)	1.093	(27.8)	.942	(23.9)	.281 (7.1) .438 (11.1)
08	.563	(14.3)	.760	(19.3)	1.187	(30.1)	1.067	(27.1)	.344 (8.7) .562 (14.3)
10	.563	(14.3)	.760	(19.3)	1.281	(32.5)	1.192	(30.3)	.375 (9.5) .625 (15.9)
12	.563	(14.3)	.760	(19.3)	1.500	(38.1)	1.380	(35.1)	.438 (11.1) .750 (19.1)
16	.656	(16.7)	1.073	(27.3)	1.719	(43.7)	1.535	(39.0)	.562 (14.3) .938 (23.8)
20	.656	(16.7)	1.323	(33.6)	2.062	(52.4)	1.848	(46.9)	.750 (19.1) 1.250 (31.8)
24	.656	(16.7)	1.323	(33.6)	2.312	(58.7)	2.255	(57.3)	.781 (19.8) 1.375 (34.9)
28	1.188	(30.2)	1.572	(39.9)	2.719	(69.1)	2.505	(63.6)	.969 (24.6) 1.625 (41.3)
32*	1.187	(30.1)	1.572	(39.9)	2.969	(75.4)	2.755	(70.0)	1.125 (28.6) 1.875 (47.6)
* Not available in Style M clamp.					** Not Applicable Style D				

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru