




Thermal Transfer Labels

Panduit is a global leader in reliable and innovative solutions for identification and safety. Products are engineered for a wide variety of industries and applications – including electrical, electronics, industrial, and network. Panduit offers a complete, leading-edge line of labeling software, high-performance label materials (all RoHS compliant), and printers that provide enhanced productivity, dependability, and value to all infrastructure labeling requirements.



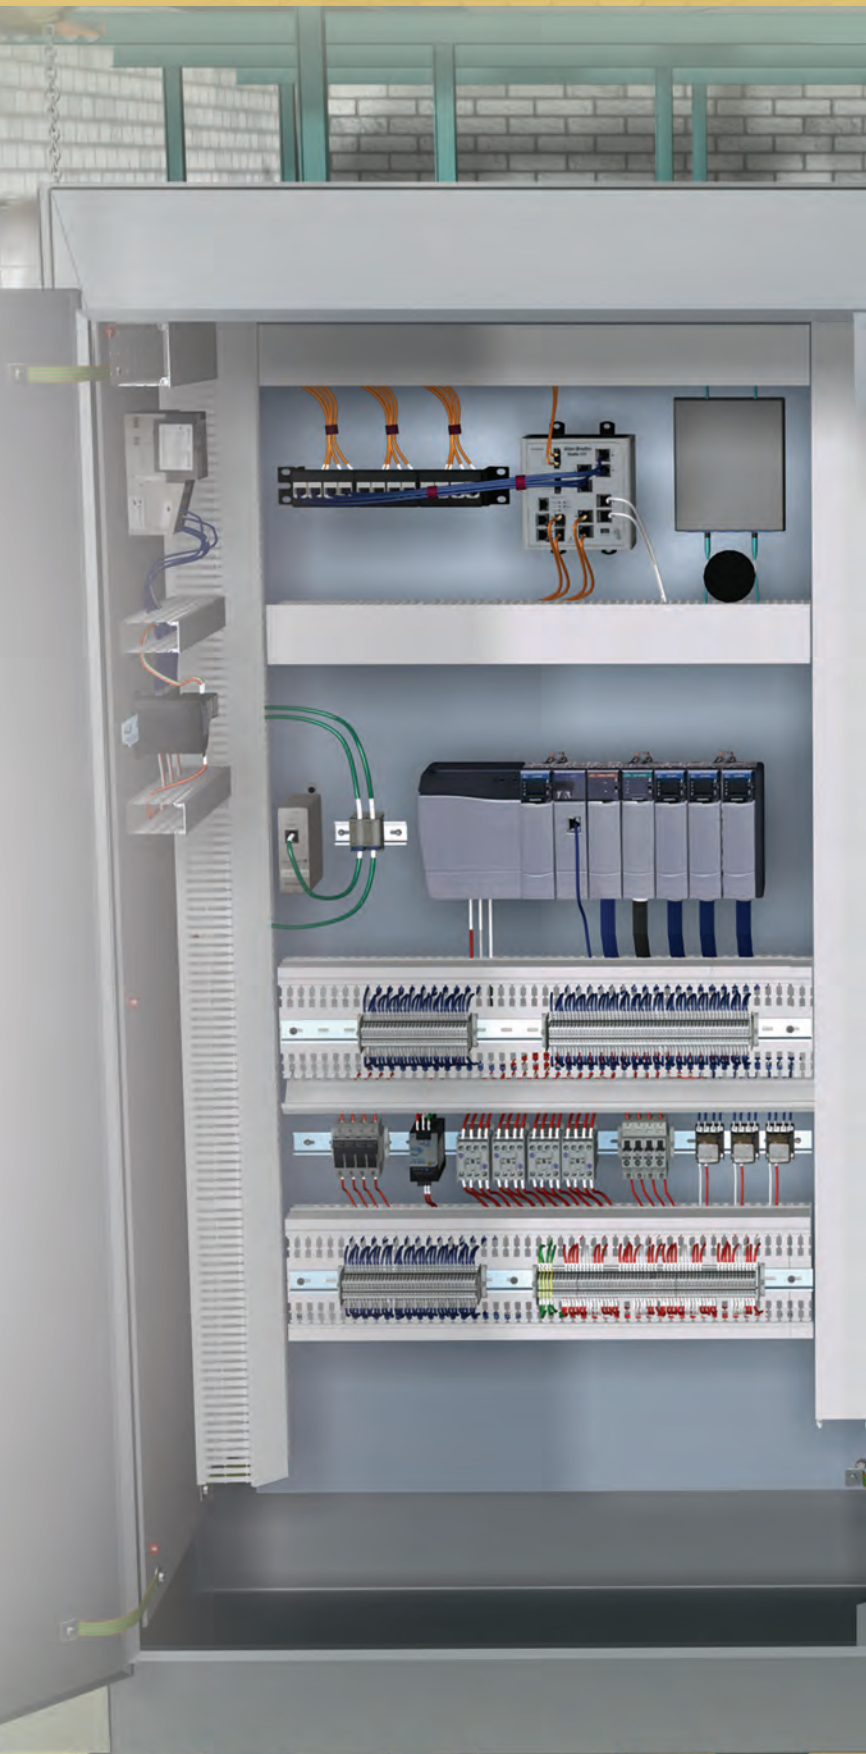

Cable/Wire Labels

Turn-Tell® Labels	4
Self-Laminating Labels	5 – 7
LabelCore™ Fiber Optic Cable Identification System	7 – 8
Flag Labels	8
Non-Laminated Vinyl Cloth Labels	9
Non-Laminated Nylon Cloth Labels	9

Marker Plates

High-Temperature Flame-Retardant Marker Plates	10
Halogen-Free Flame-Retardant Marker Plates	10
Standard Marker Plates	11

Heat Shrink Labels

Military Grade – Single-Sided Labels	12
Military Grade – Two-Sided Labels	13
Halogen-Free – Two-Sided Labels	14
Fluid-Resistant – Two-Sided Labels	15

Component Labels/Continuous Tapes

Terminal Block Markers	16
Raised Panel Labels	17 – 20
Polyester Component Labels	21
Super-Tack Polyester Component Labels	22
Tedlar® Component Labels	23
Tamper-Evident Polyester Component Labels	23
Non-Adhesive Polyester Component Labels	24
Vinyl Cloth Component Labels	24
Polyimide Component Labels	25
Paper Component Labels	26
Continuous Tapes	26 – 28

Safety and Solar Labels

Super-Tack Polyester Arc Flash Labels	29
Raised Panel Arc Flash Labels	29
Super-Tack Arc Flash Continuous Tapes	30
Super-Tack Polyester Facility Identification Labels	30
Polyester Photoluminescent Tapes	31
Raised Panel Solar Labels	31
Super-Tack Polyester Solar Labels	32
Over-Laminate Labels	32
Reflective Continuous Tapes for Solar Applications	32

Software/Printers/Accessories

Software	33
TDP43ME Printers, Accessories and Ribbons	34
TDP43HE & TDP46HE Printers, Accessories & Ribbons	35

Tedlar is a registered trademark of E.I. du Pont de Nemours and Company.

Turn-Tell® Labels

PATENTED

- Allows labels to rotate for visibility from any angle, and allows repositioning on the wire/cable to align legends for improved aesthetics

- Ideal for use in high-density or space-constrained cable applications
- Use thermal transfer hybrid ribbon
- Temperature range: -40°F to 150°F (-40°C to 66°C)



Part Number	Print-On Area Color	Width		Length		Print-On Area Height		Min. Cable O.D.		Max. Cable O.D.		Wire Range	Labels Per Row	Std. Pkg. Qty.				
		In.	mm	In.	mm	In.	mm	In.	mm	In.	mm							
R050X075V1T	White	0.50	12.7	0.75	19.1	0.25	6.4	0.12	3.1	0.16	4.0	Cat. 6 28 AWG/ 18 – 14 AWG	8	5000				
R050X125V1T				1.25	31.8	0.38	9.7	0.16	4.1	0.22	5.6	Cat. 3 UTP/12 – 10 AWG						
R050X150V1T				1.50	38.1	0.50	12.7	0.22	5.6	0.28	7.1	Cat. 5e UTP/Cat. 6 UTP/ Cat. 6A UTP/Cat. 5e FTP/ 10 – 6 AWG						
R100X075V1T	White	1.00	25.4	0.75	19.1	0.25	6.4	0.12	3.1	0.16	4.0	Cat. 6 28 AWG/ 18 – 14 AWG	4	2500				
R100X125V1T				1.25	31.8	0.38	9.7	0.16	4.1	0.22	5.6	Cat. 3 UTP/12 – 10 AWG						
R100X150V1T				1.50	38.1	0.50	12.7	0.22	5.6	0.28	7.1	Cat. 5e UTP/Cat. 6 UTP/ Cat. 6A UTP/						
R100X150V2T															TIA Blue			
R100X150V3T															TIA Green			
R100X150V4T															TIA Gray			
R100X150V7T															TIA Red			
R100X150V8T															TIA Yellow			
R100X225V1T															White			
R100X225V2T															TIA Blue			
R100X225V3T				TIA Green														
R100X225V4T				TIA Gray														
R100X225V7T				TIA Red														
R100X225V8T				TIA Yellow														
R100X400V1T				1.50	38.1	0.50	12.7	0.22	5.6	0.28	7.1	Cat. 6 FTP/Cat. 6 UTP/ Cat. 6A FTP/8-4 AWG						
R150X150V1T															2.25	57.2	0.75	19.1
R200X150V1T	2.00	50.8	0.75										19.1	0.28	7.1	0.39	9.9	Cat. 6 FTP/Cat. 6A UTP/ Cat. 6A FTP/8 – 4 AWG
R200X225V1T																		
R200X400V1T	2.00	50.8	1.00	25.4	0.39	9.9	0.95	24.1	2 – 1 AWG									
R200X150V1T										4.00	101.6	1.00	25.4	0.39	9.9	0.95	24.1	2 – 1 AWG
R200X225V1T	2.00	50.8	1.00	25.4	0.39	9.9	0.95	24.1	2 – 1 AWG									
R200X400V1T										4.00	101.6	1.00	25.4	0.39	9.9	0.95	24.1	2 – 1 AWG

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Vinyl Self-Laminating Labels

- Includes a colored print-on area and clear overlamine to protect the legend for clear and durable identification
- Sized specifically for wire and cable applications
- Thin and conformable; preferred material for most general wire/cable labeling
- Use thermal transfer hybrid ribbon
- Temperature range: -40°F to 150°F (-40°C to 66°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15-01, File # MH14979



Part Number	Print-On Area Color	Width		Length		Print-On Area Height		Min. Cable O.D.		Max. Cable O.D.		Wire Range	Labels Per Row	Std. Pkg. Qty.				
		In.	mm	In.	mm	In.	mm	In.	mm	In.	mm							
S050X075VA1Y	White	0.50	12.7	0.75	19.1	0.25	6.4	0.08	2.0	0.16	4.1	Cat. 6 28 AWG/ 18 – 14 AWG	8	5000				
S050X075VATY*														2500				
S050X125VA1Y				1.25	31.8	0.38	9.7	0.12	3.1	0.28	7.0			Cat. 3 UTP/ 12 - 10 AWG	5000			
S050X125VATY*																		
S050X150VA1Y				1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1					Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/ 10 – 6 AWG	5000	
S050X150VATY*																		
S050X250VATY*		2.50	63.5	1.00	25.4	0.32	8.1	0.48	12.1	6 – 2 AWG								
S075X075VATY*		0.75	19.1	0.25	6.4	0.08	2.0	0.16	4.0	Cat. 6 28 AWG/ 18 – 14 AWG	5	5000						
S075X100VATY*																		
S075X125VATY*																		
S075X150VATY*		1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1				Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/ 10 – 6 AWG					
S100X075VA1Y		1.00	25.4	0.75	19.1	0.25	6.4	0.08	0.50				2.0	4.0	Cat. 6 28 AWG/ 18 – 14 AWG	4	2500	
S100X075VATY*	5000																	
S100X125VA1Y	1.25			31.8	0.38	9.7	0.12	3.1	0.28	7.0	Cat. 3 UTP/ 12 - 10 AWG	5000						
S100X125VATY*																		
S100X150VA1Y	1.50			38.1	0.50	12.7	0.16	4.0	0.32	8.1			Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/ 10 - 6 AWG	5000				
S100X150VATY																		
S100X150VBTY	TIA Blue			1.50	38.1	0.50	12.7	0.16	4.0	0.32					8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/ 10 - 6 AWG	4	5000
S100X150VCTY	TIA Brown																	
S100X150VDTY	TIA Green																	
S100X150VETY	TIA Gray																	
S100X150VFTY	TIA Orange																	
S100X150VGTY	TIA Purple																	

Order number of labels required in multiples of Standard Package Quantity.

*Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Vinyl Self-Laminating Labels (continued)

Part Number	Print-On Area Color	Width		Length		Print-On Area Height		Min. Cable O.D.		Max. Cable O.D.		Wire Range	Labels Per Row	Std. Pkg. Qty.										
		In.	mm	In.	mm	In.	mm	In.	mm	In.	mm													
S100X150VHTY*	TIA Red	1.00	25.4	1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/ Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG	4	5000										
S100X150VITY*	TIA Yellow																							
S100X150V0TY*	Black																							
S100X150V9TY*	Gold																							
S100X225VA1Y	White			2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 – 4 AWG												
S100X225VATY*	White																							
S100X225VBTY*	TIA Blue																							
S100X225VCTY*	TIA Brown																							
S100X225VDTY*	TIA Green																							
S100X225VETY*	TIA Gray																							
S100X225VFTY*	TIA Orange																							
S100X225VGTY*	TIA Purple																							
S100X225VHTY*	TIA Red			2.50	63.5	1.00	25.4	0.32	8.1	0.48	12.1	6 - 2 AWG			1500									
S100X225VITY*	TIA Yellow														5000									
S100X225V0TY*	Black														1000									
S100X225V9TY*	Gold														2500									
S100X250VA1Y	White	1.50	38.1	1.00	25.4	0.32	8.1	0.95	24.3	2 - 1 AWG	250													
S100X400VA1Y											1000													
S100X400VATY*											2500													
S100X650VA1Y											1000													
S100X650VATY*		1000																						
S150X150VATY*		1.50	38.1	1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG	5000											
S150X225VATY*														2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	8 – 4 AWG		
S150X400VATY*														4.00	101.6	1.00	25.4	0.32	8.1	0.95	24.1	2 – 1 AWG	2500	
S200X150VATY*		2.00	50.8	1.50	38.1	0.50	21.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG	2	5000										
S200X225VA1Y															2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 - 4 AWG	500
S200X225VATY*																								1000
S200X250VATY*																								2.50
S200X400VA1Y				4.00	101.6	1.00	25.4	0.32	8.1	0.95	24.3	2 - 1 AWG	1000											
S200X400VATY*				4.00	101.6	1.00	25.4	0.32	8.1	0.95	24.3	2 - 1 AWG	1000											
S200X650VA1Y														250										
S200X650VATY*														1000										

Order number of labels required in multiples of Standard Package Quantity.

*Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

PVDF Self-Laminating Labels

- Self-extinguishing material and recommended alternative to Tedlar®
- Sized specifically for wire and cable applications
- Use thermal transfer hybrid ribbon
- Temperature range: -65°F to 275°F (-54°C to 135°C)
- UL969 recognized File # MH14979; cUL recognized C22.2 No. 0.15.01, File # MH149799



Part Number	Print-On Area Color	Width		Length		Print-On Area Height		Min. Cable O.D.		Max. Cable O.D.		Wire Range	Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm	In.	mm	In.	mm	In.	mm			
S050X150T1T	White	0.50	12.7	1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/ 10 – 6 AWG	8	5000
S075X125T1T		0.75	19.1	1.25	31.8	0.38	9.7	0.12	3.1	0.28	7.0	Cat. 3 UTP/12 – 10 AWG	5	
S100X075T1T		1.00	25.4	0.75	19.1	0.25	6.4	0.08	2.0	0.16	4.0	Cat. 6 28 AWG/18 – 14 AWG	4	2500
S100X125T1T				1.25	31.8	0.38	9.7	0.12	3.1	0.28	7.0	12 – 10 AWG		
S100X150T1T				1.50	38.1	0.50	12.7	0.16	4.0	0.28	7.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/ 10 - 6 AWG		
S100X225T1T				2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/Cat. 6A UTP/ Cat. 6A FTP/8 – 4 AWG		
S100X400T1T		2.00	50.8	4.00	101.6	1.00	25.4	0.32	8.1	0.95	24.3	2 – 1 AWG	2	2500
S200X400T1T														500

Tedlar® is a registered trademark of E.I. du Pont de Nemours and Company.


Order number of labels required in multiples of Standard Package Quantity.

*Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

LabelCore™ Fiber Optic Cable Identification System



- Provides a larger labeling surface on small fiber cables and allows legends to be clearly seen
- Sleeves are made of flexible PVC material
- Locate sleeve on straight section of cable at least 2 inches from fiber boot



Part Number	Color	Part Description	Std. Pkg. Qty.
NWSLC-2Y	Yellow	Yellow cable identification sleeve for 2mm simplex fiber cable, 1" long, use with labels: S100X150YAJ (Laser/Inkjet); S100X150VAC (LS8E Hand-held Printer); S100X150VA1Y or S100X150VATY (Thermal Transfer Printer).	100
NWSLC-2Y-AQ	Aqua	Aqua cable identification sleeve for 2mm simplex cable, 1" long, use with labels: S100X150YAJ (Laser/Inkjet); S100X150VAC (LS8E Hand-held Printer); S100X150VA1Y or S100X150VATY (Thermal Transfer Printer).	
NWSLC-3Y	Orange	Orange cable identification sleeve for 3mm simplex cable, 1" long, use with labels: S100X150YAJ (Laser/Inkjet); S100X150VAC (LS8E Hand-held Printer); S100X150VA1Y or S100X150VATY (Thermal Transfer Printer).	
NWSLC-7Y	White	White cable identification sleeve for 3mm duplex fiber cable, 1" long, use with labels: S100X225YAJ (Laser/Inkjet); S100X225VAC (LS8E Hand-held Printer); S100X225VATY or S200X225VATY (Thermal Transfer Printer).	

Order number of labels required in multiples of Standard Package Quantity.

Contact Technical Support at 866.871.4571.


LabelCore™ Fiber Optic Cable Identification System (continued)

Part Number	Color	Part Description	Std. Pkg. Qty.
NWSLC2-2Y	Yellow	Yellow cable identification sleeve for 2mm simplex cable, 2 inches long, use with labels: S200X150YAJ (Laser/Inkjet) or S200X150VATY (Thermal Transfer Printer).	100
NWSLC2-2Y-AQ	Aqua	Aqua cable identification sleeve for 2mm simplex cable, 2 inches long, use with labels: S200X150YAJ (Laser/Inkjet) or S200X150VATY (Thermal Transfer Printer).	
NWSLC2-3Y	Orange	Orange cable identification sleeve for 3mm simplex cable, 2 inches long, use with labels: S200X150YAJ (Laser/Inkjet) or S200X150VATY (Thermal Transfer Printer).	
NWSLC2-7Y	White	White cable identification sleeve for 3mm duplex fiber cable, 2 inches long, use with labels: S200X225YAJ (Laser/Inkjet) S200X225VATY (Thermal Transfer Printer).	

Order number of labels required in multiples of Standard Package Quantity.

Flag Labels

- Halogen-free, white polyester flag-style marker for wire/cable labeling
- Improved legibility and more information on small wires and cables provide clearer, more complete identification
- Innovative design allows the product to be applied as a permanent adhesive label or as a repositionable non-adhesive label
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized, File # MH14576 and File # MH14979; cUL recognized C22.2 No. 0.15-01, File # MH14979



Part Number	Width		Height		Print-On Area		Min. Cable O.D.		Max. Cable O.D.		Wire Range	Std. Pkg. Qty. Roll		
	In.	mm	In.	mm	Width	Height	In.	mm	In.	mm				
F100X150AJT	1.00	25.4	1.50	38.1	0.88	22.4	0.75	19.1	0.12	3.1	0.18	5.1	12 – 10 AWG	2500
F100X213AJT			2.13	54.1					0.32	8.1	0.38	9.7	3 – 2 AWG	
F100X300AJT			3.00	76.2			2.00	50.8	0.09	2.3	0.28	7.1	18 – 6 AWG	
F100X363AJT			3.63	92.2					0.21	5.1	0.46	11.7	8 – 1 AWG	

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME Printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Non-Laminated Vinyl Cloth Labels



- Thin and conformable material with repositionable adhesive allows label to be removed and reused in temporary applications
- Works well on Teflon® coated wires*
- Use thermal transfer hybrid ribbon
- Temperature range: -40° F to 170° F (-40° C to 77° C)
- UL969 recognized, File # MH14576 and MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14576

Part Number	Print-On Area Color	Width		Length		Min. Cable O.D.		Max. Cable O.D.		Wire Range	Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm	In.	mm	In.	mm			
N025X075CBT	White	0.25	6.4	0.75	19.1	0.12	3.1	0.16	4.1	12 – 10 AWG	7	10000
N025X125CBT				1.25	31.8	0.20	5.1	0.32	8.1	10 – 6 AWG		
N025X150CBT				1.50	38.1	0.24	6.1	0.40	10.2	8 – 2 AWG		
N025X175CBT				1.75	44.5	0.28	7.1	0.48	12.2	6 – 1 AWG		
N050X075CBT		0.50	12.7	0.75	19.1	0.12	3.1	0.16	4.1	12 – 10 AWG	7	10000
N050X100CBT				1.00	25.4	0.16	4.1	0.24	6.1	10 – 8 AWG		
N050X125CBT				1.25	31.8	0.20	5.1	0.32	8.1	10 – 6 AWG		
N050X150CBT				1.50	38.1	0.24	6.1	0.40	10.2	8 – 2 AWG		
N050X175CBT		1.75	44.5	0.28	7.1	0.48	12.2	6 – 1 AWG	2500			
N100X075CBT		1.00	25.4	0.75	19.1	0.12	3.1	0.16	4.1	12 – 10 AWG	3	10000
N100X125CBT				1.25	31.8	0.20	4.1	0.32	8.1	10 – 6 AWG		
N100X150CBT				1.50	38.1	0.24	6.1	0.40	10.2	8 – 2 AWG		
N100X175CBT				1.75	44.5	0.28	7.1	0.48	12.2	6 – 1 AWG		
N150X075CBT		1.50	38.1	0.75	19.1	0.12	3.1	0.16	4.1	12 – 10 AWG	1	5000

Order number of labels required in multiples of Standard Package Quantity.
 Labels are roll mounted on 3.00" cores; when using the TDP43ME Printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.
 *Teflon® is a registered trademark of E. I du Pont de Nemours and Company

Non-Laminated Nylon Cloth Labels



- Offer crisp, clear legends with superior legibility
- Used in flat applications and in a wrap format for wire/cable marking
- Use thermal transfer resin ribbon
- Temperature range: -65°F to 275°F (-54°C to 135°C)

Part Number	Color	Width		Length		Min. Cable O.D.		Max. Cable O.D.		Wire Range	Labels Per Row	Std. Pkg. Qty.			
		In.	mm	In.	mm	In.	mm	In.	mm						
N050X075C1T	White	0.50	12.7	0.75	19.1	0.12	3.1	0.16	4.1	12 – 10 AWG	5	10000			
N050X075C2T	Yellow			1.25	31.8	0.20	5.1	0.32	8.1	10 – 6 AWG					
N050X125C1T	White			1.50	38.1	0.24	6.1	0.40	10.5	8 – 2 AWG		5000			
N050X125C2T	Yellow														
N100X075C1T	White			1.00	25.4	0.75	19.1	0.12	3.1	0.16		4.1	12 – 10 AWG	3	10000
N100X075C2T	Yellow					1.25	31.8	0.20	5.1	0.32		8.1	10 – 6 AWG		
N100X125C1T	White	1.50	38.1			0.24	6.1	0.40	10.2	8 – 2 AWG					
N100X125C2T	Yellow														
N100X150C1T	White														
N100X150C2T	Yellow									5000					

Order number of labels required in multiples of Standard Package Quantity.
 Labels are roll mounted on 3.00" cores; when using the TDP43ME Printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

High-Temperature Flame-Retardant Marker Plates

- Used for identification markers in (Class 1E) harsh environments
- Compatible with Intermediate Cross Section cable ties
- Use thermal transfer RMER4BL-A or RHER4BL-A resin ribbon
- Temperature range: -67°F to 275°F (-55°C to 135°C)



Part Number	Color	Width		Height		Print-On Area Width		Labels Per Roll	Std. Pkg. Qty. (Roll)
		In.	mm	In.	mm	In.	mm		
M200X042FQT	White	2.00	50.8	0.42	10.7	1.22	31.0	500	1
M200X042FQT-B				2000					
M200X080FQT				0.80	20.3			250	
M200X080FQT-B				1000					

Order number of labels required in multiples of Standard Package Quantity.
Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Halogen-Free Flame-Retardant Marker Plates

- Used to identify wires, cables, equipment, and many other applications
- Offer crisp, clear legend with superior legibility and engineered to withstand high temperatures, harsh solvents, oils, and chemicals without over-lamination
- Compatible with Intermediate Cross Section cable ties
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 193°F (-40°C to 90°C)




Part Number	Color	Width		Height		Print-On Area Width		Labels Per Roll	Std. Pkg. Qty. (Roll)
		In.	mm	In.	mm	In.	mm		
M200X042UPT	White	2.00	50.8	0.42	10.7	1.30	33.0	500	1
M200X042UPT-B				2000					
M200X080UPT				0.80	20.3			500	
M200X080UPT-B				2000					

Order number of labels required in multiples of Standard Package Quantity.
Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Standard Marker Plates

- Non-adhesive and halogen free; used to identify wires, cables, equipment, and many other applications
- Attachable in horizontal or vertical orientation. The 0.5" Plenum rated and 0.33" non-Plenum rated Hook & Loop Cable Ties can be used in hanging position

- Meets the outgassing requirements of ASTM E-595 suitable for use in air handling spaces
- Available in a variety of colors and sizes
- Use thermal transfer resin ribbon
- Temperature range: -58°F to 221°F (-50°C to 105°C)

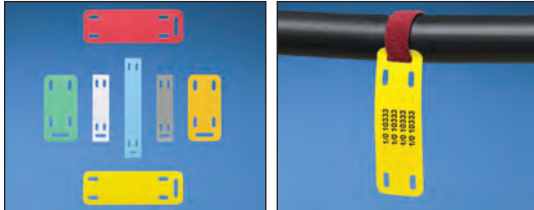

Part Number	Color	Width		Height		Print-On Area Width		Cable Type	Labels Per Roll	Std. Pkg. Qty. (Roll)
		In.	mm	In.	mm	In.	mm			
M200X050Y6T	TIA Yellow	2.00	50.8	0.50	12.7	1.07	27.3	Intermediate Cross Section Cable Ties	500	1
M200X050Y7T	White									
M200X050ACT	TIA Blue									
M200X050AET	TIA Green									
M200X050AFT	TIA Gray									
M200X050AGT	TIA Orange									
M200X050AIT	TIA Red									
M200X100Y6T	TIA Yellow	2.00	50.8	1.00	25.4	0.80	20.3	Standard Cross Section Cable Ties	2000	
M200X100Y6T-B	White								500	
M200X100Y7T	White								2000	
M200X100Y7T-B	White								500	
M200X100ACT	TIA Blue								2000	
M200X100AET	TIA Green								500	
M200X100AFT	TIA Gray								500	
M200X100AGT	TIA Orange	500								
M200X100AIT	TIA Red	500								
M300X050Y6T	TIA Yellow	3.00	76.2	0.50	12.7	2.07	52.6	Intermediate Cross Section Cable Ties	500	
M300X050Y7T	White									
M300X050ACT	TIA Blue									
M300X050AET	TIA Green									
M300X050AFT	TIA Gray									
M300X050AGT	TIA Orange									
M300X050AIT	TIA Red									
M300X100Y6T	TIA Yellow	3.00	76.2	1.00	25.4	1.80	45.7	Standard Cross Section Cable Ties	500	
M300X100Y7T	White									
M300X100ACT	TIA Blue									
M300X100AET	TIA Green									
M300X100AFT	TIA Gray									
M300X100AGT	TIA Orange									
M300X100AIT	TIA Red									

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Military Grade Single-Sided Heat Shrink Labels

- Permanent, one-piece, heat shrink sleeve designed to provide clear, durable identification of wires and cables
- Meet UL Standard 224 with a VW-1 rating for flammability and AMS-DTL-23053/5C (Class 1 and Class 3)
- Meet SAE-AS81531, MIL-STD-883F Method 2015.13, Solutions A, B, and D, and MIL-STD-202G Method 215K, Solutions A, C, and D when printed with resin and hybrid thermal transfer ribbons

- Shrink ratio 3:1
- Tested for use as an identification marker in (Class 1E) harsh environments
- Use thermal transfer hybrid ribbon or white resin ribbon
- Temperature range: -67°F to 275°F (-55°C to 135°C)
- UL224 recognized, File # E205133; CSA certified, C22.2 No. 198.1.06, File # 256205



Part Number	Part Number	Part Number	Part Number	Diameter		Width		Height		Min. Cable O.D.		Max. Cable O.D.		Wire Range	Labels Per Row	Labels Per Roll	Std. Pkg. Qty. (Roll)
				In.	mm	In.	mm	In.	mm	In.	mm	In.	mm				
H050X025H1T*	H050X025H2T	H050X025H3T	H050X025H4T	0.13	3.1	0.50	12.7	0.25	6.4	0.04	1.0	0.13	3.3	22 – 18 AWG	4	2000	1
H075X025H1T*	H075X025H2T	H075X025H3T	H075X025H4T			0.75	19.1								2	1000	
H100X025H1T*	H100X025H2T	H100X025H3T	H100X025H4T			1.00	25.4								1	500	
H150X025H1T*	H150X025H2T	H150X025H3T	H150X025H4T			1.50	38.1										
H200X025H1T*	H200X025H2T	H200X025H3T	H200X025H4T			2.00	50.8										
H050X034H1T*	H050X034H2T	H050X034H3T	H050X034H4T	0.19	4.7	0.50	12.7	0.34	8.6	0.06	1.5	0.19	4.8	18 – 12 AWG	4	2000	1
H075X034H1T*	H075X034H2T	H075X034H3T	H075X034H4T			0.75	19.1								2	1000	
H100X034H1T*	H100X034H2T	H100X034H3T	H100X034H4T			1.00	25.4								1	500	
H150X034H1T*	H150X034H2T	H150X034H3T	H150X034H4T			1.50	38.1										
H200X034H1T*	H200X034H2T	H200X034H3T	H200X034H4T			2.00	50.8										
H050X044H1T*	H050X044H2T	H050X044H3T	H050X044H4T	0.25	6.3	0.50	12.7	0.44	11.2	0.08	2.0	0.25	6.4	16 – 10 AWG	4	2000	1
H075X044H1T*	H075X044H2T	H075X044H3T	H075X044H4T			0.75	19.1								2	1000	
H100X044H1T*	H100X044H2T	H100X044H3T	H100X044H4T			1.00	25.4								1	500	
H150X044H1T*	H150X044H2T	H150X044H3T	H150X044H4T			1.50	38.1										
H200X044H1T*	H200X044H2T	H200X044H3T	H200X044H4T			2.00	50.8										
H050X064H1T*	H050X064H2T	H050X064H3T	H050X064H4T	0.38	9.7	0.50	12.7	0.64	16.3	0.13	3.3	0.38	9.7	12 – 6 AWG	4	2000	1
H100X064H1T*	H100X064H2T	H100X064H3T	H100X064H4T			1.00	25.4								2	1000	
H200X064H1T*	H200X064H2T	H200X064H3T	H200X064H4T			2.00	50.8								1	500	
H050X084H1T	—	—	—	0.50	12.7	0.50	12.7	0.84	21.3	0.17	4.3	0.50	12.7	8 – 1 AWG	4	2000	1
H100X084H1T	H100X084H2T	H100X084H3T	H100X084H4T			1.00	25.4								2	1000	
H200X084H1T	H200X084H2T	H200X084H3T	H200X084H4T			2.00	50.8								1	500	
H050X165H1T	—	—	—	1.00	25.4	0.50	12.7	1.65	41.9	0.33	8.4	1.00	25.4	4 AWG – 500 MCM	4	1000	1
H100X165H1T	H100X165H2T	H100X165H3T	H100X165H4T			1.00	25.4								2	500	
H200X165H1T	H200X165H2T	H200X165H3T	H200X165H4T			2.00	50.8								1	250	
H200X240H1T	H200X240H2T	—	—	1.50	38.1	2.00	50.8	2.40	61.0	0.50	12.7	1.50	38.1	1 AWG – 1000 MCM	1	100	

Order number of labels required in multiples of Standard Package Quantity.
 *Available in Bulk packages (5 times Labels Per Roll), add -B to end of part number

Military Grade Two-Sided Heat Shrink Labels

PATENTED

- Permanent, one-piece, heat shrink sleeve designed to provide clear, durable identification of wires and cables
- Can be printed on both sides for improved visibility
- Meet the material requirements and physical properties of AMS-DTL-23053/5C (Class 1 and Class 3) and UL standard 224 with a VW-1 rating
- Meet SAE-AS81531, MIL-STD-883F Method 2015.13, Solutions A, B and D, and MIL-STD-202G Method 215K, Solutions A,C and D when printed using resin or hybrid thermal transfer ribbons

- Shrink ratio 3:1
- Tested as an identification marker for use in (Class 1E) harsh environments
- Use thermal transfer hybrid ribbon
- Temperature range: -67°F to 275°F (-55°C to 135°C)
- UL224 recognized, File # E205133; CSA certified, C22.2 No. 198.1-06, File # 256205



Part Number	Part Number	Diameter		Width		Height		Min. Cable O.D.		Max. Cable O.D.		Wire Range	Labels Per Row	Labels Per Roll	Std. Pkg. Qty. (Roll)
		In.	mm	In.	mm	In.	mm	In.	mm	In.	mm				
H100X025H1T-2	H100X025H2T-2	0.13	3.1	1.00	25.4	0.25	6.4	0.04	1.0	0.13	3.3	22 – 18 AWG	2	1000	1
H100X025H1T-2-B	H100X025H2T-2-B			2.00	50.8									5000	
H200X025H1T-2	H200X025H2T-2	0.19	4.7	2.00	50.8	0.34	8.6	0.06	1.5	0.19	4.8	18 – 12 AWG	1	500	1
H200X025H1T-2-B	H200X025H2T-2-B			2.00	50.8									2500	
H100X034H1T-2	H100X034H2T-2	0.25	6.3	1.00	25.4	0.44	11.2	0.08	2.0	0.25	6.4	16 – 10 AWG	2	1000	1
H100X034H1T-2-B	H100X034H2T-2-B			2.00	50.8									5000	
H200X034H1T-2	H200X034H2T-2	0.25	6.3	2.00	50.8	0.44	11.2	0.08	2.0	0.25	6.4	16 – 10 AWG	1	500	1
H200X034H1T-2-B	H200X034H2T-2-B			2.00	50.8									2500	
H100X044H1T-2	H100X044H2T-2	0.38	9.7	1.00	25.4	0.64	16.3	0.13	3.3	0.38	9.7	12 – 6 AWG	2	1000	1
H100X044H1T-2-B	H100X044H2T-2-B			2.00	50.8									5000	
H200X044H1T-2	H200X044H2T-2	0.38	9.7	2.00	50.8	0.64	16.3	0.13	3.3	0.38	9.7	12 – 6 AWG	1	500	1
H200X044H1T-2-B	H200X044H2T-2-B			2.00	50.8									2500	
H100X064H1T-2	H100X064H2T-2	0.50	12.7	1.00	25.4	0.84	21.3	0.17	4.3	0.50	12.7	8 – 1 AWG	2	1000	1
H100X064H1T-2-B	H100X064H2T-2-B			2.00	50.8									5000	
H200X064H1T-2	H200X064H2T-2	0.50	12.7	2.00	50.8	0.84	21.3	0.17	4.3	0.50	12.7	8 – 1 AWG	1	500	1
H200X064H1T-2-B	H200X064H2T-2-B			2.00	50.8									2500	
H100X084H1T-2	H100X084H2T-2	0.75	19.0	1.00	25.4	1.22	31.0	0.25	6.3	0.75	19.0	8 – 4/0 AWG	2	500	1
H100X084H1T-2-B	H100X084H2T-2-B			2.00	50.8									250	
H200X084H1T-2	H200X084H2T-2	0.75	19.0	2.00	50.8	1.22	31.0	0.25	6.3	0.75	19.0	8 – 4/0 AWG	1	250	1
H200X084H1T-2-B	H200X084H2T-2-B			2.00	50.8									250	
H100X122H1T-2	H100X122H2T-2	1.00	25.4	1.00	25.4	1.65	41.9	0.33	8.4	1.00	25.4	4 AWG – 500 MCM	2	500	1
H100X122H1T-2-B	H100X122H2T-2-B			2.00	25.4									250	
H200X122H1T-2	H200X122H2T-2	1.00	25.4	2.00	25.4	1.65	41.9	0.33	8.4	1.00	25.4	4 AWG – 500 MCM	1	250	1
H200X122H1T-2-B	H200X122H2T-2-B			2.00	25.4									250	

Order number of labels required in multiples of Standard Package Quantity.

Halogen-Free Two-Sided Heat Shrink Labels

PATENTED

- Permanent, one-piece, heat shrink sleeve designed to provide clear, durable identification of wires and cables
- Can be printed on both sides for improved visibility
- Meet SAE-AS5942, MIL-STD-883F Method 2015.13, Solutions A, B, and D, and MIL-STD-202G Method 215K, Solutions A, C, and D when printed with resin and hybrid thermal transfer ribbons
- Meet BS6853; 1999 Vehicle Category 1A for burning behavior and toxic gas emissions; Smoke Density Class II
- Shrink ratio 2:1
- Use thermal transfer hybrid ribbon
- Temperature range: -22°F to 221°F (-30°C to 105°C)



Part Number	Part Number	Diameter		Width		Height		Min. Cable O.D.		Max. Cable O.D.		Wire Range	Labels Per Row	Labels Per Roll	Std. Pkg. Qty. (Roll)
		In.	mm	In.	mm	In.	mm	In.	mm	In.	mm				
H100X025HFT-2	H100X025HGT-2	0.13	3.1	1.00	25.4	0.25	6.4	0.06	1.5	0.13	3.3	22 – 18 AWG	2	1000	1
H200X025HFT-2	H200X025HGT-2			2.00	50.8								1	500	
H100X034HFT-2	H100X034HGT-2	0.19	4.7	1.00	25.4	0.34	8.6	0.09	2.3	0.19	4.8	18 – 12 AWG	2	1000	
H200X034HFT-2	H200X034HGT-2			2.00	50.8								1	500	
H100X044HFT-2	H100X044HGT-2	0.25	6.4	1.00	25.4	0.44	11.1	0.13	3.3	0.25	6.4	16 – 10 AWG	2	1000	
H200X044HFT-2	H200X044HGT-2			2.00	50.8								1	500	
H100X064HFT-2	H100X064HGT-2	0.38	9.7	1.00	25.4	0.64	16.2	0.19	4.8	0.38	9.7	12 – 6 AWG	2	1000	
H200X064HFT-2	H200X064HGT-2			2.00	50.8								1	500	
H100X084HFT-2	H100X084HGT-2	0.50	12.7	1.00	25.4	0.84	21.3	0.25	6.4	0.50	12.7	8 – 1 AWG	2	1000	
H200X084HFT-2	H200X084HGT-2			2.00	50.8								1	500	
H100X165HFT-2	H100X165HGT-2	1.00	25.4	1.00	25.4	1.65	41.9	0.50	12.7	1.00	25.4	8 AWG – 500 MCM	2	500	
H200X165HFT-2	H200X165HGT-2			2.00	50.8								1	250	

Order number of labels required in multiples of Standard Package Quantity.

PATENTED

Fluid-Resistant Two-Sided Heat Shrink Labels

- Permanent, one-piece, heat shrink sleeve designed to provide clear, durable identification of wires and cables
- Cross-linked, semi-rigid, fluid-resistant, shrinkable polyolefin material
- Available in yellow only
- Can be printed on both sides for improved visibility
- Meet the material requirements and physical properties AMS-DTL-23053/6 Class 1 and NF F00-608 Class A and H when printed with resin thermal transfer ribbons

- Meet SAE-AS5942, MIL-STD-883F Method 2015.13 Solutions A and D, and MIL-STD-202G Method 215K, Solutions A and D when printed with resin thermal transfer ribbons
- Shrink ratio 3:1
- Use thermal transfer RMER4BL-C resin ribbon
- Temperature range: -67°F to 275°F (-55°C to 135°C)




Part Number	Diameter		Width		Height		Min. Cable O.D.		Max. Cable O.D.		Wire Range	Labels Per Row	Labels Per Roll	Std. Pkg. Qty. (Roll)
	In.	mm	In.	mm	In.	mm	In.	mm	In.	mm				
H100X034HST-2	0.19	4.7	1.00	25.4	0.34	8.6	0.06	1.5	0.19	4.8	18 – 12 AWG	2	1000	1
H200X034HST-2			2.00	50.8								1	500	
H100X044HST-2	0.25	6.4	1.00	25.4	0.44	11.1	0.08	2.0	0.25	6.4	16 – 10 AWG	2	1000	
H200X044HST-2			2.00	50.8								1	500	
H100X064HST-2	0.38	9.7	1.00	25.4	0.64	16.2	0.13	3.3	0.38	9.7	12 – 6 AWG	2	1000	
H200X064HST-2			2.00	50.8								1	500	
H100X084HST-2	0.50	12.7	1.00	25.4	0.84	21.3	0.17	4.3	0.50	12.7	8 – 1 AWG	2	1000	
H200X084HST-2			2.00	50.8								1	500	
H100X165HST-2	1.00	25.4	1.00	25.4	1.65	41.9	0.33	8.4	1.00	25.4	4 AWG – 500 MCM	2	500	
H200X165HST-2			2.00	50.8								1	250	

Order number of labels required in multiples of Standard Package Quantity.

NEW! Terminal Block Markers

- Ideally suited for terminal block labeling applications within control panels
- Flexible marker design; create and install single or multiple markers in a single step
- Less marker waste – print only as many as you need
- Flexible halogen-free markers have superior holding strength in terminal blocks, eliminating markers that fall out
- Easy-Mark Plus™ Labeling Software required for printing terminal block markers

- Meets EN61010-1 (VDE 0411-1) for abrasion and wipe resistance
- Meets EN ISO 175 for oil and chemical resistance
- Meets EN 60464-3:2001 for resistance to solvents
- Meets IEC 60947-4-1/2 for resistance to aging
- Meets IEC 60068-2-8 for vibration resistance
- Use thermal transfer RMER1BL resin ribbon
- Temperature range: -40°F to 180°F (-40°C to 82°C)



Part Number	Color	Description	Width mm	Height mm	Allen-Bradley Terminal Block Compatability	Weldmuller Terminal Block Compatability	Markers Per Roll	Std. Pkg. Qty.
TB05X12EWT-AB1	White	Flexible terminal block markers on continuous rolls	5.0	12.0	1492-J3, 1492-W3	WDU 2.5	1000	1
TB06X12EWT-AB1			6.0	12.0	1492-J4, 1492-W4	WDU 4	1000	
TB08X12EWT-AB1			8.0	12.0	1492-J6	WDU 6	750	
TB05X08EWT-AB2			5.0	8.0	1492-JD3, 1492-L3 1492-LD3 1493-L3Q	WDR 2.5	1000	
TB06X08EWT-AB2			6.0	8.0	1492-JD4, 1492-L4 1492-LD4	WDR 4	1000	

Order number of markers required in multiples of Standard Package Quantity.

Markers will not fit inside the printer. The external roll stand (TDP43ME-RS) is required.

Terminal Block Adapter Kit (TDP43ME-TB-KIT) is required to print the terminal block markers. (See page 34 for additional information.)

Raised Panel Push Button Labels

- Deliver the look of engraved laminated plates with the convenience of printing on demand
- Strong holding power for rough, textured, and powder coated surfaces
- Provide crisp, clear, and durable legends for your reliable, high-performance identification needs
- Meet ASTM G154 for outdoor durability (simulating 20 years of UV resistance under normal conditions but not all outdoor exposure)
- Meets DIN 40050-9, IP69K for washdown applications
- Meet ASTM D3389 standard for abrasion resistance and also meet solar application standards
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



Part Number	Color	Width		Height		Print-On Area Height		Hole Diameter		Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm	In.	mm	In.	mm		
C120X150APT-22	White	1.20	30.5	1.50	38.1	0.45	11.4	0.87	22.0	3	500
C120X150A8T-22	Yellow										
C120X150AST-22	Green										
C120X150AWT-22	Red										
C120X150A0T-22	Black										
C120X190APT-22	White	1.90	48.3	0.85	21.6	1.18	30.0	2			
C120X190A8T-22	Yellow										
C120X190AST-22	Green										
C120X190AWT-22	Red										
C120X190A0T-22	Black	2.40	61.0	2.40	61.0	0.90	22.9	1			
C180X180APT-30	White										
C180X180A8T-30	Yellow										
C180X180AST-30	Green										
C180X180AWT-30	Red										
C180X180A0T-30	Black										
C240X240APT-30	White	2.40	61.0	2.40	61.0	0.90	22.9	1			
C240X240A8T-30	Yellow										
C240X240AST-30	Green										
C240X240AWT-30	Red										
C240X240A0T-30	Black										

Order number of labels required in multiples of Standard Package Quantity.
 Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Raised Panel Push Button Over-Laminate Labels

- Provide additional print protection in harsh environments
- Over-laminates are not printable
- Temperature range: -51°F to 275°F (-46°C to 135°C)

Part Number	Color	Width		Height		Hole Diameter		Labels Per Roll	Std. Pkg. Qty.
		In.	mm	In.	mm	In.	mm		
C120X150YK-22	Clear	1.20	30.5	1.50	38.1	0.87	22.0	3	500
C120X190YK-22				1.90	48.3				
C180X180YK-30		1.80	45.7	1.80	45.7	1.18	30.0	2	
C240X240YK-30		2.40	60.9	2.40	60.9	1.18	30.0	1	

Order number of labels required in multiples of Standard Package Quantity.

Raised Panel Half Push Button Labels

- Deliver the look of engraved laminated plates with the convenience of printing on demand
- Strong holding power for rough, textured, and powder-coated surfaces
- Provide crisp, clear, and durable legends for your reliable, high-performance identification needs
- Meets DIN 40050-9, IP69K for washdown applications
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



Part Number	Color	Width		Height		Print-On Area Height		Hole Diameter		Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm	In.	mm	In.	mm		
C180X130APT-30H	White	1.80	45.7	1.30	33.0	0.73	18.5	1.18	30.0	1	500
C240X200APT-30H		2.40	61.0	2.00	50.8	1.43	36.3				

Order number of labels required in multiples of Standard Package Quantity.
Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Raised Panel Component Labels

- Deliver the look of engraved laminated plates with the convenience of printing on demand
- Strong holding power for rough, textured, and powder-coated surfaces
- Provide crisp, clear, and durable legends for your reliable, high-performance identification needs
- Meet ASTM G154 for outdoor durability (simulating 20 years of UV resistance under normal conditions but not all outdoor exposure)
- Meets DIN 40050-9, IP69K for washdown applications
- Meet ASTM D3389 standard for abrasion resistance, and also meet solar application standards
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



Part Number	Color	Width		Height		Labels Per Row	Std. Pkg. Qty.				
		In.	mm	In.	mm						
C100X050APT	White	1.00	25.4	0.50	12.7	3	500				
C100X050A8T	Yellow										
C100X050AST	Green										
C100X050AUT	Orange										
C100X050AWT	Red										
C100X050AOT	Black										
C100X050AMT	Silver	1.25	31.8	0.30	7.6	1					
C125X030APT	White										
C125X030AOT	Black	1.70	43.2	0.90	22.9	1					
C170X090APT	White										
C170X090A8T	Yellow										
C170X090AST	Green										
C170X090AWT	Red										
C170X090AMT	Silver	2.00	50.8	1.00	25.4	1					
C200X100APT	White										
C200X100A8T	Yellow										
C200X100AST	Green										
C200X100AUT	Orange										
C200X100AWT	Red										
C200X100AOT	Black	2.52	64.0	0.30	7.6	1					
C200X100AMT	Silver										
C252X030APT	White	3.00	76.2	1.00	25.4	1					
C252X030AOT	Black										
C300X100APT	White										
C300X100A8T	Yellow										
C300X100AUT	Orange										
C300X100AWT	Red										
C300X100AOT	Black			2.50	63.5			3.50	88.9	3.00	76.2
C300X250APT	White										
C300X250A8T	Yellow										
C300X250AST	Green										
C300X250AUT	Orange										
C300X250AWT	Red										
C300X250AOT	Black	3.79	96.3	0.30	7.6	1					
C300X250AMT	Silver										
C379X030APT	White										
C379X030AQT	Blue	4.00	101.6	1.00	25.4	1					
C379X030AWT	Red										
C379X030AOT	Black										
C400X100APT	White	4.00	101.6	1.00	25.4	1					
C400X100A8T	Yellow										
C400X100AST	Green										
C400X100AUT	Orange										
C400X100AWT	Red										
C400X100AOT	Black										
C400X100AMT	Silver										

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Contact Technical Support at 866.871.4571.

Raised Panel Component Over-Laminate Labels


- Provide additional print protection in harsh environments
- Over-laminates are not printable
- Temperature range: -51°F to 275°F (-46°C to 135°C)

Part Number	Color	Width		Height		Labels Per Roll	Std. Pkg. Qty.
		In.	mm	In.	mm		
C100X050YK	Clear	1.00	25.4	0.50	12.7	1	500
C170X090YK		1.70	43.2	0.90	22.9		
C200X100YK		2.00	50.8	1.00	25.4		
C300X100YK		3.00	76.2	1.00	25.4		
C300X250YK				2.50	63.5		
C350X300YK		3.50	88.9	3.00	76.2		
C400X100YK		4.00	101.6	1.00	25.4		

Order number of labels required in multiples of Standard Package Quantity.

Raised Panel Pre-Printed Emergency Stop Labels

- Deliver the look of engraved laminated plates with the convenience of printing on demand
- Strong holding power for rough, textured, and powder-coated surfaces
- Meets DIN 40050-9, IP69K for washdown applications
- Temperature range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14576; cUL recognized C22.2 No. 0.15.01, File # MH14576

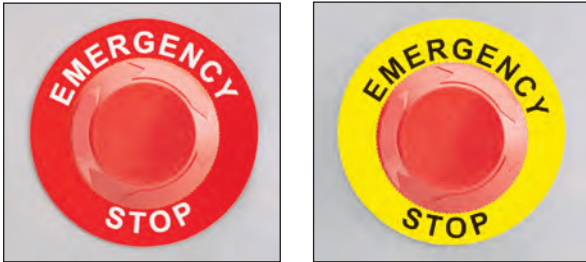

Part Number	Color	Diameter		Hole Diameter		Std. Pkg. Qty.
		In.	mm	In.	mm	
C235A8-30-ES	Black on Yellow	2.35	60.0	1.18	30.0	25
C235AW-30-ES	White on Red					
C350A8-30-ES	Black on Yellow	3.50	89.0			
C350AW-30-ES	White on Red					

Order number of labels required in multiples of Standard Package Quantity.

Polyester Component Labels

- Provide durability; high-temperature resistance and dimensional stability; does not easily stretch or tear
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized, File # MH14576 and File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979




Part Number	Color	Width		Height		Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm		
C025X025YJT	White	0.25	6.4	0.25	6.4	12	10000
C038X038YJT		0.38	9.7	0.38	9.7	7	
C050X044YJT		0.50	12.7	0.44	11.2	5	
C060X020YJT		0.60	15.2	0.20	5.1	3	
C075X025YJT		Silver	0.75	19.1	0.25		
C075X025YMT							
C080X020YJT	White	0.80	20.3	0.20	5.1	3	
C090X025YJT		0.90	22.9	0.25	6.4		
C100X025YJT		1.00	25.4	0.25	6.4		
C100X038YJT				0.38	9.7		
C100X050YJT				0.50	12.7		
C100X050YKT	Clear						
C100X050YMT	Silver						
C125X038YJT	White	1.25	31.8	0.38	9.7	3	
C150X050YJT		1.50	38.1	0.50	12.7		
C150X075YJT				0.75	19.1		
C150X075YMT	Silver						
C160X020YJT	White	1.60	40.6	0.20	5.1	3	
C200X025YJT		2.00	50.8	0.25	6.4		
C200X038YJT				0.38	9.7		
C200X050YJT				0.50	12.7		
C200X100YJT		Clear	1.00	25.4			
C200X100YKT							
C200X100YMT	Silver						
C275X125YJT	White	2.75	69.9	1.25	31.8	1	
C275X125YMT	Silver						
C300X025YJT	White	3.00	76.2	0.25	6.4		
C300X038YJT				0.38	9.7		
C300X100YJT				1.00	25.4		
C300X100YMT	Silver						
C300X200YJT	White	4.00	101.6	2.00	50.8		
C300X200YMT	Silver						
C350X100YJT	White	3.50	88.9	1.00	25.4		
C400X100YJT		4.00	101.6	2.00	50.8		
C400X200YJT				Silver	4.00	101.6	
C400X200YMT							
C400X300YJT	White	4.00	101.6	3.00	76.2		
C400X400YJT				4.00	101.6		
C400X600YJT	White	6.00	152.4	6.00	152.4		

Order number of labels required in multiples of Standard Package Quantity.
 Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores,
 the roll stand (TDP43ME-RS) is required.

Contact Technical Support at 866.871.4571.

Super-Tack Polyester Component Labels

- Provide durability; high-temperature resistance and dimensional stability; does not stretch or easily tear; and has high-tack permanent adhesive
- Used to identify patch panels, faceplates, punchdown blocks, and other network systems hardware
- Meets DIN 40050-9, IP69K for washdown applications
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



Part Number	Color	Width		Height		Type of Application	Labels Per Row	Std. Pkg. Qty.								
		In.	mm	In.	mm											
C061X030YPT	White	0.61	15.5	0.30	7.6	1-port	4	2500								
C100X050YPT		1.00	25.4	0.50	12.7	general identifier	3	10000								
C125X030YPT		1.25	31.8	0.30	7.6	2-port										
C138X019YPT		1.38	35.1	0.19	4.8	module										
C188X030YPT	White	1.88	47.8	0.30	7.6	3-port			1	2500						
C200X100YPT		Black	2.00	50.8	1.00	25.4	general identifier									
C200X100Y0T	4-port															
C252X030YPT	White	2.52	64.0	0.30	7.6	1, 2, 3, or 4-port	1	2500								
C252X030YPT-P*									TIA Blue							
C252X030YQT-P*									TIA Brown							
C252X030YRT-P*									TIA Green							
C252X030YST-P*									TIA Gray							
C252X030YTT-P*									TIA Orange							
C252X030YUT-P*									TIA Purple							
C252X030YVT-P*									TIA Red							
C252X030YWT-P*									Black							
C252X030Y0T-P*									TIA Yellow							
C252X030Y8T-P*									Gold							
C252X030Y9T-P*																
C261X030YPT									White	2.61	66.3	0.30	7.6	4-port	1	2500
C275X125YPT										2.75	69.9	1.25	31.8	general identifier		
C275X125Y0T	Black															
C288X030YPT	White	2.88	73.2	0.30	7.6	5-port	1	2500								
C300X200YPT		3.00	76.2	2.00	50.8	general identifier										
C315X030YPT		3.15	80.0	0.30	7.6	5-port										
C379X030YPT		White	3.79	96.3	0.30	7.6			6-port							
C379X030YPT-P*									1, 2, 3, 4, 5 or 6-port							
C379X030YQT-P*										TIA Blue						
C379X030YRT-P*										TIA Brown						
C379X030YST-P*										TIA Green						
C379X030YTT-P*										TIA Gray						
C379X030YUT-P*										TIA Orange						
C379X030YVT-P*	TIA Purple															
C379X030YWT-P*	TIA Red															
C379X030Y0T-P*	Black															
C379X030Y8T-P*	TIA Yellow															
C379X030Y9T-P*	Gold															
C400X200Y8T	Yellow	4.00	101.6	2.00	50.8	general identifier	1	1000								
C400X300YPT	White			3.00	76.2			2500								

*Label is perforated to be used in 1, 2, 3, 4, or 6-Port position applications.
 Order number of labels required in multiples of Standard Package Quantity.
 Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Tedlar® Component Labels

- Self-extinguishing and ideal for labeling high-temperature areas
- Meet Federal Motor Vehicle Safety Standard (FMVSS-302) for flammability
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 225°F (-40°C to 106°C); tests at 275°F have shown acceptable results



Part Number	Color	Width		Height		Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm		
C060X020TJT	White	0.60	15.2	0.20	5.1	3	10000
C090X025TJT		0.90	22.9	0.25	6.4		
C100X038TJT		1.00	25.4	0.38	9.7		
C100X050TJT				0.50	12.7		
C125X038TJT		1.25	31.8	0.38	9.7	1	2500
C200X038TJT		2.00	50.8				1.00
C200X100TJT				1.00	25.4	2500	
C300X038TJT				3.00	76.2	0.38	9.7

Tedlar® is a registered trademark of E.I. du Pont de Nemours and Company. Order number of labels required in multiples of Standard Package Quantity. Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Tamper-Evident Polyester Component Labels

- Leaves a checkerboard of silver material allowing you to see if label has been tampered with
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized, File # MH14576 and File # MH14979



Part Number	Color	Width		Height		Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm		
C075X025AAT	Silver	0.75	19.1	0.25	6.4	3	10000
C100X050AAT		1.00	25.4	0.50	12.7		
C200X100AAT		2.00	50.8	1.00	25.4	1	2500
C275X125AAT		2.75	69.9	1.25	31.8		

Order number of labels required in multiples of Standard Package Quantity. Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Non-Adhesive Polyester Component Labels

- Used to identify patch panels, faceplates, punchdown blocks, and other network systems hardware
- Use thermal transfer resin ribbon
- Temperature range: -10°F to 302°F (-23°C to 150°C)



Part Number	Color	Width		Height		Application	Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm			
C150X030Y1T	White	1.50	38.1	0.30	7.6	3-port identifier	2	1000
C195X040Y1T		1.95	49.5	0.40	10.2	Single-gang faceplate		
C261X035Y1T		2.61	66.3	0.35	8.9	4-port identifier		
C288X040Y1T		2.88	73.2	0.40	10.2	Double-gang faceplate		
C390X030Y1T		3.90	99.1	0.30	7.6	6-port identifier		
C750X050Y1T		7.50	190.5	0.50	12.7	110 block		
C788X050Y1T		7.88	200.2	0.50	12.7	GP6™ Punchdown System		

Order number of labels required in multiples of Standard Package Quantity.
Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Vinyl Cloth Component Labels

- Ideal for temporary marking of chips, boards, and ICs
- Removable without leaving any residue
- Pliable material is suitable for rough texture surfaces
- Use thermal transfer hybrid ribbon
- Temperature range: 50°F to 170°F (10°C to 77°C)
- UL969 recognized, File # MH14576 and File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14576



Part Number	Color	Width		Height		Labels Per Row	Std. Pkg. Qty.				
		In.	mm	In.	mm						
C050X044CBT	White	0.50	12.7	0.44	11.2	5	10000				
C060X020CBT		0.60	15.2	0.20	5.1	3					
C075X025CBT		0.75	19.1	0.25	6.4						
C100X025CBT		1.00	25.4					0.38	9.7		
C100X038CBT				0.50	12.7						
C100X050CBT				1	2.00	50.8		0.50	12.7		
C150X075CBT		1.50	38.1							0.75	19.1
C160X020CBT		1.60	40.6							0.20	5.1
C200X050CBT		2.00	50.8							0.50	12.7
C400X100CBT		4.00	101.6	1.00	25.4			2500			

Order number of labels required in multiples of Standard Package Quantity.
Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Polyimide Component Labels

- Ideal for electronic components and internal circuitry applications
- Intended for applications requiring solvent and high-temperature resistance performance, such as the wave solder process

- Use thermal transfer RMER4BL-C or RHER4BL-C resin ribbon on white polyimide
- Use thermal transfer hybrid ribbon on tan polyimide
- Temperature range: -40°F to 350°F (-40°C to 177°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



Part Number	Color	Width		Height		Labels Per Row	Std. Pkg. Qty.		
		In.	mm	In.	mm				
C025X025KBT	White	0.25	6.4	0.25	6.4	12	10000		
C025X025KCT	Tan								
C038X038KBT	White	0.38	9.7	0.38	9.7	7			
C038X038KCT	Tan								
C050X013KBT	White	0.50	12.7	0.13	3.3	5			
C050X013KCT	Tan								
C050X020KBT	White			0.20	5.1			0.44	11.2
C050X044KBT	White								
C050X044KCT	Tan								
C060X020KBT	White	0.60	15.3	0.20	5.1	3			
C060X020KCT	Tan								
C065X019KBT	White	0.65	16.5	0.19	4.8	3			
C075X025KBT		0.75	19.1	0.25	6.4				
C080X020KBT		0.80	20.3	0.20	5.1				
C090X025KBT		0.90	22.9	0.25	6.4				
C100X019KBT		1.00	25.4	0.19	4.8			6.4	
C100X025KBT									0.25
C100X025KCT									0.25
C100X038KBT	White	1.00	25.4	0.38	9.7	2			
C100X038KCT	Tan								
C125X025KBT	White	1.25	31.8	0.25	6.4	2			
C150X025KBT		1.50	38.1						
C160X020KBT		1.60	40.6	0.20	5.1	1			
C200X025KBT		2.00	50.8	0.25	6.4				
C200X038KBT				0.38	9.7				
C300X025KBT				3.00	76.2	0.25	6.4		

Order number of labels required in multiples of Standard Package Quantity.
 Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Paper Component Labels

- General purpose material
- Use thermal transfer hybrid ribbon

- Temperature range: -65°F to 160°F (-54°C to 71°C)
- UL969 recognized, File # MH14576 and File # MH14979



Part Number	Color	Width		Height		Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm		
C075X025PBT	White	0.75	19.1	0.25	6.4	3	10000
C100X050PBT		1.00	25.4	0.50	12.7		
C150X075PBT		1.50	38.1	0.75	19.1		
C200X100PBT		2.00	50.8	1.00	25.4	1	5000
C300X200PBT		3.00	76.2	2.00	50.8		2500
C400X100PBT		4.00	101.6	1.00	25.4		1000
C400X200PBT				2.00	50.8		2500
C400X300PBT				3.00	76.2		1000
C400X500PBT				5.00	127.0		2500
C400X600PBT				6.00	152.4	1000	

Order number of labels required in multiples of Standard Package Quantity.
Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Reflective Continuous Tapes

- Used for illuminating or highlighting a range of objects
- Offer crisp, clear legends with superior legibility
- Conformable material for flat applications and safety and facility identification
- Can be over-laminated to increase durability (see page 28)

- Use thermal transfer resin ribbon
- Temperature range: -40°F to 180°F (-40°C to 82°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



Part Number	Color	Width		Length		Std. Pkg. Qty. (Roll)
		In.	mm	Ft.	m	
T100X000RP1	White	1.00	25.4	50.0	15.2	1
T100X000RU1	Orange					
T100X000RW1	Red					
T100X000RX1	Yellow					
T200X000RP1	White	2.00	50.8			
T200X000RU1	Orange					
T200X000RW1	Red					
T200X000RX1	Yellow					
T300X000RP1	White	3.00	76.2			
T400X000RP1	White					
T400X000RQ1	Blue	4.00	101.6			
T400X000RU1	Orange					
T400X000RW1	Red					
T400X000RX1	Yellow					

Order number of labels required in multiples of Standard Package Quantity.

Continuous Tapes

- Offer crisp, clear legends with superior legibility
- Conformable material for flat applications and safety and facility identification
- Can be over-laminated to increase durability (see page 28)

- Use thermal transfer resin ribbon
- For white, black, clear, blue, and yellow vinyl continuous tapes only: UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979




Part Number	Color	Material	Temperature Range	Width		Length		Std. Pkg. Qty. (Roll)							
				In.	mm	Ft.	m								
T024X000FJT*	White	Polyolefin	-40°F to 180°F (-40°C to 82°C)	0.24	6.1										
T031X000FJT*				0.31	7.9										
T038X000FJT*				0.38	9.7										
T050X000FJT*				0.50	12.7										
T100X000VP1Y															
T100X000VQ1Y	Blue	Vinyl	-58°F to 176°F (-50°C to 80°C)	1.00	25.4										
T100X000VS1Y	Green														
T100X000VU1Y	Orange														
T100X000VW1Y	Red														
T100X000VX1Y	Yellow														
T100X000VY1Y	Black														
T100X000YK1	Clear	Polyester	-40°F to 302°F (-40°C to 150°C)												
T200X000VP1Y	White	Vinyl	-58°F to 176°F (-50°C to 80°C)	2.00	50.8	100.0	30.5	1							
T200X000VQ1Y	Blue														
T200X000VR1Y	Brown														
T200X000VS1Y	Green														
T200X000VT1Y	Gray														
T200X000VU1Y	Orange														
T200X000VV1Y	Purple														
T200X000VW1Y	Red														
T200X000VX1Y	Yellow														
T200X000VY1Y	Black														
T200X000YK1	Clear								Polyester	-40°F to 302°F (-40°C to 150°C)					
T400X000VP1Y	White								Vinyl	-58°F to 176°F (-50°C to 80°C)	4.00	101.6			
T400X000VQ1Y	Blue														
T400X000VR1Y	Brown														
T400X000VS1Y	Green														
T400X000VT1Y	Gray														
T400X000VU1Y	Orange														
T400X000VV1Y	Purple														
T400X000VW1Y	Red														
T400X000VX1Y	Yellow														
T400X000VY1Y	Black														
T400X000YK1	Clear	Polyester	-40°F to 302°F (-40°C to 150°C)												

Order number of rolls required in multiples of Standard Package Quantity.

*Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Super-Tack Polyester Continuous Tapes

- Thermal transfer printable continuous tape format
- Super-tack polyester has ultra-aggressive adhesive
- Ideal for rough, textured, and coated surfaces
- Applications include rack unit labeling, cabinets, cable tray, pathways, control panels, enclosures, pipes, and much more
- Meets DIN 40050-9, IP69K for washdown applications.
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized, File # MH14979, cUL recognized, C22.2 No. 0.15.01, File # MH14979



Part Number	Color	Material	Width		Length		Std. Pkg. Qty. (Roll)
			In.	mm	Ft.	m	
T038X000Y01	Black	Polyester	0.38	9.7	100.0	30.5	1
T038X000YP1	White						
T050X000Y01	Black						
T050X000YP1	White						
T100X000Y01	Black						
T100X000Y81	Yellow						
T100X000YP1	White						
T100X000YQ1	Blue						
T100X000YS1	Green						
T100X000YU1	Orange						
T100X000YW1	Red						
T200X000Y01	Black		2.00	50.8			
T200X000Y81	Yellow						
T200X000YP1	White						
T200X000YQ1	Blue						
T200X000YS1	Green						
T200X000YU1	Orange						
T200X000YW1	Red						
T400X000Y01	Black		4.00	101.6			
T400X000Y81	Yellow						
T400X000YP1	White						
T400X000YQ1	Blue						
T400X000YS1	Green						
T400X000YU1	Orange						
T400X000YW1	Red						

Order number of labels required in multiples of Standard Package Quantity.

Non-Printable Clear Over-Laminate Continuous Tapes

- Over-laminates can be used for additional protection over the 2" and 4" continuous tapes
- When over-laminates are used with Super-Tack Polyester Labels, the labels meet DIN 40050-9, IP69K for washdown applications
- Temperature range: -40°F to 302°F (-40°C to 150°C)

Part Number	Color	Material	Width		Length		Std. Pkg. Qty.
			In.	mm	Ft.	m	
T225X000YK1	Clear	Polyester	2.25	57.2	100.0	30.5	1
T425X000YK1			4.25	107.9			

Order number of labels required in multiples of Standard Package Quantity.

Super-Tack Polyester Arc Flash Labels

- Provide employees with the highest degree of safety through proper identification and communication
- Detailed formats compliant with NFPA 70E standard for Arc Flash labeling
- Clearly visible and recognizable hazard information to communicate arc flash hazards present
- Meets DIN 40050-9, IP69K for washdown applications
- Labels are constructed of durable polyester designed to withstand UV exposure, outdoor use, water and abrasion
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized; File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



C200X400A51



C200X400YZ1




C400X400A51



C400X400YZ1



C400X600A51



C400X600YX1



C400X600YZ1

Part Number	Width		Height		Part Description	Std. Pkg. Qty. (Roll)
	In.	mm	In	mm		
C200X400A51	2.00	50.8	4.00	101.6	Polyester safety label, WARNING header orange and black, 250 labels per roll.	1
C200X400YZ1					Polyester safety label, DANGER header red and white, 250 labels per roll.	
C400X400A51	4.00	101.6	6.00	152.4	Polyester safety label, WARNING header orange and black, 250 labels per roll.	
C400X400YZ1					Polyester safety label, DANGER header red and white, 250 labels per roll.	
C400X600A51			Polyester safety label, WARNING header orange and black, 100 labels per roll.			
C400X600YX1			Polyester safety label, orange header, 100 labels per roll.			
C400X600YZ1	Polyester safety label, DANGER header red and white, 100 labels per roll.					

Order number of labels required in multiples of Standard Package Quantity

Raised Panel Arc Flash Labels

- Super-Tack adhesive provides strong holding power for rough, textured, and powered-coated surfaces
- Meet ASTM G154 for outdoor durability (simulating 20 years of UV resistance under normal conditions but not all outdoor exposures)
- Meet ASTM D3389 standard for abrasion resistance, and also meets solar application standards
- Meets DIN 40050-9, IP69K for washdown applications
- Use thermal transfer resin ribbon
- Temperature Range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14979, cUL recognized, C22.2 No. 0.15.01, File # MH 14979



C400X400AOT



C400X400ANT

Part Number	Color	Width		Height		Part Description	Std. Pkg. Qty. (Roll)
		In.	mm	In	mm		
C400X400ANT	Orange	4.00	101.6	4.00	101.6	Raised Panel Safety Label, WARNING header, White and Orange/Black	1
C400X400AOT	Red						
	White					Raised Panel Safety Label, DANGER header, White and Red/Black	

Order number of labels required in multiples of Standard Package Quantity

Contact Technical Support at 866.871.4571.

Super-Tack Polyester Arc Flash Continuous Tapes



T400X000YX1



T400X000A91

Part Number	Width		Height		Part Description	Std. Pkg. Qty. (Roll)
	In.	mm	Ft	M		
T400X000YX1	4.00	101.6	50.0	15.2	Polyester arc flash continuous tape, orange header.	1
T400X000A91					Polyester arc flash continuous tape, red header.	

Order number of labels required in multiples of Standard Package Quantity

Super-Tack Polyester Facility Identification Labels

- Facility Identification created quickly to comply with workplace safety regulations contributing to the protection of employees and equipment from unexpected hazards
- Meets DIN 40050-9, IP69K for washdown applications
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized; File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



C400X600A41



C400X600A61



C400X600AX1



C400X600AY1



C400X600AZ1



C400X600Y81

Part Number	Width		Height		Part Description	Labels Per Row	Std. Pkg. Qty. (Roll)
	In.	mm	In	mm			
C400X600A41	4.00	101.6	6.00	152.4	Polyester safety label, DANGER header, red and black/white, 100 labels per roll.	1	1
C400X600A61					Polyester safety label, CAUTION header, yellow/black, 100 labels per roll.		
C400X600AX1					Polyester safety label, NOTICE header, blue/white, 100 labels per roll.		
C400X600AY1					Polyester safety label, SAFETY FIRST header, green/ white, 100 labels per roll.		
C400X600AZ1					Polyester safety label, yellow header, 100 labels per roll.		
C400X600Y81					Polyester safety label, yellow, 100 labels per roll.		

Order number of labels required in multiples of Standard Package Quantity

Polyester Photoluminescent Tapes

- Used to mark egress routes, fire alarms, and fire equipment
- Clearly visible for up to ten hours after power is lost
- Absorbs energy from ambient light and releases this energy in the form of a glow when power is lost
- Can be over-laminated to increase durability (see page 28)
- Use thermal transfer resin ribbon
- Temperature range: 40°F to 230°F (4.4°C to 110°C)
- UL969 recognized, File # MH14979



Normal Lighting



Blackout

Part Number	Color	Width		Length		Std. Pkg. Qty. (Roll)
		In.	mm	Ft	M	
T200X000Y2T	Photoluminescent	2.00	50.8	15.0	4.5	1
T400X000Y2T		4.00	101.6			

Order number of labels required in multiples of Standard Package Quantity

Raised Panel Solar Labels


- Print customized labels for solar applications
- Strong holding power for rough, textured, and coated surfaces
- Meet ASTM G154 for outdoor durability (simulating 20 years of UV resistance under normal conditions but not all outdoor exposures)
- Use thermal transfer resin ribbon
- Temperature Range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14979, cUL recognized, C22.2 No. 0.15.01, File # MH 14979



Part Number	Color	Width		Height		Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm		
C200X100AWT	Red	2.00	50.8	1.00	25.4	1	500
C300X250AWT		3.00	76.2	2.50	63.5		
C400X100AWT		4.00	101.6	1.00	25.4		

Order number of labels required in multiples of Standard Package Quantity

Super-Tack Polyester Solar Labels



- Solar Labels are designed to meet required safety standards for PV installation labeling.
- Certain labels leave blank spaces where variable thermal transfer printing can be added when specific on-site power and series data is required.
- Meets DIN 40050-9, IP69K for washdown applications
- This product solution has an optional clear over-laminate to function in harsh environments.

- All labels are outdoor rated and are designed to have high resistance to direct UV exposure.
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 180°F (-40°C to 82°C)
- UL969 recognized; File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979

Part Number	Color	Width		Height		Application	Legend	Std. Pkg. Qty. (Roll)	
		In.	mm	In.	mm				
C400X200SP1-AD	White on Red	4.00	101.6	2.00	50.8	AC Disconnect	VOLTAGE AND CURRENT RATINGS	50	
C400X400SP1-ASM				4.00	101.6	AC Photovoltaic Module			VOLTAGE CURRENT AND POWER RATINGS
C400X400SP1-DD						DC Disconnect			VOLTAGE AND CURRENT RATINGS
C400X400SP1-DSM						DC Photovoltaic Module			VOLTAGE CURRENT AND POWER RATINGS
C400X400SP1-PS						Photovoltaic Power Source			VOLTAGE AND CURRENT RANTINGS
C600X175SP1-AD	6.00	152.4	1.75	44.5	AC Disconnect		PHOTOVOLTAIC - AC DISCONNECT		
C600X175SP1-DD					DC Disconnect		PHOTOVOLTAIC - DC DISCONNECT		

Order number of labels required in multiples of Standard Package Quantity

Over-Laminate Labels

Part Number	Color	Width		Height		Application	Std. Pkg. Qty.
		In.	mm	In.	mm		
C300X150SL1-OL	Clear	1.50	38.1	3.00	76.2	Additional Abrasion and UV Protection	250
C400X200SL1-OL		2.00	50.8	4.00	101.6	Additional Abrasion and UV Protection	
C400X400SL1-OL		4.00	101.6			Additional Abrasion and UV Protection	
C600X175SL1-OL		1.75	44.5	6.00	152.4	Additional Abrasion and UV Protection	

Order number of labels required in multiples of Standard Package Quantity

Reflective Continuous Tapes for Solar Applications



- Used for illuminating or highlighting a range of objects
- Conformable material for flat applications and safety and facility identification
- Use thermal transfer resin ribbon

- Temperature Range: -40°F to 180°F (-40°C to 82°C)
- UL969 recognized, File # MH14979, cUL recognized, C22.2 No. 0.15.01, File # MH 14979

Part Number	Color	Material	Width		Height		Std. Pkg. Qty. (Roll)
			In.	mm	Ft.	M	
T400X000RW1	Red	Polyester	4.00	101.6	50.0	15.2	1

Order number of labels required in multiples of Standard Package Quantity

NEW! Easy-Mark Plus™ Labeling Software

PATENTED

- Powerful, easy-to-use, and affordable software that provides innovative features and functionality to address unique labeling needs
- Quickly create simple or complex labels with text boxes, lines, frames, or tables, and other useful tools
- Design detailed labels with multiple zones and objects for applications such as rating plates, arc flash labels, and fiber optic enclosures
- Simple user interface shows labels on the screen as they will be printed
- Create and print labels using QR codes, or any of the other 21 included barcode symbologies
- Upgrades available at <http://www.panduit.com/emp>

System Requirements:

- 300 MB hard drive space and 2 GB Memory
- Windows XP, Vista, 7, 8, 8.1 or 10
- 32 or 64 bit operating systems
- Microsoft.NET Framework 2.0 or higher
- Mouse or compatible pointing device
- Keyboard
- Optical Disc Drive or USB Port



Part Number	Description	Std Pkg. Qty	Std. Ctn. Qty.
EMPLUS-CD	Easy-Mark Plus™ Labeling Software, CD-ROM.	1	10
EMPLUS-DL	Easy-Mark Plus™ Labeling Software, online download.		
EMPLUS-2GO	Easy-Mark Plus™ Portable Application, USB flash drive.		
EMPLUS-SERVER	Easy-Mark Plus™ Labeling Software, networkable server based version.		

^Windows is a registered trademark of Microsoft Corp. in the United States and/or other countries.

CAD-Connect™ Labeling Software

- Facilitates quick and easy organization of identifiers from CAD for printing within Easy-Mark Plus™ Labeling Software
- Easily captures and organizes CAD data for future use and documentation
- Saves time and reduces errors by utilizing identifiers previously created in CAD files to eliminate manual entry of data into labeling software
- Compatible with full versions of AutoCAD* 2002 to 2017 and Visio version 2002 or newer
- Exports to alternative formats such as Excel^ (XLS) or Text (CSV) files for future use and documentation
- Upgrades available at www.panduit.com

System Requirements:

- 64 MB hard drive space and 64 MB RAM (256 MB RAM recommended)
- Windows 2000, XP, Vista, 7, 8, 8.1 or 10
- 32 or 64 bit operating systems
- Microsoft.NET Framework 2.0 or higher
- Mouse or compatible pointing device
- Keyboard
- Optical Disc Drive



Part Number	Color	Std Pkg. Qty	Std. Ctn. Qty.
PROG-CCCD	CAD-Connect™ Labeling Software, including Easy-Mark Plus™ Labeling Software, CD-ROM.	1	10

^Visio, Windows and EXCEL are registered trademarks of Microsoft Corp. in the United States and/or other countries.

*AutoCAD is a registered trademark of Autodesk, Inc.

TDP43ME Desktop Printer and Accessories

- Creates durable, crisp, clear legends and graphics that offer superior legibility
- Prints durable legends for harsh industrial environments
- Fine resolution for small type characters and images
- Easy-Mark Plus™ Labeling Software included with printer
- Up to 4 inches per second print speed
- Auto-sensing label gap and black mark sensors
- One-button operation, and automatic self test
- Connects quickly and easily to PC, and offers connectivity flexibility to print by USB, parallel serial, or Ethernet
- Easy ribbon loading reduces printer down time
- Able to connect to a network for sharing capability
- UL60950 listed, File # E165747



Part Number	Part Description	Std. Pkg. Qty.
TDP43ME	300 dpi printer; includes printer, Panduit® Easy-Mark Plus™ Labeling Software, RMEH4BL black hybrid ribbon, AC power adapter with US power cord, USB cable, user manual, quick start card, and driver disk; for use in North America.	1
TDP43ME/E	300 dpi printer; includes printer, Panduit® Easy-Mark Plus™ Labeling Software, RMEH4BL black hybrid ribbon, EuroPlug cord, USB cable, user manual, quick start card, and driver disk; for use outside North America.	
TDP43ME-KIT	TDP43ME printer kit. Includes: printer, Panduit® Easy-Mark Plus™ Labeling Software, RMEH4BL black hybrid ribbon, AC power adapter with US power cord, USB cable, user manual, quick start card, TDP43ME-RS Roll Stand, TDP43ME-CASE, one roll of S100X150VATY labels, and driver disk; for use in North America.	
TDP43ME/E-KIT	TDP43ME/E printer kit. Includes: printer, Panduit® Easy-Mark Plus™ Labeling Software, RMEH4BL black hybrid ribbon, AC power adapter with EuroPlug cord, USB cable, user manual, quick start card, TDP43ME-RS Roll Stand, TDP43ME-CASE, one roll of S100X150VATY labels, and driver disk; for use outside North America.	
TDP43ME-AC	Replacement AC power adapter with power cord (US cord only).	
TDP43ME-CASE	Hardside carrying case accommodates printer, AC power adapter, ribbons, printer cable, external roll stand, labels, and tools.	
TDP43ME-CUTTER	Optional power/automatic cutter for TDP43ME thermal transfer desktop printer; easy to install for automatic cutting of labels.	
TDP43ME-RS	External label roll stand for TDP43ME printer; used to rear feed labels that are supplied on 3" cores.	
TDP43ME-SPINDLE	Replacement ribbon spindle for TDP43ME Thermal Transfer Desktop Printer, Package of Two Spools.	
TDP43ME-TB-KIT	Terminal block marker adapter kit.	
PTR-CLN	Printer cleaning kit – contains (1) cleaning pen, (8) cleaning solution soaked wipes, (8) foam swabs pre-saturated with cleaning solution, MSDS, and cleaning instructions.	

TDP43ME Desktop Printer Ribbons

Part Number	Part Description	Width		Length		Std. Pkg. Qty.
		In.	mm	Ft.	m	
RMER1BL	Black resin thermal transfer ribbon. Use with terminal block markers.	1.1	27.9			1
RMEH4BL*	Black hybrid thermal transfer ribbon. Use with heat shrink, self-laminating, Turn-Tell®, tan polyimide labels, and vinyl cloth labels.					
RMER4BL*A	Black resin thermal transfer ribbon. Use with polyester labels, continuous vinyl tape, marker plates, and raised panel labels.	4.25	108.0	300.0	91.4	
RMER4BL-A	Black resin thermal transfer ribbon. Use with high-temperature marker plates.					
RMER4BL-C	Black resin thermal transfer ribbon. Use with fluid-resistant heat shrink labels and white polyimide labels.					

Order number of ribbons required in multiples of Standard Package Quantity.

*For 2.5" wide ribbons, replace 4 in part number with 2. For example, the part number of a 2.5" wide black hybrid thermal transfer ribbon is RMEH2BL.

^Other colors available, change "BL" to: BU for Blue, GR for Green, RD for Red, or WH for White (Example: RMER4BU = Blue Resin Ribbon).

TDP43HE and TDP46HE Desktop Printers and Accessories

- Convenient, easy setup; quickly begin producing labels
- Durable, clear communication through superior legibility
- Print small, fine characters and high-quality images and bar codes
- Allow continuous use in construction, industrial, and harsh environments
- Reduce time required to switch between label styles
- Fast label production without sacrificing print quality
- Easy-Mark Plus™ Labeling Software included with printer
- Up to 8 inches per second print speed
- Connect quickly and easily to PC, and offers connectivity flexibility to print by USB, parallel, Ethernet or serial
- Available with 300 or 600 dots per inch print resolution
- Able to connect to a network for sharing capability
- UL60950 listed, File # E165747



Part Number	Part Description	Std. Pkg. Qty.
TDP43HE	300 dpi printer; includes printer, Panduit® Easy-Mark Plus™ Labeling Software, RHEH4BL black hybrid ribbon, USB cable, user manual, quick start card, driver disk and US power cord; for use in North America.	1
TDP43HE/E	300 dpi printer; includes printer, Panduit® Easy-Mark Plus™ Labeling Software, RHEH4BL black hybrid ribbon, USB cable, user manual, quick start card, driver disk, and the following power cords: EuroPlug, Swiss, UK, and Japan JIS 8303 3-pin; for use outside North America.	
TDP46HE	600 dpi printer; includes printer, Panduit® Easy-Mark Plus™ Labeling Software, RHEH4BL black hybrid ribbon, USB cable, user manual, quick start card, driver disk, and US power cord; for use in North America.	
TDP46HE/E	600 dpi printer; includes printer, Panduit® Easy-Mark Plus™ Labeling Software, RHEH4BL black hybrid ribbon, USB cable, user manual, quick start card, driver disk, and the following power cords: Europlug, Swiss, UK, and Japan JIS 8303 3-pin; for use outside North America.	
PTR-CLN	Printer cleaning kit – contains (1) cleaning pen, (8) cleaning solution soaked wipes, (8) foam swabs pre-saturated with cleaning solution, MSDS, and cleaning instructions.	

TDP43HE and TDP46HE Desktop Printer Ribbons

Part Number	Part Description	Width		Length		Std. Pkg. Qty.
		In.	mm	Ft.	m	
RHEH4BL	Black hybrid thermal transfer ribbon. Use with heat shrink, self-laminating, Turn-Tell®, and vinyl cloth and tan polyimide labels.	4.33	110.0	1181.0	363.0	1
RHER4BL	Black resin thermal transfer ribbon. Use with polyester labels, continuous vinyl tape, marker plates, and raised panel labels.					
RHER4WH	White resin thermal transfer ribbon. Use with polyester labels, continuous vinyl tape, marker plates, and raised panel labels.					
RHER4BL-A	Black resin thermal transfer ribbon. Use with high-temperature marker plates.	4.33	110.0	1345.0	410.0	
RHER4BL-C	Black resin thermal transfer ribbon. Use with fluid resistant heat shrink markers and white polyimide labels.					
RHER4BL-E	Black resin thermal transfer ribbon. Used with standard marker plates and component labels for extra durability for harsh environments.					

Order number of ribbons required in multiples of Standard Package Quantity.



PANDUIT®

Panduit Corp.
World Headquarters
Tinley Park, IL 60487

cs@panduit.com
US and Canada: 800.777.3300
Europe, Middle East, and Africa:
44.20.8601.7200
Latin America: 52.33.3777.6000
Asia Pacific: 65.6305.7575

www.panduit.com

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru