


## GV2RT07

TeSys GV2 Manual Starter and Protector, thermal magnetic circuit protector, toggle switch, 1.6...2.5 A, screw clamp terminals

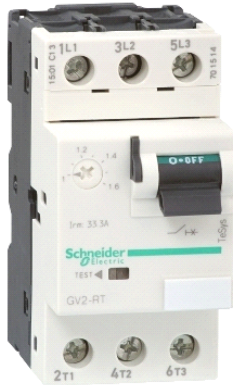

### Main

|                           |                      |
|---------------------------|----------------------|
| Range                     | TeSys                |
| Product name              | TeSys GV2            |
| Device short name         | GV2RT                |
| Product or component type | Circuit breaker      |
| Device application        | Motor<br>Transformer |
| Trip unit technology      | Thermal-magnetic     |

### Complementary

|   |  |
|---|--|
| Poles description                           | 3P   |
| Network type                                | AC   |
| Utilisation category                        | AC-3 conforming to IEC 60947-4-1<br>Category A conforming to IEC 60947-2   |
| Network frequency                           | 50/60 Hz conforming to IEC 60947-4-1   |
| Fixing mode                                 | Clipped on 35 mm symmetrical DIN rail<br>Screwed on panel (with adaptor plate)   |
| Operating position                          | Any position   |
| Motor power kW                              | 0.37 kW at 220/230 V AC 50/60 Hz (motor protection high peak current)<br>0.75 kW at 400/415 V AC 50/60 Hz (motor protection high peak current)<br>0.75 kW at 440 V AC 50/60 Hz (motor protection high peak current)<br>1.1 kW at 440 V AC 50/60 Hz (motor protection high peak current)<br>1.1 kW at 500 V AC 50/60 Hz (motor protection high peak current)<br>1.5 kW at 690 V AC 50/60 Hz (motor protection high peak current)<br>0.63 kW at 230/240 V AC 50/60 Hz (transformer protection)<br>1 kW at 400/415 V AC 50/60 Hz (transformer protection)<br>1.6 kW at 500 V AC 50/60 Hz (transformer protection)<br>1.6 kW at 690 V AC 50/60 Hz (transformer protection)<br>2 kW at 690 V AC 50/60 Hz (transformer protection) |
| Breaking capacity                           | 3 kA Icu at 690 V AC 50/60 Hz conforming to IEC 60947-2<br>100 kA Icu at 500 V AC 50/60 Hz conforming to IEC 60947-2<br>100 kA Icu at 400/415 V AC 50/60 Hz conforming to IEC 60947-2<br>100 kA Icu at 440 V AC 50/60 Hz conforming to IEC 60947-2<br>100 kA Icu at 220/230 V AC 50/60 Hz conforming to IEC 60947-2  |
| Control type                                | Toggle   |
| [In] rated current                          | 2.5 A  |
| Trip unit rating                            | 1.6...2.5 A  |
| Magnetic tripping current                   | 51 A   |
| System Voltage                              | 690 V AC 50/60 Hz conforming to IEC 60947-2  |
| [Ui] rated insulation voltage               | 690 V AC 50/60 Hz conforming to IEC 60947-2  |
| [Ith] conventional free air thermal current | 2.5 A conforming to IEC 60947-4-1  |
| [Uimp] rated impulse withstand voltage      | 6 kV conforming to IEC 60947-2   |
| Power dissipation per pole                  | 2.5 W  |
| Mechanical durability                       | 100000 cycles  |
| Electrical durability                       | 100000 cycles AC-3 at 440 V  |
| Operating rate                              | 25 cyc/h   |
| Rated duty                                  | Continuous conforming to IEC 60947-4-1   |
| Connections - terminals                     | Screw clamp terminals 2 cable(s) 1...6 mm <sup>2</sup> solid<br>Screw clamp terminals 2 cable(s) 1.5...6 mm <sup>2</sup> flexible without cable end  |

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

|                           |  |
|---------------------------|--|
|                           | Screw clamp terminals 2 cable(s) 1...4 mm <sup>2</sup> flexible with cable end |
| Tightening torque         | 1.7 N.m on screw clamp terminals   |
| Suitability for isolation | Yes conforming to IEC 60947-1  |
| Phase failure sensitivity | Yes conforming to IEC 60947-4-1  |
| Height                    | 3.5 in (89 mm)   |
| Width                     | 1.77 in (45 mm)  |
| Depth                     | 3.09 in (78.5 mm)  |

## Environment


|                                       |   |
|---------------------------------------|---|
| standards                             | EN 60204<br>IEC 60947-1<br>IEC 60947-2<br>IEC 60947-4-1<br>NF C 63-120<br>NF C 63-650<br>NF C 79-130<br>UL 508<br>VDE 0113<br>VDE 0660<br>CSA C22.2 |
| product certifications                | CCC<br>CSA<br>UL<br>EAC   |
| protective treatment                  | TH  |
| IP degree of protection               | IP20 conforming to IEC 60529  |
| IK degree of protection               | IK04  |
| ambient air temperature for operation | -4...140 °F (-20...60 °C)   |
| ambient air temperature for storage   | -40...176 °F (-40...80 °C)  |
| fire resistance                       | 1760 °F (960 °C) conforming to IEC 60695-2-1  |
| operating altitude                    | 6561.68 ft (2000 m)   |

## Offer Sustainability

|  |  |
|--|--|
| Green Premium product  | Green Premium product  |
| Compliant - since 0631 - Schneider Electric declaration of conformity                          | Compliant - since 0631 - Schneider Electric declaration of conformity                          |
| Reference contains SVHC above the threshold - go to CaP for more details                       | Reference contains SVHC above the threshold  |
| Available  | Available  |
| Need no specific recycling operations  | Need no specific recycling operations  |
| WARNING: This product can expose you to chemicals including:                                   | WARNING: This product can expose you to chemicals including:                                   |
| Antimony oxide & Antimony trioxide, which is known to the State of California to cause cancer. | Antimony oxide & Antimony trioxide, which is known to the State of California to cause cancer. |
| For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>  | For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>  |

## GV2RT


### Dimensions

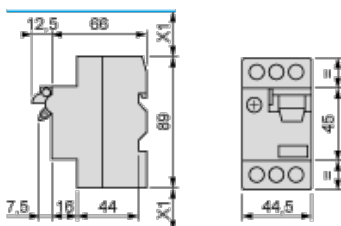


X1: Electrical clearance = 40 mm for Ue < 690 V

### Mounting

Mounting of external operator GV2AP03

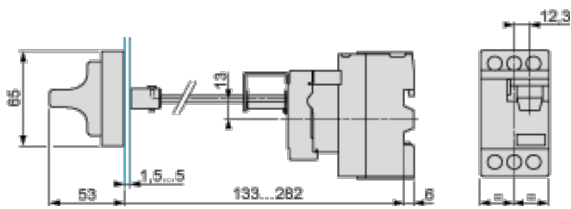


On 35 mm rail

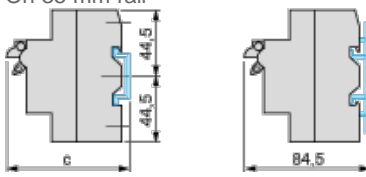

c = 80 on AM1 DP200 (35 x 7.5)


c = 88 on AM1 DE200, ED200 (35 x 15)

On panel with adapter plate GV2AF02




On pre-slotted plate AM1 PA


AF1 EA4



On rails DZ5 MB



GV2ME•• and GV2RT



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренеспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)