

Silicon PIN Photodiode with Daylight Blocking Filter

Version 1.4

BP 104 F



Features:

- Especially suitable for applications of 950 nm
- Short switching time (typ. 20 ns)
- DIL plastic package with high packing density
- The product qualification test plan is based on the guidelines of AEC-Q101-REV-C, Stress Test Qualification for Automotive Grade Discrete Semiconductors.

Applications

- Photointerrupters
- Remote control

Ordering Information

| Type: | Photocurrent I_P [μA] $\lambda = 950 \text{ nm}$, $E_e = 1 \text{ mW/cm}^2$, $V_R = 5 \text{ V}$ | Ordering Code |
|----------|--|---------------|
| BP 104 F | 34 (≥ 25) | Q62702P0084 |

Maximum Ratings ($T_A = 25^\circ\text{C}$)

| Parameter | Symbol | Values | Unit |
|---|---------------------------------|-------------|------|
| Operating and storage temperature range | $T_{\text{op}}; T_{\text{stg}}$ | -40 ... 100 | °C |
| Reverse voltage | V_R | 20 | V |
| Total Power dissipation | P_{tot} | 150 | mW |
| ESD withstand voltage (acc. to ANSI/ ESDA/ JEDEC JS-001 - HBM) | V_{ESD} | 2000 | V |

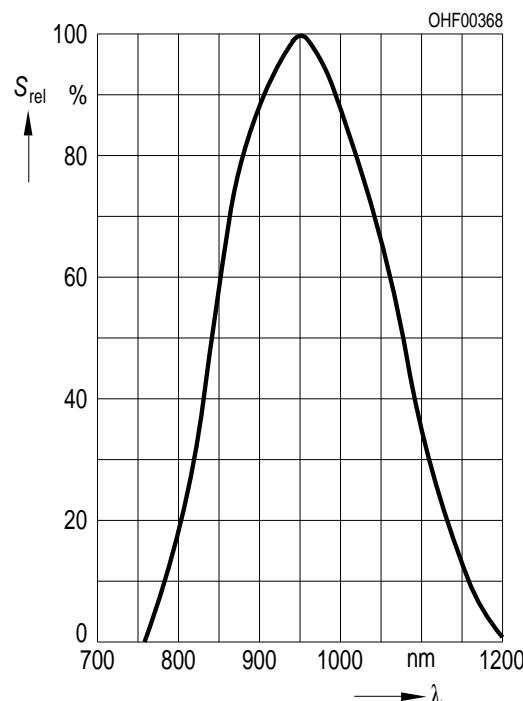
Characteristics ($T_A = 25^\circ\text{C}$)

| Parameter | Symbol | Values | Unit |
|---|---------------------------|--------------------|-------------------|
| Photocurrent ($V_R = 5 \text{ V}, E_e = 1 \text{ mW/cm}^2, \lambda = 950 \text{ nm}$) | I_P | 34 (≥ 25) | µA |
| Wavelength of max. sensitivity | $\lambda_{S \text{ max}}$ | 950 | nm |
| Spectral range of sensitivity | $\lambda_{10\%}$ | (typ) 800 ... 1100 | nm |
| Radiant sensitive area | A | 4.84 | mm ² |
| Dimensions of radiant sensitive area | L x W | 2.2 x 2.2 | mm x mm |
| Half angle | Φ | ± 60 | ° |
| Dark current ($V_R = 10 \text{ V}$) | I_R | 2 (≤ 30) | nA |
| Spectral sensitivity of the chip ($\lambda = 950 \text{ nm}$) | $S_{\lambda \text{ typ}}$ | 0.7 | A / W |
| Quantum yield of the chip ($\lambda = 950 \text{ nm}$) | η | 0.91 | Electrons /Photon |
| Open-circuit voltage ($E_e = 0.5 \text{ mW/cm}^2, \lambda = 950 \text{ nm}$) | V_O | 330 (≥ 250) | mV |
| Short-circuit current ($E_e = 0.5 \text{ mW/cm}^2, \lambda = 950 \text{ nm}$) | I_{SC} | 17 | µA |
| Rise and fall time ($V_R = 5 \text{ V}, R_L = 50 \Omega, \lambda = 850 \text{ nm}, I_p = 800 \mu\text{A}$) | t_r, t_f | 0.02 | µs |
| Forward voltage ($I_F = 100\text{mA}, E_e = 0$) | V_F | 1.3 | V |
| Capacitance ($V_R = 0 \text{ V}, f = 1 \text{ MHz}, E = 0$) | C_0 | 48 | pF |
| Temperature coefficient of V_O | TC _V | -2.6 | mV / K |

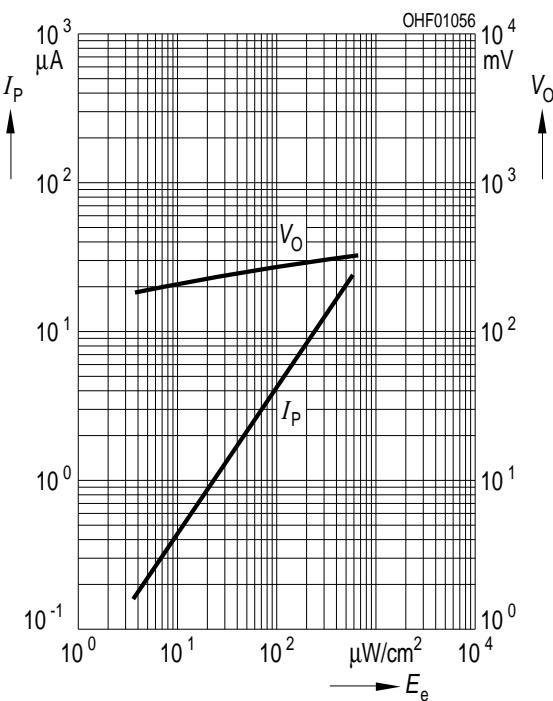
| Parameter | | Symbol | Values | Unit |
|---|-------|--------|--------|----------------------|
| Temperature coefficient of I_{SC} ($\lambda = 950 \text{ nm}$) | (typ) | TC_I | 0.18 | % / K |
| Noise equivalent power ($V_R = 10 \text{ V}$, $\lambda = 950 \text{ nm}$) | (typ) | NEP | 0.036 | pW / Hz $^{1/2}$ |
| Detection limit | (typ) | D^* | 6.1e12 | cm x Hz $^{1/2}$ / W |

Relative Spectral Sensitivity ¹⁾ page 8

$$S_{\text{rel}} = f(\lambda)$$

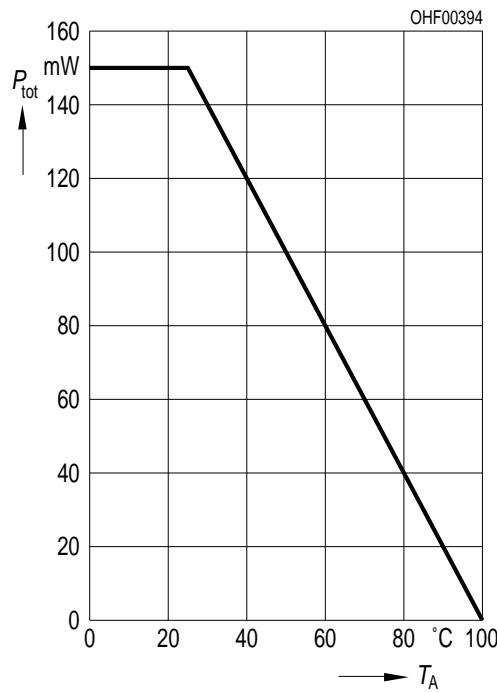
**Photocurrent / Open-Circuit Voltage** ¹⁾ page 8

$$I_P (V_R = 5 \text{ V}) / V_O = f(E_e)$$

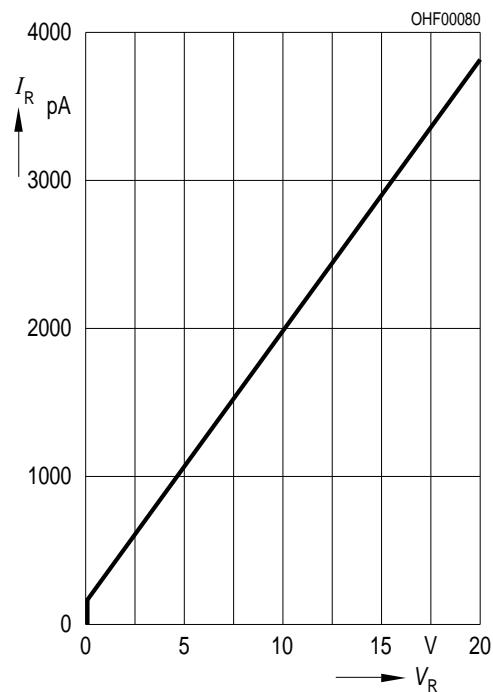


Power Consumption

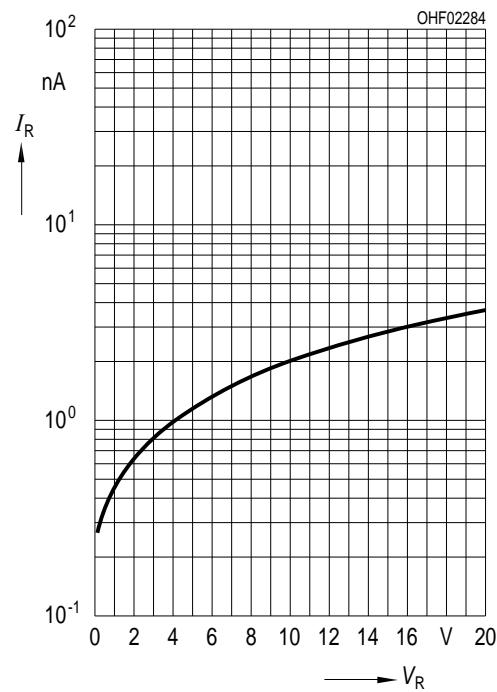
$$P_{\text{tot}} = f(T_A)$$

**Dark Current** ^{1) page 8}

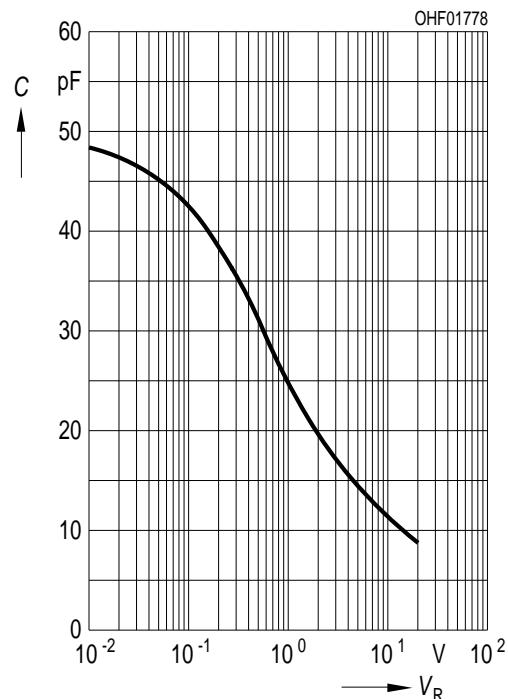
$$I_R = f(V_R), E = 0$$

**Dark Current** ^{1) page 8}

$$I_R = f(V_R), E = 0$$

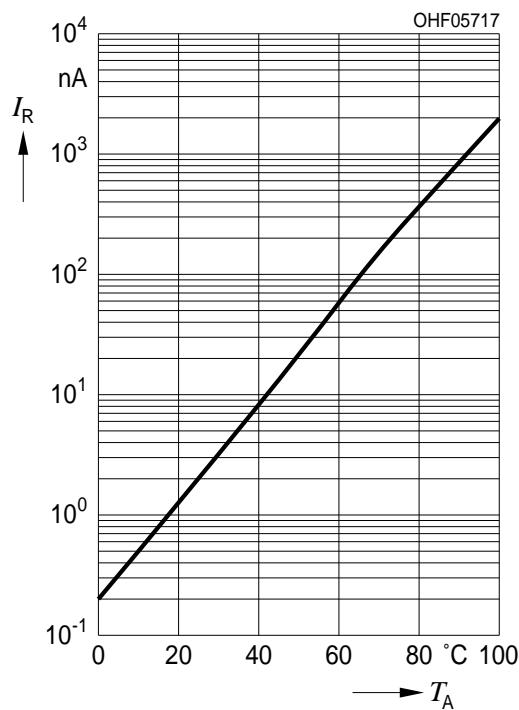
**Capacitance** ^{1) page 8}

$$C = f(V_R), f = 1 \text{ MHz}, E = 0$$

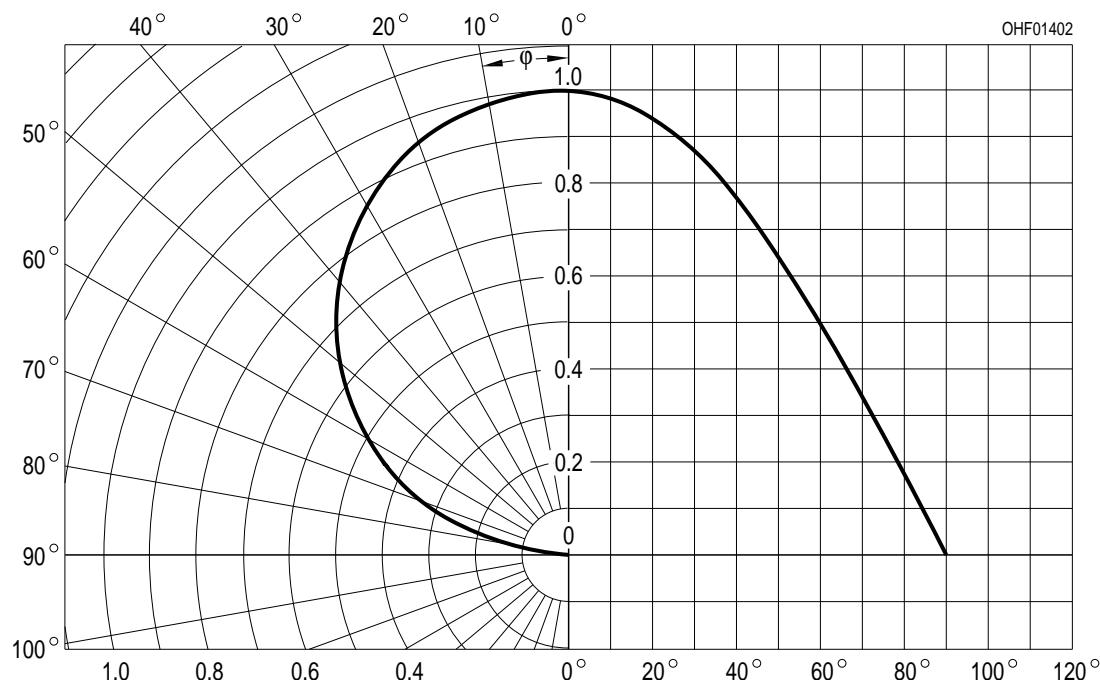


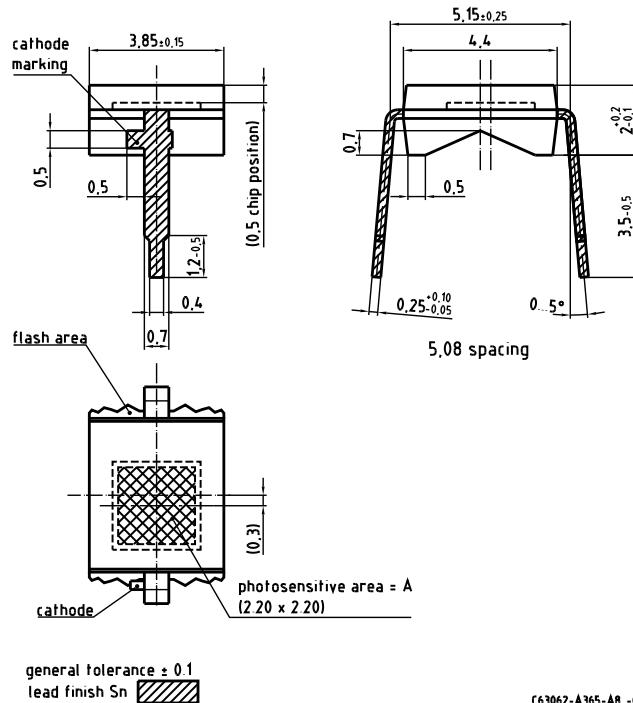
Dark Current ^{1) page 8}

$$I_R = f(T_A), V_R = 10 \text{ V}, E = 0$$

**Directional Characteristics** ^{1) page 8}

$$S_{\text{rel}} = f(\phi)$$



Package Outline

Dimensions in mm (inch).

Package

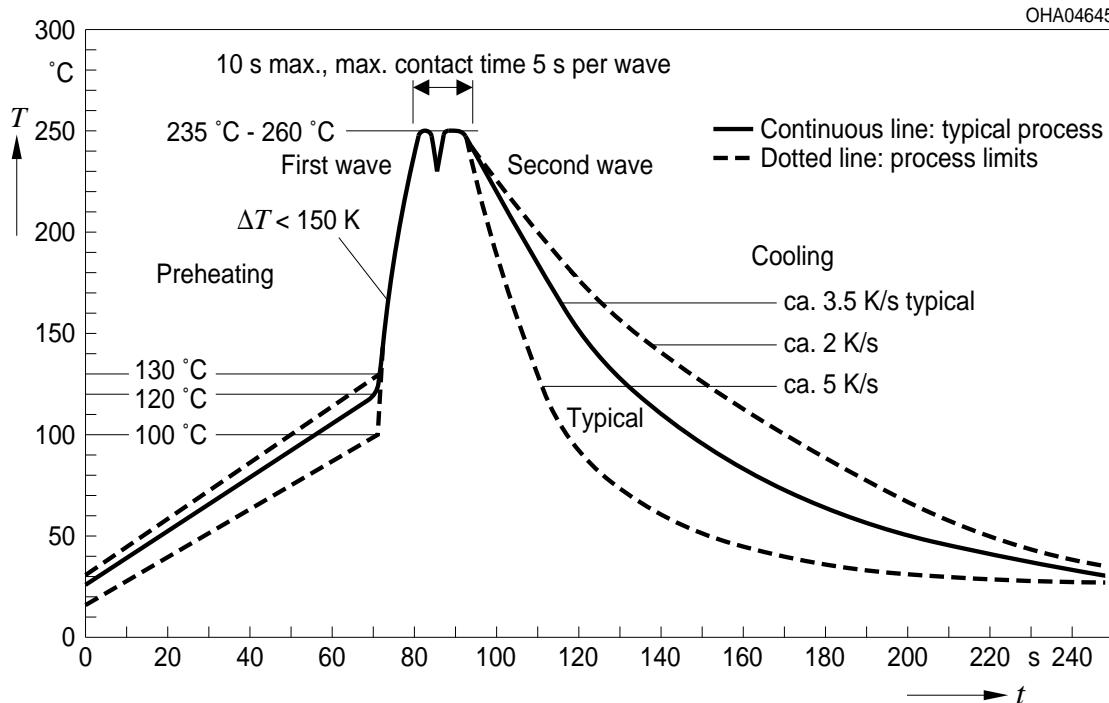
DIL, Epoxy

Approximate Weight:

72 mg

TTW Soldering

IEC-61760-1 TTW



Disclaimer

Language english will prevail in case of any discrepancies or deviations between the two language wordings.

Attention please!

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved. Due to technical requirements components may contain dangerous substances.

For information on the types in question please contact our Sales Organization.

If printed or downloaded, please find the latest version in the Internet.

Packing

Please use the recycling operators known to you. We can also help you – get in touch with your nearest sales office. By agreement we will take packing material back, if it is sorted. You must bear the costs of transport. For packing material that is returned to us unsorted or which we are not obliged to accept, we shall have to invoice you for any costs incurred.

Components used in life-support devices or systems must be expressly authorized for such purpose!

Critical components* may only be used in life-support devices** or systems with the express written approval of OSRAM OS.

*) A critical component is a component used in a life-support device or system whose failure can reasonably be expected to cause the failure of that life-support device or system, or to affect its safety or the effectiveness of that device or system.

**) Life support devices or systems are intended (a) to be implanted in the human body, or (b) to support and/or maintain and sustain human life. If they fail, it is reasonable to assume that the health and the life of the user may be endangered.

Glossary

- ¹⁾ **Typical Values:** Due to the special conditions of the manufacturing processes of LED, the typical data or calculated correlations of technical parameters can only reflect statistical figures. These do not necessarily correspond to the actual parameters of each single product, which could differ from the typical data and calculated correlations or the typical characteristic line. If requested, e.g. because of technical improvements, these typ. data will be changed without any further notice.

Published by OSRAM Opto Semiconductors GmbH
Leibnizstraße 4, D-93055 Regensburg
www.osram-os.com © All Rights Reserved.

EU RoHS and China RoHS compliant product



此产品符合欧盟 RoHS 指令的要求；

按照中国的相关法规和标准，不含有毒有害物质或元素。

ООО "ЛайфЭлектроникс"

"LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru