

LP100 series

Low profile miniature trackball

Distinctive features and specifications



- ☐ 1" ball diameter
- ☐ Panel mount design
- ☐ Available in black or backlit illumination
- ☐ Several protocol options
- ☐ Additional button strips available
- ☐ Environmental Protection Classification (IP Rating): contact factory

MECHANICAL

- Ball Diameter: 1.00" (25.40mm)
- Ball Rotation: Continuous in all directions
- Tracking Force: 15g (0.35oz)
- Weight: 33.5g (1.18oz)
- Life Cycle (ball rotations): 5 million
- Operating Temperature: -40°C to +85°C (-40°F to +185°F)

PROTOCOL OPTIONS AND ELECTRICAL SPECIFICATIONS

- USB: Input: 4.00V – 5.25V @ 25mA max
(+30mA for backlit illumination option)
Output: USB 1.1
- PS/2 (2/3BTN PS/2): Input: 5.00V @ 25mA max
(+30mA for backlit illumination option)
Output: CMOS/TTL
- Quadrature: Input: 5.00V @ 30mA max
(+30mA for backlit illumination option)
Output: Quadrature Waveforms


CONFIGURATION OPTIONS

- LED backlighting: Red, Blue, Green or Clear through a translucent Thermostat resin ball
- Additional pushbutton switch: Two, three or four* buttons (* USB only) – see Button Strips
- Connector cables
- Conformally coated PCB

MOUNTING OPTIONS



- 180° horizontal to 90° vertical – please specify when ordering.

NOTE: All values are nominal.

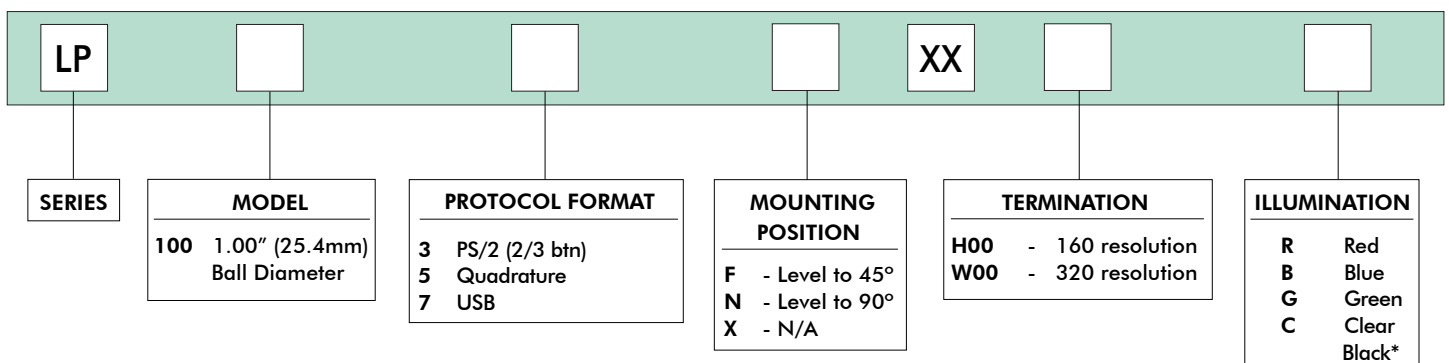


*Non-illuminated

Low profile miniature trackball

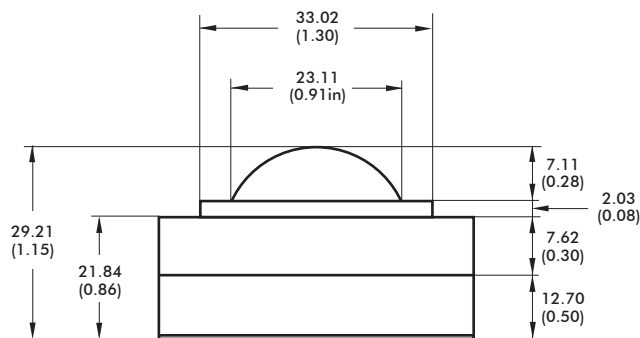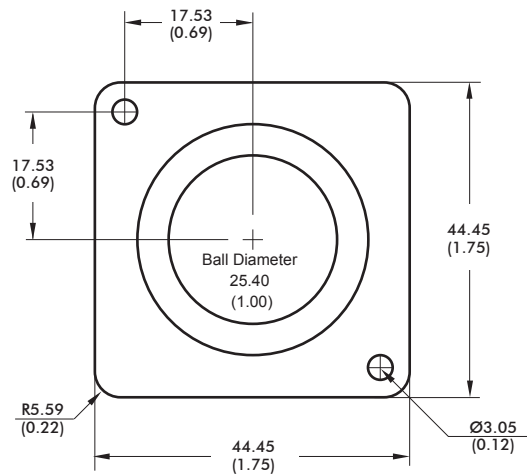


MOUNTING CUTOUT DIMENSIONS

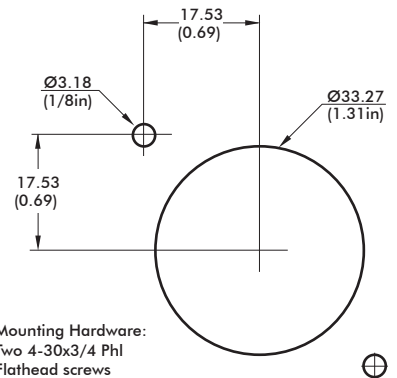

Mounting Hardware:
Two 4-30x3/4 Phl
Flathead screws

OTHER AVAILABLE PANEL
DIMENSIONS*

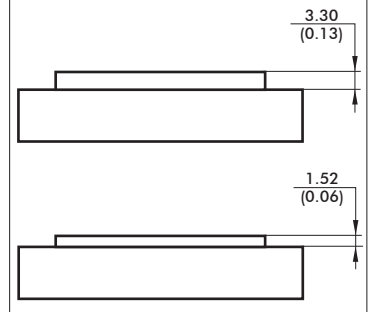


NOTES:

All dimensions are in mm/(inch).

* Please specify panel thickness with your order.

BUTTON STRIP FEATURES

- | | |
|--|--|
| <ul style="list-style-type: none"> • Two, three, or four* (*USB only) buttons • Tactile feedback • Normally open momentary contact switch | <ul style="list-style-type: none"> • 5 million lifecycles rating at 500mA at 12VDC • Black or gray button caps • Choice of convex or concave design |
|--|--|

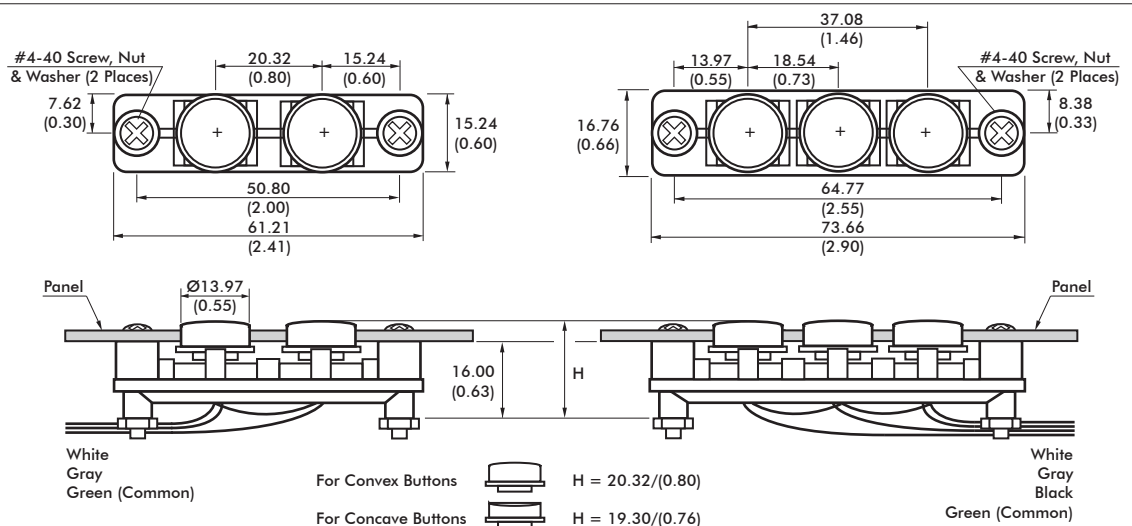

NOTE: All dimensions are in mm/(inch).

Note: The company reserves the right to change specifications without notice.

LP150 series

Low profile trackball

Distinctive features and specifications



- ☐ 1.5" ball diameter
- ☐ Panel mount design
- ☐ Available in black or backlit illumination
- ☐ Several protocol options
- ☐ Additional button strips available
- ☐ Environmental Protection Classification (IP Rating): contact factory

MECHANICAL

- Ball Diameter: 1.50" (38.10mm)
- Ball Rotation: Continuous in all directions
- Tracking Force: 10g (0.35oz)
- Weight: 118.5.5g (4.18oz)
- Life Cycle (ball rotations): 5 million
- Operating Temperature: -40°C to +85°C (-40°F to +185°F)

CONFIGURATION OPTIONS

- LED backlighting: Red, Blue, Green or Clear through a translucent Thermostat resin ball
- Additional pushbutton switch: Two, three or four* buttons (* USB only) – see Button Strips
- Connector cables
- Conformally coated PCB

PROTOCOL OPTIONS AND ELECTRICAL SPECIFICATIONS

- USB: Input: 4.00V – 5.25V @ 25mA max (+30mA for backlit illumination option)
Output: USB 1.1
- PS/2 (2/3BTN PS/2): Input: 5.00V @ 25mA max (+30mA for backlit illumination option)
Output: CMOS/TTL
- Microsoft Serial*: Input: DTR/RTS @ 14 mA max (+30mA for backlit illumination option)
Output: RS-232, Serial
- Quadrature: Input: 5.00V @ 30mA max (+30mA for backlit illumination option)
Output: Quadrature Waveforms
- Sun Workstation: Input: 5.00V @ 30mA max (+30mA for backlit illumination option)
(Mouse Systems Serial) Output: CMOS/TTL

MOUNTING OPTIONS

- 180° horizontal to 90° vertical – please specify when ordering.



NOTE: * = Microsoft Serial Interface requires a 5V supply for the LED backlighting option.
All values are nominal.

LP						
SERIES	MODEL	PROTOCOL FORMAT	MOUNTING POSITION	RESOLUTION	POWER REQUIREMENT	ILLUMINATION
150	1.50" Diameter (38.1mm)	1 Microsoft (2 btn Serial) 3 PS/2 (2/3 btn) 5 Quadrature 6 SUN Workstations 7 USB	F - Level to 45° N - Level to 90° X - N/A	10 - 120 resolution 20 - 240 resolution 30 - 480 resolution	V00 5V Regulated R00 RS-232* (DTR & RTS)	R Red B Blue G Green C Clear Black*

*Microsoft Protocol only *Non-illuminated


LP150 series

Low profile trackball

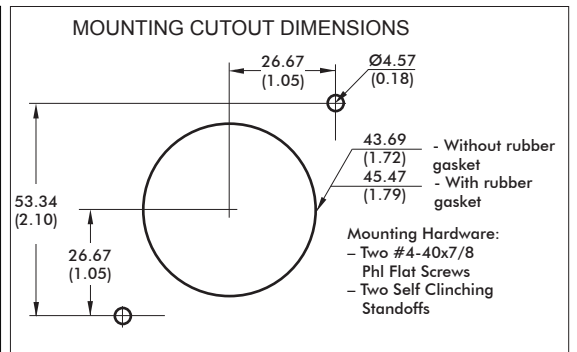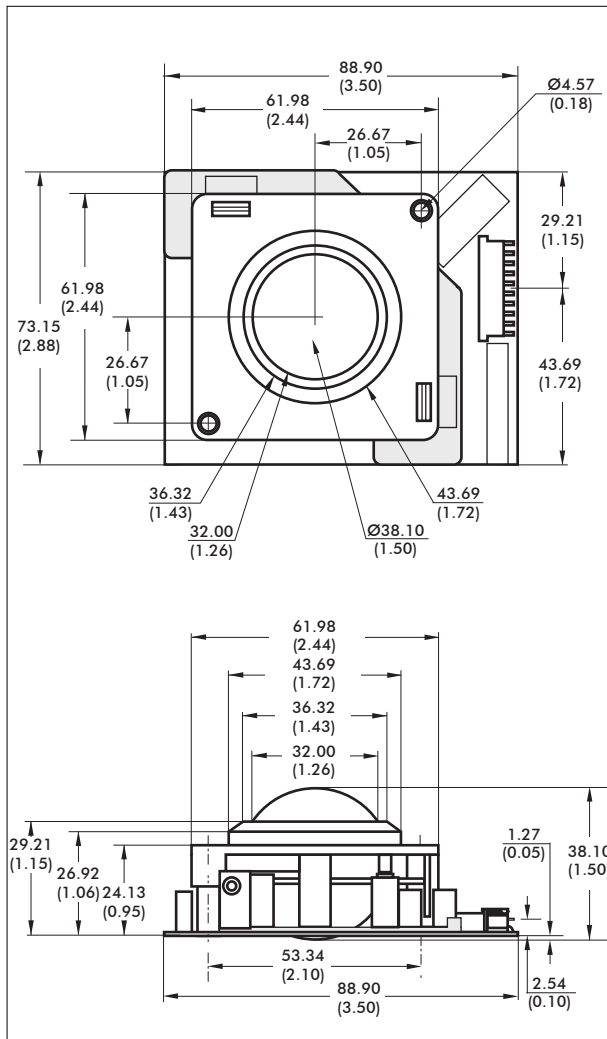

BUTTON STRIP FEATURES

- Two, three, or four* (*USB only) buttons
- Tactile feedback
- Normally open momentary contact switch
- 5 million lifecycles rating at 500mA at 12VDC
- Black or gray button caps
- Choice of convex or concave design

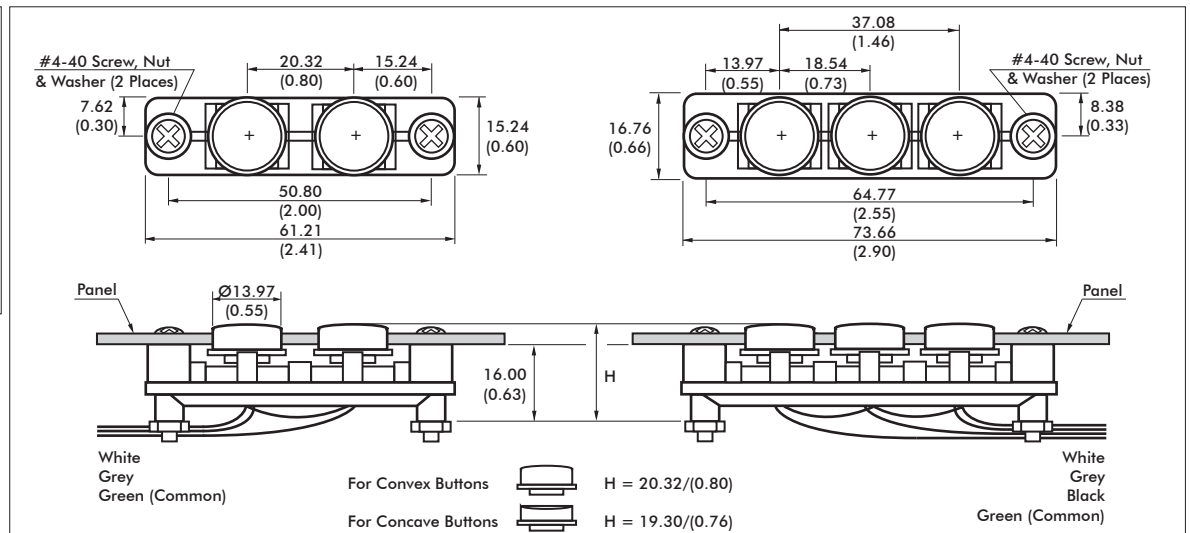

NOTE: All dimensions are in mm/(inch).

Note: The company reserves the right to change specifications without notice.

P200 series

Panel mount trackball

Distinctive features and specifications



- ☐ 2" ball diameter
- ☐ Panel mount design
- ☐ Available in black or backlit illumination
- ☐ Several protocol options
- ☐ Additional button strips available
- ☐ Environmental Protection Classification (IP Rating): contact factory

MECHANICAL	CONFIGURATION OPTIONS
- Ball Diameter: 2.00" (50.80mm) - Ball Rotation: Continuous in all directions - Tracking Force: 10g (0.35oz) - Weight: 257.5g (9.07oz) - Life Cycle (ball rotations): 5 million - Operating Temperature: -40°C to +85°C (-40°F to +185°F)	- LED backlighting: Red, Blue, Green or Clear through a translucent Thermostat resin ball - Additional pushbutton switch: Two, three or four* buttons (* USB only) – see Button Strips - Connector cables - Conformally coated PCB
PROTOCOL OPTIONS AND ELECTRICAL SPECIFICATIONS	MOUNTING OPTIONS
- USB: Input: 4.00V – 5.25V @ 25mA max (+30mA for backlit illumination option) Output: USB 1.1 - PS/2 (2/3BTN PS/2): Input: 5.00V @ 25mA max (+30mA for backlit illumination option) Output: CMOS/TTL - Microsoft Serial*: Input: DTR/RTS @ 14 mA max (+30mA for backlit illumination option) Output: RS-232, Serial - Quadrature: Input: 5.00V @ 30mA max (+30mA for backlit illumination option) Output: Quadrature Waveforms - Sun Workstation: Input: 5.00V @ 30mA max (Mouse Systems Serial) (+30mA for backlit illumination option) Output: CMOS/TTL	180° horizontal to 90° vertical – please specify when ordering.

NOTE: * = Microsoft Serial Interface requires a 5V supply for the LED backlighting option.
All values are nominal.

P						
Series	Model	Protocol Format	Mounting Position	Resolution	Power Requirement	Illumination
200	2.00" (50.8mm) Ball Diameter	1 Microsoft (2 btn Serial) 3 PS/2 (2/3 btn) 5 Quadrature 6 SUN Workstations 7 USB	F - Level to 45° N - Level to 90° X - N/A	10 - 160 resolution 20 - 320 resolution 30 - 640 resolution	V00 5V Regulated R00 RS-232* (DTR & RTS)	R Red B Blue G Green C Clear Black*

*Microsoft Protocol only

*Non-illuminated



Note: The company reserves the right to change specifications without notice.

APEM

www.apem.com


P200 series

Low profile trackball

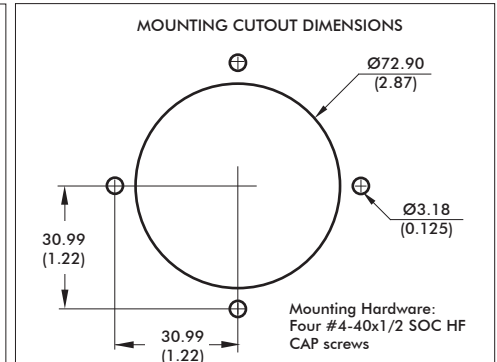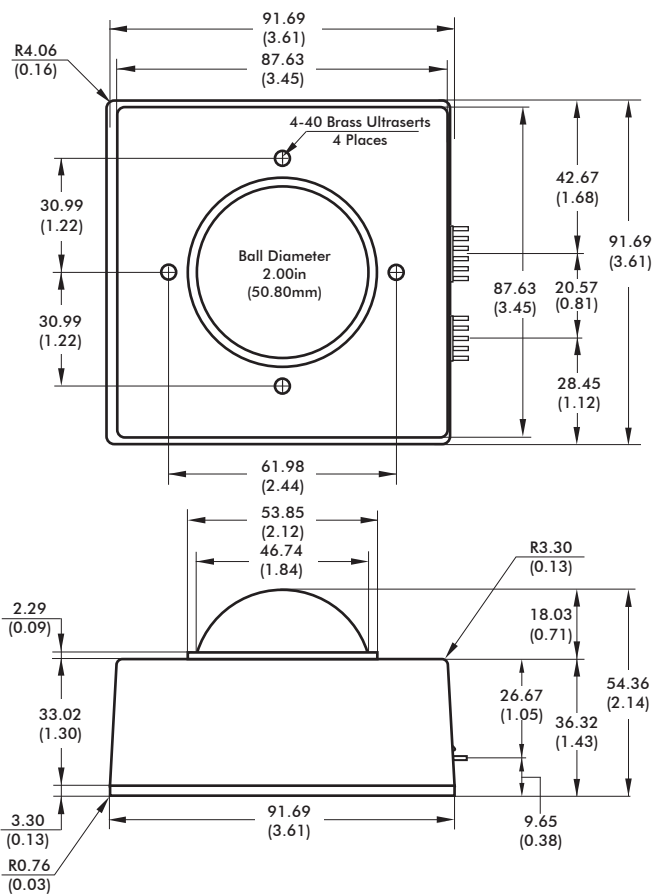

BUTTON STRIP FEATURES

- | | |
|--|--|
| <ul style="list-style-type: none"> • Two, three, or four* (*USB only) buttons • Tactile feedback • Normally open momentary contact switch | <ul style="list-style-type: none"> • 5 million lifecycles rating at 500mA at 12VDC • Black or gray button caps • Choice of convex or concave design |
|--|--|

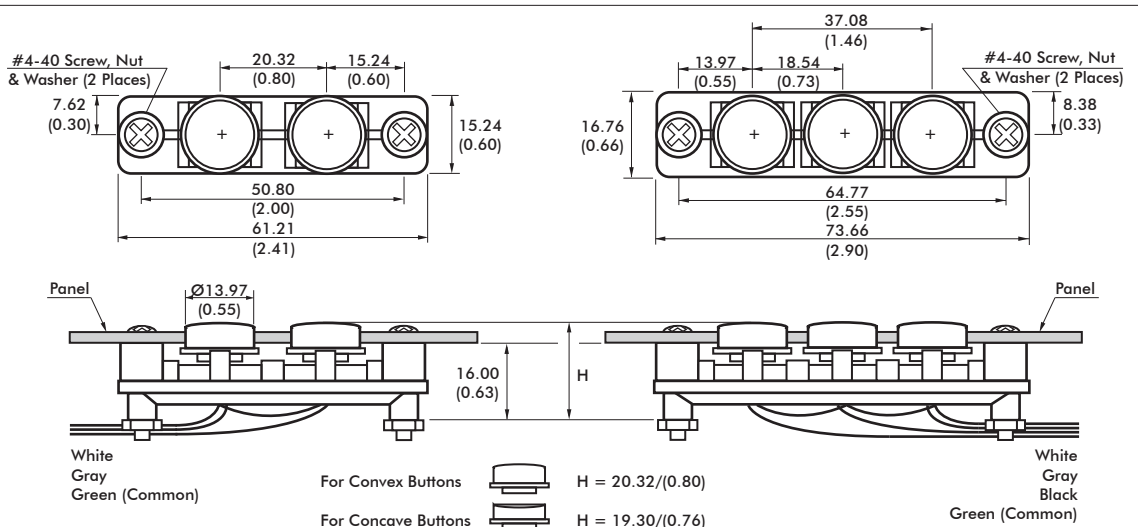

NOTE: All dimensions are in mm/(inch)

Note: The company reserves the right to change specifications without notice.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru